DL111
REV 4

MOTOROLA

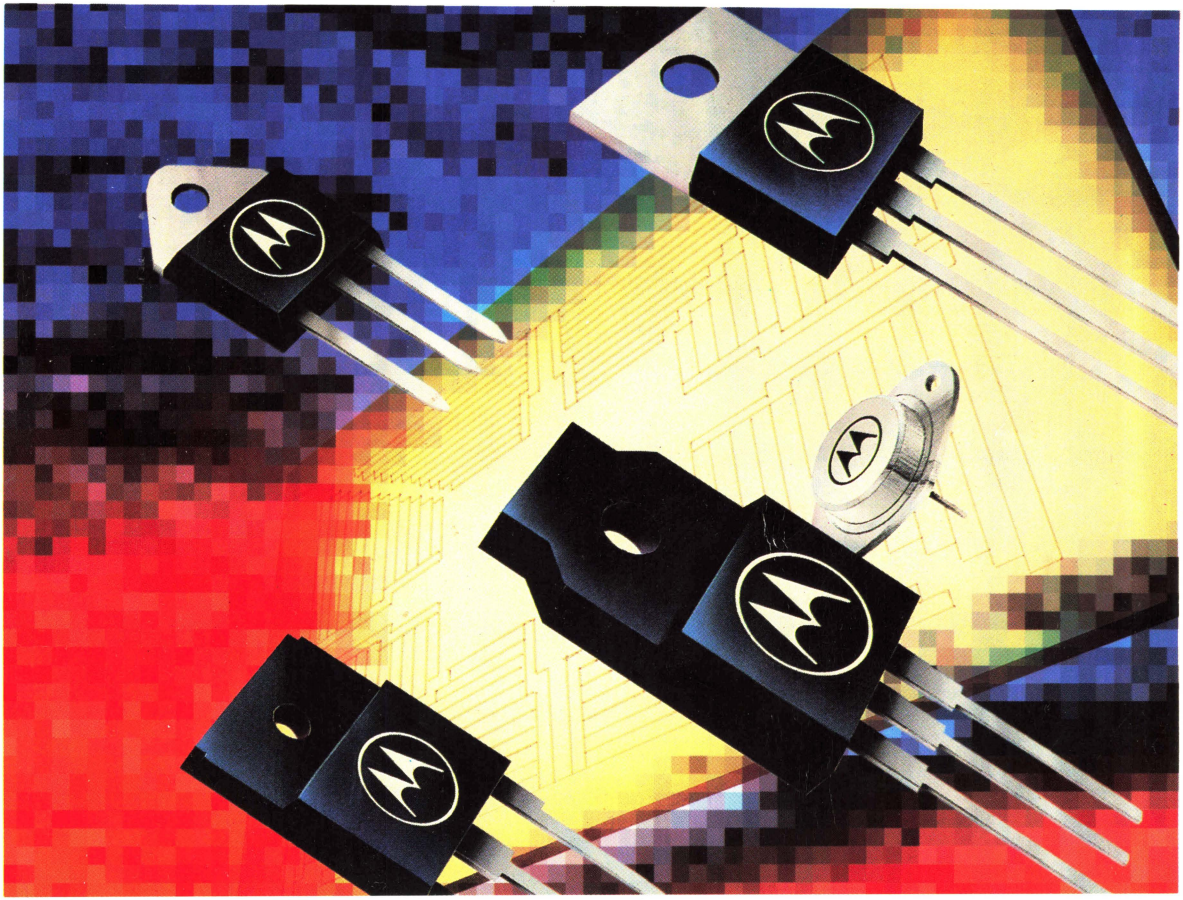

BIPOLAR POWER TRANSISTOR DATA

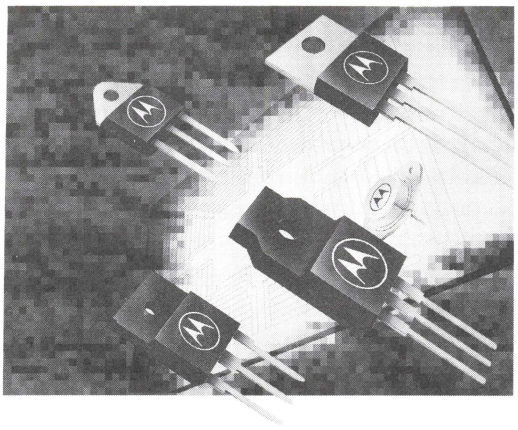

Alphanumeric Index and Cross Reference 1

Selector Guide 2

Data Sheets 3

Chipscretes, Designers', Duowatt, EpiBase, PowerBase, PowerTap, SUPERBRIDGES, Surmetric, Switchmode, Thermopad, TMOS, Thermowatt, Unibloc, and Uniwatt are trademarks of Motorola Inc. Annular Semiconductors are patented by Motorola Inc.



MOTOROLA

POWER DEVICE DATA

Prepared by
Technical Information Center

This book presents technical data for Motorola's broad line of silicon power transistors. Complete specifications are provided in the form of data sheets and accompanying selection guides provide a quick comparison of characteristics to simplify the task of choosing the best device for a circuit.

The information in this book has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Employment Opportunity/Affirmative Action Employer.

Motorola, Inc. general policy does not recommend the use of its components in life support applications wherein a failure or malfunction of the component may directly threaten life or injury. Per Motorola Terms and Conditions of Sale, the user of Motorola components in life support applications assumes all risks of such use and indemnifies Motorola against all damages.

Fifth Edition
©MOTOROLA INC., 1987
Previous Edition ©1984
"All Rights Reserved"

Printed in U.S.A.

MOTOROLA POWER TRANSISTORS IN BRIEF

Wide Range of Transistor Specifications

Bipolar transistors, NPNs and PNPs, single and multiple (Darlington) transistor structures, metal and plastic packages, Motorola's inventory of more than 1100 standard (off-the-shelf) power transistors covers the widest range of specifications for virtually every potential applications requirement.

Current Range — 0.5 to 100 Amperes
Voltage Range — 25 to 1800 Volts
Power Dissipation Range — 5 to 250 Watts.

Darlingtons

Consisting of two transistors, up to two resistors, and (up to) two diodes on a single chip, Darlington transistors achieve gain figures up to 20,000 in a single package. Rapid line expansion, and the resulting widespread implementation make Motorola Darlingtons highly cost-effective in a fast growing number of applications.

Chips, Chips, Chips!

Designing a hybrid? Motorola's wide range of power transistors is available. . . . UNENCAPSULATED through authorized chip distributors: Check with your Motorola Sales representative for the chip distributor in your area, preferred parts list, price and delivery.

Specials

Need a unique transistor with specifications not available off-the-shelf? Chances are Motorola can produce it quickly and inexpensively. Routine use of four major power processes and more than two decades of experience in the pioneering of new structures and geometries provide the insight and capability to meet any required specification within the limits of today's technology. Specials will require minimum order quantities and minimum yearly run rates. Check with your local Motorola representative for more information on special devices.

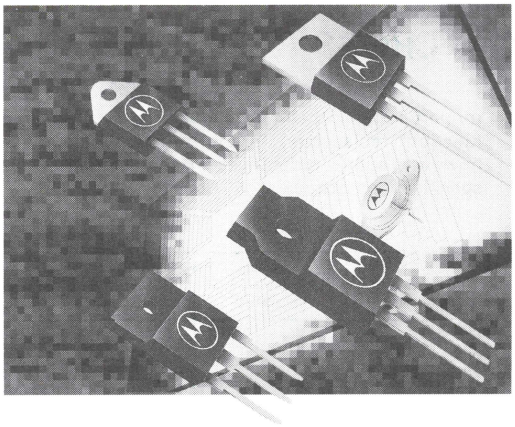

Alphanumeric Index and Cross Reference

The table on the subsequent pages contains an Alphanumeric index of Silicon power transistors currently manufactured and available to the industry.

The column headed "Similar" lists units with characteristics that might represent suitable replacements. In cases where such a replacement is contemplated, the Motorola device data sheet should be carefully compared with one for the device being replaced to determine any variations that could affect circuit performance.

ALPHANUMERIC INDEX — CROSS-REFERENCE

The following table represents an index and cross-reference guide for all low-frequency power transistors which are either manufactured directly by Motorola or for which Motorola manufactures a suitable equivalent. Where the Motorola part number differs from the Industry part number, the Motorola device is a "form, fit and function" replacement for the industry type number — however, subtle differences in characteristics and/or specifications may exist.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N1487		2N5877	3-127
2N1488		2N5878	3-127
2N1489		2N5877	3-127
2N1490		2N5878	3-127
2N1702		2N5877	3-127
2N3016		2N5337	3-100
2N3021		2N3789	3-56
2N3022		2N3789	3-56
2N3023		2N3789	3-56
2N3024		2N3791	3-56
2N3025		2N3791	3-56
2N3026		2N3791	3-56
2N3054	2N3054		3-2
2N3054A	2N3054A		3-2
2N3055	2N3055		3-6
2N3055A	2N3055A		3-9
2N3055H		2N3055A	3-9
2N3055JAN		2N5302JAN	3-96
2N3055SD		2N3055A	3-9
2N3055UB		2N3055A	3-9
2N3076		2N6249	3-177
2N3079		2N6308	3-194
2N3080		2N6543	3-229
2N3171		2N3789	3-56
2N3172		2N3789	3-56
2N3173		2N3790	3-56
2N3174		2N6226	3-9
2N3183		2N3789	3-56
2N3184		2N3789	3-56
2N3185		2N3790	3-56
2N3186		MJ15016	3-9
2N3195		2N3789	3-56
2N3196		2N3789	3-56
2N3197		2N3790	3-56
2N3198		MJ15016	3-9
2N3202		2N3719	3-32
2N3203		2N3720	3-32
2N3204		2N6303	3-32
2N3232		2N5877	3-127
2N3233		2N5882	3-130
2N3234		2N5760	3-123
2N3235		2N3055	3-6
2N3236		2N5882	3-130
2N3237		2N5302	3-96
2N3238		2N5882	3-130
2N3239		2N5882	3-130
2N3240		2N5882	3-130
2N3418		2N5336	3-100
2N3419		2N5336	3-100
2N3420		2N5336	3-100
2N3421		2N5336	3-100
2N3441	2N3441		3-13
2N3442	2N3442		3-15
2N3445	2N3477		3-18
2N3446	2N3448		3-18

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N3447	2N3447		3-18
2N3448	2N3448		3-18
2N3583	2N3583		3-20
2N3584	2N3584		3-20
2N3585	2N3585		3-20
2N3667		2N5881	3-130
2N3713	2N3714		3-26
2N3714	2N3714		3-26
2N3715	2N3715		3-26
2N3715JAN	2N3715JAN		3-26
2N3715JTX	2N3715JTX		3-26
2N3715JTXV	2N3715JTXV		3-26
2N3716	2N3716		3-26
2N3716JAN	2N3716JAN		3-26
2N3716JTX	2N3716JTX		3-26
2N3716JTXV	2N3716JTXV		3-26
2N3719	2N3719		3-32
2N3720	2N3720		3-32
2N3738	2N3738		3-37
2N3739	2N3739		3-37
2N3739JAN	2N3739JAN		3-37
2N3739JTX	2N3739JTX		3-37
2N3739JTXV	2N3739JTXV		3-37
2N3740	2N3740		3-41
2N3740A	2N3740		3-41
2N3740JAN	2N3740JAN		3-41
2N3740JTX	2N3740JTX		3-41
2N3740JTXV	2N3740JTXV		3-41
2N3741	2N3741		3-41
2N3741A	2N3741A		3-41
2N3741JAN	2N3741JAN		3-41
2N3741JTX	2N3741JTX		3-41
2N3741JTXV	2N3741JTXV		3-41
2N3766	2N3766		3-44
2N3766JAN	2N3766JAN		3-44
2N3766JTX	2N3766JTX		3-44
2N3766JTXV	2N3766JTXV		3-44
2N3767	2N3767		3-44
2N3767JAN	2N3767JAN		3-44
2N3767JTX	2N3767JTX		3-44
2N3767JTXV	2N3767JTXV		3-44
2N3771	2N3771		3-48
2N3772	2N3772		3-48
2N3773	2N3773		3-52
2N3788		2N6543	3-229
2N3789	2N3789		3-56
2N3790	2N3790		3-56
2N3791	2N3791		3-56
2N3791JAN	2N3791JAN		3-56
2N3791JTX	2N3791JTX		3-56
2N3791JTXV	2N3791JTXV		3-56
2N3792	2N3792		3-56
2N3792JAN	2N3792JAN		3-56
2N3792JTX	2N3792JTX		3-56
2N3792JTXV	2N3792JTXV		3-56

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N3863		2N3715	3-32
2N3864		2N5882	3-32
2N3865		MJ15001	3-32
2N3867	2N3867		3-32
2N3867JAN	2N3867JAN		3-32
2N3867JTX	2N3867JTX		3-32
2N3867JTXV	2N3867JTXV		3-32
2N3867SJAN	2N3867SJAN		3-32
2N3867SJTX	2N3867SJTX		3-32
2N3867SJTXV	2N3867SJTXV		3-32
2N3868	2N3868		3-32
2N3868JAN	2N3868JAN		3-32
2N3868JTX	2N3868JTX		3-32
2N3868JTXV	2N3868JTXV		3-32
2N3868SJAN	2N3868SJAN		3-32
2N3868SJTX	2N3868SJTX		3-32
2N3868SJTXV	2N3868SJTXV		3-32
2N3878		2N5428	3-108
2N3879		2N5430	3-108
2N3902	2N3902		3-60
2N3996		2N5339	3-100
2N3997		2N5339	3-100
2N3998		2N5339	3-100
2N3999		2N5339	3-100
2N4000		2N5339	3-100
2N4001		2N5339	3-100
2N4002		2N6274	3-181
2N4003		2N6274	3-181
2N4070		2N6306	3-194
2N4071		2N6306	3-194
2N4111		2N3715	3-26
2N4113		2N3716	3-26
2N4115		2N5339	3-100
2N4116		2N5339	3-100
2N4231A		2N3054A	3-2
2N4232A		2N3054A	3-2
2N4233A	2N4233A		3-64
2N4240	2N4240		3-20
2N4296		2N3738	3-37
2N4297		2N3738	3-37
2N4298		2N6235	3-174
2N4299		2N6235	3-174
2N4300		2N5337	3-100
2N4301		2N5337	3-100
2N4305		2N5337	3-100
2N4307		2N5337	3-100
2N4309		2N5339	3-100
2N4311		2N5337	3-100
2N4314		2N3868	3-32
2N4347		2N3055A	3-15
2N4348		2N5630*	3-12
2N4387		2N4898	3-72
2N4388		2N4898	3-72
2N4398	2N4398		3-68
2N4399	2N4399		3-68
2N4399JAN	2N4399JAN		3-68
2N4399JTX	2N4399JTX		3-68
2N4399JTXV	2N4399JTXV		3-68
2N4877		2N5337	3-100
2N4898	2N4898		3-72
2N4899	2N4899		3-72
2N4900	2N4900		3-72
2N4901		MJ15016	3-9
2N4902		MJ15016	3-9
2N4903		MJ15016	3-9
2N4904		MJ15016	3-9
2N4905		MJ15016	3-9
2N4906		MJ15016	3-9
2N4907		2N3791	3-56
2N4908		2N3791	3-56

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N4909		2N3792	3-56
2N4910		2N3054*	3-2
2N4911		2N3054*	3-2
2N4912	2N4912		3-75
2N4913		2N5758*	3-123
2N4914		2N5758*	3-123
2N4915		2N5758*	3-123
2N4918	2N4918		3-78
2N4919	2N4919		3-78
2N4920	2N4920		3-78
2N4921	2N4921		3-82
2N4922	2N4922		3-82
2N4923	2N4923		3-82
2N4998		2N5339	3-100
2N4999		2N6191	3-168
2N5000		2N5339	3-100
2N5001		2N6191	3-168
2N5002		2N5339	3-100
2N5003		2N6191	3-168
2N5004		2N5339	3-100
2N5005		2N6191	3-168
2N5034		2N3055	3-6
2N5035		2N3055	3-6
2N5036		2N3055	3-6
2N5037		2N3055	3-6
2N5038	2N5038		3-86
2N5038JAN	2N5038JAN		3-86
2N5038JTX	2N5038JTX		3-86
2N5038JTXV	2N5038JTXV		3-86
2N5039	2N5039		3-86
2N5039JAN	2N5039JAN		3-86
2N5039JTX	2N5039JTX		3-86
2N5039JTXV	2N5039JTXV		3-86
2N5050		2N3584	3-20
2N5051		2N3584	3-20
2N5052		2N3584	3-20
2N5067		2N5758*	3-123
2N5068		2N5758*	3-123
2N5069		2N5758*	3-123
2N5083		2N5339	3-100
2N5084		2N5339	3-100
2N5085		2N5339	3-100
2N5147		2N6191	3-168
2N5148		2N5337	3-100
2N5149		2N6191	3-168
2N5150		2N5337	3-100
2N5151		2N6191	3-168
2N5152		2N5337	3-100
2N5153		2N6191	3-168
2N5154		2N5337	3-100
2N5157		2N6545	3-235
2N5190	2N5190		3-88
2N5191	2N5191		3-88
2N5192	2N5192		3-88
2N5193	2N5193		3-92
2N5194	2N5194		3-92
2N5195	2N5195		3-92
2N5202		2N5428	3-108
2N5239		2N6306	3-134
2N5240		2N6545	3-235
2N5241		2N3902*	3-60
2N5264		2N6249	3-177
2N5284		2N5339	3-100
2N5285		2N5339	3-100
2N5286		2N6193	3-168
2N5287		2N6193	3-168
2N5293		2N6123	3-164
2N5294		2N6123	3-164
2N5295		2N6121	3-164
2N5296		2N6121	3-164

*Consult Motorola if a direct replacement is necessary.

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N5297		2N6122	3-164
2N5298		2N6122	3-164
2N5301	2N5301		3-96
2N5302	2N5302		3-96
2N5302JAN	2N5302JAN		3-96
2N5302JTX	2N5302JTX		3-96
2N5302JTXV	2N5302JTXV		3-96
2N5303	2N5303		3-96
2N5303JAN	2N5303JAN		3-96
2N5303JTX	2N5303JTX		3-96
2N5303JTXV	2N5303JTXV		3-96
2N5326		2N5339	3-100
2N5333		2N6303	3-32
2N5334		2N5337	3-100
2N5335		2N5337	3-100
2N5336	2N5336		3-100
2N5337	2N5337		3-100
2N5338	2N5338		3-100
2N5339	2N5339		3-100
2N5344	2N5344		3-104
2N5345		2N6212	3-171
2N5346		2N5339	3-100
2N5347		2N5339	3-100
2N5348		2N5339	3-100
2N5349		2N5339	3-100
2N5384		2N6191	3-168
2N5385		2N6191	3-168
2N5386		2N5038	3-86
2N5387		2N6546	3-239
2N5388		2N6546	3-239
2N5389		2N6546	3-239
2N5404		2N6191	3-168
2N5405		2N6193	3-168
2N5406		2N6191	3-168
2N5407		2N6193	3-168
2N5408		2N6191	3-168
2N5409		2N6193	3-168
2N5410		2N6191	3-168
2N5411		2N6193	3-168
2N5427	2N5428		3-108
2N5428	2N5428		3-108
2N5429	2N5429		3-108
2N5430	2N5430		3-108
2N5466		2N6545	3-235
2N5467		2N6545	3-235
2N5477		2N5339	3-100
2N5478		2N5339	3-100
2N5479		2N5339	3-100
2N5480		2N5339	3-100
2N5490		MJE3055T	3-1018
2N5491		MJE3055T	3-1018
2N5492		2N6292	3-161
2N5493		2N6292	3-161
2N5494		MJE3055T	3-1018
2N5495		MJE3055T	3-1018
2N5496		2N6292	3-161
2N5497		2N6292	3-161
2N5508		2N5428	3-108
2N5539		2N6379	3-205
2N5559		MJ15001	3-844
2N5575		2N5685	3-119
2N5578		2N5685	3-119
2N5598		2N5428	3-108
2N5600		2N5428	3-108
2N5602		2N5428	3-108
2N5604		2N5430	3-108
2N5606		2N5428	3-108
2N5610		2N5428	3-108
2N5612		2N5430	3-108
2N5614		2N3448	3-18

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N5616		2N3448	3-18
2N5618		2N3448	3-18
2N5629	2N5629		3-112
2N5630	2N5630		3-112
2N5631	2N5631		3-112
2N5632		2N5882	3-130
2N5633		MJ15001	3-844
2N5634		MJ15001	3-844
2N5651		2N6235	3-174
2N5655	2N5655		3-116
2N5656	2N5656		3-116
2N5657	2N5657		3-116
2N5660		2N6233	3-174
2N5664		2N6233	3-174
2N5665		2N6235	3-174
2N5671		2N6338	3-202
2N5672		2N6339	3-202
2N5678		2N6378	3-205
2N5683	2N5683		3-119
2N5683JAN	2N5683JAN		3-119
2N5683JTX	2N5683JTX		3-119
2N5683JTXV	2N5683JTXV		3-119
2N5684	2N5684		3-119
2N5684JAN	2N5684JAN		3-119
2N5684JTX	2N5684JTX		3-119
2N5684JTXV	2N5684JTXV		3-119
2N5685	2N5685		3-119
2N5685JAN	2N5685JAN		3-119
2N5685JTX	2N5685JTX		3-119
2N5685JTXV	2N5685JTXV		3-119
2N5686	2N5686		3-119
2N5686JAN	2N5686JAN		3-119
2N5686JTX	2N5686JTX		3-119
2N5686JTXV	2N5686JTXV		3-119
2N5729		2N5337	3-100
2N5730		2N5339	3-100
2N5733		2N6274	3-181
2N5734		2N6338	3-202
2N5737		2N5878	3-127
2N5738		2N5880	3-130
2N5739		2N5878	3-127
2N5740		2N5880	3-130
2N5741		2N5883	3-134
2N5742		2N6029	3-112
2N5743		2N5883	3-134
2N5744		MJ4502	3-636
2N5745	2N5745		3-68
2N5745JAN	2N5745JAN		3-68
2N5745JTX	2N5745JTX		3-68
2N5745JTXV	2N5745JTXV		3-68
2N5758	2N5758		3-123
2N5759		2N3055A	3-9
2N5760	2N5760		3-123
2N5804		2N6306	3-194
2N5805		2N6543	3-229
2N5838		2N6308	3-194
2N5839		2N6308	3-194
2N5840		2N6308	3-194
2N5867		2N3789*	3-56
2N5868		2N3790*	3-56
2N5869		2N3714*	3-26
2N5870		2N3714*	3-26
2N5871		2N3789*	3-56
2N5872		2N3790*	3-56
2N5873		2N3714*	3-26
2N5874		2N3714*	3-26
2N5875	2N5875		3-127
2N5876	2N5876		3-127
2N5877	2N5877		3-127
2N5878	2N5878		3-127

*Consult Motorola if a direct replacement is necessary.

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N5879	2N5879		3-130
2N5880	2N5880		3-130
2N5881	2N5881		3-130
2N5882	2N5882		3-130
2N5883	2N5883		3-134
2N5884	2N5884		3-134
2N5885	2N5885		3-134
2N5886	2N5886		3-134
2N5929		2N6338	3-202
2N5930		2N6338	3-202
2N5931		2N6341	3-202
2N5932		2N6338	3-202
2N5933		2N6338	3-202
2N5935		2N6341	3-202
2N5936		2N6338	3-202
2N5937		2N6341	3-202
2N5954		2N6318	3-198
2N5955		2N6317	3-198
2N5956		2N6317	3-198
2N5970		2N5882	3-130
2N5971		2N5882	3-130
2N5972		MJ15003	3-847
2N5974		MJE2955	3-1018
2N5975		MJE2955	3-1018
2N5976		MJE2955	3-1018
2N5977		MJE3055	3-1018
2N5978		MJE3055	3-1018
2N5979		MJE3055	3-1018
2N5980		MJE2955*	3-1018
2N5981		MJE2955*	3-1018
2N5982		2N5988*	3-138
2N5983		MJE3055*	3-1018
2N5984		MJE3055*	3-1018
2N5985		2N5991*	3-138
2N5986	2N5986		3-138
2N5987	2N5987		3-138
2N5988	2N5988		3-138
2N5989	2N5989		3-138
2N5990	2N5991		3-138
2N5991	2N5991		3-138
2N6021		TIP32C	3-1156
2N6022		TIP32C	3-1156
2N6023		2N6124	3-164
2N6024		2N6124	3-164
2N6025		2N6125	3-164
2N6026		2N6125	3-164
2N6029	2N6029		3-112
2N6030	2N6030		3-112
2N6031	2N6031		3-112
2N6032		2N6275	3-181
2N6033		2N6277	3-181
2N6034	2N6034		3-142
2N6035	2N6035		3-142
2N6036	2N6036		3-142
2N6037	2N6037		3-142
2N6038	2N6038		3-142
2N6039	2N6039		3-142
2N6040	2N6040		3-146
2N6041	2N6041		3-146
2N6042	2N6042		3-146
2N6043	2N6043		3-146
2N6044	2N6044		3-146
2N6045	2N6045		3-146
2N6049	2N6049		3-150
2N6050	2N6050		3-153
2N6051	2N6051		3-153
2N6051JAN	2N6051JAN		3-153
2N6051JTX	2N6051JTX		3-153
2N6051JTXV	2N6051JTXV		3-153
2N6052	2N6052		3-153

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N6052JAN	2N6052JAN		3-153
2N6052JTX	2N6052JTX		3-153
2N6052JTXV	2N6052JTXV		3-153
2N6053	2N6053		3-157
2N6054	2N6054		3-157
2N6055	2N6055		3-157
2N6056	2N6056		3-157
2N6057	2N6057		3-153
2N6058	2N6058		3-153
2N6058JAN	2N6058JAN		3-153
2N6058JTX	2N6058JTX		3-153
2N6058JTXV	2N6058JTXV		3-153
2N6059	2N6059		3-153
2N6059JAN	2N6059JAN		3-153
2N6059JTX	2N6059JTX		3-153
2N6059JTXV	2N6059JTXV		3-153
2N6077		2N6235	3-174
2N6078		2N6235	3-174
2N6079		2N6235	3-174
2N6098		2N6487	3-221
2N6099		2N6487	3-221
2N6100		2N6487	3-221
2N6101		2N6488	3-221
2N6102		2N6488	3-221
2N6103		2N6486	3-221
2N6106		2N6107	3-161
2N6107	2N6107		3-161
2N6108		2N6109	3-161
2N6109	2N6109		3-161
2N6110		2N6111	3-161
2N6111	2N6111		3-161
2N6121	2N6121		3-164
2N6122	2N6122		3-164
2N6123	2N6123		3-164
2N6124	2N6124		3-164
2N6125	2N6125		3-164
2N6126		TIP32C	3-156
2N6127		2N6436	3-217
2N6128		2N6338	3-202
2N6129		TIP41	3-1166
2N6130		TIP41A	3-1166
2N6131		TIP41B	3-1166
2N6132		TIP42C	3-1166
2N6133		TIP42C	3-1166
2N6134		TIP42C	3-1166
2N6175		MPSU10	3-1135
2N6176		MPSU10	3-1135
2N6177		MJE340	3-990
2N6178		MPSU06	3-1131
2N6179		MPSU05	3-1131
2N6180		MPSU56	3-1145
2N6181		MPSU55	3-1145
2N6186	2N6190		3-168
2N6187	2N6191		3-168
2N6188	2N6193		3-168
2N6189	2N6193		3-168
2N6190	2N6190		3-168
2N6191	2N6191		3-168
2N6192	2N6193		3-168
2N6193	2N6193		3-168
2N6211	2N6211		3-171
2N6212	2N6212		3-171
2N6213	2N6213		3-171
2N6226		MJ15016	3-9
2N6227		MJ15016	3-9
2N6228		MJ15016	3-9
2N6229		2N5880	3-130
2N6230		MJ15002	3-844
2N6231		MJ15002	3-844
2N6233	2N6233		3-174

*Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N6234	2N6235		3-174
2N6235	2N6235		3-174
2N6242		MJ13015	3-9
2N6243		MJ13335	3-834
2N6244		MJ13333	3-834
2N6245		MJ13335	3-834
2N6246		2N5879	3-130
2N6247		2N5880	3-130
2N6248		MJ15016	3-9
2N6249	2N6249		3-177
2N6250	2N6250		3-177
2N6251	2N6251		3-177
2N6253		2N5877	3-127
2N6254		2N5878	3-127
2N6257		2N5886	3-134
2N6258		2N5686	3-134
2N6259		2N5631	3-112
2N6260		2N3054A	3-2
2N6261		2N4233A	3-64
2N6262		2N5760	3-123
2N6263		2N3584	3-20
2N6264		2N3584	3-20
2N6270		2N6338	3-202
2N6271		2N6338	3-202
2N6272		2N6338	3-202
2N6273		2N6338	3-202
2N6274	2N6274		3-181
2N6274JAN	2N6274JAN		3-181
2N6274JTX	2N6274JTX		3-181
2N6274JTXV	2N6274JTXV		3-181
2N6275	2N6275		3-181
2N6276		2N6275	3-181
2N6277	2N6277		3-181
2N6277JAN	2N6277JAN		3-181
2N6277JTX	2N6277JTX		3-181
2N6277JTXV	2N6277JTXV		3-181
2N6278		2N6274	3-181
2N6279		2N6275	3-181
2N6280		2N6275	3-181
2N6281		2N6277	3-181
2N6282	2N6282		3-185
2N6283	2N6283		3-185
2N6283JAN	2N6283JAN		3-185
2N6283JTX	2N6283JTX		3-185
2N6283JTXV	2N6283JTXV		3-185
2N6284	2N6284		3-185
2N6284JAN	2N6284JAN		3-185
2N6284JTX	2N6284JTX		3-185
2N6284JTXV	2N6284JTXV		3-185
2N6285	2N6285		3-185
2N6286	2N6286		3-185
2N6286JAN	2N6286JAN		3-185
2N6286JTX	2N6286JTX		3-185
2N6286JTXV	2N6286JTXV		3-185
2N6287	2N6287		3-185
2N6287JAN	2N6287JAN		3-185
2N6287JTX	2N6287JTX		3-185
2N6287JTXV	2N6287JTXV		3-185
2N6288	2N6288		3-161
2N6289		2N6288	3-161
2N6290		MJE3055T	3-1018
2N6291		MJE3055T	3-1018
2N6292	2N6292		3-161
2N6293		2N6292	3-161
2N6294	2N6294		3-190
2N6295	2N6295		3-190
2N6296	2N6296		3-190
2N6297	2N6297		3-190
2N6298	2N6298		3-157
2N6298JAN	2N6298JAN		3-157

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N6298JTX	2N6298JTX		3-157
2N6298JTXV	2N6298JTXV		3-157
2N6299	2N6299		3-157
2N6299JAN	2N6299JAN		3-157
2N6299JTX	2N6299JTX		3-157
2N6299JTXV	2N6299JTXV		3-157
2N6300	2N6300		3-157
2N6300JAN	2N6300JAN		3-157
2N6300JTX	2N6300JTX		3-157
2N6300JTXV	2N6300JTXV		3-157
2N6301	2N6301		3-157
2N6301JAN	2N6301JAN		3-157
2N6301JTX	2N6301JTX		3-157
2N6301JTXV	2N6301JTXV		3-157
2N6302		2N5630	3-112
2N6303	2N6303		3-32
2N6306	2N6306		3-194
2N6306JAN	2N6306JAN		3-194
2N6306JTX	2N6306JTX		3-194
2N6307	2N6307		3-194
2N6308	2N6308		3-194
2N6308JAN	2N6308JAN		3-194
2N6308JTX	2N6308JTX		3-194
2N6312	2N6318		3-198
2N6313		2N6318	3-108
2N6314		2N6318	3-198
2N6315	2N6315		3-198
2N6316	2N6316		3-198
2N6317	2N6317		3-198
2N6318	2N6318		3-198
2N6322		MJ10015	3-706
2N6323		MJ10015	3-706
2N6324		MJ10015	3-706
2N6325		MJ10015	3-706
2N6326	2N6328		—
2N6327	2N6328		—
2N6328	2N6328		—
2N6329		2N5884	3-134
2N6330		2N5884	3-134
2N6331		2N5884	3-134
2N6338	2N6338		3-202
2N6338JAN	2N6338JAN		3-202
2N6338JTX	2N6338JTX		3-202
2N6338JTXV	2N6338JTXV		3-202
2N6339	2N6339		3-202
2N6340	2N6340		3-202
2N6341	2N6341		3-202
2N6341JAN	2N6341JAN		3-202
2N6341JTX	2N6341JTX		3-202
2N6341JTXV	2N6341JTXV		3-202
2N6354		2N6339	3-202
2N6355		2N6057	3-153
2N6356		2N6057	3-153
2N6357		2N6058	3-153
2N6358		2N6058	3-153
2N6359		2N5885	3-134
2N6371		2N3055	3-6
2N6372		2N6316	3-198
2N6373		2N6315	3-198
2N6374		2N6315	3-198
2N6377	2N6377		3-205
2N6378	2N6378		3-205
2N6378JAN	2N6378JAN		3-205
2N6378JTX	2N6378JTX		3-205
2N6378JTXV	2N6378JTXV		3-205
2N6379	2N6379		3-205
2N6379JAN	2N6379JAN		3-205
2N6379JTX	2N6379JTX		3-205
2N6379JTXV	2N6379JTXV		3-205
2N6380		2N6377	3-205

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N6381		2N6378	3-205
2N6382		2N6379	3-205
2N6383	2N6383		3-209
2N6383JAN	2N6383JAN		3-209
2N6383JTX	2N6383JTX		3-209
2N6383JTXV	2N6383JTXV		3-209
2N6384	2N6384		3-209
2N6384JAN	2N6384JAN		3-209
2N6384JTX	2N6384JTX		3-209
2N6384JTXV	2N6384JTXV		3-209
2N6385	2N6385		3-209
2N6385JAN	2N6385JAN		3-209
2N6385JTX	2N6385JTX		3-209
2N6385JTXV	2N6385JTXV		3-209
2N6386	2N6386		3-213
2N6387	2N6387		3-213
2N6388	2N6388		3-213
2N6406		MJE171	3-978
2N6407		MJE172	3-978
2N6408		MJE181*	3-978
2N6409		MJE182*	3-978
2N6410		MJE200*	3-982
2N6411		MJE210	3-982
2N6412		MJE180	3-978
2N6413		MJE181	3-978
2N6414		MJE170	3-978
2N6415		MJE171	3-978
2N6416		MJE243	3-986
2N6417		MJE243	3-986
2N6418		MJE253	3-986
2N6419		MJE253	3-986
2N6420	2N6420		3-20
2N6421	2N6421		3-20
2N6422	2N6422		3-20
2N6423		2N6212	3-171
2N6424		2N6212	3-171
2N6425		2N6212	3-171
2N6436	2N6436		3-217
2N6437	2N6437		3-217
2N6437JAN	2N6437JAN		3-217
2N6437JTX	2N6437JTX		3-217
2N6437JTXV	2N6437JTXV		3-217
2N6438	2N6438		3-217
2N6438JAN	2N6438JAN		3-217
2N6438JTX	2N6438JTX		3-217
2N6438JTXV	2N6438JTXV		3-217
2N6465		MJE15030	3-1086
2N6466		MJE15030	3-1086
2N6467		MJE15031	3-1086
2N6468		MJE15031	3-1086
2N6469		2N5879	3-130
2N6470		2N5881	3-130
2N6471		2N5881	3-130
2N6472		2N5882	3-130
2N6473		MJE15028	3-1086
2N6474		MJE15028	3-1086
2N6475		MJE15029	3-1086
2N6476		MJE15029	3-1086
2N6477		MJE15028	3-1086
2N6478		MJE15030	3-1086
2N6486	2N6486		3-221
2N6487	2N6487		3-221
2N6488	2N6488		3-221
2N6489	2N6489		3-221
2N6490	2N6490		3-221
2N6491	2N6491		3-221
2N6492		2N6055	3-1086
2N6493		2N6056	3-1086
2N6494		2N6056	3-1086
2N6495		2N6316	3-198
2N6496		2N6339	3-202

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N6497	2N6497		3-225
2N6498	2N6498		3-225
2N6500		2N5430	3-108
2N6510		2N6306	3-194
2N6511		2N6306	3-194
2N6512		2N6544	3-235
2N6513		2N6545	3-235
2N6514		2N6544	3-235
2N6530		TIP101	3-1174
2N6531		TIP102	3-1174
2N6532		TIP102	3-1174
2N6534		2N6301	3-157
2N6535		TIP102	3-1174
2N6536		TIP102	3-1174
2N6543	2N6543		3-229
2N6544	2N6545		3-235
2N6545	2N6545		3-235
2N6546	2N6546		3-239
2N6546JAN	2N6546JAN		3-239
2N6546JTX	2N6546JTX		3-239
2N6547	2N6547		3-239
2N6547JAN	2N6547JAN		3-239
2N6547JTX	2N6547JTX		3-239
2N6548		MJE800	3-1002
2N6549		MJE800	3-1002
2N6551		2N4923	3-82
2N6552		2N4923	3-82
2N6553		2N4923	3-82
2N6554		2N4919	3-78
2N6555		2N4919	3-78
2N6556		2N4919	3-78
2N6557		MJE340	3-990
2N6558		MJE340	3-990
2N6559		MJE340	3-990
2N6569		2N3055	3-6
2N6573		2N6546	3-239
2N6574		2N6546	3-239
2N6575		2N6547	3-239
2N6576	2N6576		3-243
2N6577	2N6577		3-243
2N6578	2N6578		3-243
2N6579		MJ13080	3-810
2N6580		MJ13080	3-810
2N6581		MJ16004	3-858
2N6582		MJ13080	3-810
2N6583		MJ13080	3-810
2N6584		MJ16008	3-874
2N6591		MJE341	3-992
2N6592		MJE344	3-992
2N6593		MJE344	3-992
2N6594		MJ15016	3-9
2N6609	2N6609		3-52
2N6648	2N6648		3-209
2N6648JAN	2N6648JAN		3-209
2N6648JTX	2N6648JTX		3-209
2N6648JTXV	2N6648JTXV		3-209
2N6649	2N6649	2N6054	3-157
2N6649JAN	2N6649JAN		3-157
2N6649JTX	2N6649JTX		3-157
2N6649JTXV	2N6649JTXV		3-157
2N6650		2N6054	3-157
2N6650JAN	2N6650JAN		3-157
2N6650JTX	2N6650JTX		3-157
2N6650JTXV	2N6650JTXV		3-157
2N6653		MJ13333	3-834
2N6654		MJ13333	3-834
2N6655		MJ13333	3-834
2N6666		TIP105	3-1174

*Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2N6667	2N6667		3-246
2N6668	2N6668		3-246
2N6669		MJE15028	3-1086
2N6671		2N6544	3-235
2N6672		MJ13080	3-810
2N6673		MJ13080	3-810
2N6674		MJ13090	3-816
2N6675		MJ13090	3-816
2N6676	2N6676		3-250
2N6677	2N6677		3-250
2N6678	2N6678		3-250
2N6833	2N6833		3-254
2N6834	2N6834		3-254
2N6835	2N6835		3-262
2N6836	2N6836		3-269
2N6837	2N6837		3-276
2SA483		2N6420	3-20
2SA489		TIP32C	3-1156
2SA490		2N6125	3-164
2SA496		2N4918	3-78
2SA505		2N4919	3-78
2SA566		2N6420	3-20
2SA613		2N4899	3-72
2SA614		2N4900	3-72
2SA616		2N3741	3-41
2SA623		2N4918	3-78
2SA624		2N4919	3-78
2SA626		MJ15016	3-9
2SA627		MJ15016	3-9
2SA633		2N4918	3-78
2SA634		2N4919	3-78
2SA635		2N4919	3-78
2SA636		2N4919	3-78
2SA645		MJE182	3-978
2SA646		2N4919	3-78
2SA647		2N4919	3-78
2SA648		2N6230	3-844
2SA652		2N6420	3-20
2SA653		2N6420	3-20
2SA656		MJ15016	3-9
2SA657		MJ15016	3-9
2SA658		MJ15016	3-9
2SA663		MJ15016	3-9
2SA670		2N6125	3-164
2SA671		2N6125	3-164
2SA679		MJ15016	3-9
2SA680		2N5880	3-130
2SA681		MJE253	3-986
2SA682		MJE253	3-986
2SA698		MJE350	3-994
2SA699		2N4918	3-78
2SA700		TIP30	3-1154
2SA703		2N4918	3-78
2SA706		MPSU55	3-1145
2SA714		MJ15016	3-9
2SA715		MJE170	3-978
2SA738		MJE170	3-978
2SA739		MJ6503	3-640
2SA755		2N6125	3-164
2SA756		MJ15016	3-9
2SA757		MJ15016	3-9
2SA758		MJ15016	3-9
2SA762		2N6211	3-171
2SA764		2N6317	3-198
2SA765		2N6318	3-198
2SA766		2N6420	3-20
2SA768		2N6125	3-164
2SA769		TIP32C	3-1156
2SA770		2N6109	3-161
2SA771		2N6107	3-161

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SA775		TIP30C	3-1154
2SA779		2N4918	3-78
2SA780		2N4919	3-78
2SA794		MJE253	3-986
2SA795		MJE253	3-986
2SA807		2N3789	3-56
2SA808		2N3790	3-56
2SA814		TIP30C	3-1154
2SA815		TIP30C	3-1154
2SA816		TIP30B	3-1154
2SA818		MJE350	3-994
2SA835		MJE350	3-994
2SA837		MJ15016	3-9
2SA839		TIP32C	3-1156
2SA843		MJE15031	3-1086
2SA861		MPSU51	3-1141
2SA877		2N5876	3-127
2SA878		MJ15002	3-844
2SA882		MJ15002	3-844
2SA887		2N4919	3-78
2SA897		MPSU55	3-1145
2SA898		MJE350	3-994
2SA899		MJE350	3-994
2SA900		MJE210	3-982
2SA907		MJ15016	3-9
2SA908		MJ15002	3-844
2SA909		MJ15023	3-855
2SA922		2N4918	3-78
2SA939		MJE350	3-994
2SA940		MJE15031	3-1086
2SA949		MJE15031	3-1086
2SA957		MJE15031	3-1086
2SA958		MJE15031	3-1086
2SA962		MPSU55	3-1145
2SA963		MJE171	3-978
2SA965		MJE15029	3-1086
2SA966		TIP32	3-1156
2SA968		MJE15031	3-1086
2SA969		MJE15031	3-1086
2SA971		2N6609	3-52
2SA980		2N5880	3-130
2SA981		MJ15002	3-844
2SA982		MJ15002	3-844
2SA1001		2N6438	3-217
2SA1002		2N6438	3-217
2SA1003		2N6438	3-217
2SA1007		MJ15002	3-844
2SA1008		TIP32C	3-1156
2SA1010		TIP42C	3-1162
2SA1011		MJE15031	3-1086
2SA1012		TIP42A	3-1166
2SA1020		TIP32	3-1156
2SA1040		2N6438	3-217
2SA1041		2N6438	3-217
2SA1042		2N6436	3-217
2SA1043		2N6438	3-217
2SA1044		2N6436	3-217
2SA1045		2N6052	3-153
2SA1046		2N6052	3-153
2SA1063		MJ15016	3-9
2SA1064		MJ15002	3-844
2SA1065		MJ15002	3-844
2SA1067		MJ15002	3-844
2SA1068		MJ15002	3-844
2SA1069		TIP42B	3-1166
2SA1110		MJE350	3-994
2SA1111		MJE15031	3-1086
2SA1112		MJE15031	3-1086
2SB502		2N3741	3-41
2SB503		2N3741	3-41
2SB506		MJ15016	3-9

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SB507		2N6125	3-164
2SB509		TIP32C	3-1156
2SB511		TIP32	3-1156
2SB513		TIP32C	3-1156
2SB514		TIP32A	3-1156
2SB515		TIP32A	3-1156
2SB518		MJ15016	3-9
2SB519		MJ15016	3-9
2SB520		MJ15016	3-9
2SB521		TIP42A	3-1166
2SB522		TIP42A	3-1166
2SB523		2N5193	3-92
2SB524		2N5194	3-92
2SB526		2N4920	3-78
2SB527		2N4920	3-78
2SB528		2N4920	3-78
2SB529		2N5193	3-92
2SB530		MJ15002	3-844
2SB531		MJ15016	3-9
2SB532		MJ15016	3-9
2SB536		TIP32C	3-1156
2SB537		TIP32C	3-1156
2SB539		MJ15002	3-844
2SB541		MJ15002	3-844
2SB546		MJE15031	3-1086
2SB547		MJE15031	3-1086
2SB548		2N4920	3-78
2SB549		2N4920	3-78
2SB552		MJ15023	3-855
2SB554		MJ15023	3-855
2SB555		MJ15012	3-850
2SB556		MJ15012	3-850
2SB557		MJ15002	3-844
2SB558		2N5880	3-130
2SB559		2N4918	3-78
2SB565		2N6125	3-164
2SB566		TIP32C	3-1156
2SB567		MJE15031	3-1086
2SB568		MJE15031	3-1086
2SB569		2N6034	3-142
2SB570		2N6035	3-142
2SB571		2N6036	3-142
2SB572		2N5193	3-92
2SB573		2N5194	3-92
2SB574		2N5195	3-92
2SB575		2N5193	3-92
2SB576		2N5194	3-92
2SB577		2N5195	3-92
2SB578		MJE2955	3-1018
2SB579		MJE2955	3-1018
2SB580		MJE2955	3-1018
2SB581		MJE2955	3-1018
2SB582		MJE6040	3-146
2SB583		MJE6041	3-146
2SB584		MJE6041	3-146
2SB585		2N6053	3-157
2SB586		2N6054	3-157
2SB587		2N6050	3-153
2SB588		2N6051	3-153
2SB589		2N6052	3-153
2SB595		TIP42C	3-1166
2SB596		TIP32C	3-1156
2SB600		MJ15012	3-850
2SB604		TIP32C	3-1156
2SB628		MJE15031	3-1086
2SB630		MJE15031	3-1086
2SB631		2N4920	3-78
2SB632		2N4918	3-78
2SB633		TIP42C	3-1166
2SB648		MJE350	3-994

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SB649		MJE350	3-994
2SB653		MJ15016	3-9
2SB654		MJ15016	3-9
2SB655		MJ15002	3-844
2SB656		MJ15002	3-844
2SB668		TIP32A	3-1156
2SB669		TIP32B	3-1156
2SB673		2N6042	3-146
2SB674		2N6041	3-146
2SB675		2N6040	3-146
2SB676		TIP127	3-1181
2SB677		TIP125	3-1181
2SB679		TIP117	3-1178
2SB681		MJ15002	3-844
2SB689		TIP42C	3-1166
2SB690		TIP42C	3-1166
2SB691		MJE4352	3-1024
2SB692		MJE4352	3-1024
2SB693		2N6287	3-181
2SB694		MJ11015	3-757
2SB695		MJE4352	3-1024
2SB696		2N6231	3-844
2SB697		MJ15002	3-844
2SB707		2N6107	3-161
2SB708		2N6107	3-161
2SB711		2N6041	3-146
2SB712		2N6042	3-146
2SB713		MJE4352	3-1024
2SB717		MJE350	3-994
2SB718		MJE350	3-994
2SB719		MJE15031	3-1086
2SB720		MJE15031	3-1086
2SB722		MJ15002	3-840
2SB723		MJ15023	3-855
2SB724		TIP32A	3-1156
2SB727		MJE15029	3-1086
2SB743		MJE170	3-978
2SB744		MJE172	3-978
2SB750		TIP115	3-1178
2SB751		TIP126	3-1181
2SB753		TIP42C	3-1166
2SB754		2N6109	3-161
2SB772		MJE170	3-978
2SC41		MJ410	3-620
2SC42		MJ410	3-620
2SC42A		MJ410	3-620
2SC43		2N3055A	3-9
2SC44		2N3055A	3-9
2SC101		2N3584	3-20
2SC161		2N3447	3-18
2SC240		2N3055A	3-9
2SC241		2N3447	3-18
2SC242		2N3055A	3-9
2SC243		MJ410	3-620
2SC244		2N3447	3-18
2SC245		2N3055A	3-9
2SC246		MJ410	3-620
2SC270		MJ411	3-620
2SC407		MJ15011	3-850
2SC408		MJ15011	3-850
2SC409		2N6249	3-177
2SC410		2N6249	3-177
2SC411		2N6546	3-239
2SC412		2N6546	3-239
2SC431		2N6341	3-202
2SC432		2N6341	3-202
2SC433		MJ15022	3-852
2SC434		MJ15022	3-852
2SC435		MJ10000	3-664
2SC436		MJ10000	3-664

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SC483		2N3583	3-20
2SC487		2N3583	3-20
2SC488		2N6233	3-174
2SC489		2N3441	3-13
2SC490		2N3766	3-44
2SC491		2N3584	3-20
2SC492		2N3055A	3-9
2SC493		2N3055A	3-9
2SC494		2N3447	3-18
2SC495		2N4923	3-82
2SC496		2N4921	3-82
2SC508		2N6233	3-174
2SC515		2N3739	3-37
2SC518		2N3448	3-18
2SC518A		2N3448	3-18
2SC519		2N3055A	3-9
2SC519A		2N5760	3-123
2SC520		2N3448	3-18
2SC520A		2N3448	3-18
2SC521		2N3447	3-18
2SC521A		2N3448	3-18
2SC558		MJ3029	3-630
2SC582		2N3739	3-37
2SC586		MJ410	3-620
2SC642		BU205	3-394
2SC643		BU205	3-394
2SC646		2N3447	3-18
2SC647		2N3448	3-18
2SC664		2N5758	3-123
2SC665		2N5760	3-123
2SC675		2N6306	3-194
2SC676		2N6306	3-194
2SC677		2N6306	3-194
2SC678		2N6306	3-194
2SC679		2N3585	3-20
2SC680		2N3584	3-20
2SC681		MJ15011	3-850
2SC685		2N3739	3-37
2SC687		MJ410	3-620
2SC736		2N3055A	3-9
2SC758		2N6307	3-194
2SC759		2N6306	3-194
2SC760		2N6306	3-194
2SC768		2N3055	3-9
2SC769		MJ15001	3-844
2SC770		MJ15011	3-850
2SC771		MJ15011	3-850
2SC779		2N3739	3-37
2SC782		2N3739	3-37
2SC783		2N3738	3-37
2SC789		2N6123	3-164
2SC790		TIP31A	3-1156
2SC791		2N3584	3-20
2SC792		2N6308	3-194
2SC793		2N5758	3-123
2SC794		2N5758	3-123
2SC795		2N3739	3-37
2SC806		MJ431	3-622
2SC807		MJ413	3-622
2SC808		MJ411	3-620
2SC825		2N3585	3-20
2SC833		2N6235	3-174
2SC840		2N3584	3-20
2SC840A		2N3584	3-20
2SC861		MJ3029	3-630
2SC862		2N6545	3-235
2SC867		2N3739	3-37
2SC884		2N3584	3-20
2SC885		2N6307	3-194
2SC886		2N6306	3-194

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SC887		MJ410	3-620
2SC888		MJ410	3-620
2SC889		MJ410	3-620
2SC895		2N3441	3-13
2SC897		2N5760	3-123
2SC898		2N5760	3-123
2SC901		2N6306	3-194
2SC901A		2N6306	3-194
2SC902		MJ15001	3-844
2SC931		MJE3055	3-1018
2SC932		MJE3055	3-1018
2SC935		2N6308	3-194
2SC936		BU205	3-394
2SC937		BU205	3-394
2SC939		MJ15001	3-844
2SC940		2N6249	3-177
2SC961		2N3055A	3-9
2SC962		2N5758	3-123
2SC981		2N5430	3-108
2SC999		BU205	3-394
2SC1004		BU205	3-394
2SC1004A		BU205	3-394
2SC1005		BU208	3-399
2SC1013		MJE180	3-978
2SC1014		MJE181	3-978
2SC1025		2N6233	3-174
2SC1030		2N5760	3-123
2SC1031		2N3585	3-20
2SC1034		BU205	3-394
2SC1046		BU208	3-399
2SC1050		MJ411	3-620
2SC1051		2N5760	3-123
2SC1055		2N5430	3-108
2SC1059		2N3739	3-37
2SC1060		TIP31A	3-1156
2SC1061		TIP31A	3-1156
2SC1078		BU205	3-394
2SC1079		MJ15001	3-840
2SC1080		MJ15001	3-840
2SC1086		BU208	3-399
2SC1088		MJE3439	3-1022
2SC1089		MJE3439	3-1022
2SC1096		MJE180	3-978
2SC1098		2N4923	3-82
2SC1099		BU208	3-399
2SC1100		BU208	3-399
2SC1101		BU205	3-394
2SC1102		2N3739	3-37
2SC1104		2N3585	3-20
2SC1105		2N3739	3-37
2SC1106		2N6308	3-194
2SC1107		2N6123	3-164
2SC1108		2N6123	3-164
2SC1109		2N6123	3-164
2SC1110		2N6123	3-164
2SC1111		MJ15001	3-844
2SC1112		MJ15001	3-844
2SC1113		MJE15030	3-1086
2SC1114		2N6543	3-229
2SC1115		MJ15001	3-844
2SC1116		MJ15011	3-850
2SC1124		MPSU04	3-1127
2SC1125		MPSU10	3-1135
2SC1130		2N6543	229
2SC1131		2N6543	3-229
2SC1132		BU208	3-394
2SC1140		2N6547	3-239
2SC1141		2N6546	3-239
2SC1142		MJ13015	3-798
2SC1143		MJ13014	3-798

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SC1151		BU205	3-394
2SC1152		2N6308	3-194
2SC1153		BU205	3-394
2SC1154		MJ12003	3-770
2SC1155		MJE182	3-978
2SC1156		2N6543	3-229
2SC1157		2N4923	3-82
2SC1160		2N3738	3-37
2SC1161		2N3738	3-37
2SC1162		MJE180	3-978
2SC1167		BU205	3-394
2SC1168		2N3739	3-37
2SC1170		BU208	3-394
2SC1170A		BU208	3-394
2SC1171		BU205	3-394
2SC1172		BU208	3-394
2SC1173		TIP31	3-1156
2SC1174		MJ12003	3-770
2SC1184		BU205	3-394
2SC1185		2N6308	3-194
2SC1195		2N6308	3-194
2SC1224		MJE341	3-992
2SC1226		MJE800	3-1002
2SC1227		MJ10006	3-682
2SC1228		MJ13091	3-816
2SC1229		MJ10006	3-682
2SC1237		TIP31B	3-1156
2SC1243		MJE800	3-1002
2SC1292		2N6308	3-194
2SC1295		BU205	3-394
2SC1304		2N3739	3-37
2SC1309		BU208	3-394
2SC1316		MJ13015	3-798
2SC1322		2N6250	3-177
2SC1325		MJ12005	3-778
2SC1343		MJ15011	3-850
2SC1348		BU208	3-394
2SC1358		BU208	3-394
2SC1367		BU205	3-394
2SC1381		MJE182	3-978
2SC1382		MJE182	3-978
2SC1391		2N3739	3-37
2SC1402		MJ15001	3-844
2SC1403		MJ15001	3-844
2SC1409		TIP47	3-1170
2SC1410		TIP47	3-1170
2SC1413		BU208	3-394
2SC1418		TIP31	3-1156
2SC1419		TIP31	3-1156
2SC1429		MPSU01	3-1123
2SC1431		2N3584	3-20
2SC1433		MJ411	3-620
2SC1434		2N6546	3-239
2SC1436		2N6249	3-177
2SC1440		MJ15001	3-844
2SC1441		2N6249	3-177
2SC1444		2N5428	3-108
2SC1445		2N5430	3-108
2SC1447		TIP47	3-1170
2SC1448		TIP47	3-1170
2SC1449		MJE180	3-978
2SC1450		2N3583	3-20
2SC1454		MJ411	3-620
2SC1456		2N3739	3-37
2SC1463		2N6543	3-229
2SC1466		2N3585	3-20
2SC1467		MJ13015	3-798
2SC1468		MJ13091	3-816
2SC1469		MJ13091	3-816
2SC1477		MJ10006	3-682

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SC1501		MJE3439	3-1022
2SC1504		MJ13015	3-798
2SC1505		TIP48	3-1170
2SC1506		TIP48	3-1170
2SC1507		TIP48	3-1170
2SC1514		MJE3439	3-1022
2SC1516		2N6037	3-142
2SC1517		2N4922	3-82
2SC1519		MJE340	3-990
2SC1520		MJE340	3-990
2SC1521		MJE340	3-990
2SC1576		MJ13091	3-816
2SC1577		MJ13091	3-816
2SC1578		MJ10014	3-757
2SC1579		MJ10014	3-757
2SC1580		MJ10014	3-757
2SC1584		2N6249	3-177
2SC1585		2N6249	3-177
2SC1586		2N6250	3-177
2SC1609		2N6340	3-202
2SC1610		2N6341	3-202
2SC1617		MJ411	3-620
2SC1618		2N5758	3-123
2SC1619		2N5758	3-123
2SC1628		MPSU04	3-1127
2SC1629		MJ1001	3-626
2SC1630		MPSU04	3-1127
2SC1664		2N6300	3-157
2SC1667		2N5758	3-123
2SC1669		TIP47	3-1170
2SC1672		2N6341	3-202
2SC1683		TIP47	3-1170
2SC1722		TIP48	3-1170
2SC1723		TIP48	3-1170
2SC1728		MPSU07	3-1133
2SC1749		MJE340	3-990
2SC1755		MJE2360T	3-1014
2SC1756		MJE2360T	3-1014
2SC1757		MJE2360T	3-1014
2SC1760		MPSU07	3-1133
2SC1761		MPSU01	3-1123
2SC1768		MJ3041	3-632
2SC1777		2N5882	3-130
2SC1782		MJ15001	3-844
2SC1783		2N6249	3-177
2SC1784		MJ15001	3-844
2SC1785		2N6249	3-177
2SC1786		2N6250	3-177
2SC1818		2N6340	3-202
2SC1819		MJE2361T	3-1014
2SC1826		TIP41B	3-1166
2SC1827		TIP41C	3-1166
2SC1829		MJ3041	3-632
2SC1830		2N6578	3-243
2SC1831		2N6056	3-157
2SC1832		MJ10009	3-688
2SC1846		MJE180	3-978
2SC1847		MJE181	3-978
2SC1848		MJE182	3-978
2SC1866		2N5760	3-123
2SC1868		MJ13090	3-816
2SC1869		MJ15001	3-844
2SC1870		2N6546	3-239
2SC1875		MJ12003	3-770
2SC1880		TIP112	3-1178
2SC1881		TIP110	3-1178
2SC1883		TIP122	3-1181
2SC1884		2N6301	3-157
2SC1891		BU205	3-394
2SC1892		BU205	3-394

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SC1893		MJ12003	3-770
2SC1894		BU208	3-394
2SC1895		MJ12005	3-778
2SC1896		MJ12005	3-778
2SC1903		MJE341	3-992
2SC1904		MJE341	3-992
2SC1905		MJE2361T	3-1014
2SC1922		MJ12003	3-770
2SC1929		TIP48	3-1170
2SC1942		MJ12003	3-770
2SC1983		TIP111	3-1178
2SC1984		TIP112	3-1178
2SC1985		TIP41B	3-1166
2SC1986		TIP41C	3-1166
2SC2024		2N4923	3-82
2SC2027		MJ12005	3-778
2SC2068		MJE340	3-992
2SC2071		MJE3440	3-1022
2SC2073		TIP47	3-1170
2SC2080		MJE180	3-978
2SC2085		MJE2361T	3-1014
2SC2121		MJ411	3-620
2SC2122		MJ431	3-622
2SC2123		MJ10014	3-700
2SC2126		MJE13004	3-1058
2SC2127		2N6249	3-177
2SC2128		MJ10015	3-706
2SC2138		MJ13091	3-816
2SC2139		MJ13091	3-816
2SC2140		MJ13091	3-816
2SC2147		MJ10015	3-706
2SC2148		MJ13091	3-816
2SC2151		MJ10014	3-757
2SC2159		MJ10015	3-757
2SC2167		MJE15030	3-1086
2SC2168		MJE15030	3-1086
2SC2189		MJ15001	3-844
2SC2190		2N6545	3-235
2SC2191		2N6547	3-239
2SC2198		2N6301	3-157
2SC2199		MJ11018	3-759
2SC2204		MJ10016	3-706
2SC2209		MJE181	3-978
2SC2220		MJ10016	3-706
2SC2229		TIP47	3-1170
2SC2230		TIP47	3-1170
2SC2233		2N6497	3-225
2SC2235		TIP47	3-1170
2SC2236		TIP31	3-1156
2SC2238		TIP47	3-1170
2SC2239		2N3584	3-20
2SC2242		MJE2361T	3-1014
2SC2243		2N6543	3-229
2SC2244		2N6545	3-235
2SC2245		MJ13091	3-816
2SC2246		2N6547	3-239
2SC2247		2N6543	3-229
2SC2248		2N6545	3-235
2SC2249		MJ10015	3-757
2SC2250		MJ10016	3-757
2SC2256		2N6249	3-177
2SC2260		2N6249	3-177
2SC2261		2N6249	3-177
2SC2262		2N6249	3-177
2SC2270		2N5194	3-92
2SC2278		MJE3439	3-1022
2SC2292		MJ13091	3-816
2SC2293		MJ13091	3-816
2SC2298		MJE270	–
2SC2311		2N4922	3-82

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SC2321		MJ15001	3-844
2SC2322		MJ15015	3-9
2SC2323		MJ15001	3-844
2SC2324		2N6038	3-142
2SC2331		MJE13004	3-1058
2SC2333		MJE13005	3-1058
2SC2334		MJE15030	3-1086
2SC2335		MJE13007	3-1064
2SC2337		MJ15001	3-844
2SC2344		TIP47	3-1170
2SC2354		2N3739	3-37
2SC2356		MJ13091	3-816
2SC2357		MJ12010	3-786
2SC2358		MJ12010	3-786
2SC2359		MJ13015	3-798
2SC2366		MJ10016	3-706
2SC2371		MJE3439	3-1022
2SC2373		MJE13006	3-1064
2SC2388		2N6543	3-229
2SC2397		MJE3055T	3-1018
2SC2402		2N6546	3-239
2SC2403		MJ10015	3-706
2SC2428		2N6249	3-172
2SC2429		MJ16010	3-890
2SC2430		MJ15001	3-844
2SC2431		MJ15015	3-9
2SC2432		2N5882	3-130
2SC2433		MJ11016	3-757
2SC2434		2N6328	–
2SC2435		2N6059	3-153
2SC2436		2N6059	3-153
2SC2442		MJ10016	3-706
2SC2443		MJ10016	3-706
2SC2448		MJ13091	3-816
2SC2449		MJ13091	3-816
2SC2450		MJ13091	3-816
2SC2451		MJ13091	3-816
2SC2452		MJ13091	3-816
2SC2453		MJ13091	3-816
2SC2482		MJE2361T	3-1014
2SC2487		MJ15001	3-844
2SC2488		MJ15001	3-844
2SC2489		MJ15001	3-844
2SC2492		MJ15001	3-844
2SC2493		MJ15001	3-844
2SC2500		TIP31	3-1156
2SC2516		2N6497	3-225
2SC2534		MJE13003	3-1052
2SC2535		MJE13005	3-1058
2SC2536		MJE13005	3-1058
2SC25 (T0218)		MJ13091	3-816
2SC2562		TIP42A	3-1162
2SC2569		2N5760	3-123
2SC2590		MJE341	3-992
2SD12		2N5758	3-123
2SD15		2N5758	3-123
2SD16		2N5758	3-123
2SD17		2N5760	3-123
2SD18		MJ15011	3-850
2SD24		2N3739	3-37
2SD26		2N5758	3-123
2SD26A		2N5758	3-123
2SD26B		2N5758	3-123
2SD26C		2N5760	3-123
2SD28		2N3767	3-44
2SD29		2N3767	3-44
2SD041		2N3716	3-26
2SD45		2N5760	3-123
2SD46		2N5760	3-123
2SD47		2N5758	3-123

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD49		2N3584	3-20
2SD50		2N5758	3-123
2SD51		2N5758	3-123
2SD52		2N5758	3-123
2SD53		2N3055A	3-9
2SD55		2N6328	–
2SD56		2N3738	3-37
2SD57		2N3766	3-44
2SD58		2N3766	3-44
2SD60		2N5760	3-123
2SD67		2N3055A	3-9
2SD68		2N5758	3-123
2SD69		2N5760	3-123
2SD70		2N3766	3-44
2SD71		2N3584	3-20
2SD73		2N5758	3-123
2SD74		2N5760	3-123
2SD80		2N5758	3-123
2SD81		2N5758	3-123
2SD82		2N5758	3-123
2SD83		2N5760	3-123
2SD84		MJ15011	3-850
2SD88		2N5758	3-123
2SD90		2N3766	3-44
2SD91		2N3766	3-44
2SD92		2N3583	3-20
2SD93		2N3584	3-20
2SD94		2N3584	3-20
2SD102		2N3583	3-20
2SD103		2N3584	3-20
2SD107		2N6056	3-157
2SD108		2N6056	3-157
2SD110		MJ15001	3-844
2SD111		2N5882	3-130
2SD113		MJ802	3-624
2SD114		2N5686	3-157
2SD116		2N5758	3-123
2SD117		2N5760	3-123
2SD118		2N5760	3-123
2SD119		2N5758	3-123
2SD124		2N5758	3-123
2SD124A		2N5758	3-123
2SD125		2N5758	3-123
2SD125A		2N5758	3-123
2SD126		2N5760	3-123
2SD129		2N3767	3-44
2SD130		2N3766	3-44
2SD131		2N5758	3-123
2SD132		2N6338	3-202
2SD138		2N3738	3-37
2SD139		2N3739	3-37
2SD141		2N3766	3-44
2SD142		2N3766	3-44
2SD143		2N3767	3-44
2SD144		2N3767	3-44
2SD146		2N4912	3-75
2SD147		2N4912	3-75
2SD148		2N4912	3-75
2SD150		2N3583	3-20
2SD151		2N5882	3-130
2SD152		2N3583	3-20
2SD154		2N3767	3-44
2SD155		2N3767	3-44
2SD156		2N3738	3-37
2SD157		2N3739	3-37
2SD158		2N3738	3-37
2SD159		2N3739	3-37
2SD161		MJ15001	3-844
2SD163		2N3715	3-26
2SD164		2N5882	3-130

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD165		MJ15001	3-844
2SD166		MJ15011	3-850
2SD168		2N6385	3-209
2SD171		2N6543	3-229
2SD172		2N5877	3-127
2SD173		2N5882	3-130
2SD174		2N5877	3-127
2SD175		2N5882	3-130
2SD176		2N5882	3-130
2SD177		MJ15001	3-844
2SD180		2N5758	3-123
2SD181		MJ15001	3-844
2SD188		2N5758	3-123
2SD189		2N5758	3-123
2SD189A		2N5758	3-123
2SD198		2N6308	3-194
2SD199		BU205	3-394
2SD200		BU205	3-394
2SD201		2N5758	3-123
2SD202		2N3055A	3-9
2SD203		2N5760	3-123
2SD206		2N5877	3-127
2SD207		2N5882	3-130
2SD208		MJ15001	3-844
2SD211		2N5877	3-127
2SD212		2N5882	3-130
2SD213		MJ15001	3-844
2SD214		MJ15001	3-844
2SD217		MJ15001	3-844
2SD218		MJ15001	3-844
2SD226		2N3766	3-44
2SD231		2N5302	3-96
2SD232		2N6275	3-181
2SD234		TIP31A	3-1156
2SD235		TIP31A	3-1156
2SD236		2N4912	3-75
2SD237		2N4912	3-75
2SD238		2N3583	3-20
2SD241		2N3766	3-37
2SD242		2N3767	3-37
2SD243		MJE15030	3-1086
2SD244		MJE15030	3-1086
2SD246		BU208	3-394
2SD247		2N5758	3-123
2SD249		2N5302	3-96
2SD250		2N6328	–
2SD251		2N3584	3-20
2SD254		2N3767	3-37
2SD255		2N3767	3-37
2SD256		2N3766	3-37
2SD257		2N3767	3-37
2SD258		MJE15030	3-1086
2SD259		MJE15030	3-1086
2SD260		2N5758	3-123
2SD262		2N6546	3-239
2SD265		2N6545	3-239
2SD266		2N6545	3-239
2SD271		MJE13005	3-1058
2SD272		MJE13005	3-1058
2SD273		2N6545	3-239
2SD274		2N6545	3-239
2SD283		MJE15030	3-1086
2SD284		MJE15030	3-1086
2SD285		MJE15030	3-1086
2SD286		MJ15011	3-850
2SD287		MJ15011	3-850
2SD288		TIP31B	3-1156
2SD289		TIP31B	3-1156
2SD290		2N5428	3-108
2SD291		2N3767	3-44

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD292		2N3767	3-44
2SD293		2N6547	3-239
2SD294		2N6547	3-239
2SD295		MJ13335	3-834
2SD296		MJ13335	3-834
2SD297		MJE15030	3-1086
2SD299		MJ12004	3-772
2SD300		MJ12004	3-772
2SD301		2N6385	3-209
2SD310		2N6547	3-239
2SD311		2N6547	3-239
2SD312		2N6543	3-229
2SD313		TIP31A	3-1156
2SD314		TIP31A	3-1156
2SD315		2N3766	3-44
2SD316		2N3716	3-26
2SD317		TIP31A	3-1156
2SD318		TIP31A	3-1156
2SD319		MJ15001	3-844
2SD320		2N6308	3-194
2SD321		2N6306	3-194
2SD322		MJ15018	–
2SD323		MJ15018	–
2SD324		2N3739	3-37
2SD325		TIP31	3-1156
2SD326		2N3739	3-37
2SD330		TIP31A	3-1156
2SD331		TIP31A	3-1156
2SD334		2N3055A	3-9
2SD335		2N5758	3-123
2SD338		2N5758	3-123
2SD339		2N5758	3-123
2SD340		MJ15015	3-9
2SD341		MJ15015	3-9
2SD342		TIP31B	3-1156
2SD343		TIP31B	3-1156
2SD344		TIP31B	3-1156
2SD345		TIP31B	3-1156
2SD346		TIP41A	3-1166
2SD347		TIP41A	3-1166
2SD348		MJ12005	3-772
2SD350		MJ12004	3-772
2SD351		2N6545	3-235
2SD353		2N6308	3-194
2SD356		2N4923	3-82
2SD357		2N4923	3-82
2SD358		2N4923	3-82
2SD359		2N5190	3-88
2SD360		2N5190	3-88
2SD361		2N5191	3-88
2SD363		MJ10015	3-706
2SD364		MJ10016	3-706
2SD365		TIP31A	3-1156
2SD366		TIP31A	3-1156
2SD368		MJ12005	3-778
2SD369		2N3716	3-26
2SD371		2N5758	3-123
2SD372		MJ10015	3-706
2SD373		MJ10015	3-706
2SD374		MJ10016	3-706
2SD375		MJ13330	3-828
2SD376		MJ13331	3-828
2SD377		MJ13334	3-834
2SD379		2N5758	3-123
2SD380		MJ12005	3-778
2SD381		MJE15030	3-1086
2SD382		MJE15030	3-1086
2SD383		MJ411	3-620
2SD384		2N6301	3-157
2SD385		2N6301	3-157

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD386		MJE13004	3-1058
2SD387		MJE13004	3-1058
2SD388		MJ15018	–
2SD389		TIP31A	3-1156
2SD390		TIP31A	3-1156
2SD393		MJ13091	3-816
2SD394		MJ13091	3-816
2SD395		MJ13091	3-816
2SD396		2N6547	3-239
2SD401		TIP47	3-1170
2SD402		TIP47	3-1170
2SD404		TIP120	3-1181
2SD414		MJE341	3-992
2SD415		MJE341	3-992
2SD416		MJ12005	3-778
2SD417		2N6306	3-194
2SD418		MJ12005	3-778
2SD422		MJE13004	3-1058
2SD423		MJE13004	3-1058
2SD424		MJ15001	3-844
2SD425		MJ15001	3-844
2SD426		MJ15001	3-844
2SD427		2N3055A	3-9
2SD428		2N5758	3-123
2SD429		2N6547	3-239
2SD430		2N3055A	3-9
2SD431		MJ15001	3-844
2SD432		MJ15001	3-844
2SD433		MJ15011	3-844
2SD434		MJ13330	3-828
2SD435		MJ13333	3-834
2SD436		MJ13333	3-834
2SD437		MJ13091	3-816
2SD457		MJ10015	3-706
2SD458		MJ13091	3-816
2SD459		TIP121	3-1181
2SD460		TIP122	3-1181
2SD461		MJ411	3-620
2SD463		2N6056	3-157
2SD464		2N6056	3-157
2SD475		2N6122	3-164
2SD476		2N6123	3-164
2SD478		TIP47	3-1170
2SD479		2N6037	3-142
2SD480		2N6038	3-142
2SD481		2N6039	3-142
2SD482		2N5655	3-116
2SD483		2N5656	3-116
2SD484		2N5657	3-116
2SD485		2N5190	3-88
2SD486		2N5191	3-88
2SD487		2N5192	3-88
2SD488		2N4921	3-82
2SD489		2N4922	3-82
2SD490		2N4923	3-82
2SD491		MJE3055	3-1018
2SD492		2N3055	3-6
2SD493		MJE3055	3-1018
2SD494		MJE3055	3-1018
2SD495		MJE3055	3-1018
2SD496		MJE6043	3-146
2SD497		MJE6044	3-146
2SD498		MJE6045	3-146
2SD499		MJE3055	3-1018
2SD500		MJE3055	3-1018
2SD501		2N5991	3-138
2SD502		2N6055	3-157
2SD503		2N6056	3-157
2SD504		2N6057	3-153
2SD505		2N6058	3-153

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD506		2N6059	3-153
2SD517		MJ12003	3-770
2SD518		MJE13004	3-1058
2SD519		MJ13015	3-798
2SD522		2N5882	3-130
2SD523		2N6055	3-157
2SD524		2N6056	3-157
2SD525		TIP41C	3-1166
2SD526		TIP41B	3-1166
2SD531		TIP41C	3-1166
2SD533		MJ423	3-622
2SD538		MJ13091	3-816
2SD539		MJ13015	3-798
2SD544		TIP41C	3-1166
2SD552		2N6250	3-177
2SD553		TIP41B	3-1166
2SD554		2N3584	3-20
2SD555		MJ13015	3-798
2SD558		MPSU07	3-1133
2SD570		2N6123	3-164
2SD572		MJ10014	3-700
2SD573		MJ10014	3-700
2SD574		MJ11016	3-706
2SD577		MJ12004	3-770
2SD589		MJ12005	3-778
2SD597		2N5758	3-123
2SD598		2N3055A	3-9
2SD600		2N4923	3-82
2SD604		MJ3041	3-632
2SD605		MJ3042	3-632
2SD606		MJ10014	3-700
2SD608		TIP47	3-1170
2SD610		TIP47	3-1170
2SD612		MJE520	3-1000
2SD613		TIP41C	3-1166
2SD622		MJE13005	3-1058
2SD626		MJ10012	3-696
2SD627		MJ12004	3-770
2SD628		2N6059	3-153
2SD629		2N6059	3-153
2SD630		2N5302	3-96
2SD631		2N5302	3-96
2SD632		2N6308	3-194
2SD633		TIP122	3-1181
2SD634		TIP121	3-1181
2SD635		TIP120	3-1181
2SD640		2N6545	3-235
2SD642		MJ10016	3-706
2SD643		MJ10015	3-706
2SD644		MJ10016	3-706
2SD645		MJ10016	3-706
2SD646		MJ10016	3-706
2SD649		MJ12004	3-770
2SD650		MJ3042	3-632
2SD663		MJ3042	3-632
2SD665		2N6249	3-177
2SD668		MJE344	3-992
2SD669		MJE344	3-992
2SD670		2N6578	3-243
2SD672		2N6308	3-194
2SD673		2N3055A	3-9
2SD674		2N3055A	3-9
2SD675		2N5760	3-123
2SD676		2N5760	3-123
2SD677		2N6543	3-229
2SD678		TIP110	3-1178
2SD679		TIP111	3-1178
2SD686		TIP122	3-1181
2SD687		MJE800T	3-1002
2SD689		TIP112	3-1178

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD690		2N5428	3-108
2SD691		2N6301	3-157
2SD692		2N6056	3-157
2SD693		MJ10012	3-696
2SD694		MJ10015	3-706
2SD695		MJ10015	3-706
2SD696		MJ10015	3-706
2SD702		MJ10015	3-706
2SD703		MJ10016	3-706
2SD705		MJ10012	3-696
2SD706		MJ10014	3-700
2SD707		MJ10014	3-700
2SD708		MJ10014	3-700
2SD709		MJ3041	3-632
2SD710		MJ10004	3-676
2SD716		TIP41C	3-1166
2SD717		D44H10	3-616
2SD718		MJE15028	3-1086
2SD721		2N6045	3-146
2SD722		2N6045	3-146
2SD723		TIP31C	3-1156
2SD724		MJE13004	3-1058
2SD725		MJ12005	3-778
2SD726		TIP31C	3-1156
2SD727		2N3055A	3-9
2SD728		2N5760	3-123
2SD729		2N6284	3-185
2SD731		2N6306	3-194
2SD732		2N6306	3-94
2SD733		MJ15001	3-844
2SD748		2N6308	3-194
2SD749		2N6543	3-229
2SD751		MJ423	3-622
2SD752		MJ15001	3-844
2SD753		2N6249	3-177
2SD757		MJE3440	3-1022
2SD758		MJE3440	3-1022
2SD759		TIP47	3-1170
2SD760		TIP47	3-1170
2SD761		TIP47	3-1170
2SD762		TIP31A	3-1156
2SD764		MJ12002	3-765
2SD765		MJ12003	3-770
2SD766		2N3739	3-37
2SD768		2N6045	3-1156
2SD793		MJE180	3-978
2SD794		MJE182	3-978
2SD797		MJE802	3-1002
2SD800		2N6308	3-194
2SD801		2N6545	3-235
2SD802		2N6545	3-235
2SD803		2N6059	3-153
2SD805		MJ10016	3-706
2SD811		MJ12010	3-786
2SD823		MJE15030	3-1086
2SD836		TIP110	3-1178
2SD837		TIP120	3-1181
2SD839		MJE800T	3-1002
2SD840		TIP121	3-1181
2SD843		MJE15028	3-1086
2SD844		MJE3055T	3-1018
2SD867		MJ15001	3-844
2SD872		MJE3055	3-1018
2SD873		2N3773	3-52
2SD877		2N3441	3-13
2SD878		2N3055	3-6
2SD880		TIP31A	3-1156
2SD882		MJE180	3-978
2SD903		MJ12005	3-778
2SD950		MJ12004	3-770

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
2SD951		MJ12004	3-772
2SD952		MJ12004	3-772
2SD953		MJ12005	3-778
40250		2N3054A	3-2
40251		2N3055	3-6
40310		2N3054A	3-2
40312		2N3054A	3-2
40313		2N4240	3-20
40316		2N3054A	3-2
40318		2N4240	3-20
40322		2N4240	3-20
40324		2N3054A	3-2
40325		2N3055	3-6
40328		2N4240	3-20
40363		2N5877	3-127
40364		2N4233A	3-64
40369		2N5877	3-127
40372		2N3054	3-2
40373		2N3441	3-13
40374		2N3583	3-20
40375		2N5428	3-108
40411		MJ802	3-624
40513		MJE3055T	3-1018
40514		MJE3055T	3-1018
40542		MJE3055	3-1018
40543		MJE3055	3-1018
40613		TIP31	3-1156
40618		TIP31	3-1156
40621		TIP31	3-1156
40622		TIP31	3-1156
40624		TIP41A	3-1166
40627		TIP41A	3-1166
40629		TIP31	3-1156
40630		TIP31	3-1156
40631		TIP31A	3-1156
40632		TIP41A	3-1166
40636		2N5878	3-127
40829		2N6316	3-198
40830		2N6315	3-198
40831		2N6315	3-198
40850		2N4240	3-20
40852		2N6543	3-229
40853		2N6546	3-239
40854		2N6546	3-239
40871		TIP41C	3-1166
40872		TIP42C	3-1166
40873		TIP41B	3-1166
40874		TIP41B	3-1166
40875		TIP41C	3-1166
40875		TIP41A	3-1166
40885		MPSU10	3-1135
40886		MPSU10	3-1135
40887		MJE340	3-990
40910		2N3054A	3-2
40911		2N3054A	3-2
40912		2N3584	3-20
40913		2N3584	3-20
41012		2N5038	3-86
41013		2N6339	3-202
41500		TIP29	3-1154
41501		TIP30	3-1154
41504		TIP31	3-1156
41505		MPSU10	3-1135
41506		2N6543	3-229
43104		2N5631	3-112
BD127	BD157		3-287
BD128	BD158		3-287
BD129	BD159		3-287
BD130	2N3055		3-6
BD131	BD785		3-355

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD132	BD786		3-355
BD133	BD787		3-355
BD135	BD135		3-283
BD135-6	BD139-6		3-283
BD135-10	BD139-10		3-283
BD135-16	BD139-16		3-283
BD136	BD136		3-285
BD136-6	BD140-6		3-285
BD136-10	BD140-10		3-285
BD136-16	BD140-16		3-285
BD137	BD137		3-283
BD137-6	BD-139-6		3-283
BD137-10	BD139-10		3-283
BD137-16	BD139-16		3-283
BD138	BD138		3-285
BD138-6	BD140-6		3-283
BD138-10	BD140-10		3-283
BD138-16	BD140-16		3-283
BD139	BD139		3-283
BD139-6	BD139-6		3-283
BD139-10	BD139-10		3-283
BD139-16	BD139-16		3-283
BD140	BD140		3-285
BD140-6	BD140-6		3-285
BD140-10	BD140-10		3-285
BD140-16	BD140-16		3-285
BD142	2N3055		3-6
BD142-4	2N3055		3-6
BD142-6	2N3055		3-6
BD142-7	2N3055		3-6
BD157	BD157		3-287
BD158	BD158		3-287
BD159	BD159		3-287
BD165	BD165		3-289
BD166	BD166		3-291
BD167	BD167		3-289
BD168	BD168		3-291
BD169	BD169		3-289
BD170	BD170		3-291
BD175	BD175		3-293
BD175-6	BD179-6		3-293
BD175-10	BD179-10		3-293
BD175-16	BD179-16		3-293
BD176	BD176		3-295
BD176-6	BD180-6		3-295
BD176-10	BD180-10		3-295
BD176-16	BD180-16		3-295
BD177	BD177		3-293
BD177-6	BD179-6		3-293
BD177-10	BD179-10		3-293
BD177-16	BD179-16		3-293
BD178	BD178		3-295
BD178-6	BD180-6		3-295
BD178-10	BD180-6		3-295
BD179	BD179		3-293
BD179-6	BD179-6		3-293
BD179-10	BD179-10		3-293
BD180	BD180		3-295
BD180-6	BD180-6		3-295
BD180-10	BD180-10		3-295
BD185	BD185		3-297
BD186	BD186		3-299
BD187	BD187		3-297
BD188	BD188		3-299
BD189	BD189		3-297
BD190	BD190		3-299
BD195	MJE3055		3-1018
BD196	MJE2955		3-1018
BD197	MJE3055		3-1018
BD198	MJE2955		3-1018
BD199	MJE3055		3-1018

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD200	MJE2955		3-1018
BD201	BD795		3-363
BD202	BD796		3-365
BD203	BD797		3-363
BD204	BD798		3-365
BD205	BD205		3-301
BD206	BD206		3-303
BD207	BD207		3-301
BD208	BD208		3-303
BD220	BD537		3-345
BD221	BD533		3-345
BD222	BD535		3-345
BD223	BD538		3-345
BD224	BD534		3-345
BD225	BD536		3-345
BD226	BD135		3-283
BD227	BD136		3-285
BD228	BD137		3-283
BD229	BD138		3-285
BD230	BD139		3-283
BD231	BD140		3-285
BD232	BD232		3-305
BD233	BD233		3-307
BD234	BD234		3-309
BD235	BD235		3-307
BD236	BD236		3-309
BD237	BD237		3-307
BD238	BD238		3-309
BD239	BD241		3-311
BD239-4	BD241-4		3-311
BD239-5	BD241-5		3-311
BD239-66	BD241-66		3-311
BD239A	BD241A		3-311
BD239A4	BD241A4		3-311
BD239A5	BD241A5		3-311
BD239A66	BD241A66		3-311
BD239B	BD241B		3-311
BD239B4	BD241B4		3-311
BD239B5	BD241B5		3-311
BD239B66	BD241B66		3-311
BD239C	BD241C		3-311
BD239C4	BD241C4		3-311
BD239C5	BD241C5		3-311
BD239C66	BD241C66		3-311
BD240	BD242		3-311
BD240-4	BD242-4		3-311
BD240-5	BD242-5		3-311
BD240-66	BD242-66		3-311
BD240A	BD242A		3-311
BD240A4	BD242A4		3-311
BD240A5	BD242A5		3-311
BD240A66	BD242A66		3-311
BD240B	BD242B		3-311
BD240B4	BD242B4		3-311
BD240B5	BD242B5		3-311
BD240B66	BD242B66		3-311
BD240C	BD242C		3-311
BD240C4	BD242C4		3-311
BD240C5	BD242C5		3-311
BD240C66	BD242C66		3-311
BD241	BD241		3-313
BD241A	BD241A		3-313
BD241B	BD241B		3-313
BD241C	BD241C		3-313
BD242	BD242		3-313
BD242A	BD242A		3-313
BD242B	BD242B		3-313
BD242C	BD242C		3-313
BD243	BD243		3-317
BD243A	BD243A		3-317
BD243B	BD243B		3-317

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD243C	BD243C		3-317
BD244	BD244		3-317
BD244A	BD244A		3-317
BD244B	BD244B		3-317
BD244C	BD244C		3-317
BD249	BD249		–
BD249A	BD249A		–
BD249B	BD249B		–
BD249C	BD249C		–
BD250	BD250		–
BD250A	BD250A		–
BD250B	BD250B		–
BD250C	BD250C		–
BD253	2N6543		3-229
BD253A	2N6543		3-229
BD253B	2N6543		3-229
BD253C	BU326A		3-419
BD268	BDW45		3-379
BD268A	BDW46		3-379
BD269	BDW40		3-379
BD269A	BDW41		3-379
BD262	BD678		3-351
BD262A	BD680		3-351
BD262B	BD682		3-351
BD263	BD677		3-349
BD263A	BD679		3-349
BD263B	BD681		3-349
BD266	BD898		3-373
BD266A	BD900		3-373
BD266B	BD902		3-373
BD267	BD897		3-371
BD267A	BD899		3-371
BD267B	BD901		3-371
BD271	BD533		3-345
BD272	BD534		3-345
BD273	BD535		3-345
BD274	BD536		3-345
BD275	BD537		3-345
BD276	BD538		3-345
BD278	MJE3055T		3-1018
BD278A	MJE3055T		3-1018
BD279		2N6037	3-1020
BD280		2N6034	3-1020
BD291	BD243		3-317
BD292	BD244		3-317
BD293	BD243A		3-317
BD294	BD244A		3-317
BD295	BD243B		3-317
BD296	BD244B		3-317
BD301	BD533		3-345
BD302	BD534		3-345
BD303	BD535		3-345
BD304	BD536		3-345
BD301	BD795		3-363
BD302	BD796		3-365
BD303	BD797		3-363
BD304	BD798		3-365
BD306A	BD785		3-363
BD306B	BD785		3-363
BD307A	BD787		3-363
BD307B	BD787		3-363
BD311	2N3715		3-321
BD312	2N3791		3-321
BD313	2N3716		3-26
BD314	2N3792		3-56
BD315	BD368		3-324
BD316	BD369		3-324
BD329	MJE200		3-982
BD337	BDX33D		–
BD338	BDX34D		–
BD330	MJE210		3-982

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD331	BD897		3-371
BD332	BD898		3-373
BD333	BD899		3-371
BD334	BD900		3-373
BD335	BD901		3-371
BD336	BD902		3-373
BD342	2N3055		3-6
BD343	MJE2955		3-1018
BD344	BD138		3-285
BD345	BD137		3-283
BD346	BD798		3-365
BD347	BD797		3-363
BD348	BD140		3-285
BD349	BD139		3-283
BD361	MJE200		3-982
BD361A	MJE200		3-982
BD362	MJE210		3-982
BD362A	MJE210		3-982
BD375	BD785		3-355
BD376	BD786		3-355
BD377	BD787		3-355
BD378	BD788		3-355
BD379	BD789		3-359
BD380	BD790		3-359
BD385		MJE181	3-978
BD385-1		MJE181	3-978
BD385-2		MJE181	3-978
BD385-5		MJE181	3-978
BD385-8		MJE181	3-978
BD386		MJE171	3-978
BD386-1		MJE171	3-978
BD386-2		MJE171	3-978
BD386-5		MJE171	3-978
BD386-8		MJE171	3-978
BD387		MJE182	3-978
BD387-1		MJE182	3-978
BD387-2		MJE182	3-978
BD387-5		MJE182	3-978
BD387-8		MJE182	3-978
BD388		MJE172	3-978
BD388-1		MJE172	3-978
BD388-2		MJE172	3-978
BD388-5		MJE172	3-978
BD388-8		MJE172	3-978
BD389		MJE243	3-986
BD389-1		MJE243	3-986
BD389-2		MJE243	3-986
BD389-5		MJE243	3-986
BD389-8		MJE243	3-986
BD390		MJE253	3-986
BD390-1		MJE253	3-986
BD390-2		MJE253	3-986
BD390-5		MJE253	3-986
BD390-8		MJE253	3-986
BD410	BD232		3-305
BD411		MJE3300	3-1020
BD411-1		MJE3300	3-1020
BD411-2		MJE3300	3-1020
BD411-5		MJE3300	3-1020
BD411-8		MJE3300	3-1020
BD412		MJE3300	3-1020
BD412-1		MJE3300	3-1020
BD412-2		MJE3300	3-1020
BD412-5		MJE3300	3-1020
BD412-8		MJE3300	3-1020
BD413		MJE3310	3-1020
BD413-1		MJE3310	3-1020
BD413-2		MJE3310	3-1020
BD413-5		MJE3310	3-1020
BD413-8		MJE3310	3-1020

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD414		MJE3310	3-1020
BD414-1		MJE3310	3-1020
BD414-2		MJE3310	3-1020
BD414-5		MJE3310	3-1020
BD414-8		MJE3310	3-1020
BD415		MJE181	3-978
BD415-1		MJE181	3-978
BD415-2		MJE181	3-978
BD415-8		MJE181	3-978
BD416		MJE171	3-978
BD416-1		MJE171	3-978
BD416-2		MJE171	3-978
BD416-5		MJE171	3-978
BD417		MJE182	3-978
BD417-1		MJE182	3-978
BD417-2		MJE182	3-978
BD417-5		MJE182	3-978
BD417-8		MJE182	3-978
BD418		MJE172	3-978
BD418-1		MJE172	3-978
BD418-2		MJE172	3-978
BD418-5		MJE172	3-978
BD418-8		MJE172	3-978
BD419		MJE243	3-986
BD419-1		MJE243	3-986
BD419-2		MJE243	3-986
BD419-8		MJE243	3-986
BD420		MJE253	3-986
BD420-1		MJE253	3-986
BD420-2		MJE253	3-986
BD420-5		MJE253	3-986
BD420-8		MJE253	3-986
BD424	BD791		3-359
BD429	MJE200		3-982
BD430	MJE210		3-982
BD433	BD433		3-327
BD433-16	BD433		3-327
BD434	BD434		3-330
BD434-16	BD434		3-330
BD435	BD435		3-327
BD436	BD436		3-330
BD437	BD437		3-327
BD438	BD438		3-330
BD439	BD439		3-327
BD440	BD440		3-330
BD441	BD441		—
BD442	BD442		3-330
BD443	BD179		3-293
BD443A	BD179		3-293
BD466A		MJE3300	3-1020
BD466B		MJE3300	3-1020
BD477A		MJE3310	3-1020
BD477B		MJE3310	3-1020
BD505	BD505		3-333
BD505-1	BD505		3-333
BD505-5	BD505		3-333
BD506	BD506		3-335
BD506-5	BD506		3-335
BD507	BD507		3-333
BD507-1	BD507		3-333
BD507-5	BD507		3-333
BD508	BD508		3-335
BD508-1	BD508		3-335
BD508-5	BD508		3-335
BD509	BD509		3-333
BD509-1	BD509		3-333
BD509-5	BD509		3-333
BD510	BD510		3-335
BD510-5	BD510		3-335
BD515	BD515		3-337

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD515-1	BD515		3-337
BD515-5	BD515		3-337
BD516	BD516		3-339
BD516-1	BD516		3-339
BD516-5	BD516		3-337
BD517	BD517		3-337
BD517-1	BD517		3-337
BD518	BD518		3-339
BD518-1	BD518		3-339
BD519	BD519		3-337
BD519-1	BD519		3-337
BD519-5	BD519		3-337
BD520	BD520		3-339
BD520-1	BD520		3-339
BD520-5	BD520		3-339
BD524	BD791		3-359
BD525	BD525		3-341
BD525-2	BD525		3-341
BD525-5	BD525		3-341
BD526	BD526		3-343
BD526-1	BD526		3-343
BD526-5	BD526		3-343
BD527	BD527		3-341
BD527-1	BD527		3-341
BD527-2	BD527		3-341
BD527-5	BD527		3-341
BD528	BD528		3-343
BD528-1	BD528		3-343
BD528-5	BD528		3-343
BD529	BD529		3-341
BD529-1	BD529		3-341
BD529-2	BD529		3-341
BD529-5	BD529		3-341
BD530	BD530		3-343
BD530-1	BD530		3-343
BD530-5	BD530		3-343
BD533	BD533		3-345
BD534	BD534		3-345
BD535	BD535		3-345
BD536	BD536		3-345
BD537	BD537		3-345
BD538	BD538		3-345
BD539	BD243		3-317
BD539A	BD243A		3-317
BD539B	BD243B		3-317
BD539C	BD243C		3-317
BD540	BD244		3-317
BD540A	BD244A		3-317
BD540B	BD244B		3-317
BD540C	BD244C		3-317
BD543	BD805		3-367
BD543A	BD807		3-367
BD543B	BD809		3-367
BD544	BD806		3-369
BD544A	BD808		3-369
BD544B	BD810		3-369
BD546D	BD546D		—
BD561	BD187		3-297
BD575	BD241		3-313
BD576	BD242		3-313
BD577	BD241A		3-313
BD578	BD242A		3-313
BD579	BD241B		3-313
BD580	BD242B		3-313
BD581	BD241C		3-313
BD582	BD242C		3-313
BD585	BD533		3-345
BD586	BD534		3-345
BD587	BD535		3-345
BD588	BD536		3-345
BD589	BD537		3-345

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD590	BD538		3-345
BD591	BD241C		3-313
BD592	BD242C		3-313
BD595	BD795		3-363
BD596	BD796		3-365
BD597	BD797		3-363
BD598	BD798		3-365
BD599	BD799		3-363
BD600	BD800		3-365
BD601	BD801		3-363
BD602	BD802		3-365
BD605	BD805		3-367
BD606	BD806		3-369
BD607	BD807		3-367
BD608	BD808		3-369
BD609	BD809		3-367
BD610	BD810		3-369
BD611	BD433		3-327
BD612	BD434		3-330
BD613	BD435		3-327
BD614	BD436		3-330
BD615	BD437		3-327
BD616	BD438		3-330
BD617	BD439		3-327
BD618	BD440		3-330
BD619	BD441		—
BD620	BD442		3-330
BD633	BD241		3-313
BD634	BD242		3-313
BD635	BD241A		3-313
BD636	BD242A		3-313
BD637	BD241B		3-313
BD638	BD242B		3-313
BD643	BD895		3-371
BD644	BD896		3-373
BD645	BD897		3-371
BD646	BD898		3-373
BD647	BD899		3-371
BD648	BD900		3-373
BD649	BD901		3-371
BD650	BD902		3-373
BD661	BD185		3-297
BD661K	BD533		3-345
BD662	BD186		3-299
BD662K	BD534		3-345
BD663	BD795		3-363
BD664	BD796		3-365
BD675	BD675		3-349
BD675A	BD675A		3-349
BD676	BD676		3-351
BD676A	BD676A		3-351
BD677	BD677		3-345
BD677A	BD677A		3-345
BD678	BD678		3-351
BD678A	BD678A		3-351
BD679	BD679		3-349
BD679A	BD679A		3-349
BD680	BD680		3-351
BD680A	BD680A		3-351
BD681	BD681		3-349
BD682	BD682		3-351
BD695	BD895		3-371
BD695A	BD895A		3-371
BD696	BD896		3-373
BD696A	BD896A		3-373
BD697	BD897		3-363
BD697A	BD897A		3-363
BD698	BD898		3-373
BD698A	BD898A		3-373
BD699	BD899		3-371

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD699A	BD899A		3-371
BD700	BD900		3-373
BD700A	BD900A		3-373
BD701	BD901		3-371
BD702	BD902		3-373
BD705	BD795		3-363
BD706	BD796		3-365
BD707	BD797		3-363
BD708	BD798		3-365
BD709	BD799		3-363
BD710	BD800		3-365
BD711	BD801		3-363
BD712	BD802		3-365
BD733	BD533		3-345
BD734	BD534		3-345
BD735	BD533		3-345
BD736	BD534		3-345
BD737	BD533		3-345
BD738	BD534		3-345
BD743	BD805		3-345
			3-367
BD743A	BD807		
BD743B	BD809		3-367
BD743D		MJE15030	3-367
BD744	BD806		3-1086
BD744A	BD808		3-369
			3-369
BD744B	BD810		
BD744D		MJE15031	3-369
BD775	BD775		3-1086
BD776	BD776		3-353
BD777	BD777		3-353
			3-353
BD778	BD778		
BD779	BD779		3-353
BD780	BD780		3-353
BD785	BD785		3-353
BD786	BD786		3-355
			3-355
BD787	BD787		
BD788	BD788		3-355
BD789	BD789		3-355
BD790	BD790		3-359
BD791	BD791		3-359
			3-359
BD792	BD792		
BD795	BD795		3-359
BD796	BD796		3-363
BD797	BD797		3-365
BD798	BD798		3-363
			3-365
BD799	BD799		
BD800	BD800		3-363
BD801	BD801		3-365
BD802	BD802		3-363
BD805	BD805		3-365
			3-367
BD806	BD806		3-369
BD807	BD807		3-367
BD808	BD808		3-369
BD809	BD809		3-367
BD810	BD810		3-369
BD813		MJE181	3-978
BD814		MJE171	3-978
BD815		MJE182	3-978
BD816		MJE172	3-978
BD817		MJE243	3-986
BD818		MJE253	3-986
BD825		MJE181	3-978
BD826		MJE171	3-978
BD827		MJE182	3-978
BD828		MJE172	3-978
BD829		MJE243	3-986
BD830		MJE253	3-986
BD833	BD785		3-355
BD834	BD786		3-355
BD835	BD787		3-355

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BD836	BD788		3-355
BD837	BD789		3-359
BD838	BD790		3-359
BD839	C.M.		–
BD861	BD675		3-349
BD862	BD676		3-351
BD863	BD677		3-349
BD864	BD678		3-351
BD865	BD679		3-349
BD866	BD680		3-350
BD875	BD775		3-353
BD876	BD776		3-353
BD877	BD777		3-353
BD878	BD778		3-353
BD879	BD779		3-353
BD880	BD780		3-353
BD895	BD895		3-371
BD895A	BD895A		3-371
BD896	BD896		3-373
BD896A	BD896A		3-373
BD897	BD897		3-371
BD897A	BD897A		3-371
BD898	BD898		3-373
BD898A	BD898A		3-373
BD899	BD899		3-371
BD899A	BD899A		3-371
BD900	BD900		3-373
BD900A	BD900A		3-373
BD901	BD901		3-371
BD902	BD902		3-373
BD905	2N6486		3-221
BD906	2N6489		3-221
BD907	2N6487		3-221
BD908	2N6490		3-221
BD909	2N6488		3-221
BD910	2N6491		3-221
BD933	BD241		3-313
BD934	BD242		3-313
BD935	BD241A		3-313
BD936	BD242A		3-313
BD937	BD241B		3-313
BD938	BD242B		3-313
BD939	BD241C		3-313
BD940	BD242C		3-313
BD941		MJE15030	3-1086
BD942		MJE15031	3-1086
BD943	BD533		3-345
BD944	BD534		3-345
BD945	BD533		3-345
BD946	BD534		3-345
BD947	BD533		3-345
BD948	BD534		3-345
BD949	BD535		3-345
BD950	BD536		3-345
BD951	BD537		3-345
BD952	BD538		3-345
BD953	BD241C		3-311
BD954	BD242C		3-311
BD955		MJE15030	3-1086
BD956		MJE15031	3-1086
BD975	BD775		3-353
BD976	BD776		3-353
BD977	BD777		3-353
BD978	BD778		3-353
BD979	BD779		3-353
BD980	BD780		3-353
BDT29	TIP29		3-1154
BDT29A	TIP30		3-1154
BDT29B	TIP29B		3-1154
BDT29C	TIP29C		3-1154

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BDT30	TIP30A		3-1154
BDT30B	TIP30B		3-1154
BDT30C	TIP30C		3-1154
BDT31	TIP31		3-1056
BDT31A	TIP31A		3-1056
BDT31B	TIP31B		3-1056
BDT31C	TIP31C		3-1056
BDT32	TIP32		3-1056
BDT32A	TIP32A		3-1056
BDT32B	TIP32B		3-1056
BDT32C	TIP32C		3-1156
BDT41	TIP41		3-1166
BDT41A	TIP41A		3-1166
BDT41B	TIP41B		3-1166
BDT41C	TIP41C		3-1166
BDT42	TIP42		3-1166
BDT42A	TIP42A		3-1166
BDT42B	TIP42B		3-1166
BDT42C	TIP42C		3-1166
BDT60	TIP125		3-1181
BDT60A	TIP126		3-1181
BDT60B	TIP127		3-1181
BDT60C	BDX53D		—
BDT61	TIP120		3-1181
BDT61A	TIP121		3-1181
BDT61B	TIP122		3-1181
BDT61C	BDX53D		—
BDT62	BDW45		3-379
BDT62A	BDW46		3-379
BDT62B	BDW47		3-379
BDT62C	BDW48		3-379
BDT62C	C.M.		—
BDT63	BDW40		3-379
BDT63A	BDW41		3-379
BDT63B	BDW42		3-379
BDT63C	BDW43		—
BDT64	BDW44		3-379
BDT64A	BDW45		3-379
BDT64B	BDW46		3-379
BDT64C	BDW47		3-379
BDT65	BDW40		3-379
BDT65A	BDW41		3-379
BDT65B	BDW42		3-379
BDT65C	BDW43		—
BDT91	BD807		3-367
BDT92	BD808		3-369
BDT93	BD809		3-367
BDT94	BD810		3-369
BDV64	BDV64		3-375
BDV64A	BDV64A		3-375
BDV64B	BDV64B		3-375
BDV64C	MJH11017		3-375
BDV65	BDV65		3-375
BDV65A	BDV65A		3-375
BDV65B	BDV65B		3-375
BDV65C	MJH11018		3-375
BDV66C	MJH11017		3-1117
BDV66D	MJH11019		3-1117
BDV67C	MJH11018		3-1117
BDV67D	MJH11020		3-1117
BDV91	MJE3055T		3-1018
BDV92	TIP34B		3-1160
BDV93	TIP34C		3-1160
BDV94	TIP2955		3-1189
BDV95	TIP33B		3-1160
BDV96	TIP33C		3-1160
BDW21	2N3714		3-26
BDW21A	2N3714		3-26
BDW21B	2N3714		3-26
BDW21C		2N5882	3-130

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BDW22	2N3789		3-56
BDW22A	2N3789		3-56
BDW22B	2N3790		3-56
BDW22C	2N5880		3-130
BDW23	BDX53		3-389
BDW23A	BDX53A		3-389
BDW23B	BDX53B		3-389
BDW23C	BDX53C		3-389
BDW24	BDX54		3-389
BDW24A	BDX54A		3-389
BDW24B	BDX54B		3-389
BDW24C	BDX54C		3-389
BDW39	BDW39		3-379
BDW40	BDW40		3-379
BDW41	BDW41		3-379
BDW42	BDW42		3-379
BDW44	BDW44		3-379
BDW45	BDW45		3-379
BDW46	BDW46		3-379
BDW47	BDW47		3-379
BDW51	2N3715		3-26
BDW51A	2N3715		3-26
BDW51B	2N3716		3-26
BDW51C	2N5882		3-130
BDW52	2N3791		3-56
BDW52A	2N3792		3-56
BDW52B	2N3792		3-56
BDW52C	2N5880		3-130
BDW53	TIP120		3-1181
BDW53A	TIP120		3-1181
BDW53B	TIP121		3-1181
BDW53C	BDX53C		3-389
BDW53C	C.M.		—
BDW53D	BDX53D		—
BDW53D	C.M.		—
BDW54	TIP125		3-1181
BDW54A	TIP125		3-1181
BDW54B	TIP126		3-1181
BDW54C	BDX54C		3-389
BDW54D	BDX54D		—
BDW55	BD135		3-283
BDW56	BD136		3-285
BDW57	BD137		3-283
BDW58	BD138		3-285
BDW59	BD139		3-283
BDW60	BD140		3-285
BDW63	BDX53		3-389
BDW63A	BDX53A		3-389
BDW63B	BDX53B		3-389
BDW63C	BDX53C		3-389
BDW63D	BDX53D		—
BDW64	BDX54		3-389
BDW64A	BDX54A		3-389
BDW64B	BDX54B		3-389
BDW64C	BDX54C		3-389
BDW73D	BDX33D		3-389
BDW74D	BDX34D		—
BDW73	BD895		3-371
BDW73A	BD897		3-371
BDW73B	BD899		3-371
BDW73C	BD901		3-371
BDW74	BD896		3-373
BDW74A	BD898		3-373
BDW74B	BD900		3-371
BDW74C	BD902		3-373
BDW83	BDV65		3-375
BDW83A	BDV65		3-375
BDW83B	BDV65A		3-375
BDW83C	BDV65B		3-375
BDW84	BDV64		3-375
BDW84A	BDV64		3-375

CM Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BDW84B	BDV64A		3-375
BDW84C	BDV64B		3-375
BDW93	BDW39		3-379
BDW93A	BDW40		3-379
BDW93B	BDW41		3-379
BDW93C	BDW42		3-379
BDW94	BDW44		3-379
BDW94A	BDW45		3-379
BDW94B	BDW46		3-379
BDW94C	BDW47		3-379
BDX10	2N3055A		3-9
BDX10-4	2N3055A		3-9
BDX10-6	2N3055A		3-9
BDX10-7	2N3055A		3-9
BDX10C	2N3055A		3-9
BDX18	MJ2955		3-6
BDX33	BDX33		3-385
BDX33A	BDX33A		3-385
BDX33B	BDX33B		3-385
BDX33C	BDX33C		3-385
BDX33D	BDX33D		—
BDX34	BDX34		3-385
BDX34A	BDX34A		3-385
BDX34B	BDX34B		3-385
BDX34C	BDX34C		3-385
BDX34D	BDX34D		—
BDX35	MJE240		3-986
BDX35	TIP42C		3-1162
BDX36	MJE240		3-986
BDX36	TIP42D		3-1162
BDX37	MJE240		3-986
BDX37	TIP42D		3-1162
BDX42	BD775		3-353
BDX43	BD777		3-353
BDX44	BD779		3-353
BDX45	BD776		3-353
BDX46	BD778		3-353
BDX47	BD779		3-353
BDX53	BDX53		3-389
BDX53A	BDX53A		3-389
BDX53B	BDX53B		3-389
BDX53C	BDX53C		3-389
BDX53D	BDX53D		—
BDX54	BDX54		3-389
BDX54A	BDX54A		3-389
BDX54B	BDX54B		3-389
BDX54C	BDX54C		3-389
BDX54D	BDX54D		—
BDX70		2N6487	3-221
BDX71		2N6487	3-221
BDX72		2N6488	3-221
BDX73		2N6488	3-221
BDX74		2N6486	3-221
BDX75		2N6486	3-221
BDX77	BD799		3-363
BDX78	BD800		3-365
BDX83	MJ3000		3-628
BDX83A	MJ3000		3-628
BDX83B	MJ3001		3-628
BDX83C	MJ4035		3-634
BDX84	MJ2500		3-628
BDX84A	MJ2500		3-628
BDX84B	MJ2501		3-628
BDX84C	MJ4032		3-634
BDX91	2N3715		3-26
BDX92	2N3791		3-56
BDX93	2N3716		3-26
BDX94	2N3792		3-56
BDX95		2N5882	3-130
BDX96	2N5880		3-130

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BDY29	2N5303		3-96
BDY34	BD785		3-355
BDY37	2N3773		3-52
BDY80	BD533		3-345
BDY81	BD535		3-345
BDY82	BD534		3-345
BDY83	BD536		3-345
BDY93	BU326A		3-419
BDY93/01	BU326A		3-419
BDY94	BU326A		3-419
BDY94/01	BU326A		3-419
BDY96	BUS47		3-455
BDY96-1	BUS47		3-455
BDY96/01	BUS47		3-455
BDY97	BUS47		3-455
BDY97-1	BUS47		3-455
BF380	MPSU10		3-1135
BF380-5	MPSU10		3-1135
BF381	MPSU10		3-1135
BF382	MPSU10		3-1135
BF382-5	MPSU10		3-1135
BF415	BF757		—
BF416	BF760		—
BF417	MJE340		3-990
BF418	BF761		—
BF460-1	BF460		—
BF460-2	BF460		—
BF460-8	BF460		—
BF461-1	BF461		—
BF461-2	BF461		—
BF461-5	BF461		—
BF461-8	BF461		—
BF462-1	BF462		—
BF462-2	BF462		—
BF462-8	BF462		—
BF463-1	BF463		—
BF463-2	BF463		—
BF463-5	BF463		—
BF463-8	BF463		—
BF464-1	BF464		—
BF464-2	BF464		—
BF464-5	BF464		—
BF464-8	BF464		—
BF465-1	BF465		—
BF465-2	BF465		—
BF465-5	BF465		—
BF465-8	BF465		—
BF466	BF466		—
BF466-1	BF466		—
BF466-2	BF466		—
BF466-8	BF466		—
BF467	BF467		—
BF467-1	BF467		—
BF467-2	BF467		—
BF467-8	BF467		—
BF468	BF468		—
BF468-1	BF468		—
BF468-2	BF468		—
BF468-8	BF468		—
BF469	BF787		—
BF470	BF790		—
BF471	BF788		—
BF472	BF791		—
BF615	BF757		—
BF616	BF760		—
BF617	BF758		—
BF618	BF761		—
BF715	BF787		—
BF716	BF790		—
BF717	BF758		—

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BF718	BF761		—
BF757	BF757		—
BF757-1	BF757		—
BF757-2	BF757		—
BF757-5	BF757		—
BF757-8	BF757		—
BF758	BF758		—
BF758-5	BF758		—
BF758-8	BF758		—
BF759	BF759		—
BF759-1	BF759		—
BF759-2	BF759		—
BF759-5	BF759		—
BF759-8	BF759		—
BF760	BF760		—
BF760-2	BF760		—
BF760-5	BF760		—
BF760-8	BF760		—
BF761	BF761		—
BF761-1	BF761		—
BF761-5	BF761		—
BF761-8	BF761		—
BF762	BF762		—
BF762-1	BF762		—
BF762-2	BF762		—
BF762-5	BF762		—
BF762-8	BF762		—
BF787	BF787		—
BF787-1	BF787		—
BF788	BF788		—
BF788-1	BF788		—
BF788-5	BF788		—
BF789	BF789		—
BF789-1	BF789		—
BF789-5	BF789		—
BF789-11	BF789		—
BF790	BF790		—
BF790-1	BF790		—
BF790-2	BF790		—
BF790-5	BF790		—
BF791	BF791		—
BF791-1	BF791		—
BF791-5	BF791		—
BF792	BF792		—
BF792-1	BF792		—
BF792-2	BF792		—
BF792-5	BF792		—
BF857	BF757		—
BF858	BF757		—
BF859	BF758		—
BF869	BF787		—
BF870	BF790		—
BF871	BF788		—
BF872	BF791		—
BU104P	BU406		3-422
BU105	BU205		3-394
BU108	BU208		3-399
BU109P	BU407		3-422
BU124	BU426		3-424
BU126		2N6545	3-235
BU126		BUS45P	3-447
BU126A		BUS45P	3-447
BU134	MJ423		3-622
BU137	BUT16		3-519
BU157	BUT16		3-519
BU180		MJE5741	3-1028
BU180A		MJE5742	3-1028
BU204	BU205		3-394
BU205	BU205		3-394
BU205A	BU205		3-394

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BU207	BU208		3-399
BU208	BU208		3-399
BU208A	BU208A		3-404
BU208D	BU208D		3-409
BU222	BU326A		3-419
BU221A	BU326A		3-419
BU223	MJ431		3-622
BU223A	MJ431		3-622
BU322	BU323		3-411
BU322A	BU323A		3-311
BU323	BU323		3-311
BU323A	BU323A		3-311
BU323P	BU323P		3-415
BU326		BUS45P	3-419
BU326A		BUS45P	3-419
BU326S	BU326A		3-419
BU406	BU406		3-422
BU406D	C.M.		3-422
BU406H	C.M.		3-422
BU407	BU407		3-422
BU407	C.M.		3-422
BU426		BUS45P	3-424
BU426A	BU426A		3-424
BU433	BU426		3-424
BU500	BU500		3-428
BU508	BU508		3-430
BU508A	BU508A		3-430
BU508AD	BU508AD		3-430
BU508D	BU508D		3-430
BU522	BU522		3-435
BU522A	BU522A		3-435
BU522B	BU522B		3-435
BU806	BU806		3-438
BU807	BU807		3-438
BU808	BU208		3-399
BUR50	BUS50		3-483
BUR51	BUS51		3-485
BUR52	BUS52		3-485
BUS11		BUS46P	3-49
BUS12	BUS47		3-455
BUS12A	BUS47A		3-455
BUS13	BUS48		3-469
BUS13A	BUS48A		3-469
BUS14	BUS98		3-494
BUS14A	BUS98A		3-494
BUS36	BUS36		3-440
BUS37	BUS37		3-440
BUS45P	BUS45P		3-447
BUS46P	BUS46P		3-449
BUS47	BUS47		3-455
BUS47A	BUS47A		3-455
BUS47AP	BUS47AP		3-462
BUS47P	BUS47P		3-462
BUS48	BUS48		3-469
BUS48AP	BUS48AP		3-469
BUS48P	BUS48P		3-476
BUS50	BUS50		3-483
BUS51	BUS51		3-485
BUS52	BUS52		3-485
BUS97	BUS97		3-487
BUS97A	BUS97A		3-487
BUS98	BUS98		3-494
BUS98A	BUS98A		3-494
BUT13	BUT13		3-501
BUT14	BUT14		3-507
BUT15	BUT15		3-513
BUT16	BUT16		3-519
BUT33	BUT33		3-525
BUT34	BUT34		3-531
BUT35	BUT35		3-537
BUT36	BUT36		3-543

CM Consult Motorola if a direct replacement is necessary.

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BUT50P	BUT50P		3-549
BUT51P	BUT51P		3-551
BUT90	BUS50		3-483
BUT91	BUS51		3-485
BUT92	BUS52		3-485
BUV10	BUV10		—
BUV10N	BUV10N		3-552
BUV11	BUV11		3-555
BUV11N	BUV11N		3-558
BUV12	BUV12		3-561
BUV18		BUS50	3-483
BUV19		BUS50	3-483
BUV20	BUV20		3-564
BUV21	BUV21		3-567
BUV21N	BUV21N		3-570
BUV22	BUV22		3-573
BUV23	BUV23		3-576
BUV24	BUV98		3-579
BUV25	BUS98A		3-494
BUV26	BUV26		—
BUV27	BUV27		—
BUV47	BUS47P		3-462
BUV47A	BUS47AP		3-462
BUV47B	BUS47P		3-462
BUV48	BUS48P		3-476
BUV48A	BUS48AP		3-469
BUW11	BUW11		3-582
BUW11A	BUW11A		3-582
BUW12	BUW12		3-582
BUW12A	BUW12A		3-582
BUW24	BU326A		3-419
BUW25	BU326A		3-419
BUW26	BU326A		3-419
BUW34	BUS47		3-455
BUW35	BUS47		3-455
BUW36	BUS47A		3-455
BUW44	BUS48		3-469
BUW45	BUS48		3-469
BUW46	BUS48A		—
BUW72		BUS46P	3-449
BUW74	BUS47		3-455
BUW75	BUS47		3-455
BUW76	BUS47		3-455
BUW77	BUS47		3-455
BUW81	MJ10014		3-700
BUW81A	MJ10014		3-700
BUW84	MJE13003		3-1052
BUW85	MJE13003		3-1052
BUX13	BUX13		3-590
BUX14	BUS47		3-455
BUX14CECCF	BUS47		3-455
BUX14CECCL	BUS47		3-455
BUX15	BUS47A		3-455
BUX15CECCF	BUS47A		3-455
BUX15CECCL	BUS47A		3-455
BUX16	2N6543		3-229
BUX16A	2N6543		3-229
BUX16B	2N6543		3-229
BUX16C	2N6543		3-229
BUX17	BUS48		3-469
BUX17A	BUS48		3-469
BUX17B	BUS48		3-469
BUX17C	BUS48		3-469
BUX18	2N6544		3-235
BUX18A	2N6544		3-235
BUX18B	2N6545		3-235
BUX18C	2N6545		3-235
BUX39	BUX39		3-593
BUX40	BUX40		3-596
BUX41	BUX41		3-599
BUX41N	BUX41N		3-602
BUX42	BUX42		3-605
BUX43	2N6308		3-608
BUX44	BUS47		3-455

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
BUX45	BUS47A		3-455
BUX46	2N6543		3-229
BUX47	BUS47		3-455
BUX47A	BUS47A		3-455
BUX48	BUX48	BUS48	3-469
BUX48A	BUX48A	BUS48A	3-455
BUX48S	BUS48		3-469
BUX66	2N6211		3-171
BUX66A	2N6212		3-171
BUX66B	2N6212		3-171
BUX66C	2N6213		3-171
BUX67	2N3584		3-20
BUX67A	2N3584		3-20
BUX67B	2N3585		3-20
BUX67C	2N4240		3-20
BUX80	BUS47	2N6547	3-239
BUX81	BUS47A	MJ13335	3-834
BUX82	BU326A	2N6545	3-235
BUX83	BU326A	2N6545	3-235
BUX84		BUS45P	3-447
BUX84		MJE13005	3-611
BUX85	MJE13005	MJE13005	3-611
BUX86	MJE13003	MJE13003	3-1052
BUX87	MJE13003	MJE13003	3-1052
BUX97	BU326A		3-419
BUX97A	BU326A		3-419
BUX97B	BU326A		3-419
BUX98	BUS98		3-494
BUX98A	BUS98A		3-494
BUY29	MJ410		3-620
BUY30	MJ411		3-620
BUY49P	BUY49P		—
BUY69A	BUS47A		3-455
BUY69B	BUS47		3-455
BUY69C	2N6306		3-194
BUY70A	BU326A		3-419
BUY70B	BU326A		3-419
BUY70C	BU326A		3-419
D40C1		MJE800	3-1002
D40C2		MJE800	3-1002
D40C4		MJE800	3-1002
D40C5		MJE800	3-1002
D40D1		MJE180	3-978
D40D2		MJE180	3-978
D40D3		MJE180	3-978
D40D4		MJE181	3-978
D40D5		MJE181	3-978
D40D7		MJE181	3-978
D40D8		MJE181	3-978
D40D10		MJE182	3-978
D40D11		MJE182	3-978
D40D13		MJE182	3-978
D40D14		MJE182	3-978
D40E1		MJE180	3-978
D40E5		MJE181	3-978
D40E7		MJE182	3-978
D40K1		MJE800	3-1002
D40K2		MJE800	3-1002
D40K3		MJE800	3-1002
D40K4		MJE800	3-1002
D40N1		MJE340	3-990
D40N2		MJE340	3-990
D40N3		MJE340	3-990
D40N4		MJE340	3-990
D40P1		MJE341	3-992
D40P3		MJE344	3-992
D40P5		MJE340	3-990
D41D1		2N4918	3-78
D41D2		2N4918	3-78
D41D4		2N4919	3-78

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
D41D5		2N4919	3-78
D41D7		2N4919	3-78
D41D8		2N4919	3-78
D41D10		2N4920	3-78
D41D11		2N4920	3-78
D41D13		2N4920	3-78
D41D14		2N4920	3-78
D41E1		2N4918	3-78
D41E5		2N4919	3-78
D41E7		2N4920	3-78
D41K1		MJE700	3-1002
D41K2		MJE700	3-1002
D41K3		MJE700	3-1002
D41K4		MJE700	3-1002
D42C1		MJE180	3-978
D42C2		MJE180	3-978
D42C3		MJE180	3-978
D42C4		MJE171	3-978
D42C5		MJE171	3-978
D42C6		MJE171	3-978
D42C7		MJE171	3-978
D42C8		MJE171	3-978
D42C9		MJE171	3-978
D43C1		MJE180	3-978
D43C2		MJE180	3-978
D43C3		MJE180	3-978
D43C4		MJE171	3-978
D43C5		MJE171	3-978
D43C6		MJE171	3-978
D43C7		MJE171	3-978
D43C8		MJE171	3-978
D43C9		MJE171	3-978
D44C1		D44E3	3-614
D44C2		D44E3	3-614
D44C3		D44E3	3-614
D44C4		D44E3	3-614
D44C5		D44E3	3-614
D44C6		D44E3	3-614
D44C7		D44E3	3-614
D44C8		D44E3	3-614
D44C9		D44E3	3-614
D44C10		D44E3	3-614
D44C11		D44E3	3-614
D44C12		D44E3	3-614
D44D1		2N6386	3-213
D44D2		2N6386	3-213
D44D3		2N6043	3-146
D44D4		2N6043	3-146
D44D5		2N6044	3-146
D44D6		2N6044	3-146
D44E1	D44E1		3-614
D44E2	D44E3		3-614
D44E3	D44E3		3-614
D44H1	D44H5		3-616
D44H2	D44H5		3-616
D44H4	D44H5		3-616
D44H5	D44H5		3-616
D44H7	D44H7		3-616
D44H8	D44H8		3-616
D44H10	D44H10		3-616
D44H11	D44H11		3-616
D44R1		TIP47	3-1170
D44R2		TIP47	3-1170
D44R3		TIP48	3-1170
D44R4		TIP48	3-1170
D44R5		TIP47	3-1170
D44R6		TIP48	3-1170
D44TD3		MJE13070	3-1180
D44TD4		MJE13070	3-1180
D44TD5		MJE13070	3-1180

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
D44TE3		MJE13070	3-1080
D44TE4		MJE13070	3-1080
D44TE5		MJE13070	3-1080
D44VH1	D44VH1		3-618
D44VH4	D44VH4		3-618
D44VH7	D44VH7		3-618
D44VH10	D44VH10		3-618
D45C1		MJE15029	3-1086
D45C2		MJE15029	3-1086
D45C3		MJE15029	3-1086
D45C4		MJE15029	3-1086
D45C5		MJE15029	3-1086
D45C6		MJE15029	3-1086
D45C7		MJE15029	3-1086
D45C8		MJE15029	3-1086
D45C9		MJE15029	3-1086
D45C10		MJE15029	3-1086
D45C11		MJE15029	3-1086
D45C12		MJE15029	3-1086
D45E1		TIP125	3-614
D45E2		TIP125	3-614
D45E3		TIP126	3-614
D45H1	D45H1		3-616
D45H2	D45H2		3-616
D45H4	D45H4		3-616
D45H5	D45H5		3-616
D45H7	D45H7		3-616
D45H8	D45H8		3-616
D45H9	D45H9		3-616
D45H10	D45H10		3-616
D45H11	D45H11		3-616
D45H12		D45H11	3-616
D45VH1	D45VH1		3-618
D45VH4	D45VH4		3-618
D45VH7	D45VH10		3-618
D45VH10	D45VH10		3-618
D56W1		BU208	3-399
D56W2		BU208	3-399
D56W3		BU208	3-399
D56W4		BU208	3-399
D64VE3	MJ13080		3-810
D64VE4	MJ13080		3-810
D64VE5	MJ13080		3-810
D64VP3	MJ13090		3-816
D64VP4	MJ13090		3-816
D64VP5	MJ13090		3-816
D64VS3	MJ16016		3-906
D64VS4	MJ16016		3-906
D64VS5	MJ16016		3-906
DTS310	2N6306		3-194
DTS311	2N6306		3-194
DTS401	2N3902		3-60
DTS402	2N3902		3-60
DTS403	2N6308		3-194
DTS409	2N6308		3-194
DTS410	MJ410		3-620
DTS411	MJ411		3-620
DTS413	MJ413		3-622
DTS423	MJ423		3-622
DTS424	2N6308		3-194
DTS425	2N6545		3-235
DTS430	2N6307		3-194
DTS431	MJ431		3-622
DTS515	2N6306		3-194
DTS516	2N6306		3-194
DTS517	2N6306		3-194
DTS518	2N6307		3-194
DTS519	2N6308		3-194
DTS660	2N6233		3-174
DTS663	2N6235		3-174

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
DTS665	2N6235		3-174
DTS701	BU205		3-394
DTS702	BU205		3-394
DTS712	BU208		3-399
DTS714	BU208		3-399
DTS801	BU205		3-394
DTS802	BU208		3-399
DTS804	BU208		3-399
DTS812	BU208		3-399
DTS814	BU208		3-399
DTS1010	2N6056		3-157
DTS1020	MJ3001		3-628
DTS4010	MJ3041		3-632
DTS4025	MJ3041		3-632
DTS4026	MJ10012		3-696
DTS4039	MJ10000		3-664
DTS4040	MJ10000		3-664
DTS4041	MJ10000		3-664
DTS4045	MJ10000		3-664
DTS4059	MJ10000		3-664
DTS4060	MJ10001		3-664
DTS4061	MJ10000		3-664
DTS4065	MJ10001		3-664
DTS4066	MJ10000		3-664
DTS4067	MJ10000		3-664
DTS4074	MJ10004		3-676
DTS4075	MJ10004		3-676
FT47	TIP47		3-1170
FT48	TIP48		3-1170
FT49	TIP49		3-1170
FT50	TIP50		3-1170
FT317	MJE15028		3-1086
FT317A	MJE15028		3-1086
FT317B	MJE15030		3-1086
FT401	2N3902		3-60
FT402	2N3902		3-60
FT410	MJ410		3-620
FT411	MJ411		3-620
FT413	MJ413		3-622
FT417	MJE15029		3-1086
FT417A	MJE15029		3-1086
FT417B	MJE15031		3-1086
FT423	MJ423		3-622
FT430	2N6307		3-194
FT431	MJ431		3-622
FT2955	MJE2955T		3-1018
FT3055	MJE3055T		3-1018
GE5060	MJ10000		3-664
GE5061	MJ10000		3-664
GE5062	MJ10001		3-664
GE6060	MJ10015		3-706
GE6061	MJ10015		3-706
GE6062	MJ10015		3-706
GE6251	MJ10004		3-676
GE6252	MJ10004		3-676
GE6253	MJ10005		3-676
IR401	2N3902		3-60
IR402	2N3902		3-60
IR403	2N6308		3-194
IR409	2N6308		3-194
IR410	MJ410		3-620
IR411	MJ411		3-620
IR413	MJ413		3-622
IR423	MJ423		3-622
IR424	2N6308		3-194
IR425	2N6545		3-235
IR430	2N6307		3-194
IR431	MJ431		3-622
IR515	2N6250		3-177
IR516	2N6250		3-177
IR517	2N6251		3-177

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
IR518	2N6546		3-239
IR519	2N6547		3-239
IR640	MJ3000		3-628
IR641	MJ3001		3-628
IR642	2N6578		3-243
IR645	MJ2500		3-628
IR646	MJ2501		3-628
IR647	2N6052		3-153
IR660	MJ410		3-620
IR663	MJ423		3-622
IR665	MJ12003		3-770
IR701	BU205		3-394
IR801	BU205		3-394
IR802	MJ802		3-624
IR900	MJ900		3-626
IR901	MJ901		3-626
IR1000	MJ1000		3-626
IR1001	MJ1001		3-626
IR1010	2N6056		3-157
IR1020	MJ3001		3-628
IR2500	MJ2500		3-628
IR2501	MJ2501		3-628
IR3000	MJ3000		3-628
IR3001	MJ3001		3-628
IR3771	2N3771		3-48
IR3772	2N3772		3-48
IR3773	2N3773		3-52
IR4039	MJ10000		3-664
IR4040	MJ10000		3-664
IR4041	MJ10000		3-664
IR4045	MJ10000		3-664
IR4050	MJ10000		3-664
IR4055	MJ10000		3-664
IR4059	MJ10000		3-664
IR4060	MJ10001		3-664
IR4061	MJ10000		3-664
IR4065	MJ10001		3-664
IR4502	MJ4502		3-636
IR5000	MJ10000		3-664
IR5001	MJ10000		3-664
IR5002	MJ10001		3-664
IR5060	MJ10000		3-664
IR5061	MJ10000		3-664
IR5062	MJ10001		3-664
IR5252		MJ10002	3-670
IR5261	MJ10002		3-670
IR6000	MJ10004		3-676
IR6001	MJ10004		3-676
IR6002	MJ10005		3-676
IR6060	MJ10004		3-676
IR6061	MJ10004		3-676
IR6062	MJ10005		3-676
IR6251	MJ10006		3-682
IR6252	MJ10007		3-682
IR6302	2N5630		3-112
KDT410		MJ410	3-620
KDT411		MJ411	3-620
KDT413		MJ413	3-622
KDT423		MJ423	3-622
KDT430		2N6307	3-194
KDT431		MJ431	3-622
KDT515		2N6306	3-194
KDT516		2N6306	3-194
KDT517		2N6306	3-194
KDT518		2N6307	3-194
KDT519		2N6308	3-194
KP3946		2N6274	3-181
KP3948		2N6274	3-181
MDS20		2N5655	3-116
MDS21		2N5656	3-116

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MDS26		MJE180	3-978
MDS27		MJE181	3-978
MDS60		MJE350	3-994
MDS73		MJE171	3-978
MDS74		MJE172	3-978
MDS75		MJE253	3-986
MDS76		MJE181	3-978
MDS77		MJE171	3-978
MDS1678		MJE181	3-978
MJ105	BU205		3-394
MJ205	BU205		3-394
MJ400	MJ400	2N3739	3-37
MJ410	MJ410		3-620
MJ411	MJ411		3-620
MJ413	MJ413		3-622
MJ423	MJ423		3-622
MJ424	MJ424	2N6308	3-194
MJ425	MJ425	2N6545	3-235
MJ431	MJ431		3-622
MJ450		2N5884	3-134
MJ480		2N3055	3-6
MJ481		2N3055	3-6
MJ490		2N3789	3-56
MJ491		2N3789	3-56
MJ701		MJ12002	3-765
MJ702		MJ12002	3-765
MJ704		MJ12002	3-765
MJ721		MJ12002	3-765
MJ723		MJ12002	3-765
MJ802	MJ802		3-624
MJ804		MJ12004	3-772
MJ900	MJ900		3-626
MJ901	MJ901		3-626
MJ920		2N6298	3-157
MJ921		2N6299	3-157
MJ1000	MJ1000		3-626
MJ1001	MJ1001		3-626
MJ1200		2N6300	3-157
MJ1201		2N6301	3-157
MJ1800		2N6308	3-194
MJ2249		2N3766	3-45
MJ2250	MJ2250		3-45
MJ2251		2N3767	3-37
MJ2252		2N3738*	3-37
MJ2253		2N3739*	3-41
MJ2254		2N3740*	3-41
		2N3741*	
MJ2267		MJ15016	3-9
MJ2268		MJ2955	3-6
MJ2300		MJE270	—
MJ2305		MJE271	—
MJ2500	MJ2500		3-628
MJ2501	MJ2501		3-628
MJ2801			3-6
MJ2802		2N3055	3-130
MJ2840		2N5881*	3-127
MJ2841		2N5877	3-127
		2N5878	
MJ2901		MJ15016	3-9
MJ2940		2N5875	3-127
MJ2955	MJ2955		3-6
MJ2955A	MJ2955A		3-9
MJ3000	MJ3000		3-628
MJ3001	MJ3001		3-628
MJ3029	MJ3029		3-630
MJ3030	2N6545		3-235
MJ3040	MJ3041		3-632
MJ3041	MJ3041		3-632
MJ3042	MJ3042		3-632
MJ3055	2N3055		3-6
MJ3055A	2N3055A		6-9
MJ3237	MJE15031		3-1086
MJ3238	MJE15031		3-1086

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJ3247	MJE15030		3-1086
MJ3248	MJE15030		3-1086
MJ4030	MJ4030		3-634
MJ4031	MJ4031		3-634
MJ4032	MJ4032		3-634
MJ4033	MJ4033		3-634
MJ4034	MJ4034		3-634
MJ4035	MJ4035		3-634
MJ4237	MJ15012		3-850
MJ4238	MJ15012		3-850
MJ4247	MJ15011		3-850
MJ4248	MJ15011		3-850
MJ4360		MJE13002	3-1052
MJ4361		MJE13003	3-1052
MJ4380		MJE13004	3-1058
MJ4381		MJE13005	3-1058
MJ4400		MJE13004	3-1058
MJ4401		MJE13005	3-1058
MJ4502	MJ4502		3-636
MJ4645	MJ4646		3-638
MJ4646	MJ4646		3-638
MJ4647	MJ4647		3-638
MJ6502	MJ6503		3-640
MJ6503	MJ6503		3-640
MJ6700		2N6193	3-168
MJ8100		2N6193	3-168
MJ8500	MJ8501		3-646
MJ8501	MJ8501		3-646
MJ8502	MJ8502		3-652
MJ8503	MJ8503		3-652
MJ8504	MJ8504		3-658
MJ8505	MJ8505		3-658
MJ10000	MJ10000		3-664
MJ10001	MJ10001		3-664
MJ10002	MJ10002		3-670
MJ10003		MJ10002	3-670
MJ10004	MJ10004		3-676
MJ10005	MJ10005		3-676
MJ10006	MJ10006		3-682
MJ10007	MJ10007		3-682
MJ10008	MJ10008		
MJ10009	MJ10009		3-688
MJ10011	MJ10011		3-688
MJ10012	MJ10012		3-694
MJ10013	MJ10014		3-696
			3-700
MJ10014	MJ10014		
MJ10015	MJ10015		3-700
MJ10016	MJ10016		3-706
MJ10020	MJ10020		3-706
MJ10021	MJ10021		3-711
			3-711
MJ10022	MJ10022		
MJ10023	MJ10023		3-717
MJ10024	MJ10024		3-717
MJ10025	MJ10025		3-723
MJ10027		C.M.	3-723
MJ10029		C.M.	
MJ10041		C.M.	3-729
MJ10042		C.M.	3-743
MJ10044		C.M.	3-729
MJ10045		C.M.	3-743
MJ10047		C.M.	3-729
MJ10048		C.M.	3-743
MJ10050		C.M.	
MJ10051		C.M.	
MJ10052		C.M.	
MJ10100		C.M.	
MJ10101		C.M.	
MJ10102		C.M.	
MJ10200		C.M.	
MJ10201		C.M.	

*Consult Motorola if a direct replacement is necessary.
CM Consult Motorola if a direct replacement is necessary.

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJ10202		C.M.	
MJ11011	MJ11011		3-757
MJ11012	MJ11012		3-757
MJ11013	MJ11013		3-757
MJ11014	MJ11014		3-757
MJ11015	MJ11015		3-757
MJ11016	MJ11016		3-757
MJ11017	MJ11017		3-759
MJ11018	MJ11018		3-759
MJ11019	MJ11019		3-759
MJ11020	MJ11020		3-759
MJ11021	MJ11021		3-759
MJ11022	MJ11022		3-759
MJ11028	MJ11028		3-763
MJ11029	MJ11029		3-763
MJ11030	MJ11030		3-763
MJ11031	MJ11031		3-763
MJ11032	MJ11032		3-763
MJ11033	MJ11033		3-763
MJ12002	MJ12002		3-765
MJ12003	MJ12003		3-770
MJ12004	MJ12004		3-772
MJ12005	MJ12005		3-778
MJ12005D	MJ12005D		3-780
MJ12010	MJ12010		3-786
MJ12020	MJ12020		3-788
MJ12021	MJ12021		3-788
MJ12022	MJ12022		3-788
MJ13010		2N6547	3-239
MJ13014	MJ13014		3-798
MJ13015	MJ13015		3-798
MJ13018		MJ13330	3-828
MJ13019		MJ13331	3-828
MJ13070	MJ13070		3-804
MJ13071	MJ13071		3-804
MJ13080	MJ13080		3-810
MJ13081	MJ13081		3-810
MJ13090	MJ13090		3-816
MJ13091	MJ13091		3-816
MJ13100		MJ16016	3-906
MJ13101		MJ16016	3-906
MJ13330	MJ13330		3-828
MJ13331	MJ13331		3-828
MJ13332	MJ13333		3-834
MJ13333	MJ13333		3-834
MJ13334	MJ13335		3-834
MJ13335	MJ13335		3-834
MJ14000	MJ14000		3-840
MJ14001	MJ14001		3-840
MJ14002	MJ14002		3-840
MJ14003	MJ14003		3-840
MJ15001	MJ15001		3-844
MJ15002	MJ15002		3-844
MJ15003	MJ15003		3-847
MJ15004	MJ15004		3-847
MJ15011	MJ15011		3-850
MJ15012	MJ15012		3-850
MJ15015	MJ15015		3-9
MJ15016	MJ15016		3-9
MJ15018	MJ15018		3-9
MJ15019	MJ15019		3-9
MJ15022	MJ15022		3-852
MJ15023	MJ15023		3-855
MJ15024	MJ15024		3-852
MJ15025	MJ15025		3-855
MJ15026		MJ15024	3-852
MJ15027		MJ15025	3-855
MJ16002	MJ16002		3-858
MJ16002A	MJ16002A		3-866
MJ16004	MJ16004		3-858
MJ16006	MJ16006		3-874
MJ16006A	MJ16006A		3-882
MJ16008	MJ16008		3-874

CM Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJ16010	MJ16010		3-890
MJ16010A	MJ16010A		3-898
MJ16012	MJ16012		3-890
MJ16014	MJ16014		3-906
MJ16016	MJ16016		3-906
MJ16018	MJ16018		3-914
MJD29	MJD29		3-920
MJD29C	MJD29C		3-920
MJD30	MJD30		3-920
MJD30C	MJD30C		3-920
MJD31	MJE31		3-924
MJD31C	MJD32C		3-924
MJD32	MJD32		3-924
MJD32C	MJD32C		3-924
MJD41C	MJD41C		3-928
MJD42C	MJD42C		3-928
MJD44E3	MJD44E3		—
MJD44H11	MJD44H11		3-932
MJD45E3	MJD45E3		—
MJD45H11	MJD45H11		3-932
MJD47	MJD47		3-936
MJD50	MJD50		3-936
MJD112	MJD112		3-940
MJD117	MJD117		3-940
MJD122	MJD122		3-946
MJD127	MJD127		3-946
MJD200	MJD200		3-952
MJD210	MJD210		3-952
MJD340	MD340		3-956
MJD350	MJD350		3-956
MJD2955	MJD2955		3-960
MJD3055	MJD3055		3-960
MJD6036	MJD6036		3-964
MJD6039	MJD6039		3-964
MJD13003	MJD13003		3-970
MJE29		TIP29	3-1154
MJE29A		TIP29A	3-1154
MJE29B		TIP29B	3-1154
MJE29C		TIP29C	3-1154
MJE30		TIP30	3-1154
MJE30A		TIP30A	3-1154
MJE30B		TIP30B	3-1154
MJE30C		TIP30C	3-1154
MJE31		TIP31	3-1156
MJE31A		TIP31A	3-1156
MJE31B		TIP31B	3-1156
MJE31C		TIP31C	3-1156
MJE32		TIP32	3-1156
MJE32A		TIP32A	3-1156
MJE32B		TIP32B	3-1156
MJE32C		TIP32C	3-1156
MJE33		TIP41	3-1166
MJE33A		TIP41A	3-1166
MJE33B		TIP41B	3-1166
MJE33C		TIP41C	3-1166
MJE34		TIP42	3-1166
MJE34A		TIP42A	3-1166
MJE34B		TIP42B	3-1166
MJE34C		TIP42C	3-1166
MJE41		TIP41	3-1166
MJE41A		TIP41A	3-1166
MJE41B		TIP41B	3-1166
MJE41C		TIP41C	3-1166
MJE42		TIP42	3-1166
MJE42A		TIP42A	3-1166
MJE42B		TIP42B	3-1166
MJE42C		TIP42C	3-1166
MJE47		TIP47	3-1170
MJE48		TIP48	3-1170
MJE49		TIP49	3-1170
MJE51		2N6497	3-225
MJE51T		2N6497	3-225
MJE52		2N6498	3-225
MJE52T		2N6498	3-225

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJE53		MJE13005	3-1058
MJE53T		MJE13005	3-1058
MJE101		MJE2955	3-1018
MJE102		MJE2955	3-1018
MJE103		MJE2955	3-1018
MJE104		MJE2955	3-1018
MJE105	MJE105		3-976
MJE105K		TIP42A	3-1166
MJE170	MJE170		3-978
MJE171	MJE171		3-978
MJE172	MJE172		3-978
MJE180	MJE180		3-978
MJE181	MJE181		3-978
MJE182	MJE182		3-978
MJE200	MJE200		3-982
MJE201		MJE3055	3-982
MJE202		MJE3055	3-1018
MJE203		MJE3055	3-1018
MJE204		MJE3055	3-1018
MJE205		MJE3055	3-1018
MJE205K		TIP41A	3-1166
MJE210	MJE210		3-982
MJE220		MJE181	3-978
MJE221		MJE181	3-978
MJE222		MJE181	3-978
MJE223		MJE182	3-978
MJE224		MJE182	3-978
MJE225		MJE182	3-978
MJE230		MJE171	3-978
MJE231		MJE171	3-978
MJE232		MJE171	3-978
MJE233		MJE172	3-978
MJE234		MJE172	3-978
MJE235		MJE172	3-978
MJE240	MJE240		3-986
MJE241	MJE241		3-986
MJE242	MJE243		3-986
MJE243	MJE243		3-986
MJE244	MJE244		3-986
MJE250	MJE250		3-986
MJE251	MJE251		3-986
MJE252	MJE253		3-986
MJE253	MJE253		3-986
MJE254		MJE253	3-986
MJE270	MJE270		–
MJE271	MJE271		–
MJE340	MJE340		3-990
MJE340K		TIP48	3-990
MJE341	MJE341		3-992
MJE341K		TIP47	3-992
MJE344	MJE344		3-992
MJE344K		TIP47	3-992
MJE345		MJE3439	3-1022
MJE350	MJE350		3-994
MJE370	MJE370		3-996
MJE370K		TIP32	3-1156
MJE371	MJE371		3-998
MJE371K		TIP32	3-1156
MJE482		2N5190	3-88
MJE483		2N5191	3-88
MJE484		2N5192	3-88
MJE488		2N5191	3-88
MJE492		2N5193	3-92
MJE493		2N5194	3-92
MJE494		2N5195	3-92
MJE520	MJE520		3-1000
MJE520K		TIP31	3-1156
MJE521	MJE521		–
MJE521K		TIP31	3-1156

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJE700	MJE700		3-1002
MJE700T	MJE700T		3-1002
MJE701	MJE701		3-1002
MJE701T		TIP125	3-1181
MJE702	MJE702		3-1002
MJE702T		TIP126	3-1181
MJE703	MJE703		3-1002
MJE703T		TIP126	3-1181
MJE710		2N4918	3-78
MJE711		2N4919	3-78
MJE712		2N4920	3-78
MJE720	MJE720		–
MJE721		2N4923	3-82
MJE722		2N4923	3-82
MJE800	MJE800		3-1002
MJE800T	MJE800T		3-1002
MJE801	MJE801		3-1002
MJE801T		TIP120	3-1181
MJE802	MJE802		3-1002
MJE802T		TIP121	3-1181
MJE803	MJE803		3-1002
MJE803T		TIP121	3-1181
MJE1090	MJE1090		–
MJE1091	MJE1093		–
MJE1092	MJE1092		–
MJE1093	MJE1093		–
MJE1100	MJE1100		–
MJE1101	MJE1101		–
MJE1102	MJE1102		–
MJE1103	MJE1103		–
MJE1290		2N5988	3-138
MJE1291		2N5988	3-138
MJE1320	MJE1320		3-1006
MJE1660	MJE1660		3-1012
MJE1661	MJE1661		3-1012
MJE2010		TIP42	3-1166
MJE2011		TIP42A	3-1166
MJE2020		TIP41	3-1166
MJE2021		TIP41A	3-1166
MJE2050		MJE200	3-982
MJE2055		MJE3055	3-1018
MJE2090		TIP125	3-1181
MJE2091		TIP125	3-1181
MJE2092		TIP126	3-1181
MJE2093		TIP126	3-1181
MJE2100		TIP120	3-1181
MJE2101		TIP120	3-1181
MJE2102		TIP121	3-1181
MJE2103		TIP121	3-1181
MJE2150		MJE210	3-982
MJE2160		TIP48	3-1170
MJE2360		MJE2360T	3-1014
MJE2360T	MJE2360T		3-1014
MJE2361		MJE2361T	3-1014
MJE2361T	MJE2361T		3-1014
MJE2370		TIP32	3-1156
MJE2371		TIP32A	3-1156
MJE2480		TIP31	3-1156
MJE2481		TIP31A	3-1156
MJE2482		2N6121	3-164
MJE2483		2N6122	3-164
MJE2490		TIP32	3-1156
MJE2491		TIP32A	3-1156
MJE2520		TIP31	3-1156
MJE2521		TIP31A	3-1156
MJE2522		TIP31	3-1156
MJE2523		TIP31A	3-1156
MJE2801	MJE2801		3-1016
MJE2801K		MJE2801T	3-1016
MJE2801T	MJE2801T		3-1016
MJE2901	MJE2901		3-1016

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJE2901K		MJE2955T	3-1018
MJE2901T		MJE2955T	3-1018
MJE2955	MJE2955		3-1018
MJE2955K		MJE2955T	3-1018
MJE2955T	MJE2955T		3-1018
MJE3055	MJE3055		3-1018
MJE3055K		MJE3055T	3-1018
MJE3055T	MJE3055T		3-1018
MJE3300		2N6037	3-1020
MJE3301		2N6039	3-1020
MJE3302		2N6039	3-142
MJE3310		2N6034	3-142
MJE3311		2N6035	3-142
MJE3312		2N6036	3-142
MJE3370		MJE370	3-996
MJE3371		2N5193	3-92
MJE3439	MJE3439		3-1022
MJE3440	MJE3440		3-1022
MJE3520		MJE520	3-1000
MJE3521		2N5190	3-88
MJE3738		TIP47	3-1170
MJE3739		TIP48	3-1170
MJE4340	MJE4340		3-1024
MJE4341	MJE4341		3-1024
MJE4342	MJE4342		3-1024
MJE4343	MJE4343		3-1024
MJE4350	MJE4350		3-1024
MJE4351	MJE4351		3-1024
MJE4352	MJE4352		3-1024
MJE4353	MJE4353		3-1024
MJE4918		TIP30	3-1154
MJE4919		TIP30A	3-1154
MJE4920		TIP30B	3-1154
MJE4921		TIP29	3-1154
MJE4922		TIP29A	3-1154
MJE4923		TIP29B	3-1154
MJE5170		MJE15031	3-1086
MJE5171		MJE15031	3-1086
MJE5172		MJE15031	3-1086
MJE5180		MJE15030	3-1086
MJE5181		MJE15030	3-1086
MJE5182		MJE15030	3-1086
MJE5190		2N6121	3-164
MJE5191		2N6122	3-164
MJE5192		2N6123	3-164
MJE5193		2N6124	3-164
MJE5194		2N6125	3-164
MJE5195		TIP32C	3-1156
MJE5655		TIP47	3-1170
MJE5656		TIP48	3-1170
MJE5657		TIP49	3-1170
MJE5730		MJE5850	3-1032
MJE5731		MJE5850	3-1032
MJE5732		MJE5850	3-1032
MJE5740	MJE5740		3-1028
MJE5741	MJE5741		3-1028
MJE5742	MJE5742		3-1028
MJE5850	MJE5850		3-1032
MJE5851	MJE5851		3-1032
MJE5852	MJE5852		3-1032
MJE5960		2N6489	3-221
MJE5974		TIP42	3-1166
MJE5975		TIP42A	3-1166
MJE5976		TIP42B	3-1166
MJE5977		TIP41	3-1166
MJE5978		TIP41A	3-1166
MJE5979		TIP41B	3-1166
MJE5980		2N6489	3-221
MJE5981		2N6490	3-221
MJE5982		2N6491	3-221

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MJE5983		2N6486	3-221
MJE5984		2N6487	3-221
MJE5985		2N6488	3-221
MJE6040	MJE6040		3-146
MJE6041	MJE6041		3-146
MJE6042		MJE6041	3-146
MJE6043	MJE6043		3-146
MJE6044	MJE6044		3-146
MJE6045	MJE6045		3-146
MJE8500	MJE8500		3-1038
MJE8501	MJE8501		3-1038
MJE8502	MJE8502		3-1044
MJE8503	MJE8503		3-1044
MJE10011	MJE10011		—
MJE12007	MJE12007		3-1050
MJE13002	MJE13002		3-1052
MJE13003	MJE13003		3-1052
MJE13004	MJE13004		3-1058
MJE13005	MJE13005		3-1058
MJE13006	MJE13006		3-1064
MJE13007	MJE13007		3-1064
MJE13008	MJE13008		3-1072
MJE13009	MJE13009		3-1072
MJE13070	MJE13070		3-1080
MJE13071	MJE13071		3-1080
MJE15028	MJE15028		3-1086
MJE15029	MJE15029		3-1086
MJE15030	MJE15030		3-1086
MJE15031	MJE15031		3-1086
MJE16002	MJE16002		3-1090
MJE16004	MJE16004		3-1090
MJE16032	MJE16032		3-1098
MJE16034	MJE16034		3-1098
MJE16080	MJE16080		3-1106
MJE16081	MJE16081		3-1106
MJH6282	MJH6282		3-1113
MJH6283	MJH6283		3-1113
MJH6284	MJH6284		3-1113
MJH6285	MJH6285		3-1113
MJH6286	MJH6286		3-1113
MJH6287	MJH6287		3-1113
MJH6676	MJH6676		3-250
MJH6677	MJH6677		3-250
MJH6678	MJH6678		3-250
MJH11017	MJH11017		3-1117
MJH11018	MJH11018		3-1117
MJH11019	MJH11019		3-1117
MJH11020	MJH11020		3-1117
MJH11021	MJH11021		3-1117
MJH11022	MJH11022		3-1117
MJH12004	MJH12004		3-772
MJH13090	MJH13090		3-816
MJH13091	MJH13091		3-816
MJH16002	MJH16002		3-1090
MJH16002A	MJH16002A		3-866
MJH16004	MJH16004		3-1090
MJH16006	MJH16006		3-874
MJH16006A	MJH16006A		3-882
MJH16008	MJH16008		3-874
MJH16010	MJH16010		3-890
MJH16010A	MJH16010A		3-898
MJH16012	MJH16012		3-890
MJH16018	MJH16018		3-914
MJH16032	MJH16032		3-1098
MJH16034	MJH16034		3-1098
MPSU01	MPSU01		3-1123
MPSU01A	MPSU01A		3-1123
MPSU02	MPSU02		3-1125
MPSU03	MPSU03		3-1127
MPSU04	MPSU04		3-1127
MPSU05	MPSU05		3-1131
MPSU06	MPSU06		3-1131
MPSU07	MPSU07		3-1133
MPSU10	MPSU10		3-1135

*Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
MPSU11		MPSU10	3-1135
MPSU12		MPSU45	3-1138
MPSU31		MPSU06	3-1138
MPSU45	MPSU45		3-1138
MPSU47		MPSU06	3-1131
MPSU51	MPSU51		3-1141
MPSU51A	MPSU51A		3-1141
MPSU52	MPSU52		3-1143
MPSU55	MPSU55		3-1145
MPSU56	MPSU56		3-1145
MPSU57	MPSU57		3-1147
MPSU60	MPSU60		3-1149
MPSU95	MPSU95		3-1151
NSD102		2N4923	3-82
NSD103		2N4923	3-82
NSD104		2N4923	3-82
NSD105		2N4923	3-82
NSD106		2N4923	3-82
NSD131		MJE340	3-990
NSD132		MJE340	3-990
NSD133		MJE340	3-990
NSD134		MJE340	3-990
NSD135		MJE340	3-990
NSD151		MJE800	3-1002
NSD152		MJE800	3-1002
NSD202		2N4919	3-78
NSD203		2N4919	3-78
NSD204		2N4919	3-78
NSD205		2N4919	3-78
NSD206		2N4919	3-78
NSD3439		MJE3439	3-1022
NSD3440		MJE3440	3-1022
NSDU01		MPSU01	3-1123
NSDU01A		MPSU01A	3-1123
NSDU05		MPSU05	3-1131
NSDU06		MPSU06	3-1131
NSDU07		MPSU07	3-1133
NSDU45		MPSU45	3-1138
NSDU51		MPSU51	3-1141
NSDU51A		MPSU51A	3-1141
NSDU55		MPSU55	3-1145
NSDU56		MPSU56	3-1145
NSDU57		MPSU57	3-1145
NSE170		MJE170	—
NSE171		MJE171	—
NSE180		MJE180	—
NSE181		MJE181	—
NSP41		TIP41	3-1166
NSP41A		TIP41A	3-1166
NSP41B		TIP41B	3-1166
NSP41C		TIP41C	3-1166
NSP42		TIP42	3-1166
NSP42A		TIP42A	3-1166
NSP42B		TIP42B	3-1166
NSP42C		TIP42C	3-1166
NSP105		TIP42A	3-1166
NSP205		TIP41A	3-1166
NSP370		TIP32	3-1156
NSP371		TIP32	3-1156
NSP520		TIP31	3-1156
NSP521		TIP31	3-1156
NSP575		TIP29A	3-1154
NSP576		TIP30A	3-1154
NSP577		TIP29A	3-1154
NSP578		TIP30A	3-1154
NSP579		TIP29B	3-1154
NSP580		TIP30B	3-1154
NSP581		TIP29C	3-1154
NSP582		TIP30C	3-1154
NSP585		TIP29A	3-1154

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
NSP586		TIP30A	3-1154
NSP587		TIP29A	3-1154
NSP588		TIP30A	3-1154
NSP589		TIP29B	3-1154
NSP590		TIP30B	3-1154
NSP595		TIP31A	3-1156
NSP596		TIP32A	3-1156
NSP597		TIP31A	3-1156
NSP598		TIP32A	3-1156
NSP599		TIP31B	3-1156
NSP600		TIP32B	3-1156
NSP695		TIP120	3-1181
NSP695A		TIP100	3-1178
NSP696		TIP125	3-1181
NSP696A		TIP105	3-1174
NSP697		TIP120	3-1181
NSP697A		TIP100	3-1178
NSP698		TIP125	3-1181
NSP698A		TIP105	3-1174
NSP699		TIP121	3-1181
NSP699A		TIP101	3-1174
NSP700		TIP126	3-1181
NSP700A		TIP106	3-1174
NSP701		TIP122	3-1181
NSP702		TIP127	3-1181
NSP2010		TIP42	3-1166
NSP2011		TIP42A	3-1166
NSP2021		TIP41A	3-1166
NSP2090		TIP125	3-1181
NSP2091		TIP125	3-1181
NSP2092		TIP126	3-1181
NSP2093		TIP126	3-1181
NSP2100		TIP120	3-1181
NSP2101		TIP120	3-1181
NSP2102		TIP121	3-1181
NSP2103		TIP121	3-1181
NSP2370		TIP32	3-1156
NSP2480		TIP31	3-1156
NSP2481		TIP31A	3-1156
NSP2490		TIP32	3-1156
NSP2491		TIP32A	3-1156
NSP2520		TIP31	3-1156
NSP2955		MJE2955T	3-1018
NSP3054		TIP31A	3-1156
NSP3055		MJE3055T	3-1018
NSP4918		TIP30	3-1154
NSP4919		TIP30A	3-1154
NSP4920		TIP30B	3-1154
NSP4921		TIP29	3-1154
NSP4922		TIP29A	3-1154
NSP4923		TIP29B	3-1154
NSP5190		2N6121	3-164
NSP5191		2N6122	3-164
NSP5192		2N6123	3-164
NSP5193		2N6124	3-164
NSP5194		2N6125	3-164
NSP5195		TIP32C	3-1156
NSP5974		TIP42	3-1166
NSP5975		TIP42A	3-1166
NSP5976		TIP42B	3-1166
NSP5977		TIP41	3-1166
NSP5978		TIP41A	3-1166
NSP5979		TIP41B	3-1166
NSP5980		2N6489	3-221
NSP5981		2N6490	3-221
NSP5982		2N6491	3-221
NSP5983		2N6486	3-221
NSP5984		2N6487	3-221
NSP5985		2N6488	3-221
PM26K380		MJ13015	3-798
PM27K380		2N6543	3-229
PMD10K-40		2N6057	3-153
PMD10K-60		2N6057	3-153
PMD10K-80		2N6058	3-153
PMD10K-100		2N6059	3-153

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
PMD11K-40		2N6050	3-153
PMD11K-60		2N6050	3-153
PMD11K-80		2N6051	3-153
PMD11K-100		2N6052	3-153
PMD12K-40		MJ1000	3-626
PMD12K-60		MJ1000	3-626
PMD12K-80		MJ1001	3-626
PMD12K-100		2N6059	3-153
PMD13K-40		MJ900	3-626
PMD13K-60		MJ900	3-626
PMD13K-80		MJ901	3-626
PMD13K-100		2N6052	3-153
PMD16K-40		2N6282	3-185
PMD16K-60		2N6282	3-185
PMD16K-80		2N6283	3-185
PMD16K-100		2N6284	3-185
PMD17K-40		2N6285	3-185
PMD17K-60		2N6284	3-185
PMD17K-80		2N6286	3-185
PMD17K-100		2N6287	3-185
PMD20K-120		2N6578	3-243
PMD25K-120		2N6578	3-243
PMD1600K		2N6282	3-185
PMD1601K		2N6282	3-185
PMD1602K		2N6283	3-185
PMD1603K		2N6284	3-185
PMD1700K		2N6285	3-185
PMD1701K		2N6285	3-185
PMD1702K		2N6286	3-185
PMD1703K		2N6287	3-185
RCA1B01		2N5878	3-127
RCA1B04		MJ15022	3-852
RCA1B05		MJ15024	3-852
RCA1B06		MJ15003	3-847
RCA1B09		MJ15024	3-852
RCA1C03		MJE15028	3-1086
RCA1C04		MJE15029	3-1086
RCA1C05		TIP41A	3-1166
RCA1C06		TIP42C	3-1166
RCA1C07		MJE3055T	3-1018
RCA1C08		MJE2955T	3-1018
RCA1C09		MJE3055T	3-1018
RCA1C10		2N6292	3-161
RCA1C11		2N6107	3-161
RCA1C12		MJE15028	3-1086
RCA1C13		MJE15029	3-1086
RCA1C14		2N6290	3-1018
RCA1C15		2N6388	3-213
RCA1C16		2N6668	3-246
RCA1E02		2N3583	3-20
RCA1E03		2N6420	3-20
RCA29		TIP29	3-1154
RCA29A		TIP29A	3-1154
RCA29B		TIP29B	3-1154
RCA29C		TIP29C	3-1154
RCA30		TIP30	3-1154
RCA30A		TIP30A	3-1154
RCA30B		TIP30B	3-1154
RCA30C		TIP30C	3-1154
RCA31		TIP31	3-1156
RCA31A		TIP31A	3-1156
RCA31B		TIP31B	3-1156
RCA31C		TIP31C	3-1156
RCA32		TIP32	3-1156
RCA32A		TIP32A	3-1156
RCA32B		TIP32B	3-1156
RCA32C		TIP32C	3-1166
RCA41		TIP41	3-1166
RCA41A		TIP41A	3-1166
RCA41B		TIP41B	3-1166
RCA41C		TIP41C	3-1166
RCA42		TIP42	3-1166
RCA42A		TIP42A	3-1166
RCA42B		TIP42B	3-1166
RCA42C		TIP42C	3-1166

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
RCA120		TIP120	3-1181
RCA121		TIP121	3-1181
RCA122		TIP122	3-1181
RCA125		TIP125	3-1181
RCA126		TIP126	3-1181
RCA410		MJ410	3-620
RCA411		MJ411	3-620
RCA413		MJ413	3-622
RCA423		MJ423	3-622
RCA431		MJ431	3-622
RCA1000		MJ1000	3-626
RCA1001		MJ1001	3-626
RCA3054		2N6122	3-164
RCA3055		2N6487	3-221
RCA3441		MJE15030	3-1086
RCA6263		MJE15030	3-1086
RCA8203		TIP105	3-1174
RCA8203A		2N6667	3-246
RCA8203B		2N6668	3-246
RCA8350		2N6648	3-209
RCA8350A		2N6054	3-157
RCA8350B		2N6054	3-157
RCA8766		MJ10002	3-670
RCA8766A		MJ10002	3-670
RCA8766B		MJ10002	3-844
RCA8766C		MJ15002	3-844
RCA8766D		MJ15002	3-844
RCA8766E		MJ15002	3-844
RCA8767		2N6546	3-239
RCA8767A		2N6547	3-239
RCA8767B		2N6547	3-239
RCA9113		2N6546	3-239
RCA9113A		2N6547	3-239
RCA9113B		2N6547	3-239
RCP111A		MJE340	3-990
RCP111B		MJE340	3-990
RCP111C		MJE340	3-990
RCP111D		MJE340	3-990
RCP113A		MJE340	3-990
RCP113B		MJE340	3-990
RCP113C		MJE340	3-990
RCP113D		MJE340	3-990
RCP115		MJE341	3-992
RCP115B		MJE340	3-990
RCP117		MJE341	3-992
RCP117B		MJE340	3-990
RCP131A		MJE344	3-992
RCP131B		MJE344	3-992
RCP131C		MJE340	3-990
RCP131D		MJE340	3-990
RCP133A		MJE344	3-992
RCP133B		MJE344	3-992
RCP133C		MJE340	3-990
RCP133D		MJE340	3-990
RCP135		2N4923	3-82
RCP135B		MJE340	3-990
RCP137		2N4923	3-82
RCP137B		MJE340	3-990
RCS579		2N6306	3-194
RCS617		2N5882	3-130
RCS618		2N5880	3-130
SDM6000		MJ10012	3-696
SDM6001		MJ10012	3-696
SDM6002		MJ10012	3-696
SDM6003		MJ10012	3-696
SDM20301		MJ4033	3-634
SDM20302		MJ4033	3-634
SDM20303		MJ4034	3-634
SDM20304		MJ4035	3-634
SDM20311		MJ4033	3-634
SDM20312		MJ4033	3-634
SDM20313		MJ4034	3-634
SDM20314		MJ4035	3-634
SDM20321		MJ4033	3-634
SDM20322		MJ4033	3-634

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
SDM20323		MJ4034	3-634
SDM20324		MJ4035	3-634
SDM21301		MJ4030	3-634
SDM21302		MJ4030	3-634
SDM21303		MJ4031	3-634
SDM21304		MJ4032	3-634
SDM21311		MJ4030	3-634
SDM21312		MJ4030	3-634
SDM21313		MJ4031	3-364
SDM21314		MJ4032	3-364
SDN1010		2N6056	3-157
SDN1020		MJ3001	3-628
SDN4040		MJ10000	3-664
SDN4045		MJ10000	3-664
SDN6000		MJ10000	3-664
SDN6001		MJ10000	3-664
SDN6002		MJ10001	3-664
SDN6060		MJ10000	3-664
SDN6061		MJ10000	3-664
SDN6062		MJ10000	3-664
SDN6251		MJ10002	3-670
SDN6552		MJ10002	3-670
SDN6253		MJ10002	3-670
SDT7A01		2N5428	3-108
SDT7A02		2N5428	3-108
SDT7A03		2N5428	3-108
SDT7A08		2N5428	3-108
SDT7A09		2N5428	3-108
SDT401		2N6543	3-229
SDT402		2N6543	3-229
SDT410		MJ410	3-620
SDT411		MJ411	3-620
SDT413		MJ413	3-622
SDT423		MJ423	3-622
SDT424		2N6308	3-194
SDT425		2N6545	3-235
SDT430		2N6307	3-194
SDT431		MJ431	3-622
SDT520		2N6306	3-194
SDT521		2N6306	3-194
SDT522		2N6306	3-194
SDT525		2N6306	3-194
SDT526		2N6306	3-194
SDT527		2N6306	3-194
SDT530		2N6306	3-194
SDT531		2N6306	3-194
SDT532		2N6306	3-194
SDT535		2N6306	3-194
SDT536		2N6307	3-194
SDT537		2N6307	3-194
SDT540		2N6307	3-194
SDT541		2N6307	3-194
SDT542		2N6307	3-194
SDT545		2N6308	3-194
SDT546		2N6308	3-194
SDT547		2N6308	3-194
SDT550		2N6308	3-194
SDT551		2N6308	3-194
SDT552		2N6308	3-194
SDT707		2N5428	3-108
SDT1050		2N6308	3-194
SDT1051		2N6308	3-194
SDT1052		2N6543	3-229
SDT1053		2N6543	3-229
SDT1054		2N6543	3-229
SDT1055		2N6308	3-194
SDT1056		2N3902	3-60
SDT1057		2N6545	3-235
SDT1058		2N6545	3-235
SDT1059		2N6545	3-235

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
SDT1060		2N6308	3-194
SDT1061		2N3902	3-60
SDT1062		2N6545	3-235
SDT1063		2N6545	3-235
SDT1064		2N6545	3-235
SDT1301		2N6235	3-174
SDT1302		2N6235	3-174
SDT1303		2N6235	3-174
SDT1304		2N6235	3-174
SDT3125		2N6190	3-168
SDT3126		2N6190	3-168
SDT3321		2N6193	3-168
SDT3322		2N6193	3-168
SDT3323		2N6190	3-168
SDT3324		2N6193	3-168
SDT3325		2N6193	3-168
SDT3326		2N6193	3-168
SDT3327		2N6190	3-168
SDT3328		2N6193	3-168
SDT3401		2N5339	3-100
SDT3402		2N5339	3-100
SDT3403		2N5339	3-100
SDT3404		2N5339	3-100
SDT3405		2N5339	3-100
SDT3406		2N5339	3-100
SDT3407		2N5339	3-100
SDT3408		2N5339	3-100
SDT3421		2N5337	3-100
SDT3422		2N5337	3-100
SDT3423		2N5336	3-100
SDT3424		2N5338	3-100
SDT3425		2N5337	3-100
SDT3426		2N5337	3-100
SDT3427		2N5336	3-100
SDT3428		2N5338	3-100
SDT3501		2N3719	3-32
SDT3502		2N3720	3-32
SDT3503		2N6303	3-32
SDT3504		2N6193	3-168
SDT3505		2N3867	3-32
SDT3506		2N3868	3-32
SDT3507		2N6303	3-32
SDT3508		2N6193	3-168
SDT3775		2N3867	3-32
SDT3776		2N3868	3-32
SDT3777		2N6303	3-32
SDT3778		2N3867	3-32
SDT4451		2N5337	3-100
SDT4452		2N5336	3-100
SDT4453		2N5337	3-100
SDT4454		2N5336	3-100
SDT4455		2N5337	3-100
SDT4456		2N5337	3-100
SDT4483		2N5337	3-100
SDT4901		2N3583	3-20
SDT4902		2N6233	3-174
SDT4903		2N6235	3-174
SDT4904		2N3585	3-20
SDT4905		2N3585	3-20
SDT5101		TIP41A	3-1166
SDT5102		TIP41A	3-1166
SDT5103		TIP41A	3-1166
SDT5111		TIP42A	3-1166
SDT5112		TIP42A	3-1166
SDT5113		TIP42A	3-1166
SDT5501		2N5337	3-100
SDT5502		2N5337	3-100
SDT5503		2N5337	3-100
SDT5504		2N5539	3-100
SDT5506		2N5337	3-100

ALPHANUMERIC INDEX — CROSS-REFERENCE (continued)

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
SDT5507		2N5337	3-100
SDT5508		2N5336	3-100
SDT5509		2N5338	3-100
SDT5511		2N5337	3-100
SDT5512		2N5337	3-100
SDT5513		2N5337	3-100
SDT5514		2N5339	3-100
SDT5901		2N3766	3-44
SDT5902		2N3766	3-44
SDT5903		2N3767	3-44
SDT5904		2N3584	3-20
SDT5905		2N3584	3-44
SDT5906		2N3766	3-44
SDT5907		2N3766	3-44
SDT5908		2N3767	3-44
SDT5909		2N3584	3-20
SDT5910		2N3584	3-20
SDT5911		2N5428	3-108
SDT5912		2N5428	3-108
SDT5913		2N5428	3-108
SDT5914		2N5429	3-108
SDT5951		2N3584	3-20
SDT5952		2N3583	3-20
SDT5953		2N3584	3-20
SDT5954		2N3584	3-20
SDT5955		2N3583	3-20
SDT5956		2N3584	3-20
SDT6308		2N5339	3-100
SDT6309		2N5339	3-100
SDT6310		2N5339	3-100
SDT6311		2N5339	3-100
SDT6312		2N5339	3-100
SDT6313		2N5339	3-100
SDT6314		2N5339	3-100
SDT6315		2N5339	3-100
SDT6316		2N5339	3-100
SDT6408		2N5339	3-100
SDT6409		2N5339	3-100
SDT6410		2N5339	3-100
SDT6411		2N5339	3-100
SDT6412		2N5339	3-100
SDT6413		2N5339	3-100
SDT6414		2N5339	3-100
SDT6415		2N5339	3-100
SDT6416		2N5339	3-100
SDT6901		2N3584	3-20
SDT6902		2N3584	3-20
SDT6903		2N3584	3-20
SDT6904		2N3584	3-20
SDT7201		2N6306	3-194
SDT7202		2N6306	3-194
SDT7203		2N6306	3-194
SDT7204		2N6307	3-194
SDT7205		2N6308	3-202
SDT7206		2N6341	
SDT7207		2N6306	3-194
SDT7208		2N6306	3-194
SDT7209		2N6307	3-194
SDT7603		2N6338	3-202
SDT7604		2N6339	3-202
SDT7605		2N6341	3-202
SDT7609		2N6338	3-202
SDT7610		2N6339	3-202
SDT7611		2N6341	3-202
SDT7612		2N6249	3-177
SDT7731		2N5881	3-130
SDT7732		2N5881	3-130
SDT7733		2N5882	3-130
SDT7734		2N5629	3-112
SDT7735		2N5630	3-112

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
SDT7736		2N5631	3-112
SDT9201		2N3055	3-6
SDT9202		2N5878	3-127
SDT9203		2N5882	3-130
SDT9204		MJ15001	3-844
SDT9205		2N3055	3-6
SDT9206		2N3055	3-6
SDT9207		2N5878	3-127
SDT9208		2N5882	3-130
SDT9209		MJ15001	3-844
SDT9210		2N3055	3-6
SDT9301		2N3054A	3-2
SDT9302		2N3054A	3-2
SDT9303		2N4233A	3-64
SDT9304		2N3054A	3-2
SDT9305		2N3054A	3-2
SDT9306		2N4233A	3-64
SDT9307		2N3714	3-26
SDT9308		2N3715	3-26
SDT9309		2N3716	3-26
SDT9701		2N5303	3-96
SDT9702		2N5629	3-112
SDT9703		2N5630	3-112
SDT9704		2N5882	3-130
SDT9705		2N5629	3-112
SDT9706		2N5630	3-112
SDT9707		2N3055	3-6
SDT12301		2N5339	3-100
SDT12302		2N5339	3-100
SDT12303		2N5339	3-100
SDT12305		2N5339	3-100
SDT12306		2N5339	3-100
SDT12307		2N5339	3-100
SDT13301		2N6546	3-239
SDT13302		2N6547	3-239
SDT13303		2N6547	3-239
SDT13304		MJ13335	3-834
SDT13305	C.M.	MJ13335	3-834
SDTB01		2N5339	3-100
SDTB02		2N5339	3-100
SDTB03		2N5339	3-100
SDTB05		2N5339	3-100
SDTB06		2N5339	3-100
SDTB07		2N5339	3-100
SE9300	SE9300		3-100
SE9301	SE9301		—
SE9302	SE9302		—
SE9303		MJ1000	3-626
SE9304		MJ1001	3-626
SE9306		MJ4032	3-634
SE9307		MJ4034	3-634
SE9308		MJ4035	3-37
SE9331		2N3739	—
SE9400	SE9400		—
SE9401	SE9401		—
SE9402	SE9402		—
SE9403		MJ900	3-626
SE9404		MJ901	3-626
SE9406		MJ4030	3-634
SE9407		MJ4031	3-634
SE9408		MJ4032	3-634
SV7056		MJE340	3-990
SVT100-5C		2N5882	3-130
SVT200-5C		2N6306	3-194
SVT200-10		2N6306	3-194
SVT200-10C		MJ15022	3-852
SVT250-3C		2N6308	3-194
SVT250-5		2N6308	3-194
SVT250-5C		2N6306	3-194
SVT250-10		2N6306	3-194

CM Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
SVT250-10C		MJ15024	3-852
SVT300-3C		2N6307	3-194
SVT300-5		2N6543	3-229
SVT300-5C		2N6307	3-194
SVT300-10		2N6307	3-194
SVT300-10C		MJ13090	3-816
SVT350-3		2N6545	3-235
SVT350-3C		2N6308	3-194
SVT350-5		2N6308	3-194
SVT350-5C		MJ13080	3-810
SVT350-12		2N6547	3-239
SVT400-3		2N6545	3-235
SVT400-3C		2N6543	3-229
SVT400-5		2N6543	3-229
SVT400-5C		2N6545	3-235
SVT400-12		MJ13090	3-816
SVT450-3		2N6545	3-235
SVT450-3C		MJ13335	3-834
SVT450-5		2N6543	3-229
SVT450-5C		MJ13080	3-810
SVT6000		MJ10004	3-676
SVT6001		MJ10004	3-676
SVT6002		MJ10005	3-676
SVT6060		MJ10004	3-676
SVT6061		MJ10004	3-676
SVT6062		MJ10005	3-676
SVT6251		MJ10006	3-682
SVT6252		MJ10006	3-682
SVT6253		MJ10007	3-682
SVT6546		MJ13090	3-816
SVT6547		MJ13090	3-816
SVT7520		2N6543	3-229
SVT7521		2N6543	3-229
SVT7522		MJ13335	3-834
SVT7523		2N6308	3-194
SVT7524		2N6543	3-229
SVT7525		MJ13335	3-834
SVT7530		MJ13081	3-810
SVT7531		MJ13080	3-810
SVT7532		MJ16004	3-858
SVT7533		MJ13080	3-810
SVT7534		MJ13080	3-810
SVT7535		MJ16004	3-858
SVT7540		MJ16008	3-874
SVT7541		MJ16008	3-874
SVT7542		MJ16008	3-874
SVT7543		MJ13080	3-810
SVT7544		MJ13080	3-810
SVT7545		MJ16008	3-874
SVT7550		MJ13091	3-816
SVT7551		MJ16010	3-890
SVT7552		MJ16010	3-890
SVT7553		MJ13090	3-816
SVT7554		MJ13091	3-816
SVT7555		MJ16010	3-890
SVT7560		MJ13091	3-816
SVT7561		MJ16012	3-890
SVT7563		MJ13090	3-816
SVT7564		MJ13090	3-816
SVT7565		MJ13090	3-816
SVT7570		MJ13091	3-816
SVT7571		MJ16012	3-890
SVT7573		MJ13090	3-816
SVT7574		MJ13090	3-816
SVT7575		MJ16012	3-890
TIP29	TIP29		3-1154
TIP29A	TIP29A		3-1154
TIP29B	TIP29B		3-1154
TIP29C	TIP29C		3-1154
TIP29D		MJE15030	3-1086
TIP29E		MJE15030	3-1086

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
TIP29F		MJE15030	3-1086
TIP30	TIP30		3-1154
TIP30A	TIP30A		3-1154
TIP30B	TIP30B		3-1154
TIP30C	TIP30C		3-1154
TIP30D			3-1086
TIP30E		MJE15031	3-1086
TIP30F		MJE15031	3-1086
TIP31	TIP31	MJE15031	3-1156
TIP31A	TIP31A		3-1156
TIP31B	TIP31B		3-1156
TIP31C	TIP31C		3-1156
TIP31D			3-1086
TIP31E		MJE15030	3-1086
TIP31F		MJE15030	3-1086
		MJE15030	
TIP32	TIP32		3-1156
TIP32A	TIP32A		3-1156
TIP32B	TIP32B		3-1156
TIP32C	TIP32C		3-1156
TIP32D		MJE15031	3-1186
TIP32E			3-1086
TIP32F		MJE15031	3-1086
TIP33	TIP33	MJE15031	3-1160
TIP33A	TIP33A		3-1160
TIP33B	TIP33B		3-1160
TIP33C	TIP33C		3-1160
TIP34	TIP34		3-1160
TIP34A	TIP34A		3-1160
TIP34B	TIP34B		3-1160
TIP34C	TIP34C		3-1160
TIP35	TIP35		3-1162
TIP35A	TIP35A		3-1162
TIP35B	TIP35B		3-1162
TIP35C	TIP35C		3-1162
TIP35D	*		
TIP35E	*		
TIP35F	*		
TIP36	TIP36		3-1162
TIP36A	TIP36A		3-1162
TIP36B	TIP36B		3-1162
TIP36C	TIP36C		3-1162
TIP36D	*		
TIP36E	*		
TIP36F	*		
TIP41	TIP41		3-1166
TIP41A	TIP41A		3-1166
TIP41B	TIP41B		3-1166
TIP41C	TIP41C		3-1166
TIP41D		MJE15031	3-1086
TIP41E		MJE15031	3-1086
TIP41F		MJE15031	3-1086
TIP42	TIP42		3-1166
TIP42A	TIP42A		3-1166
TIP42B	TIP42B		3-1166
TIP42C	TIP42C		3-1166
TIP42D	TIP42D		—
TIP42E	TIP42E		—
TIP42F	TIP42F		—
TIP47	TIP47		3-1170
TIP48	TIP48		3-1170
TIP49	TIP49		3-1170
TIP50	TIP50		3-1170
TIP61	TIP61		—
TIP61A		TIP29C	3-1154
TIP61B		TIP29C	3-1154
TIP61C		TIP29C	3-1154
TIP62		TIP32C	3-1156
TIP62A		TIP32C	3-1156
TIP62B		TIP32B	3-1156
TIP62C		TIP32C	3-1156

*Consult Motorola if a direct replacement is necessary.

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
TIP63	TIP47		3-1170
TIP64	TIP48		3-1170
TIP73		2N6486	3-221
TIP73A		2N6487	3-221
TIP73B		2N6488	3-221
TIP74		2N6489	3-221
TIP74A		2N6490	3-221
TIP74B		2N6491	3-221
TIP75		MJE13005	3-1058
TIP75A		MJE13004	3-1058
TIP75B		MJE13004	3-1058
TIP75C		MJE13005	3-1058
TIP100	TIP100		3-1174
TIP101	TIP101		3-1174
TIP102	TIP102		3-1174
TIP105	TIP105		3-1174
TIP106	TIP106		3-1174
TIP107	TIP107		3-1174
TIP110	TIP110		3-1178
TIP111	TIP111		3-1178
TIP112	TIP112		3-1178
TIP115	TIP115		3-1178
TIP116	TIP116		3-1178
TIP117	TIP117		3-1178
TIP120	TIP120		3-1181
TIP121	TIP121		3-1181
TIP122	TIP122		3-1181
TIP125	TIP125		3-1181
TIP126	TIP126		3-1181
TIP127	TIP127		3-1181
TIP140	TIP140		3-1185
TIP140T		TIP100	3-1174
TIP141	TIP141		3-1185
TIP141T		TIP102	3-1174
TIP142	TIP142		3-1185
TIP142T		TIP103	3-1174
TIP145	TIP145		3-1185
TIP145T		TIP105	3-1174
TIP146	TIP146		3-1185
TIP146T		TIP106	3-1174
TIP147	TIP147		3-1185
TIP147T		TIP107	3-1174
TIP150		MJE13006	3-1064
TIP151		MJE13007	3-1064
TIP152		MJE13007	3-1064
TIP160		MJE5740	3-1028
TIP161		MJE5741	3-1028
TIP162		MJE5742	3-1028
TIP510		MJ15018	—
TIP511		MJ15018	—
TIP512		MJ15018	—
TIP513		MJ15012	3-850
TIP514		MJE15030	3-1086
TIP517		2N6339	3-202
TIP518		2N6341	3-202
TIP519		MJ15019	—
TIP520		MJ15019	—
TIP521		2N6211	3-171
TIP522		2N6211	3-171
TIP523		MJ15012	3-850
TIP524		2N6497	3-225
TIP525		MJ15011	3-850
TIP526		MJ15011	3-850
TIP527		MJ15012	3-850
TIP528		MJ15012	3-850
TIP536		MJ16006	3-874
TIP545		MJ15016	3-9
TIP546		MJ15016	3-9
TIP550		MJ12002	3-765
TIP551		MJ12003	3-770

Industry Part Number	Motorola Direct Replacement	Motorola Similar Replacement	Page Number
TIP552		MJ12004	3-772
TIP553		MJ12004	3-772
TIP554		MJ13080	3-810
TIP555		MJ13080	3-810
TIP556		MJ13080	3-810
TIP558		MJ16006	3-874
TIP559		MJ16006	3-874
TIP560		MJ16006	3-874
TIP562		MJ16012	3-890
TIP563		MJ16012	3-890
TIP564		MJ11018	3-759
TIP565		MJ10009	3-688
TIP575		MJ13080	3-810
TIP575A		MJ13080	3-810
TIP575B		MJ13080	3-810
TIP575C		MJ13080	3-810
TIP600		TIP100	3-1174
TIP601		TIP101	3-1174
TIP602		TIP102	3-1174
TIP605		TIP105	3-1174
TIP606		TIP106	3-1174
TIP607		TIP107	3-1174
TIP620		TIP120	3-1181
TIP621		TIP121	3-1181
TIP622		TIP122	3-1181
TIP625		TIP125	3-1181
TIP626		TIP126	3-1181
TIP627		TIP127	3-1181
TIP640		2N6384	3-209
TIP641		2N6385	3-209
TIP645		2N6054	3-157
TIP646		2N6650	3-157
TIP660		MJ10002	3-670
TIP661		MJ10002	3-670
TIP662		MJ10002	3-670
TIP663		MJ10001	3-664
TIP664		MJ10008	3-688
TIP665		MJ10009	3-688
TIP666		MJ10002	3-670
TIP667		MJ10002	3-670
TIP668		MJ10014	3-700
TIP701		MJ13080	3-810
TIP702		MJ13081	3-810
TIP2955		MJE2955T	3-1189
TIP3055		MJE3055T	3-1189
TIPL751		MJ13070	3-804
TIPL751A		MJ13071	3-804
TIPL752		MJ13080	3-810
TIPL752A		MJ13080	3-810
TIPL753		MJ13080	3-810
TIPL753A		MJ13080	3-810
TIPL755		MJ13090	3-816
TIPL755A		MJ13091	3-816
TIPL757		MJ16016	3-906
TIPL757A		MJ16016	3-906
TIPL760		MJE13070	3-804
TIPL760A		MJE13071	3-804
TIPL774		MJ10009	3-688
TIPL775		MJ11018	3-759
TIPL775A		MJ11020	3-759
UMT1008		MJ13014	3-798
UMT1009		MJ13015	3-798
UMT1203		MJE13004	3-1058
UMT1204		MJE13005	3-1058
WT5100		MJ13015	3-798
WT5200		2N6547	3-239

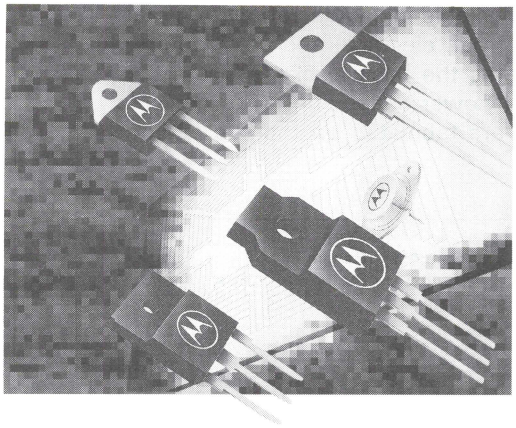

CONTENTS: Page

Standard Device Selection by Package . . 2-2
TABLE 1 TO-204AA (Case 1) (Case 11)/ TO-204AE (Case 197) . . . 2-3
TABLE 2 TO-205AA (Case 31) 2-8
TABLE 3 TO-205AD (Case 79) 2-8
TABLE 4 TO-213AA (Case 80) 2-9
TABLE 5 TO-218AC (Case 340) . . . 2-10
TABLE 6 TO-220AB (Case 221A) . . 2-12
TABLE 7 TO-225AA (Case 77) 2-15
TABLE 8 TO-225AB (Case 90) 2-17
TABLE 9 Case 152 2-17
TABLE 10 DPAK (Case 369A-03) (Case 359-03) . . . 2-18
TABLE 11 (Case 353-01) 2-18
Selection by Function
TABLE 12 Military Qualified 2-19
TABLE 13 Power Darlingtons 2-20
TABLE 14 Power Switching (<200 Volts) 2-24
TABLE 15 SWITCHMODE (>200 Volts) 2-26
Applications Selector Guides 2-31
Applications Literature 2-31
Audio 2-32
TABLE 16 2-32
CRT Deflection 2-33
TABLE 17 2-33
Leadform Options 2-34
Mounting Hardware 2-36

Selector Guide

2

The selector guides on the subsequent pages offer a quick "first-selection" capability for devices that fit specific applications categories.

Because designers have different application prerequisite, the devices are categorized in three ways:

1. *by package*
2. *by major product category*
3. *by major applications*

In each case, pertinent electrical characteristics are supplied to permit rapid comparison of potentially suitable devices.

Selection By Package

Motorola power transistors are available in a wide variety of metal and plastic packages to match thermal, electrical and cost requirements. The following table compares the basic packages from the standpoint of current, voltage and power capabilities. The devices available in the various packages are tabulated on the succeeding pages.

Package		I_C Range (Amps)	V_{CE} Range (Volts)	P_D (Watts)	Page #
	TO-204AA (TO-3) Case 1 Case 11	2.5–30	40–1500	36–250	2-3
	TO-204AE Case 197	2.5–70	40–1500	36–350	2-3
	TO-205AA Case 31 (TO-5)	3.0	40–800	6.0	2-8
	TO-205AD (TO-39) Case 79	0.5–5.0	40–400	5.0–10	2-8
	TO-213AA (TO-66) Case 80	1.0–10	40–325	20–90	2-9
	DPAK Case 369-03	0.5–10	40–400	12.5–20	2-18
	DPAK Case 369A-04	0.5–10	40–400	12.5–20	2-18
	TO-218AC Case 340	5.0–25	40–1500	80–150	2-10
	TO-220AB Case 221A	0.5–15	30–1800	15–125	2-12
	TO-225AA TYPE Case 77	0.3–5.0	25–400	12.5–40	2-15
	TO-225AB Case 90	5.0–15	40–100	65–100	2-17
	Case 152	0.5–2.0	30–300	10	2-17
	Case 353	25–100	250–850	250	2-18

2

Bipolar Power Transistors

TABLE 1 — METAL TO-204AA (Formerly TO-3) — TO-204AE (Type)





STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

CASE 11-01, 11-3 — 40 mil pins
CASE 1-04, 1-05 — 40 mil pins
MODIFIED TO-3
CASE 197-01 — 60 mil pins

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
2.5	800	MJ8501		7.5 min	0.5	4	2	1		125
	1500*	BU205		2 min		2	0.75 typ	2	4 typ	36
		MJ12002		1.11 min	2		1	2	4 typ	75
3.5	325	2N3902		30/90	1	1.2 typ	0.1 typ	1	2.8	100
4	1500*	MJ12003		2.5 min	3		1	3		100
5	200	MJ410		30/90	1				2.5	100
	250	MJ3029		30 min	0.4		1	3		125
	300	MJ411		30/90	1				2.5	100
	400	2N6543		7/35	3	4	0.8	3	6	100
		MJ13070		8 min	3	1.5	0.5	3		125
	450	MJ13071		8 min	3	1.5	0.5	3		125
		MJ16002		5 min	5	3	0.3	3		125
		MJ16004		7 min	5	2.7	0.35	3		125
		2N6834		10/30	3	2.7	0.35	3	15	125
	500	MJ16002A		5 min	5	3	0.3	3		125
	700	MJ8502		7.5 min	1	4	2	2.5		150
	800	MJ8503		7.5 min	1	4	2	2.5		150
	850*	MJ12020		5 min	5		0.13 typ	3	15	125
	1500*	BU208		2.25 min	4.5		0.6 typ	4.5	4 typ	60
		BU208A		2.25 min	4.5	8 typ	0.4 typ	4.5	4 typ	90
		BU208D†		2.25 min	4.5		0.6 typ	4.5	4 typ	60
		MJ12004		2.5 min	4.5		1	4.5	4	100
6	100	2N5758	2N6226	25/100	3	0.7 typ	0.5 typ	3	1	150
	120	2N5759	2N6227	20/80	3	0.7 typ	0.5 typ	3	1	150
	140	2N5760	2N6228	15/60	3	0.7 typ	0.5 typ	3	1	150

(continued)

$|h_{fe}|$ @ 1 MHz, ## Darlington
* $V_{(BR)CEX}$ or $V_{(BR)CES}$
† D Suffix on this device signifies internal C-E Diode

TABLE 1 — METAL TO-204AA — TO-204AE (Type) (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
6	375	BU326		30 typ	0.6	3.5	1**	2.5	6	90
	400	BU326A		30 typ	0.6	3.5	1**	2.5	6	90
7	300	MJ3041##		250 min	2.5					175
	350	MJ3042##		250 min	2.5					175
7.5	60	2N3447		40/120	5	2	0.35	5	10	115
	80	2N3448		40/120	5	2	0.35	5	10	115
8	60	MJ1000##	MJ900##	1k min	3					90
		2N6055##	2N6053##	750/18k	4	1.5 typ	1.5 typ	4	4#	100
	80	MJ1001##	MJ901##	1k min	3					90
		2N6056##	2N6054##	750/18k	4	1.5 typ	1.5 typ	4	4#	100
	250	2N6306		15/75	3	1.6	0.4	3	5	125
	300	2N6307		15/75	3	1.6	0.4	3	5	125
	350	2N6308		12/60	3	1.6	0.4	5	5	125
	400	2N6545		7/35	5	4	1	5	6	125
			MJ6503	15 min	2	2	0.5	4		125
		MJ13080		8 min	5	1.5	0.5	5		150
	450	MJ13081		8 min	5	1.5	0.5	5		150
		MJ16006		5 min	8	2.5	0.25	5		150
		MJ16008		7 min	8	2.2	0.25	5		150
		2N6835		10/30	5	2.5	0.25	5	10	150
	500	MJ16006A		5 min	8	3	0.4	5		150
	850*	MJ12021		5 min	8		0.1 typ	5		150
	1400*	MJ10011##		20 min	4		1	4		80
	1500*	MJ12005		5 min	5		1	5		100
9	400	BUS47		7 min	6	2	0.4	6		150
	450	BUS47A		7 min	5	2	0.4	5		150
10	40	2N6383##	2N6648##	1k/20k	5				20#	100
	60	BD311	BD312	25 min	5				4	115
			2N3789	15 min	3	0.3 typ	0.4 typ	5	4	150
		2N3715	2N3791	30 min	3	0.3 typ	0.4 typ	5	4	150
		2N5877	2N5875	20/100	4	1	0.8	4	4	150
		2N6384##		1k/20k	5				20#	100
		MJ3000##	MJ2500##	1k min	5					150
	80	2N3714	2N3790	15 min	3	0.3 typ	0.4 typ	5	4	150
		2N3716	2N3792	30 min	3	0.3 typ	0.4 typ	5	4	150
		2N5878	2N5876	20/100	4	1	0.8	4	4	150
		2N6385##		1k/20k	5				20#	100
		MJ3001##	MJ2501##	1k min	5					150
	140	2N5634		15/60	5	0.9 typ	0.9 typ	5	1	150
		2N3442		20/70	4					117

* $V_{(BR)CEX}$, # $|h_{fe}|$ @ 1 MHz, ## Darlington

(continued)

JAN, JTX, JTXV Available

TABLE 1 — METAL TO-204AA — TO-204AE (Type) (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s µs Max	Resistive Switching t_f µs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
10	250	MJ15011	MJ15012	20/100	2					200
	325	BUX43		8 min	5	2.2	0.9	5	8	120
		MJ413		20/80	0.5				2.5	125
		MJ423		30/90	1				2.5	125
		MJ431		15/35	2.5				2.5	125
	350	BU323##		150 min	6	7.5 typ	5.2 typ	6		175
		MJ13014		8/20	5	2	0.5	5		150
		MJ10002##		3/300	5	2.5	1	5	10#	150
		MJ10006##		30/300	5	1.5	0.5	5	10#	150
	400	BU323A##		150 min	6	7.5 typ	5.2 typ	6		175
		MJ10007##		30/300	5	1.5	0.5	5	10#	150
		MJ10012##		100/2k	6	15	15	6		175
		MJ13015		8/20	5	2	0.5	5		150
	600	MJ10014##		10/250	10	2.5	0.8	10		175
	700	MJ8504		7.5 min	1.5	4	2	5		175
	800	MJ8505		7.5 min	1.5	4	2	5		175
		MJ16018		4 min	5	4.5 typ	0.2 typ	5		150
	950*	MJ12010		4.2 min	5		1	5		100
12	60	2N6057##	2N6050##	750/18k	6	1.6 typ	1.5 typ	6	4#	150
	80	2N6058##	2N6051##	750/18k	6	1.6 typ	1.5 typ	6	4#	150
	100	2N6059##	2N6052##	750/18k	6	1.6 typ	1.5 typ	6	4#	150
	250	BUX42		8 min	6	2	0.4	6	8	120
	1000	BUT16##		5 min	8	3.3	1.5	8		150
15	60	2N3055	MJ2955	20/70	4	0.7 typ	0.3 typ	4	2.5	115
		2N3055A	MJ2955A	20/70	4				0.8	115
		2N6576##		2k/20k	4	2	7	10	10–200#	120
		2N5881	2N5879	20/100	6	1	0.8	6	4	160
	80	2N5882	2N5880	20/100	6	1	0.8	6	4	160
	90	2N6577##		2k/20k	4	2	7	10	10-200#	120
	120	MJ15015	MJ15016	20/70	4				1	180
		2N6578##		2k/20k	4	2	7	10	10-200#	120
	140	MJ15001	MJ15002	25/150	4				2	200
	150	MJ11018##	MJ11017##	100 min	15				3#	175
	200	BUX41		8 min	8	1.5	0.4	8	8	120
		2N6249		10/50	10	3.5	1	10	2.5	175
		MJ11020##	MJ11019##	100 min	15				3#	175
	250	MJ11022##	MJ11021##	100 min	15				3#	175
	275	2N6250		8/50	10	3.5	1	10	2.5	175
	300	2N6546		6/30	10	4	0.7	10	6 to 24	175
		2N6676		8 min	15	2.5	0.5	15	3	175
	325	BUX13		8 min	8	2.5	0.8	8	8	150
	400	BUS48		8 min	10	2	0.4	10		175
		BUX48				3	0.8	10		175
		2N6547		6/30	10	4	0.7	10	6 to 24	175
		2N6678		8 min	15	2.5	0.5	15	3	175
		MJ13090		8 min	10	2.5	0.5	10		175
	450	BUS48A		8 min	10	2	0.4	10		175
		BUX48A				3	0.8	8		175
		MJ13091		8 min	10	2.5	0.5	10		175
		MJ16010		5 min	15	1.2 typ	0.2 typ	10		175

JAN, JTX, JTXV Available

* $V_{(BR)CEX}$, # $|h_{fe}|$ @ 1 MHz, ## Darlington

(continued)

TABLE 1 — METAL TO-204AA — TO-204AE (Type) (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
15		MJ16012		7 min	15	0.9 typ	0.15 typ	10		175
		2N6836		10/30	10	3	0.35	10	10	175
	500	MJ16010A		5 min	15	3	0.4	10		175
	850*	MJ12022		5 min	15		0.1 typ	10		175
16	60	MJ4033##	MJ4030##	1k/	10					150
	80	BD315	BD316	25 min	5				1	200
		MJ4034##	MJ4031##	1k/	10					150
	100	BD317	BD318	25 min	5				1	200
		2N5629	2N6029	25/100	8	1.2 typ	1.2 typ	8	1	200
		MJ4035##	MJ4032##	1k/	10					150
	120	2N5630	2N6030	20/80	8	1.2 typ	1.2 typ	8	1	200
	140	2N3773	2N6609	15/60	8	1.1 typ	1.5 typ	8	4	150
		2N5631	2N6031	15/60	8	1.2 typ	1.2 typ	8	1	200
	200	MJ15022	MJ15023	15/60	8				5	250
	250	MJ15024	MJ15025	15/60	8				5	250
18	160	BUX41N		8 min	12	1.2	0.25	12	8	120
20	60	2N3772		15/60	10				2	150
		2N6282##	2N6285##	750/18k	10	2.5 typ	2.5 typ	10	4#	160
	75	2N5039		20/100	10	1.5	0.5	10	60	140
	80	2N5303	2N5745	15/60	10	2	1	10	2	200
		2N6283##	2N6286##	750/18k	10	2.5 typ	2.5 typ	10	4#	160
	90	2N5038		20/100	12	1.5	0.5	12	60	140
	100	2N6284##	2N6287##	750/18k	10	2.5 typ	2.5 typ	10	4#	160
	125	BUX40		8 min	15	1	0.25	15	8	120
	140	MJ15003	MJ15004	25/150	5				2	250
	160	BUV11N		10 min	15	1.2	0.25	15	8	150
	200	BUV11		10 min	12	1.8	0.4	12	8	150
		MJ13330		8/40	10	3.5	0.7	10	5 to 40	175
	250	BUV12		10 min	10	1.5	0.5	10	8	150
		MJ13331		8/40	10	3.5	0.7	10	5 to 40	175
	350	MJ10000##		40/400	10	3	1.8	10	10#	175
		MJ10004##		40/400	10	1.5	0.5	10	10#	175
	400	BUV24		8 min	12	3	0.9	12	8	250
		MJ10001##		40/400	10	3	1.8	10	10#	175
		MJ10005##		40/400	10	1.5	0.5	10	10#	175
		MJ13333		10/60	5	4	0.7	10		175
	450	MJ10008##		30/300	10	2	0.6	10	8#	175
		MJ16014		5 min	20	2.7	0.35	20		250
		MJ16016		7 min	20	2.2	0.25	20		250
		2N6837		10/30	15	2.5	0.25	15		250
	500	MJ10009##		30/300	10	2	0.6	10	8#	175
		MJ13335		10/60	5	4	0.7	10		175
	700	BUT15##		15 min	12	2.5	0.8	12		175
	750	MJ10024##		50/600	20	5	1.8	10		250
	850	MJ10025##		50/600	20	5	1.8	10		250

* $V_{(BR)CEX}$, # $|h_{fe}|$ @ 1 MHz, ## Darlington

JAN, JTX, JTXV Available

TABLE 1 — METAL TO-204AA — TO-204AE (Type) (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
24	1000	BUT36##		5 min	16	6	2.5	16		250
25	60	2N5885	2N5883	20/100	10	1	0.8	10	4	200
	80	2N5886	2N5884 2N6436	20/100 30/120	10 10	1 1	0.8 0.25	10 10	4 40	200 200
	100	2N6338	2N6437	30/120	10	1	0.25	10	40	200
	120	2N6339	2N6438	30/120	10	1	0.25	10	40	200
	125	BUV10 BUV10N		10 min 10 min	20 20	1.2 1.55	0.25 0.45	20 15	8 10	150 175
	140	2N6340		30/120	10	1	0.25	10	40	200
	150	2N6341		30/120	10	1	0.25	10	40	200
	500	BUT14##		15 min	16	2.8	0.8	16		175
28	400	BUT13##		20 min	20	2.6	0.8	18		175
30	40	2N3771 2N5301	 2N4398	15/60 15/60	15 15	 2	 1	 10	2 2	150 200
	60	2N5302 MJ11012##	2N4399 MJ11011##	15/60 1k min	15 20	2	1	10	2 4#	200 200
	90	BUX39 MJ11014##	 MJ11013##	8 min 1k min	20 20	1	0.25	20	8 4#	120 200
	100	2N6328 MJ802	 MJ4502	6/30 25/100	30 7.5				3 2	200 200
	120	MJ11016##	MJ11015##	1k min	20				4#	200
	325	BUV23●		8 min	16	1.8	0.4	16	8	250
	400	BUS98● BUX98		8 min	20	2.3 3	0.4 0.8	20 20		250 250
	450	BUS98A● BUX98A MJ16020● MJ16022●		8 min 5 min 7 min	16 30 30	2.3 3 1.8 1.5	0.4 0.8 0.2 0.15	16 16 20 20		250 250 250 250
40	160	BUV21N●		10 min	40	1	0.2	40	8	250
	200	BUV21●		10 min	25	1.8	0.4	25	8	150
	250	BUS52● BUV22●		15 min 10 min	40 20	 1.1	 0.35	 20	 8	350 250
	350	MJ10022●##		50/600	120	2.5	0.9	20		250
	400	MJ10023●##		50/600	10	2.5	0.9	20		250
	700	BUT35●##		15 min	24	4	1.2	24		250
50	60	2N5685● MJ11028●##	2N5683● MJ11029●##	15/60 400 min	25 50	0.5 typ	0.3 typ	25	2	300 300
	80	2N5686●	2N6584● 2N6377●	15/60 30/120	25 20	0.5 typ 0.8	0.3 typ 0.25	25 20	2 30	300 250
	90	MJ11030●##	MJ11031●##	400 min	50					300
	100	2N6274●	2N6378●	30/120	20	0.8	0.25	20	30	250
	120	2N6275● MJ11032●##	2N6379● MJ11033●##	30/120 400 min	20 50	0.8	0.25	20	30	250 300
	125	BUV20●		10 min	50	1.2	0.25	50	8	250
	150	2N6277●		30/120	20	0.8	0.25	20	30	250

● Modified TO-3, 60 mil pins, # $|h_{fe}|$ @ 1 MHz, ## Darlington

JAN, JTX, JTXV Available

TABLE 1 — METAL TO-204AA — TO-204AE (Type) (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
50	200	BUS51•		15 min	50					350
	400	MJ10015•##		10 min	40	2.5	1	20		250
	500	BUT34•##		15 min	32	3	1.5	32		250
		MJ10016•##		10 min	40	2.5	1	20		250
56	400	BUT33•##		20 min	36	3.3	1.6	36		250
60	60	MJ14000•	MJ14001•	15/100	50					300
	80	MJ14002•	MJ14003•	15/100	50					300
	200	MJ10020•##		75 min	15	3.5	0.5	30		250
	250	MJ10021•##		75 min	15	3.5	0.5	30		250
70	125	BUS50•		15 min	50					350

• Modified TO-3, 60 mil pins, # $|h_{fe}|$ @ 1 MHz, ## Darlington

TABLE 2 — METAL TO-205AA PACKAGE (Formerly TO-5)

CASE 31-03

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
3	40		2N3719	25/180	1	0.4*		1	60	6
			2N3867	40/200	1.5	0.4*		1.5	60	6
	60		2N3720	25/180	1	0.4*		1	60	6
			2N3868	30/150	1.5	0.4*		1.5	60	6
	80		2N6303	30/150	1.5	0.4*		1.5	60	6

*t_{off}

TABLE 3 — METAL TO-205AD PACKAGE (Formerly TO-39)

CASE 79-02

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR
(Pin 3 connected to case)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
0.5	300		MJ4646	20 min	0.5	0.72*		0.05	40	5
	400		MJ4647	20 min	0.5	0.72*		0.05	30	5
4	60	2N4877		20/100	4	1.5	0.5	4	4	10
5	80	2N5336	2N6190	30/120	2	2	0.2	2	30	6
		2N5337	2N6191	60/240	2	2	0.2	2	30	6
	100	2N5338		30/120	2	2	0.2	2	30	10
		2N5339	2N6193	60/240	2	2	0.2	2	30	6

*t_{off}

JAN, JTX, JTXV Available

TABLE 4 — METAL TO-213AA PACKAGE (Formerly TO-66)

CASE 80-02





STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
1	40		2N4898	20/100	0.5	0.6 typ	0.3 typ	0.5	3	25
	60		2N4899	20/100	0.5	0.6 typ	0.3 typ	0.5	3	25
	80	2N4912	2N4900	20/100	0.5	0.6 typ	0.3 typ	0.5	3	25
	175	2N3583	2N6420	40/200	0.5	2 typ	0.23 typ	0.5	10	35
	225	2N3738		40/200	0.1	3 typ	0.3 typ	0.1	10	20
	250		2N5344	25/100	0.5	0.6	0.1	0.5	60	40
	300	2N3739		40/200	0.1	3 typ	0.3 typ	0.1	10	20
2	225		2N6211	10/100	1	2.5	0.6	1	20	35
	250	2N3584	2N6421	25/100	1	4	3	1	10	35
	300		2N6212	10/100	1	2.5	0.6	1	20	35
		2N3585	2N6422	25/100	1	4	3	1	10	35
		2N4240		30/150	0.75	6	3	0.75	15	35
	350		2N6213	10/100	1	2.5	0.6	1	20	35
3	140	2N3441		25/100	0.5				0.2	25
4	60		2N3740	30/100	0.25	1.3 typ	0.27 typ	0.25	4	25
		2N3054,A	2N6049	25/100	0.5	1 typ	0.3 typ	0.5	3	75
		2N3766		40/160	0.5	0.9 typ	0.09 typ	0.5	10	20
		2N6294##	2N6296##	750/18k	2	0.9 typ	0.7 typ	2	4#	50
	80		2N3741	30/100	0.25	1.3 typ	0.27 typ	0.25	4	25
		2N3767		40/160	0.5	0.9 typ	0.09 typ	0.5	10	20
		2N6295##	2N6297##	750/18k	2	0.9 typ	0.7 typ	2	4	50
5	80	2N4233A		25/100	1.5	0.5 typ	0.2 typ	1.5	4	75
	275	2N6233		25/125	1	3.5	0.5	1	20	50
	325	2N6235		25/125	1	3.5	0.5	1	20	50
7	60	2N6315	2N6317	20/100	2.5	1	0.8	2.5	4	90
	80	2N5428		60/240	2	2	0.2	2	30	40
		2N6316	2N6318	20/100	2.5	1	0.8	2.5	4	90
	100	2N5429		30/120	2	2	0.2	2	30	40
		2N5430		60/240	2	2	0.2	2	30	40
8	60	2N6300##	2N6298##	750/18k	4	1.5 typ	1.5 typ	4	4#	75
	80	2N6301##	2N6299##	750/18k	4	1.5 typ	1.5 typ	4	4#	75
10	80	2N6495		10/60	10	0.15 typ	0.05 typ	10	25	70

$|h_{fe}|$ @ 1 MHz, ## Darlington

JAN, JTX, JTXV Available

TABLE 5 — PLASTIC TO-218AC PACKAGE

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR



CASE 340-01

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
3	750	MJH16032		4 min	3	2	1.5	2		125
	850	MJH16034		4 min	3	2	1.5	2		125
5	400	BUW11		6 min	3	4	0.8	3		125
	450	BUW11A MJH16002 MJH16004		6 min 5 min 7 min	2.5 5 5	4 3 2.7	0.8 0.3 0.35	2.5 3 3		125 100 100
	500	MJH16002A		5 min	5	3	0.3	3		100
	1500*	MJH12004		2.5 min	4.5	—	1	4.5	4	100
6	375	BU426		30 typ	0.6	2 typ	0.5 typ	2.5	6 typ	113
	400	BU426A		30 typ	0.6	2 typ	0.5 typ	2.5	6 typ	113
8	400	BUW12		6 min	6	4	0.8	5		125
	450	BUW12A MJH16006 MJH16008		6 min 5 min 7 min	5 8 8	4 2.5 2.2	0.8 0.25 0.25	5 5 5		125 125 125
	500	BUT50P## MJH16006A		30 min 5 min	2 8	0.75 typ 2.5	0.1 typ 0.25	5 5		100 125
	700	BU508,A BU508D,AD		2.25 min 2.25 min	4.5 4.5	8 typ 8 typ	0.5 typ 0.5 typ	4.5 4.5	7 7	125 125
	750	MJH12005					0.4 typ	5	4	100
9	400	BUS47P		7 min	5	2	0.4	6		128
	450	BUS47AP		7 min	6	2	0.4	6		128
10	40	TIP33	TIP34	20 min	3				3	80
	60	BDV65## TIP33A TIP140##	BDV64## TIP34A TIP145##	1k min 20 min 500 min	5 3 10	 2.5 typ	 2.5 typ	 5	 3 4#	125 80 125
	80	BDV65A## TIP33B TIP141##	BDV64A## TIP34B TIP146##	1k min 20 min 500 min	5 3 10	 2.5 typ	 2.5 typ	 5	 3 4#	125 80 125
	100	BDV65B## TIP33C TIP142##	BDV64B## TIP34C TIP147##	1k min 20 min 500 min	5 3 10	 2.5 typ	 2.5 typ	 5	 3 4#	125 80 125
	120	BDV65C##	BDV64C##	1k min	5					125
	200	BU323P##		150 min	6	15	15	6		125
	250	BU323AP##		150 min	6	15	15	6		125
	400	MJH10012##		100/2k	6	15	15	6		118
	800	MJH16018		4 min	5	4.5 typ	0.2 typ	5		150
15	60	TIP3055	TIP2955	5 min	10				2.5	80
	150	MJH11018	MJH11017	400/15k	10				3#	150

$|h_{fe}|$ @ 1 MHz, ## Darlington
* $V_{(BR)CEX}$ or $V_{(BR)CES}$

(continued)

TABLE 5 — PLASTIC TO-218AC PACKAGE (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
15	200	MJH11020	MJH11019	400/15k	10				3#	150
	250	MJH11022	MJH11021	400/15k	10				3#	150
	300	MJH6676		8 min	15	2.5	0.5	15		125
	350	MJH6677		8 min	15	2.5	0.5	15		125
	400	BUS48P		8 min	10	2	0.4	10		150
		BUW13				4	0.8	10		175
		MJH6678		8 min	15	2.5	0.5	15		125
		MJH13090		8 min	10	2.5	0.5	10		125
	450	BUS48AP		8 min	8	2	0.4	10		150
		BUW13A				4	0.8	8		175
		MJH13091		8 min	10	2.5	0.5	10		125
		MJH16010		5 min	15	1.2	0.2	10		150
		MJH16012		7 min	15	0.9	0.15	10		150
	500	BUT51P##		40 min	5	1.1	0.16	10		125
		MJH16010A		5 min	15	3	0.4	10		150
16	100	MJE4340	MJE4350	15 min	8	1.2 typ	1.2 typ	8	1	125
	120	MJE4341	MJE4351	15 min	8	1.2 typ	1.2 typ	8	1	125
	140	MJE4342	MJE4352	15 min	8	1.2 typ	1.2 typ	8	1	125
	160	MJE4343	MJE4353	15 min	8	1.2 typ	1.2 typ	8	1	125
20	60	MJH6282##	MJH6285##	750/18k	10				4#	125
	80	MJH6283##	MJH6286##	750/18k	10				4#	125
	100	MJH6284##	MJH6287##	750/18k	10				4#	125
25	40	TIP35	TIP36	10/75	15	0.6 typ	0.3 typ	10	3	125
	45	BD249	BD250	10 min	15				3	125
	60	BD249A	BD250A	10 min	15				3	125
		TIP35A	TIP36A	10/75	15	0.6 typ	0.3 typ	10	3	125
	80	BD249B	BD250B	10 min	15				3	125
		TIP35B	TIP36B	10/75	15	0.6 typ	0.3 typ	10	3	125
	100	BD249C	BD250C	10 min	15				3	125
		TIP35C	TIP36C	10/75	15	0.6 typ	0.3 typ	10	3	125

$|h_{fe}|$ @ 1 MHz, ## Darlington

TABLE 6 — PLASTIC TO-220AB PACKAGE



CASE 221A-02

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
0.5	350	MJE2360T MJE2361T		15 min 40 min	0.1 0.1				10 typ 10 typ	30 30
1	40	TIP29	TIP30	15/75	1	0.6 typ	0.3 typ	1	3	30
	60	TIP29A	TIP30A	15/75	1	0.6 typ	0.3 typ	1	3	30
	80	TIP29B	TIP30B	15/75	1	0.6 typ	0.3 typ	1	3	30
	100	TIP29C	TIP30C	15/75	1	0.6 typ	0.3 typ	1	3	30
	250	TIP47		30/150	0.3	2 typ	0.18 typ	0.3	10	40
	300	TIP48		30/150	0.3	2 typ	0.18 typ	0.3	10	40
	350	TIP49		30/150	0.3	2 typ	0.18 typ	0.3	10	40
	400	TIP50		30/150	0.3	2 typ	0.18 typ	0.3	10	40
2	45	BD239	BD240	15 min	1				3	30
	60	BD239A TIP110##	BD240A TIP115##	15 min 500 min	1 2	1.7 typ	1.3 typ	2	3 25#	30 50
	80	BD239B TIP111##	BD240B TIP116##	15 min 500 min	1 2	1.7 typ	1.3 typ	2	3 25#	30 50
	100	BD239C TIP112##	BD240C TIP117##	15 min 500 min	1 2	1.7 typ	1.3 typ	2	3 25#	30 50
	400	BUX84		30 min	0.1	3.5	1.4	1	4	50
	450	BUX85		30 min	0.1	3.5	1.4	1	4	50
	900	MJE1320		3 min	1	4 typ	0.8 typ	1		80
2.5	700	MJE8500		7.5 min	0.5	4	2	1		65
	750	MJE12007		1.1 min	2		1	2	4 typ	65
	800	MJE8501		7.5 min	0.5	4	2	1		65
3	40	TIP31	TIP32	25 min	1	0.6 typ	0.3 typ	1	3	40
	45	BD241	BD242	25 min	1				3	40
	60	BD241A TIP31A	BD242A TIP32A	25 min 25 min	1 1	0.6 typ	0.3 typ	1	3 3	40 40
	80	BD241B TIP31B	BD242B TIP32B	25 min 25 min	1 1	0.6 typ	0.3 typ	1	3 3	40 40
	100	BD241C TIP31C	BD242C TIP32C	25 min 25 min	1 1	0.6 typ	0.3 typ	1	3 3	40 40
	750	MJE16032		4 min	3	2	1.5	2		80
	850	MJE16034		4 min	3	2	1.5	2		80
4	45	2N6121 BD533	2N6124 BD534	25/100 25 min	1.5 2	0.4 typ	0.3 typ	1.5	2.5 3	40 50
	60	2N6122 BD535 MJE800T##	2N6125 BD536 MJE700T##	25/100 25 min 750 min	1.5 2 1.5	0.4 typ	0.3 typ	1.5	2.5 3 1#	40 50 40
	80	2N6123 BD537	 BD538	20/80 15 min	1.5 2	0.4 typ	0.3 typ	1.5	2.5 3	40 50
	300	MJE13004		6/30	3	3	0.7	3	4	60
	400	MJE13005		6/30	3	3	0.7	3	4	60
5	60	TIP120##	TIP125##	1k min	3	1.5 typ	1.5 typ	3	4#	65
	80	TIP121##	TIP126##	1k min	3	1.5 typ	1.5 typ	3	4#	65
	100	TIP122##	TIP127##	1k min	3	1.5 typ	1.5 typ	4	4#	75

$|h_{fe}|$ @ 1 MHz, ## Darlington

(continued)

TABLE 6 — PLASTIC TO-220AB PACKAGE (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
5	250	2N6497		10/75	2.5	1.8	0.8	2.5	5	80
	300	2N6498		10/75	2.5	1.8	0.8	2.5	5	80
	400	MJE13070		8 min	3	1.5	0.5	3		80
	450	BUS46P		7 min	3	1.5	0.5	2		75
		MJE13071		8 min	3	1.5	0.5	3		80
		MJE16002		5 min	5	3	0.3	3		80
		MJE16004		7 min	5	2.7	0.35	3		80
	700	MJE8502		7.5 min	1	4	2	2.5		80
	800	MJE8503		7.5 min	1	4	2	2.5		80
6	40	TIP41	TIP42	15/75	3	0.4 typ	0.15 typ	3	3	65
	45	BD243	BD244	15 min	3				3	65
	60	BD243A	BD244A	15 min	3				3	65
		TIP41A	TIP42A	15/75	3	0.4 typ	0.15 typ	3	3	65
	80	BD243B	BD244B	15 min	3				3	65
		TIP41B	TIP42B	15/75	3	0.4 typ	0.15 typ	3	3	65
	100	BD243C	BD244C	15 min	3				3	65
		TIP41C	TIP42C	15/75	3	0.4 typ	0.15 typ	3	3	65
7	30	2N6288	2N6111	30/150	3	0.4 typ	0.15 typ	3	4	40
	45	BD795	BD796	25 min	3				3	65
	50	2N6290	2N6109	30/150	2.5	0.4 typ	0.15 typ	3	4	40
	60	BD797	BD798	25 min	3				3	65
	70	2N6292	2N6107	30/150	3	0.4 typ	0.15 typ	3	4	40
	80	BD799	BD800	15 min	3				3	65
	100	BD801	BD802	15 min	3				3	65
	150	BU407,D		30 min	1.5		0.75	5	10	60
	200	BU406,D		30 min	1.5		0.75	5	10	60
	375	BU522##		250 min	2.5				7.5	75
	425	BU522A##		250 min	2.5				7.5	75
	450	BU522B##		250 min	2.5				7.5	75
8	40	2N6386##		1k/20k	3				20#	65
	45	BDX53##	BDX54##	750 min	3				4#	60
		BD895##	BD896##	750 min	3				1#	70
		BD895A##	BD896A##	750 min	4				1#	70
	60	2N6043##	2N6040##	1k/10k	4	1.5 typ	1.5 typ	3	4#	75
		BDX53A##	BDX54A##	750 min	3				4#	60
		BD897##	BD898##	750 min	3				1#	70
		BD897A##	BD898A##	750 min	4				1#	70
		TIP100##	TIP105##	1k/20k	3	1.5 typ	1.5 typ	3	4#	80
	80	2N6044##	2N6041##	1k/10k	4	1.5 typ	1.5 typ	3	4#	75
		BDX53B##	BDX54B##	750 min	3				4#	60
		BD899##	BD900##	750 min	3				1#	70
		BD899A##	BD900A##	750 min	4				1#	70
		TIP101##	TIP106##	1k/20k	3	1.5 typ	1.5 typ	3	4#	80
	100	2N6045##	2N6042##	1k/10k	3	1.5 typ	1.5 typ	3	4#	75
		BDX53C##	BDX54C##	750 min	3				4#	60
		BD901##	BD902##	750 min	3				1#	70
		TIP102##	TIP107##	1k/20k	3	1.5 typ	1.5 typ	3	4#	80

$|h_{fe}|$ @ 1 MHz, ## Darlington

(continued)

TABLE 6 — PLASTIC TO-220AB PACKAGE (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
8	120	BDX53D##	BDX54D##	750 min	3				4#	60
		MJE15028	MJE15029	20 min	4				30	50
	150	MJE15030	MJE15031	20 min	4				30	50
		BU807##		100 min	5	0.55 typ	0.2 typ	5		60
	200	BU806##		100 min	5	0.55 typ	0.2 typ	5		60
	300	MJE13006		5/30	5	3	0.7	5	4	80
		MJE5740##		200 min	4	8 typ	2 typ	6		80
			MJE5850	15 min	2	2	0.5	4		80
	350	MJE5741##		200 min	4	8 typ	2 typ	6		80
			MJE5851	15 min	2	2	0.5	4		80
	400	MJE5742##		200 min	4	8 typ	2 typ	6		80
		MJE13007		5/30	5	3	0.7	5	4	80
			MJE5852	15 min	2	2	0.5	4		80
		MJE16080		5 min	8	2	0.5	5		80
	450	MJE16080		5 min	8	2	0.5	5		80
10	30		D45H1	20 min	4					50
			D45H2	40 min	4					50
	40	D44E1##		1000 min	5	2 typ	0.5 typ	10		50
	45	BDX33##	BDX34##	750 min	4				3	70
		BD805	BD806	15 min	4				1.5	90
			D45H4	20 min	4					50
		D44H5	D45H5	40 min	4					50
	60	BDX33A##	BDX34A##	750 min	4				3	70
		BD807	BD808	15 min	4				1.5	90
		D44H7	D45H7	20 min	4					50
		D44H8	D45H8	40 min	4					50
			D45H9	40 min	4					50
		MJE2801T		25/100	3					75
		MJE3055T	MJE2955T	20/70	4					75
		2N6387##	2N6667##	1k/20k	5				20#	65
		SE9300	SE9400	1k min	4				1#	70
	80	BDX33B##	BDX34B##	750 min	3				3	70
		BD809	BD810	15 min	4				1.5	90
		D44E3##		1000 min	5	2 typ	0.5 typ	10		50
			D45H12	40 min	4					50
		2N6388##	2N6668##	1k/20k	5				20#	65
		D44H10	D45H10	20 min	4	0.5 typ	0.14 typ	5	50 typ	50
		D44H11	D45H11	40 min	4	0.5 typ	0.14 typ	5	50 typ	50
		SE9301	SE9401	1k min	4				1#	70
	100	BDX33C##	BDX34C##	750 min	3				3	70
		SE9302	SE9402	1k min	4				1#	70
12	300	MJE13008		6/30	8	3	0.7	8	4	100
	400	MJE13009		6/30	8	3	0.7	8	4	100
15	30	D44VH1	D45VH1	20 min	4	0.7	0.09	8	50 typ	83
	40	2N6486	2N6489	20/150	5	0.6 typ	0.3 typ	5	5	75
	45	D44VH4	D45VH4	20 min	4	0.5	0.09	8	50 typ	83
	60	2N6487	2N6490	20/150	5	0.6 typ	0.3 typ	5	5	75
		D44VH7		20 min	4	0.5	0.09	8	50 typ	83
	80	2N6488	2N6491	20/150	5	0.6 typ	0.3 typ	5	5	75
		D44VH10	D45VH10	20 min	4	0.5	0.09	8	50 typ	83

$|h_{fe}|$ @ 1 MHz, ## Darlington

TABLE 7 — PLASTIC TO-225AA PACKAGE (Formerly TO-126)

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE



STYLE 3:
PIN 1. BASE
2. COLLECTOR
3. EMITTER

CASE 77-04
PLASTIC

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C
0.3	250	MJE3440		40/160	0.02				15	15
	350	MJE3439		40/160	0.02				15	15
0.5	150	MJE341		25/200	0.05				15	20.8
	200	MJE344		30/300	0.05				15	20.8
	250	2N5655 BD157		30/250 30/240	0.1 0.05	3.5 typ	0.24 typ	0.1	10	20 20
	300	BD158 BD232 MJE340 2N5656	 MJE350 	30/240 20 min 30/240 30/250	0.05 0.15 0.05 0.1	 3.5 typ	 0.24 typ	 0.1	 10	20 20 20.8 20
	350	2N5657 BD159		30/250 30/240	0.1 0.05	3.5 typ	0.24 typ	0.1	10	20 20
1	40	2N4921	2N4918	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
	60	2N4922	2N4919	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
	80	2N4923	2N4920	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
1.5	40	MJE720		8 min	1					20
	45	BD165 BD135 BD135.6 BD135.10 BD135.16	BD166 BD136 BD136.6 BD136.10 BD136.16	15 min 40/250 40/100 63/160 100/250	0.5 0.15 0.15 0.15 0.15				6	20 12.5 12.5 12.5 12.5
	60	BD167 BD137 BD137.6 BD137.10 BD137.16	BD168 BD138 BD138.6 BD138.10 BD138.16	15 min 40/250 40/100 63/160 100/250	0.5 0.15 0.15 0.15 0.15				6	20 12.5 12.5 12.5 12.5
	80	BD169 BD139 BD139.6 BD139.10 BD139.16	BD170 BD140 BD140.6 BD140.10 BD140.16	15 min 40/250 40/100 63/160 100/250	0.5 0.15 0.15 0.15 0.15				6	20 12.5 12.5 12.5 12.5
	300	MJE13002●		5/25	1	4	0.7	1	5	40
	400	MJE13003●		5/25	1	4	0.7	1	5	40
2	45	BD233	BD234	25 min	1				3	25
	60	BD235	BD236	25 min	1				3	25
	80	BD237	BD238	25 min	1				3	25
	100	MJE270	MJE271	1.5k min	0.12				6	15
3	30	MJE520	MJE370	25 min	1					25

● Case 77 (Style 3), # $|h_{fe}|$ @ 1 MHz, ## Darlington

(continued)

TABLE 7 — PLASTIC TO-225AA PACKAGE (Formerly TO-126) (continued)

I_CCont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
3	40	MJE180	MJE170	50/250	0.1	0.6 typ	0.12 typ	0.1	50	12.5
	45	BD175	BD176	40/250	0.15				3	30
		BD175.6	BD176.6	40/100	0.15				3	30
		BD175.10	BD176.10	63/160	0.15				3	30
		BD175.16	BD176.16	100/250	0.15				3	30
	60	BD177	BD178	40/250	0.15				3	30
		BD177.6	BD178.6	40/100	0.15				3	30
		BD177.10	BD178.10	63/160	0.15				3	30
		BD177.16	BD178.16	100/250	0.15				3	30
		MJE181	MJE171	50/250	0.1	0.6 typ	0.12 typ	0.1	50	12.5
	80	BD179	BD180	40/250	0.15				3	30
		BD179.6	BD180.6	40/100	0.15				3	30
		BD179.10	BD180.10	63/160	0.15				3	30
		BD179.16	BD180.16	100/250	0.15				3	30
		MJE182	MJE172	50/250	0.1	0.6 typ	0.12 typ	0.1	50	12.5
	200	BUY49P		30 min	0.5				25	20
4	20	BD433	BD434	50 min	2				3	36
	30	BD185	BD186	15 min	2				20	40
		BD435	BD436	50 min	2				3	36
	40	2N5190	2N5193	25/100	1.5	0.4 typ	0.4 typ	1.5	2	40
		MJE521	MJE371	40 min	1					40
		2N6037##	2N6034##	750/18k	2	1.7 typ	1.2 typ	2	25	40
	45	BD187	BD188	15 min	2				20	40
		BD437	BD438	40 min	2				3	36
		BD675##	BD676##	750 min	1.5					40
		BD675A##	BD676A##	750 min	2					40
		BD785	BD786	20 min	2				50	15
		BD775##	BD776##	750 min	2				20	15
	60	BD189	BD190	15 min	2				20	40
		BD439	BD440	25 min	2				3	36
		BD677##	BD678##	750 min	1.5					40
		BD677A##	BD678A##	750 min	2					40
		BD787	BD788	20 min	2				50	15
		BD777##	BD778##	750 min	2				20	15
		2N5191	2N5194	25/100	1.5	0.4 typ	0.4 typ	1.5	2	40
		MJE800##	MJE700##	750 min	1.5				1#	40
		MJE801##	MJE701##	750 min	2				1#	40
		2N6038##	2N6035 ##	750/18k	2	1.7 typ	1.2 typ	2	25	40
	80	2N5192	2N5195	25/100	1.5	0.4 typ	0.4 typ	1.5	2	40
		BD441	BD442	15 min	2				3	36
		BD679##	BD680##	750 min	1.5					40
		BD679A##	BD680A##	750 min	2					40
		BD789	BD790	10 min	2				40	15
		BD779##	BD780##	750 min	2				20	15
		MJE802##	MJE702##	750 min	1.5				1#	40
		MJE803##	MJE703##	750 min	2				1#	40
		2N6039##	2N6036##	750/18k	2	1.7 typ	1.2 typ	2	25	40
	100	BD681##	BD682##	750 min	1.5					40
		BD791	BD792	10 min	2				40	15
		MJE243	MJE253	40/120	0.2	0.7 typ	0.08 typ	0.2	40	15
5	25	MJE200	MJE210	45/180	2	0.13 typ	0.035 typ	2	65	15

• Case 77 (Style 3), # $|h_{fe}|$ @ 1 MHz, ## Darlington

TABLE 8 — PLASTIC TO-225AB (Formerly TO-127)

STYLE 2:
PIN 1. EMITTER
2. COLLECTOR
3. BASE



CASE 90-05
PLASTIC

I_CCont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
5	50		MJE105	25/100	2					65
	60	MJE1100##	MJE1090##	750 min	3A				1	70
		MJE1101##		750 min	4A				1	70
	80	MJE1102##	MJE1092##	750 min	3A				1	70
		MJE1103##	MJE1093##	750 min	4A				1	70
8	60	MJE6043##	MJE6040##	1k/20k	4	1.5 typ	1.5 typ	4	4#	75
	80	MJE6044##	MJE6041##	1k/20k	4	1.5 typ	1.5 typ	4	4#	75
	100	MJE6045##		1k/20k	4	1.5 typ	1.5 typ	4	4#	75
10	45		BD206	15 min	4				1.5	90
	60	BD207	BD208	15 min	4				1.5	90
		MJE2801	MJE2901	25/100	3					90
		MJE3055	MJE2955	20/70	4				2	90
12	40	2N5989	2N5986	20/120	6	0.5 typ	0.25 typ	6	2	100
	60		2N5987	20/120	6	0.5 typ	0.25 typ	6	2	100
	80	2N5991	2N5988	20/120	6	0.5 typ	0.25 typ	6	2	100
15	40	MJE1660		20/100	5				3	90
	60	MJE1661		20/100	5				3	90

$|h_{fe}|$ @ 1 MHz, ## Darlington

TABLE 9 — PLASTIC CASE 152

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR
(COLLECTOR CONNECTED TO TAB)



I_CCont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
0.5	300	MPS-U10	MPS-U60	30 min	0.03				60	10
0.8	40	MPS-U02	MPS-U52	30 min	0.5				150	10
1	120	MPS-U03		40 min	0.01				100	10
	180	MPS-U04		40 min	0.01				100	10
2	20	BD505	BD506	40 min	1				50	10
	30	BD507	BD508	40 min	1				50	10
		MPS-U01	MPS-U51	50 min	1				50	10
	40	BD509	BD510	40 min	1				50	10
		MPS-U01A	MPS-U51A	50 min	1				50	10
		MPS-U45##	MPS-U95##	4k min	1				100	10

(continued)

Darlington

TABLE 9 — PLASTIC CASE 152 (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
2	45	BD515	BD516	25 min	0.5				50	10
	60	BD517	BD518	25 min	0.5				50	10
		MPS-U05	MPS-U55	60 min	0.25				50	10
	80	BD519	BD520	25 min	0.5				50	10
		MPS-U06	MPS-U56	60 min	0.25				50	10
	100	BD529	BD530	30 min	0.25				50	10
		MPS-U07	MPS-U57	30 min	0.25				50	10

Darlington

TABLE 10 — DPAK — SURFACE MOUNT POWER PACKAGE

CASE 369A-04



CASE 369-03



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type*		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Typ	t_f μs Typ	@ I_C Amp		
0.5	300	MJD340	MJD350	30/240	0.05					15
1	40	MJD29	MJD30	15/75	1	0.6	0.3	1	3	15
	100	MJD29C	MJD30C	15/75	1	0.6	0.3	1	3	15
	250	MJD47		30/150	0.3	2	0.2	0.3	10	15
	400	MJD50		30/150	0.3	2	0.2	0.3	10	20
1.5	400	MJD13003		5/25	1	4 max	0.7 max	1	4	15
2	100	MJD112##	MJD117##	500 min	2	1.7	1.3	2	25#	20
3	40	MJD31	MJD32	25 min	1	0.6	0.3	1	3	15
	100	MJD31C	MJD32C	25 min	1	0.6	0.3	1	3	15
4	80	MJD6039##	MJD6036##	1k/12k	2	1.7	1.2	2	25	20
5	25	MJD200	MJD210	45/180	2	0.15	0.04	2	65	12.5
6	100	MJD41C	MJD42C	15/75	3	0.4	0.15	3	3	20
8	80	MJD44H11	MJD45H11	40 min	4	0.5	0.14	5	50 typ	20
	100	MJD122##	MJD127##	1k/12k	4	1.5	2	4	4#	20
10	60	MJD3055	MJD2955	20/100	4	1.5	1.5	3	2	20
	80	MJD44E3##		1k min	5	2	0.5	10		20

Darlington
* Case 369-03 may be ordered by adding -1 suffix to part number.

TABLE 11 — PLASTIC MO-040AA†

CASE 353-01



I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	t_s μs Max	t_f μs Max	@ I_C Amp	P_D (Case) Watts @ 25°C
		NPN	PNP						
50	450	MJ10044##		50 min	50	3.8	1.3	50	250
100	250	MJ10047##		75 min	100	4	1	100	250
		MJ10048##		75 min	100	20	8	100	250

Darlington † Not recommended for new designs — consult Motorola.

Selection By Major Product Categories

TABLE 12 — MILITARY SPECIFIED POWER TRANSISTORS

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN/#	Device Type PNP/#	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s µs Max	Resistive Switching t_f µs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
1	300	2N3739J,/402A TX, TXV		40/200	0.1	3.5*		0.5	10	20	TO-213AA/80
3	40		2N3867J,/350A TX, TXV	40/200	1.5	0.5	0.1	1.5	60	10	TO-205AA/31
			2N3867SJ,350A TX, TXV	40/200	1.5	0.5	0.1	1.5	60	10	TO-205AD/79
	60		2N3868J,/350A TX, TXV	30/150	1.5	0.5	0.1	1.5	60	10	TO-205AA/31
			2N3868SJ,/350A TX, TXV	30/150	1.5	0.055	0.035	1.5	60	5	TO-205AD/79
4	60		2N3740J,/441A TX, TXV	30/100	0.25	1*		1	5	25	TO-213AA/80
		2N3766J,/518 TX, TXV		40/160	0.5	2.5*		0.5	10	25	TO-213AA/80
	80		2N3741J,/441A TX, TXV	30/100	0.25	1*		1	5	25	TO-213AA/80
		2N3767J,/518 TX, TXV		40/160	0.5	2.5*		0.5	10	25	TO-213AA/80
5	100	2N5339J/560 TX, TXV	2N6193J/561 TX, TXV	60/240	2	2	0.2	2	30	6	TO-205AD/79
8	60	2N6300J,/540** TX, TXV	2N6298J,/540** TX, TXV	750/18k	4	8*		4	25	75	TO-213AA/80
	80	2N6301J,/540** TX, TXV	2N6299J,/540** TX, TXV	750/18k	4	8*		4	25	75	TO-213AA/80
	250	2N6306J,/498		15/75	3	3*		3	5	125	TO-204/1
	350	2N6308J,/498		12/60	3	3*		3	5	125	TO-204/1
10	40	2N6383J,/523** TX, TXV	2N6648J,527 TX, TXV	1k/20k	5	10*		5	20	100	TO-204/1
			2N6648J,/527** TX, TXV	1k/20k	5	10*		5	50	85	TO-204/1
	60	2N3715J,/408B TX, TXV	2N3791J,/379B TX, TXV	30/120	3	2*		5	4	150	TO-204/1
		2N6384J,/523** TX, TXV		1k/20k	5	10*		5	20	100	TO-204/1
			2N6649J,/527 TX, TXV	1k/20k	5	10*		5	50	85	TO-204/1
	80	2N3716J,/408B TX, TXV	2N3792J,/379B TX, TXV	30/120	3	2*		5	4	150	TO-204/1
		2N6385J,/523** TX, TXV		1k/20k	5	10*		5	20	100	TO-204/1
			2N6650J,/527** TX, TXV	1k/20k	5	10*		5	50	85	TO-204/1
12	80	2N6058J,/502** TX, TXV	2N6051J,/501** TX, TXV	1k/18k	6	10*		5	10	150	TO-204/1
	100	2N6059J,/502** TX, TXV	2N6052J,/501** TX, TXV	1k/18k	6	10*		5	10	150	TO-204/1
15	300	2N6546J,/525 TX		12/60	5	4.7*		10	6	175	TO-204/1

MIL-S-19500 Detailed Spec. shown by Device Type

* t_{off}

** Consult Factory for qualification status.

TABLE 12 — MILITARY SPECIFIED POWER TRANSISTORS (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN/#	Device Type PNP/#	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
15	400	2N6547J,/525 TX		12/60	5	4.7*		10	6	175	TO-204/1
20	75	2N5039J,/439 TX, TXV**		30/150	2	2*		10	60	140	TO-204/1
	80	2N5303J,/456A TX, TXV	2N5745J,433 TX, TXV	15/60	10	3*		10	2	200	TO-204/1
		2N6283J,/504** TX, TXV	2N6286J,/505** TX, TXV	1250/18k	10	10*		10	8	175	TO-204/1
	90	2N5038J/439 TX, TXV**		50/200	2	2*		12	60	140	TO-204/1
	100	2N6284J,/504** TX, TXV	2N6287J,/505 TX, TXV	1250/18k	10	10*		10	8	175	TO-204/1
25	100	2N6338J,/509 TX, TXV**		30/120	10	1		10	40	200	TO-204/1
			2N6437J,/508 TX, TXV**	30/120	10	1		10	40	200	TO-204/1
	120		2N6438J,/509 TX, TXV**	30/120	10	1		10	40	200	TO-204/1
	150	2N6341J,/509 TX, TXV**		30/120	1	1		10	40	200	TO-204/1
30	60	2N5302J,/456A TX, TXV	2N4399J,/433 TX, TXV	15/60	15	3*		10	2	200	TO-204/1
50	60	2N5685J,/464 TX, TXV	2N5683J,/466 TX, TXV	15/60	25	3*		25	2	300	TO-204/197 MOD
	80	2N5686J,/464 TX, TXV	2N5684J,/466 TX, TXV	15/60	25	3*		25	2	300	TO-204/197 MOD
	100	2N6274J,/514 TX, TXV**	2N6378J,/515 TX, TXV**	30/120	20	1.05*		20	30	250	TO-204/197 MOD
	120		2N6379J,/515 TX, TXV**	30/120	20	1.05*		20	30	250	TO-204/197 MOD
	150	2N6277J,/514 TX, TXV**		30/120	20	1.05*		20	30	250	TO-204/197

MIL-S-19500 Detailed Spec. shown by Device Type

* t_{off}

** Consult Factory for qualification status.

TABLE 13 — POWER DARLINGTONS

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	$\|h_{fe}\|$ @ 1 MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
2	40	MPS-U45	MPS-U95	4k min	1				100	10	/152
	60	TIP110	TIP115	1k min	1	2 typ	1 typ	1	25	50	TO-220/221A
	80	TIP111	TIP116	1k min	1	2 typ	1 typ	1	25	50	TO-220/221A
	100	TIP112	TIP117	1k min	1	2 typ	1 typ	1	25	50	TO-220/221A
		MJE270	MJE271	1.5k min	0.12				6	25	TO-225AA/77

(continued)

TABLE 13 — POWER DARLINGTONS (continued)

I_CCont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			$\|h_{fe}\|$ @ 1 MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp			
4	40	MJE3300	MJE3310	1k min	1				20	15	TO-225AA/77R
		2N6037	2N6034	750/1k	2	1.7 typ	1.2 typ	2	25	40	TO-225AA/77
	45	BD675	BD676	750 min	1.5					40	TO-225AA/77
		BD675A	BD676A	750 min	2					40	TO-225AA/77
		BD775	BD776	750 min	2				20	15	TO-225AA/77
	60	BD677	BD678	750 min	1.5					15	TO-225AA/77
		BD677A	BD678A	750 min	2					40	TO-225AA/77
		BD777	BD778	750 min	2				20	40	TO-225AA/77
		MJE3301		1k min	1				20	15	TO-225AA/77R
		MJE800	MJE700	750 min	1.5				1	40	TO-225AA/77
		MJE800T	MJE700T	750 min	1.5				1	40	TO-220/221A
		MJE801	MJE701	750 min	2				1	40	TO-225AA/77
		2N6038	2N6035	750/18k	2	1.7 typ	1.2 typ	2	25	40	TO-225AA/77
		2N6294	2N6296	750/18k	2	0.9 typ	0.7 typ	2	4	50	TO-213AA/80
	80	BD679	BD680	750 min	1.5					40	TO-225AA/77
		BD679A	BD680A	750 min	2					40	TO-225AA/77
		BD779	BD780	750 min	2				20	15	TO-225AA/77
		MJE802	MJE702	750 min	1.5					40	TO-225AA/77
		MJE803	MJE703	750 min	2					40	TO-225AA/77
		2N6039	2N6036	750/18k	2	1.7 typ	1.2 typ	2	25	40	TO-225AA/77
		2N6295	2N6297	750/18k	2	0.9 typ	0.7 typ	2	4	50	TO-213AA/80
	100	BD681	BD682	750 min	1.5					40	TO-225AA/77
5	60	MJE1100	MJE1090	750 min	3A				1	70	TO-225AB/90
		MJE1101	MJE1091	750 min	4A				1	70	TO-225AB/90
		TIP120	TIP125	1k min	3	1.5 typ	1.5 typ	3	4	65	TO-220/221A
	80	MJE1102	MJE1092	750 min	3A				1	70	TO-225AB/90
		MJE1103	MJE1102	750 min	4A				1	70	TO-225AB/90
		TIP121	TIP126	1k min	3	1.5 typ	1.5 typ	3	4	65	TO-220/221A
	100	TIP122	TIP127	1k min	3	1.5 typ	1.5 typ	3	4	65	TO-220/221A
7	300	MJ3041		250 min	2.5					100	TO-204/1
	350	MJ3042		250 min	2.5					100	TO-204/1
	375	BU522		250 min	2.5				7.5	75	TO-220/221A
	425	BU522A		250 min	2.5				7.5	75	TO-220/221A
	450	BU522B		250 min	2.5				7.5	75	TO-220/221A
8	40	2N6386		1k/20k	3				20	65	TO-220/221A
	45	BDX53	BDX54	750 min	3				4	60	TO-220/221A
		BD895	BD896	750 min	3				1	70	TO-220/221A
		BD895A	BD896A	750 min	4				1	70	TO-220/221A
	60	BDX53A	BDX54A	750 min	3				4	60	TO-220/221A
		BD897	BD898	750 min	3				1	70	TO-220/221A
		BD897A	BD898A	750 min	4				1	70	TO-220/221A
		MJ1000	MJ900	1k min	3					90	TO-204/11
		TIP100	TIP105	1k/20k	3	1.5 typ	1.5 typ	3	4	80	TO-220/221A
		2N6043	2N6040	1k/10k	4	1.5 typ	1.5 typ	3	4	75	TO-220/221A
		2N6300	2N6298	750k/18k	4	1.5 typ	1.5 typ	4	4	75	TO-213AA/80
		2N6055	2N6053	750k/18k	4	1.5 typ	1.5 typ	4	4	100	TO-204/11
		MJE6043	MJE6040	1k/20k	4	1.5 typ	1.5 typ	4	2	75	TO-225AB/90
	80	BDX53B	BDX54B	750 min	3				4	60	TO-220/221A
		BD899	BD900	750 min	3				1	70	TO-220/221A
		BD899A	BD900A	750 min	4				1	70	TO-220/221A
		MJ1001	MJ901	1k min	3					90	TO-204/11
		TIP101	TIP106	1k/20k	3	1.5 typ	1.5 typ	3	4	80	TO-220/221A

(continued)

TABLE 13 — POWER DARLINGTONS (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	$\|h_{fe}\|$ @ 1 MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
8		2N6044	2N6041	1k/10k	4	1.5 typ	1.5 typ	3	4	75	TO-220/221A
		2N6301	2N6299	750k/18k	4	1.5 typ	1.5 typ	4	4	75	TO-213A/80
		2N6056	2N6054	750k/18k	4	1.5 typ	1.5 typ	4	4	100	TO-204A/11
		MJE6044	MJE6041	1k/20k	4	1.5 typ	1.5 typ	4	2	75	TO-225AB/90
	100	BDX53C	BDX54C	750 min	3				4	60	TO-220/221A
		BD901	BD902	750 min	3				1	70	TO-220/221A
		MJE6045		1k/20k	4	1.5 typ	1.5 typ	4	2	75	TO-225AB/90
		TIP102	TIP107	1k/20k	3	1.5 typ	1.5 typ	3	4	80	TO-220/221A
		2N6045	2N6042	1k/10k	4	1.5 typ	1.5 typ	3	4	75	TO-220/221A
	120	BDX53D	BDX54D	750 min	3				4	60	TO-220/221A
	150	BU807•		100 min	5	0.55 typ	0.2 typ	5		60	TO-220/221A
	200	BU806•		100 min	5	0.55 typ	0.2 typ	5		60	TO-220/221A
	300	MJE5740		200/400	4	8 typ	2 typ	6		80	TO-220/221A
	350	MJE5741		200/400	4	8 typ	2 typ	6		80	TO-220/221A
	400	MJE5742		200/400	4	8 typ	2 typ	6		80	TO-220/221A
	500	BUT50P•		30 min	2	0.75 typ	0.1 typ	5		100	TO-218/340
	1400*	MJ10011		20 min	4			1	4	80	TO-204/1
10	40	2N6383	2N6648	1k/20k	5				20	100	TO-204/11
		D44E1		1000 min	5	2 typ	0.5 typ	10		50	TO-220/221A
	45	BDX33	BDX34	750 min	4				3	70	TO-220/221A
	60	BDV65	BDV64	1k min	5					125	TO-218/340
		BDX33A	BDX34A	750 min	4				3	70	TO-220/221A
		MJ3000	MJ2500	1k min	5					150	TO-204/1
		2N6387	2N6667	1k/20k	5				20	65	TO-220/221A
		2N6384		1k/20k	5				20	100	TO-204/11
		D44E2		1000 min	5	2 typ	0.5 typ	10		50	TO-220/221A
		TIP140	TIP145	500 min	10	2.5 typ	2.5 typ	5	4	125	TO-218/340
	80	2N6388	2N6668	1k/20k	5				20	65	TO-220/221A
		2N6385		1k/20k	5				20	100	TO-204/11
		BDV65A	BDV64A	1k min	5					125	TO-218/340
		BDX33B	BDX34B	750 min	3				3	70	TO-220/221A
		D44E3		1000 min	5	2 typ	0.5 typ	10		50	TO-220/221A
		TIP141	TIP146	500 min	10	2.5 typ	2.5 typ	5	4	125	TO-218/340
	100	BDV65B	BDV64B	1k min	5					125	TO-218/340
		BDX33C	BDX34C	750 min	3				3	70	TO-220/221A
		TIP142	TIP147	500 min	10	2.5 typ	2.5 typ	5	4	125	TO-218/340
	120	BDV65C	BDV64C	1k min	5					125	TO-218/340
		BDX33D	BDX34D	750 min	3				3	70	TO-220/221A
	200	BU323P		150 min	6	15	15	6		125	TO-218/340
	250	BU323AP		150 min	6	15	15	6		125	TO-218/340
	350	BU323		150 min	6	7.5 typ	5.2 typ	6		175	TO-204/1
		MJ10002		30/300	5	2.5	1	5	10	150	TO-204/1
		MJ10006•		30/300	5	1.5	0.5	5	10	150	TO-204/1
	400	BU323A		150 min	6	7.5 typ	5.2 typ	6		175	TO-204/1
		MJH10012		100/2k	6	15	15	6		118	TO-218/340
		MJ10007•		30/300	5	1.5	0.5	5	10	150	TO-204/1
		MJ10012		100/2k	6	15	15	6		175	TO-204/1
	600	MJ10014•		10/250	10	2.5	0.8	10		175	TO-204/1

• Darlington with speed-up diode.

(continued)

TABLE 13 — POWER DARLINGTONS (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			$\|h_{fe}\|$ @ 1 MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp			
12	60	2N6057	2N6050	750/18k	6	1.6 typ	1.5 typ	6	4	150	TO-204/1
	80	2N6058	2N6051	750/18k	6	1.6 typ	1.5 typ	6	4	150	TO-204/1
	100	2N6059	2N6052	750/18k	6	1.6 typ	1.5 typ	6		150	TO-204/11
	1000	BUT16•		5 min	8	3.3	1.5	8		150	TO-204/1
15	60	2N6576		2k/20k	4	2	7	10	10/200	120	TO-204/11
	90	2N6577		2k/20k	4	2	7	10	10/200	120	TO-204/11
	120	2N6578		2k/20k	4	2	7	10	10/200	120	TO-204/11
	150	MJ11018 MJH11018	MJ11017 MJH11017	100 min 100 min	15 15				3 3	175 150	TO-204/1 TO-218/340
	200	MJ11020 MJH11020	MJ11019 MJH11019	100 min 100 min	15 15				3 3	175 150	TO-204/1 TO-218/340
	250	MJ11022 MJH11022	MJ11021 MJH11021	100 min 100 min	15 15				3 3	175 150	TO-204/1 TO-218/340
	500	BUT51P		40 min	5	1.1	0.16	10		125	TO-218/340
16	60	MJ4033	MJ4030	1k min	10					150	TO-204/1
	80	MJ4034	MJ4031	1k min	10					150	TO-204/1
	100	MJ4035	MJ4032	1k min	10					150	TO-204/1
20	60	2N6282 MJH6282	2N6285 MJH6285	750/18k 750/18k	10 10	2.5 typ 2.5 typ	2.5 typ 2.5 typ	10 10	4 4	160 125	TO-204/1 TO-218/340
	80	2N6283 MJH6283	2N6286 MJH6286	750/18k 750/18k	10 10	2.5 typ 2.5 typ	2.5 typ 2.5 typ	10 10	4 4	160 125	TO-204/1 TO-218/340
	100	2N6284 MJH6284	2N6287 MJH6287	750/18k 750/18k	10 10	2.5 typ 2.5 typ	2.5 typ 2.5 typ	10 10	4 4	160 125	TO-204/1 TO-218/340
	350	MJ10000 MJ10004•		40/400 40/400	10 10	3 1.5	1.8 0.5	10	10 10	175 175	TO-204/1 TO-204/1
	400	MJ10001 MJ10005•		40/400 40/400	10 10	3 1.5	1.8 0.5	10	10 10	175 175	TO-204/1 TO-204/1
	450	MJ10008•		30/300	10	2	0.6	10	8	175	TO-204/1
	500	MJ10009•		30/300	10	2	0.6	10	8	175	TO-204/1
	700	BUT15•		15 min	12	2.5	0.8	12		175	TO-204/1
	750	MJ10024•		50/600	5	5	1.8	10		250	TO-204/1
	850	MJ10025•		50/600	5	5	1.8	10		250	TO-204/1
24	1000	BUT36•		5 min	16	6	2.5	16		250	TO-204 Mod/197
25	500	BUT14•		15 min	16	2.8	0.8	16		175	TO-204/1
28	400	BUT13•		20 min	20	2.6	0.8	18		175	TO-204/1
30	60	MJ11012	MJ11011	1k min	20				4	200	TO-204/1
	90	MJ11014	MJ11013	1k min	20				4	200	TO-204/1
	120	MJ11016	MJ11015	1k min	20				4	200	TO-204/1
40	350	MJ10022•		50/600	10	2.5	0.9	20		250	TO-204 Mod/197
	400	MJ10023•		50/600	10	2.5	0.9	20		250	TO-204 Mod/197
	700	BUT35•		15 min	24	4	1.2	24		250	TO-204 Mod/197
50	60	MJ11028	MJ11029	400 min	50					300	TO-204 Mod/197

• Darlington with speed-up diode.

(continued)

TABLE 13 — POWER DARLINGTONS (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			$\|h_{fe}\|$ @ 1 MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp			
50	90	MJ11030	MJ11031	400 min	50					300	TO-204 Mod/197
	120	MJ11032	MJ11033	400 min	50					300	TO-204 Mod/197
	400	MJ10015•		10 min	40	2.5	0.5	20	10	250	TO-204 Mod/197
	450	MJ10044•		50 min	50	3.8	1.3	50		250	— /353
	500	BUT34• MJ10016•		15 min 10 min	32 40	3 2.5	1.5 0.5	32 20	 10	250 250	TO-204 Mod/197 TO-204 Mod/197
56	400	BUT33•		20 min	36	3.3	1.6	36		250	TO-204 Mod/197
60	200	MJ10020•		75/1k min	15	3.5	0.5	30		250	TO-204 Mod/197
	250	MJ10021•		75/1k min	15	3.5	0.5	30		250	TO-204 Mod/197
100	250	MJ10047• MJ10048•		75 min 75 min	100 100	4 20	1 8	100 100		250 250	— /353 — /353

• Darlington with speed-up diode.

TABLE 14 — POWER SWITCHING TRANSISTORS

$V_{CEO} < 200$ V

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp			
0.8	40	MPS-U02	MPS-U52	30 min	0.5				150	10	—/152
1	120	MPS-U03		40 min	0.1				100	10	—/152
	180	MPS-U04		40 min	0.1				100	10	—/152
2	20	BD505	BD506	40 min	1				50	10	—/152
	30	BD507 MPS-U01	BD508 MPS-U51	40 min 50 min	1 1				50 50	10 10	—/152 —/152
	40	BD509 MPS-U01A MPS-U45#	BD510 MPS-U51A MPS-U95#	40 min 50 min 4k min	1 1 1				50 50 100	10 10 10	—/152 —/152 —/152
	45	BD515	BD516	25 min	0.5				50	10	—/152
	60	BD517 MPS-U05	BD518 MPS-U55	25 min 60 min	0.5 0.25				50 50	10 10	—/152 —/152
	80	BD519 MPS-U06	BD520 MPS-U56	25 min 60 min	0.5 0.25				50 50	10 10	—/152 —/152
	100	BD529 MPS-U07	BD530 MPS-U57	30 min 60 min	0.25 0.25				50 50	10 10	—/152 —/152
	150	2N5051		25/100	0.75	3.5	1.2	0.75	10	40	TO-213AA/80
3	40		2N3719 2N3867	25/180 40/200	2 2	0.4* 0.4*		1 1	60 60	6 6	TO-205AA/31 TO-205AA/31
	60		2N3720 2N3868	25/180 30/150	2 2	0.4* 0.4*		1 1	60 60	6 6	TO-205AA/31 TO-205AA/31
	80		2N6303	30/150	2	0.4*		1	60	6	TO-205AA/31

Darlington

* t_{off} @ 1 MHz

(continued)

TABLE 14 — POWER SWITCHING TRANSISTORS (continued)

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
4	30	BD185	BD186	15 min	2				20	40	TO-225AA/77
	45	BD187	BD188	15 min	2				20	40	TO-225AA/77
		BD785	BD786	20 min	2				50	15	TO-225AA/77
	60	2N4877		20/100	4	1.5	0.5	4	30	10	TO-205AD/79
		BD189	BD190	15 min	2				20	40	TO-225AA/77
		BD787	BD788	20 min	2				50	15	TO-225AA/77
	80	BD789	BD790	10 min	2				40	15	TO-225AA/77
	100	BD791	BD792	10 min	2				40	15	TO-225AA/77
5	60		MJ8100	25/180	2	1	0.15	2	30	10	TO-205AD/79
	80	2N5337	2N6191	60/240	2	2	0.2	2	30	10	TO-205AD/79
	100	2N5339	2N6193	60/240	2	2	0.2	2	30	10	TO-205AD/79
7	60	2N6315	2N6317	20/100	2.5	1	0.8	2.5	4	90	TO-213AA/80
	80	2N5428		60/240	2	2	0.2	2	30	60	TO-213AA/80
		2N5347	2N6187	60/240	2	2	0.2	2	30	60	TO-210AA/160
		2N6316	2N6318	20/100	2.5	1	0.8	2.5	4	90	TO-213AA/80
	100	2N5430		60/240	2	2	0.2	2	30	60	TO-213AA/80
		2N5349	2N6189	60/240	2	2	0.2	2	30	60	TO-210AA/160
7.5	60	2N3447		40/120	5	2	0.35	5	10	115	TO-204/11
	80	2N3448		40/120	5	2	0.35	5	10	115	TO-204/11
8	120	MJ3247	MJ3237	40 min	3	0.4 typ	0.18 typ	5	20	75	TO-213AA/80
		MJ4247	MJ4237	40 min	3	0.4 typ	0.18 typ	5	20	90	TO-204/11
		MJE15028	MJE15029	20 min	4	0.4 typ	0.18 typ	5	30	50	TO-220/221A
	150	MJ3248	MJ3238	40 min	3	0.4 typ	0.18 typ	5	20	75	TO-213AA/80
		MJ4248	MJ4238	40 min	3	0.4 typ	0.18 typ	5	20	90	TO-204/11
		MJE15030	MJE15031	20 min	4	0.4 typ	0.18 typ	5	30	50	TO-220/221A
10	60		MJ6700	25/180	2	1	0.15	2	30	60	TO-210AA/160
		2N5877	2N5875	20/100	4	1	0.8	4	4	150	TO-204/11
	80	2N5878	2N5876	20/100	4	1	0.8	4	4	150	TO-204/11
15	60	2N5881	2N5879	20/100	6	1	0.8	6	4	160	TO-204/11
	80	2N5882	2N5880	20/100	6	1	0.8	6	4	160	TO-204/11
18	160	BUX41N		8 min	12	1.2	0.25	12	8	120	TO-204/1
20	75	2N5039		20/100	10	1.5	0.5	10	60	140	TO-204/1
	80	2N5303	2N5745	15/60	10	2	1	10	2	200	TO-204/11
	90	2N5038		20/100	12	1.5	0.5	12	60	140	TO-204/1
	125	BUX40		8 min	15	1	0.25	15	8	120	TO-204/1
	160	BUV11N		10 min	15	1.2	0.25	15	8	150	TO-204/1
25	60	2N5885	2N5883	20/100	10	1	0.8	10	4	200	TO-204/11
	80	2N5886	2N5884	20/100	10	1	0.8	10	4	200	TO-204/11
			2N6436	30/120	10	1	0.25	10	40	200	TO-204/1
	100	2N6338		30/120	10	1	0.25	10	40	200	TO-204/1
			2N6437	30/120	10	1	0.25	10	40	200	TO-204/1
	120	2N6339		30/120	10	1	0.25	10	40	200	TO-204/1
			2N6438	30/120	10	1	0.25	10	40	200	TO-204/1
	125	BUV10		10 min	20	1.2	0.25	20	8	150	TO-204/1
		BUV10N		10 min	20	1.55	0.45	15	10	175	TO-204/1

(continued)

TABLE 14 — POWER SWITCHING TRANSISTORS (continued)

I_CCont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type NPN	Device Type PNP	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
25	140	2N6340		30/120	10	1	0.25	10	40	200	TO-204/1
	150	2N6341		30/120	10	1	0.25	10	40	200	TO-204/1
30	40	2N5301	2N4398	15/60	15	2	1	10	2	200	TO-204/11
	60	2N5302	2N4399	15/60	15	2	1	10	2	200	TO-204/11
	90	BUX39		8 min	20	1	0.25	20	8	120	TO-204/1
40	160	BUV21N		10 min	40	1	0.2	40	8	250	TO-204 Mod/197
50	80		2N6377	30/120	20	0.8					TO-204 Mod/197
	100	2N6274	2N6378	30/120	20	0.8	0.25	20	30	250	TO-204 Mod/197
	120	2N6275	2N6379	30/120	20	0.8	0.25	20	30	250	TO-204 Mod/197
	125	BUV20		10 min	50	1.2	0.25	50	8	250	TO-204 Mod/197
	140	2N6276		30/120	20	0.8	0.25	20	30	250	TO-204 Mod/197
	150	2N6277		30/120	20	0.8	0.25	20	30	250	TO-204 Mod/197
70	125	BUS50		15 min	50					350	TO-204 Mod/197

TABLE 15 — SWITCHMODE POWER TRANSISTORS

$V_{CEO} \geq 200$ V

Devices are listed in descending order of $V_{CEO(sus)}$, and I_CCont

$V_{CEO(sus)}$ Volts Min	I_CCont Amps Max	V_{CEV} Volts Min	Device Type NPN unless otherwise noted	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
1000	24	1400	BUT36##	5 min	16	6	2.5	16		250	TO-204 Mod/197
	12	1400	BUT16##	5 min	8	3.3	1.5	8		150	TO-204/1
900	2	1800	MJE1320	3 min	1	4 typ	0.8 typ	1		80	TO-220/221A
850	20	1200	MJ10025##★	50/600	20	5	1.8	10			TO-204/1
	3	1500 1500	MJE16034 MJH16034	4 min 4 min	3 3	2 2	1.5 1.5	2 2		80 125	TO-220/221A TO-218/340
800	10	1400 1500 1500	MJ8505★ MJ16018★ MJH16018★	7.5 min 4 min 4 min	1.5 5 5	4 4.5 typ 4.5 typ	2 0.2 typ 0.2 typ	5 5 5			TO-204/1 TO-204/1 TO-218/340
	5	1400 1400	MJ8503★ MJE8503★	7.5 min 7.5 min	1 1	4 4	2 2	2.5 2.5			TO-204/1 TO-220/221A
	2.5	1400 1400	MJ8501★ MJE8501★	7.5 min 7.5 min	0.5 0.5	4 4	2 2	1 1			TO-204/1 TO-220/221A
750	20	1000	MJ10024##★	50/600	20	5	1.8	10			TO-204/1
	8	1500 1500	MJ12005 MJH12005	5 min	5		1 0.4 typ	5 5	4 typ 4	 100	TO-204/1 TO-218/340
	5	1500	MJ12004★	2.5 min	4.5		1	4.5	4 typ		TO-204/1
	4	1500	MJ12003	2.5 min	3		1	3	4 typ		TO-204/1

★ Designers Data Sheet characterization
Darlington ## Darlington with speed-up diode * t_{off} ** $|h_{fe}|$ @ 1 MHz

(continued)

TABLE 15 — SWITCHMODE POWER TRANSISTORS (continued)

$V_{CEO(sus)}$ Volts Min	I_CCont Amps Max	V_{CEV} Volts Min	Device Type NPN unless otherwise noted	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
750	3	1500	MJE16032	4 min	3	2	1.5	2		80	TO-220/221A
		1500	MJH16032	4 min	3	2	1.5	2		125	TO-218/340
	2.5	1500	MJ12002★	1.11 min	2		1	2	4 typ		TO-204/1
		1500	MJE12007★	1.1 min	2		1	2	4 typ		TO-220/221A
700	40	1000	BUT35##	15 min	24	4	1.2	24		250	TO-204 Mod/197
	20	1000	BUT15##	15 min	12	2.5	0.8	12		175	TO-204/1
	10	1200	MJ8504★	7.5 min	1.5	4	2	5			TO-204/1
	8	1400	MJ10011#	20 min	4		1	4			TO-204/1
		1500	BU508,A	2.25 min	4.5	8 typ	0.5 typ	4.5	7	125	TO-218/340
		1500	BU508D,AD	2.25 min	4.5	8 typ	0.5 typ	4.5	7	125	TO-218/340
	5	1200	MJ8502★	7.5 min	1	4	2	2.5			TO-204/1
		1200	MJE8502★	7.5 min	1	4	2	2.5			TO-220/221A
		1500	BU208A	2.25 min	4.5	8 typ	0.4 typ	4.5	4 typ	90	TO-204/1
		1500	BU208D	2.25 min	4.5		0.6 typ	4.5			TO-204/1
	2.5	1200	MJE8500★	7.5 min	0.5	4	2	1			TO-220/221A
600	15	700	MJ10014##★	10/250	10	2.5	0.8	10			TO-204/1
550		650	MJ10013##★	10/250	10	2.5	0.8	10			TO-204/1
500	50	750	MJ10016##★	10 min	40	2.5	1	20			TO-204 Mod/197
		850	BUT34##	15 min	32	3	1.5	32		250	TO-204 Mod/197
	25	850	BUT14##	15 min	16	2.8	0.8	16		175	TO-204/1
	20	600	MJ10009##★	30/300	10	2	0.6	10	8**		TO-204/1
		800	MJ13335★	10/60	5	4	0.7	10			TO-204/1
	15	850	BUT51P##	40 min	5	1.1	0.16	10		125	TO-218/340
		1000	MJ16010A★	5 min	15	3	0.4	10			TO-204/1
		1000	MJH16010A★	5 min	15	3	0.4	10			TO-218/340
	8	850	BUT50P##	30 min	2	0.75 typ	0.1 typ	5		100	TO-218/340
		1000	MJ16006A★	5 min	15	3	0.4	10			TO-204/1
		1000	MJH16006A★	5 min	15	3	0.4	10			TO-218/340
	5	1000	MJ16002A★	5 min	15	3	0.3	3			TO-204/1
		1000	MJH16002A★	5 min	15	3	0.3	3			TO-218/340
450	50	500	MJ10044##★	50 min	50	3.8	1.3	50			—/353
	30	850	MJ16020	5 min	30	1.8	0.2	20		250	TO-204/1
		850	MJ16022	7 min	30	1.5	0.15	20		250	TO-204/1
		1000	BUS98A	8 min	16	2.3	0.4	16		250	TO-204 Mod/197
	20	650	MJ10008##★	30/300	10	2	0.6	10	8**		TO-204/1
		850	2N6837★	10/30	15	2.5	0.25	15	15		TO-204/1
		850	MJ16014★	5 min	20	2.7	0.35	20			TO-204/197
		850	MJ16016★	7 min	20	2.2	0.25	20			TO-204/197
	15	750	MJ13091★	8 min	10	2.5	0.5	10			TO-204/1
		850	2N6836★	10/30	10	3	0.35	10	10		TO-204/1
		850	MJ12022★	5 min	15		0.1 typ	10			TO-204/1
		850	MJ16010★	5 min	15	1.2 typ	0.2 typ	10			TO-204/1
		850	MJ16012★	7 min	15	0.9 typ	0.15 typ	10			TO-204/1
		850	MJH16010★	5 min	15	1.2	0.2	10		175	TO-218/340
		850	MJH16012★	7 min	15	0.9	0.15	10		150	TO-218/340
		1000	BUS48A	8 min	10	2	0.4	10		175	TO-204/1

★ Designers Data Sheet characterization
Darlington ## Darlington with speed-up diode * t_{off} ** $|h_{fe}|$ @ 1 MHz

(continued)

TABLE 15 — SWITCHMODE POWER TRANSISTORS (continued)

$V_{CEO(sus)}$ Volts Min	I_C Cont Amps Max	V_{CEV} Volts Min	Device Type NPN unless otherwise noted	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
450	15	1000	**BUS48AP**	8 min	8	2	0.4	10		150	TO-218/340
		1000	**BUW13A**			4	0.8	8		175	TO-218/340
	9	1000	**BUS47A**	7 min	5	2	0.4	5		150	TO-204/1
		1000	**BUS47AP**	7 min	6	2	0.4	6		128	TO-218/340
	8	750	**MJ13081★**	8 min	5	1.5	0.5	5			TO-204/1
		850	**2N6835★**	7.5/3	5	2.5	0.25	5	10		TO-204/1
		850	**MJE16080**	5 min	8	2	0.5	5		80	TO-220/221A
		850	**MJ12021★**	5 min	8		0.1 typ	8			TO-204/1
		850	**MJ16006★**	5 min	8	2.5	0.25	5			TO-204/1
		850	**MJ16008★**	7 min	8	2.2	0.25	5			TO-204/1
		850	**MJH16006★**	5 min	8	2.5	0.25	5			TO-218/340
		850	**MJH16008★**	7 min	8	2.2	0.25	5			TO-218/340
		1000	**BUW12A**	6 min	5	4	0.8	5		125	TO-218/340
	5	750	**MJ13071★**	8 min	3	1.5	0.5	3			TO-204/1
		750	**MJE13071★**	8 min	3	1.5	0.5	3			TO-220/221A
		850	**2N6834★**	10/30	3	2.7	0.35	3	15		TO-204/1
		850	**MJ12020★**	5 min	5		0.13 typ	3			TO-204/1
		850	**MJ16002★**	5 min	5	3	0.3	3			TO-204/1
		850	**MJ16004★**	8 min	3	2.7	0.35	3			TO-204/1
		850	**MJE16002★**	5 min	5	3	0.3	3			TO-220/221A
		850	**MJE16004★**	7 min	5	2.7	0.35	3			TO-220/221A
		850	**MJH16002★**	5 min	5	3	0.3	3			TO-218/340
		850	**MJH16004★**	7 min	5	2.7	0.35	3			TO-218/340
		1000	**BUW11A**	6 min	2.5	4	0.8	2.5		125	TO-218/340
	3	1000	**BUX85**	30 min	0.1	3.5	1.4	1	4	50	TO-220/221A
400	56	600	**BUT33##**	20 min	36	3.3	1.6	36		250	TO-204 Mod/197
	50	650	**MJ10015##★**	10 min	40	2.5	1	20			TO-204 Mod/197
	40	600	**MJ10023##★**	50/600	10	2.5	0.9	20			TO-204 Mod/197
	30	850	**BUS98**	8 min	20	2.3	0.4	20		250	TO-204 Mod/197
	28	600	**BUT13##**	20 min	20	2.6	0.8	18		175	TO-204/1
	20	450	**BUV24**	8 min	12	3	0.9	12	8	250	TO-204/1
		500	**MJ10001#★**	40/400	10	3	1.8	10	10**		TO-204/1
		500	**MJ10005#★**	40/400	10	1.5	0.5	10	10**		TO-204/1
		500	**MJ13333★**	10/60	5	4	0.7	10			TO-204/1
	15	650	**MJ13090★**	8 min	10	2.5	0.5	10			TO-204/1
		650	**MJH6678**	8 min	15	2.5	0.5	15		125	TO-218/340
		650	**2N6678**	8 min	15	2.5	0.5	15	3		TO-204/1
		850	**2N6547★**	6/30	10	4	0.7	10	6 to 24		TO-204/1
		850	**BUS48**	8 min	10	2	0.4	10		175	TO-204/1
		850	**BUS48P**	8 min	10	2	0.4	10		150	TO-218/340
		850	**BUW13**			4	0.8	10		175	TO-218/340
		850	**BUX48**			3	0.6	10			TO-204/1
	12	700	**MJE13009★**	6/30	8	3	0.7	8	4**		TO-220/221A
	10	950	**MJ12010**	4.2 min	5		1	5	6 typ		TO-204/1
		550	**MJ10012#**	100/2k	6	6	15	15	6		TO-204/1
		500	**MJ10003#★**	30/300	5	2.5	1	5	10**		TO-204/1
		500	**MJ10007##★**	30/300	5	1.1	0.25	5	10**		TO-204/1
		450	**MJ13015★**	8/20	5	2	0.5	5			TO-204/1
	9	850	**BUS47**	7 min	6	2	0.4	6		150	TO-204/1
		850	**BUS47P**	7 min	5	2	0.4	6		128	TO-218/340

★ Designers Data Sheet characterization
Darlington ## Darlington with speed-up diode * t_{off} ** $|h_{fe}|$ @ 1 MHz

(continued)

TABLE 15 — SWITCHMODE POWER TRANSISTORS (continued)

$V_{CEO(sus)}$ Volts Min	I_{C}Cont Amps Max	V_{CEV} Volts Min	Device Type NPN unless otherwise noted	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
	8	850	2N6545★	7/35	5	4	1	5	6		TO-204/1
		800	MJE5742#	200/400	4	8 typ	2 typ	6			TO-220/221A
		800	MJE16080	5 min	8	2	0.5	5		80	TO-220/221A
		850	BUW12	6 min	6	4	0.8	5		125	TO-218/340
		850	BUX84	30 min	0.1	3.5	1.4	1	4	50	TO-220/221A
		700	MJE13007★	6/30	5	3	0.7	5	4		TO-220/221A
		650	MJ13080★	8 min	5	1.5	0.5	5			TO-204/1
		450	MJ6503-PNP★	15 min	2	2	0.5	4			TO-204/1
		450	MJE5852-PNP★	15 min	2	2	0.5	4			TO-220/221A
	6	900	BU326A	30 typ	0.6	3.5	1**	2.5	6	90	TO-204/1
		900	BU426A	30 typ	0.6	2 typ	0.5 typ	2.5	6 typ	113	TO-218/340
	5	850	2N6543★	7/35	3	4	0.8	3	6		TO-204/1
		850	BUW11	6 min	3	4	0.8	3		125	TO-218/340
		650	MJ13070★	8 min	3	1.5	0.5	3			TO-204/1
		650	MJE13070★	8 min	3	1.5	0.5	3			TO-220/221A
	4	700	MJE13005★	6/30	3	3	0.7	3	4		TO-220/221A
	1.5	700	MJE13003★	5/25	1	4	0.7	1	5		TO-225AA/77R
	0.5	400	MJ4647-PNP	20 min	0.5	0.72*		0.05	40		TO-205AD/79
375	6	800	BU326	30 typ	0.6	3.5	1**	2.5	6	90	TO-204/1
		800	BU426	30 typ	0.6	2 typ	0.5 typ	2.5	6 typ	113	TO-218/340
350	40	450	MJ10022##★	50/600	10	2.5	0.9	20			TO-204 Mod/197
	20	450	MJ10000#★	40/400	10	3	1.8	10	10**		TO-204/1
		450	MJ10004##★	40/400	10	1.5	0.5	10	10**		TO-204/1
	15	550	2N6677	8 min	15	2.5	0.5	15	3		TO-204/1
		375	2N6251	6/50	10	3.5	1	10	2.5		TO-204/1
		550	MJH6677	8 min	15	2.5	0.5	15		125	TO-218/340
	10	450	MJ10002#★	30/300	5	2.5	1	5	10**		TO-204/1
		450	MJ10006##★	30/300	5	1.5	0.5	5	10**		TO-204/1
		400	MJ13014★	8/20	5	2	0.5	5			TO-204/1
	8	700	2N6308	12/60	3	1.6	0.4	5	5		TO-204/1
		700	MJE5741#	200/400	4	8 typ	2 typ	6			TO-220/221A
		400	MJE5851-PNP	15 min	2	2	0.5	4			TO-220/221A
	2	400	2N6213-PNP	10/100	1	2.5	0.6	1	4		TO-213AA/80
325	30	400	BUV23	8 min	16	1.8	0.4	16	8	250	TO-204 Mod/197
	15	400	BUX13	8 min	8	2.5	0.8	8	8	150	TO-204/1
	5	350	2N6235	25/125	1	3.5	0.5	1	20		TO-213AA/80
300	15	650	2N6546★	6/30	10	4	0.7	10	6 to 24		TO-204/1
		450	2N6676	8 min	15	2.5	0.5	15	3		TO-204/1
		450	MJH6676	8 min	15	2.5	0.5	15		125	TO-218/340
	12	600	MJE13008★	6/30	8	3	0.7	8	4**		TO-220/221A
	8	600	2N6307	15/75	3	1.6	0.4	3	5		TO-204/1
		600	MJE13006★	6/30	5	3	0.7	5	4		TO-220/221A
		600	MJE5740	200/400	4	8 typ	2 typ	6			TO-220/221A
		350	MJE5850-PNP★	15 min	2	2	0.5	4			TO-220/221A
	5	400	2N6498	10/75	2.5	1.8	0.8	2.5	5		TO-220/221A
	4	600	MJE13004★	6/30	3	3	0.7	3	4		TO-220/221A
	2	500	2N3585	25/100	1	4	3	1	10		TO-213AA/80
		500	2N6422-PNP	25/100	1	4	3	1	10		TO-213AA/80
		350	2N6212-PNP	10/100	1	2.5	0.6	1	4		TO-213AA/80
	1.5	600	MJE13002★	5/25	1	4	0.7	1	5		TO-225AA/77R

★ Designers Data Sheet characterization
Darlington ## Darlington with speed-up diode * t_{off} ** $|h_{fe}|$ @ 1 MHz

TABLE 15 — SWITCHMODE POWER TRANSISTORS (continued)

$V_{CEO(sus)}$ Volts Min	I_C Cont Amps Max	V_{CEV} Volts Min	Device Type NPN unless otherwise noted	h_{FE} Min/Max	@ I_C Amp	Resistive Switching t_s μs Max	Resistive Switching t_f μs Max	Resistive Switching @ I_C Amp	f_T MHz Min	P_D (Case) Watts @ 25°C	Case JEDEC/MOT
300	1	300	2N5345-PNP	25/100	0.5	0.6	0.1	0.5	60		TO-213AA/80
	0.5	300	MJ4646-PNP	20 min	0.5	0.72*		0.05	40		TO-205AD/79
275	15	300	2N6250	8/50	10	3.5	1	10	2.5		TO-204/1
250	100	300 300	MJ10047##★ MJ10048#★	75 min 75 min	100 100	4 2	1 8	100 100			—/353 —/353
	60	350	MJ10021##★	25 min	30	3.5	0.5	30			TO-204 Mod/197
	40	300 350	BUV22 BUS52	10 min 15 min	20 40	1.1	0.35	20	8	250 350	TO-204/1 TO-204/1
	20	300 450	BUV12 MJ13331★	10 min 8/40	10 10	1.5 3.5	0.5 0.7	10 10	8 5/40	150	TO-204/1 TO-204/1
	15	250 250	MJ11021#-PNP MJ11022#	100 min 100 min	15 15				3# 3#		TO-204/1 TO-204/1
	12	300	BUX42	8 min	6	2	0.4	6	8	120	TO-204/1
	8	500 400	2N6306 MJ6502-PNP★	15/75 15 min	3 2	1.6 2	0.4 0.5	3 4	5		TO-204/1 TO-204/1
	5	500 350	MJ3029 2N6497	30 min 10/75	0.4 2.5	1.8	1 0.8	3 2.5	5		TO-204/11 TO-220/221A
	2	375 375	2N3584 2N6421-PNP	25/100 25/100	1 1	4 4	3 3	1 1	10 10		TO-213AA/80 TO-213AA/80
	1	250	2N5344-PNP	25/100	0.5	0.6	0.1	0.5	60		TO-213AA/80
225	2	275	2N6211	10/100	1	2.5	0.6	1	20		TO-213AA/80
200	60	300	MJ10020##★	25 min	30	3.5	0.5	30			TO-204 Mod/197
	50	300	BUS51	15 min	50					350	TO-204/1
	40	250	BUV21	10 min	25	1.8	0.4	25	8	150	TO-204/1
	20	250 400	BUV11 MJ13330★	10 min 8/40	12 10	1.8 3.5	0.4 0.7	12 10	8 5/40	150	TO-204/1 TO-204/11
	15	225 250 200 200	2N6249 BUX41 MJ11019#-PNP MJ11020#	10/50 8 min 100 min 100 min	10 8 15 15	3.5 1.5	1 0.4	10 8	2.5 8 3# 3#	120	TO-204/11 TO-204/1 TO-204/1 TO-204/1
	3	250	BUY49P	30 min	0.5				25	20	TO-225AA/77

★ Designers Data Sheet characterization
Darlington ## Darlington with speed-up diode * t_{off} ** $|h_{fe}|$ @ 1 MHz

Application Selector Guides

Application Literature

To obtain copies of these notes, simply list the AN, AR, EB or EN numbers and send your request to: Technical Information Center, Motorola Semiconductor Products Inc., P.O. Box 20924, Phoenix, Arizona 85036

AN-222A The ABC's of Solid-State DC-to-AC Inverters
AN-484A Medium Power Audio Amplifiers
AN-485 High-Power Audio Amplifiers with Short-Circuit Protection
AN-569 Transient Thermal Resistance — General Data and its Use
AN-703 Designing Digitally-Controlled Power Supplies
AN-719 A New Approach to Switching Regulators
AN-766 A Variable Frequency Control for 3ϕ Induction Motors
AN-767 A Line Operated, Regulated 5 V/50 A Switching Power Supply
AN-778 Mounting Techniques for Power Semiconductors
AN-785 Reverse-Bias Safe Operating Area
AN-786 Power Darlington Load Line Considerations
AN-803 The Effect of Emitter-Base Avalanching on High-Voltage Power Switching
AN-828 The Effects of Base Drive Conditions on RBSOA
AN-845 New Bipolars Compare Favorably with FETs for Switching Efficiency
AN-861 Power Transistors Safe Operating Area — Special Considerations for Motor Drives
AN-873 Understanding Power Transistor Dynamic Behavior — dv/dt Effects on Switching RBSOA
AN-875 Power Transistor Safe Operating Area — Special Considerations for Switching Power Supplies
AN-915 Characterizing Collector-To-Emitter and Drain-To-Source Diodes for Switchmode Applications
AN-951 Drive Optimization for 1 kV Offline Converter Transistors
AN-952 Ultrafast Recovery Rectifiers Extend Power Transistor SOA
AR-109 Power Transistor Safe Operating Area — Special Considerations for Motor Drives
AR-119 Dynamic Saturation Voltage — A Designers Comparison
AR-120 Speeding Up the High Voltage Transistor
AR-131 Baker Clamps, Traditional Concepts Updated. . .
AR-180 Electronic Ballasts
AR-181 Bipolar Transistors Excel in Off-Line Resonant Converters
EB-76 Horizontal CRT Deflection Techniques
EB-78 New ICs in Switching Supplies
EB-85A Full-Bridge Switching Power Supplies
EB-86A Half-Bridge Switching Power Supplies
EB-87A Flyback Switching Power Supplies
EB-88A Push-Pull Switching Power Supplies
EB-99 Proportional Reverse Base Current Drive Circuit
EN-101 Verifying Collector Voltage Ratings

GENERAL DESIGN CURVES FOR POWER AUDIO OUTPUT STAGES

$V_{(BR)CEO}$ Required on Output and Driver Transistors versus Output Power for 4, 8 and 18 Ohm Load

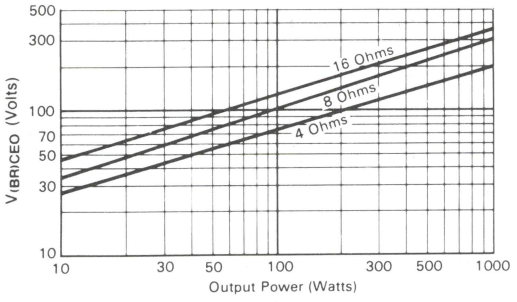

Output Transistor Peak Collector Current versus Output Power for 4, 8 and 16 Ohm Loads

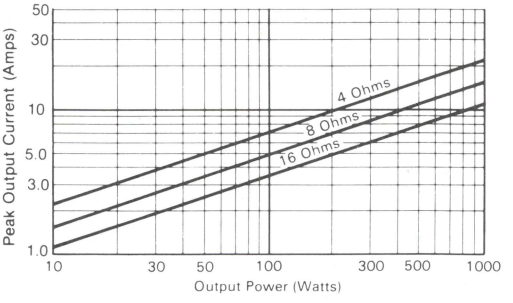

Another important parameter that must be considered before selecting the output transistors is the safe-operating area these devices must withstand. For a complete discussion on these see Application Notes AN-484A and AN-485.

TABLE 16 — RECOMMENDED POWER TRANSISTORS FOR AUDIO/SERVO LOADS

2

RMS Power Output	NPN	PNP	Case	P_D Watts @ 25°C	V_{CEO}	h_{FE}@ Min/Max	I_C Amps	f_T MHz Typ	ISB Volts/Amps
To 25W	MJE15030	MJE15031	TO-220	50W	150 V	20 min	4A	70	14/3.6
25 to 50W	2N3055A	MJ2955A	TO-204	120W	120 V	20/70	4A	3	60/2
	MJ15001	MJ15002	TO-204	200W	140 V	25/150	4A	3	40/5
50 to 100W	MJ15015	MJ15016	TO-204	180W	120 V	20/70	4A	3	60/3
	MJ15003	MJ15004	TO-204	250W	140 V	25/150	5A	3	100/1
Over 100W	MJ15024	MJ15025	TO-204	250W	250 V	15/60	8A	8	80/2.2

The Power Transistors shown are provided for reference only and show device capability. The final choice of the Power Transistors used is left to the circuit designer and depends upon the particular safe-operating area required and the mounting and heat sinking configuration used.

CRT Deflection

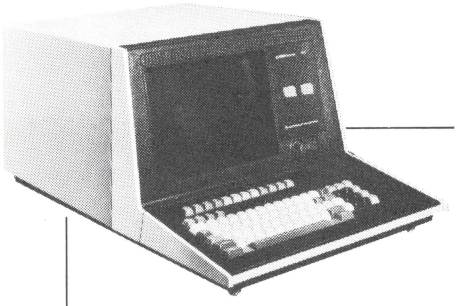

The typical raster scanning television or CRT data monitor normally uses an inductive switched horizontal output stage. The horizontal output switching is accomplished by a high voltage bipolar power transistor. This device switches from 0.5 to 5 A or higher collector current levels and must block a 100 to 1500 V retrace or flyback pulse. The listed Motorola semiconductor power devices will easily handle this task if the circuit electrical parameters have been properly established.

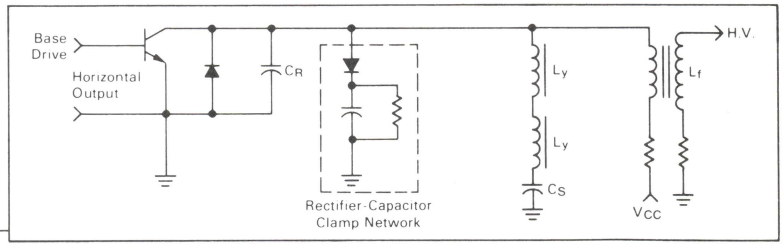

TABLE 17 — HORIZONTAL CRT DEFLECTION TRANSISTOR SELECTOR GUIDE

Applications	Retrace Voltage	I_{PK} Amps	Scan Rate	Preferred Devices*	V_{CEX} Volts	I_C Amps
Line Operated T.V. (120 Vac)						
Small Screen B/W	Up to 975	1 to 2	15 k	MJ12002	1500	2.5
Large Screen B/W, or						
Small Color	Up to 975	2 to 3	15 k	MJ12003	1500	4
Large Screen Color	Up to 975	4 to 5	15 k	BU508,D	1500	8
Battery Operated T.V.	Up to 250	3 to 10	15 k	BU407	350	7
Display Monitors						
Low End	Up to 250	3 to 10	20 k	BU407	350	7
High End	Up to 975	2 to 5	30 k	MJH16018	1500	8

* Additional selections are available for specific circuit requirements — see Device Selection By Package Type.

Preferred Leadform Options For Motorola Plastic Power Transistors

ORDERING INFORMATION

TO-225AA (Case 77), TO-225AB (Case 90), TO-220AB (Case 221A)

Devices may be leadformed by first converting to a special "SJE" number. The factory must be given the designation of the package and the applicable leadform suffix letter. The factory must be consulted.

TO-225AA LEADFORMS

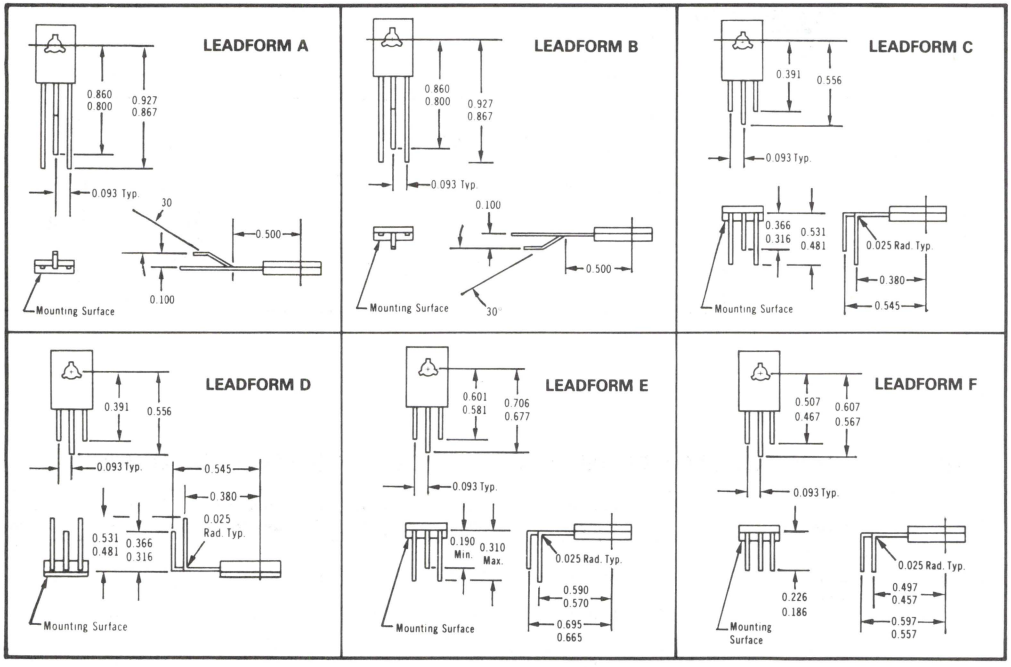

TO-225AB LEADFORMS

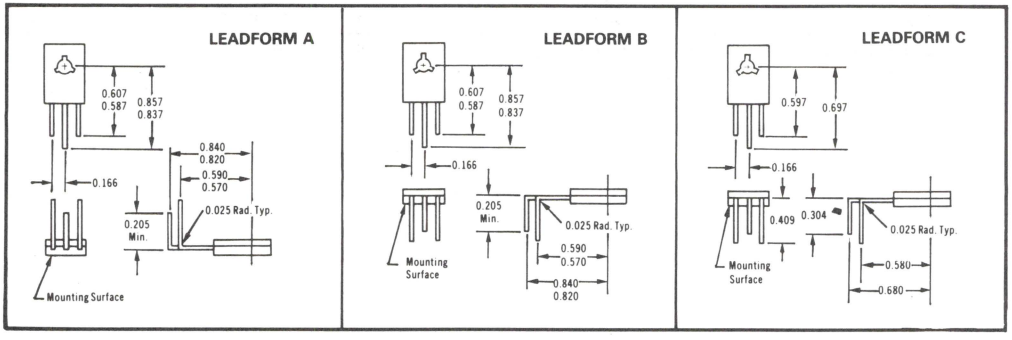

TO-220 LEADFORMS

Options are listed in parenthesis below standard dimensions.

LEADFORM AJ



LEADFORM AK



LEADFORM S



LEADFORMS W & WC



LEADFORM 2A



LEADFORMS 3 & 3A



LEADFORMS 5F & 5FA



LEADFORMS 5R & 5RA



LEADFORMS 10R & 10RC



LEADFORM 15FA



LEADFORM 16



2

Mounting Hardware

TO-204AA

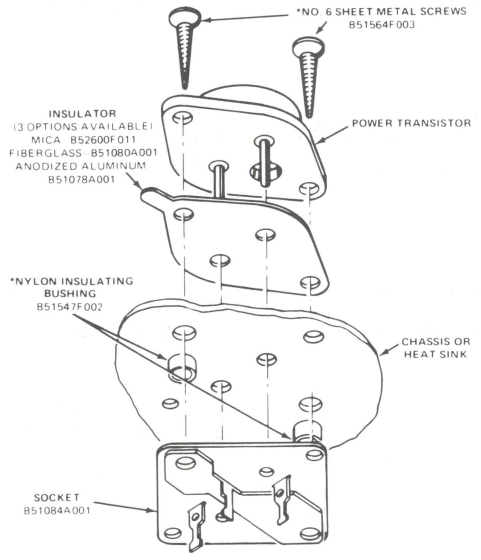

* Longer screws (not available from Motorola) and multiple bushings may be required for thick chassis or heat sink.

TO-213AA

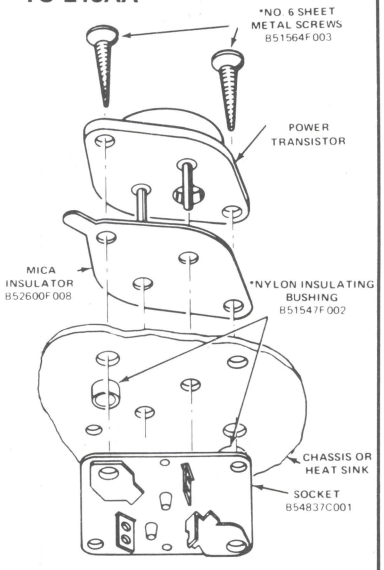

* Longer screws (not available from Motorola) and multiple bushings may be required for thick chassis or heat sink.

TO-225AA

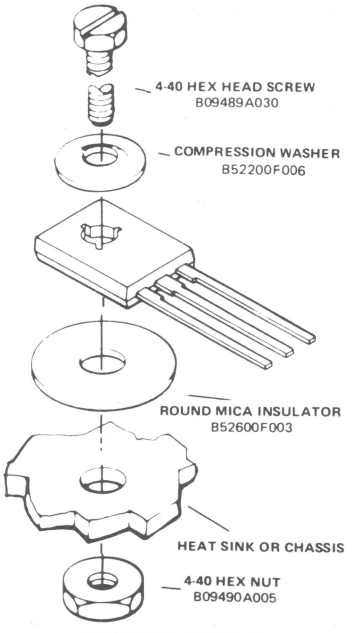

TORQUE REQUIREMENTS
0.68N-m (6IN-LBS.) MAX.

MOUNTING HARDWARE — continued

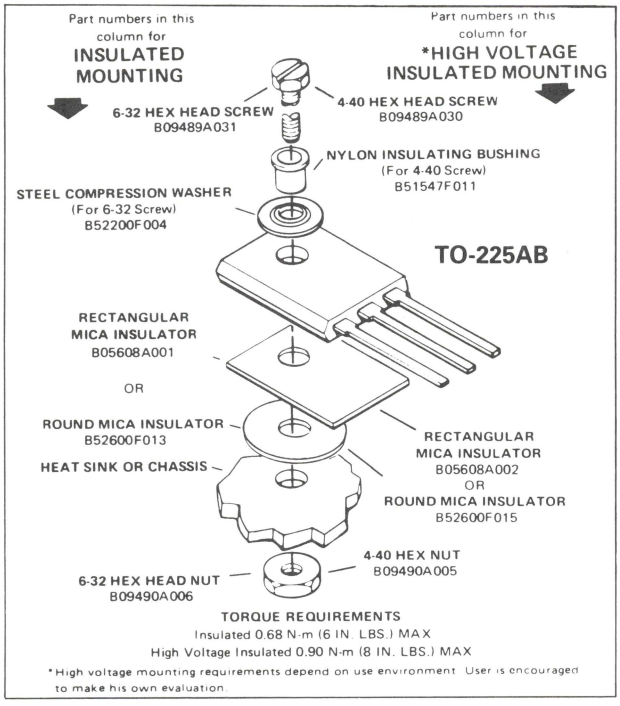

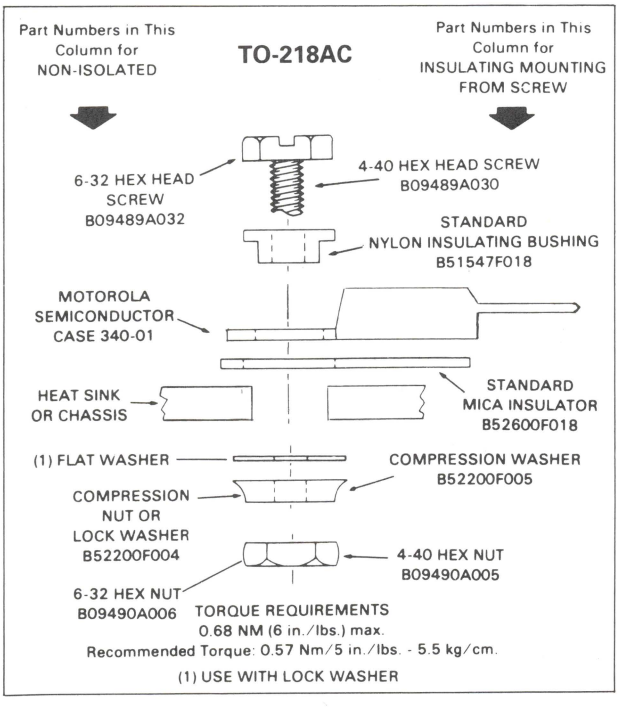

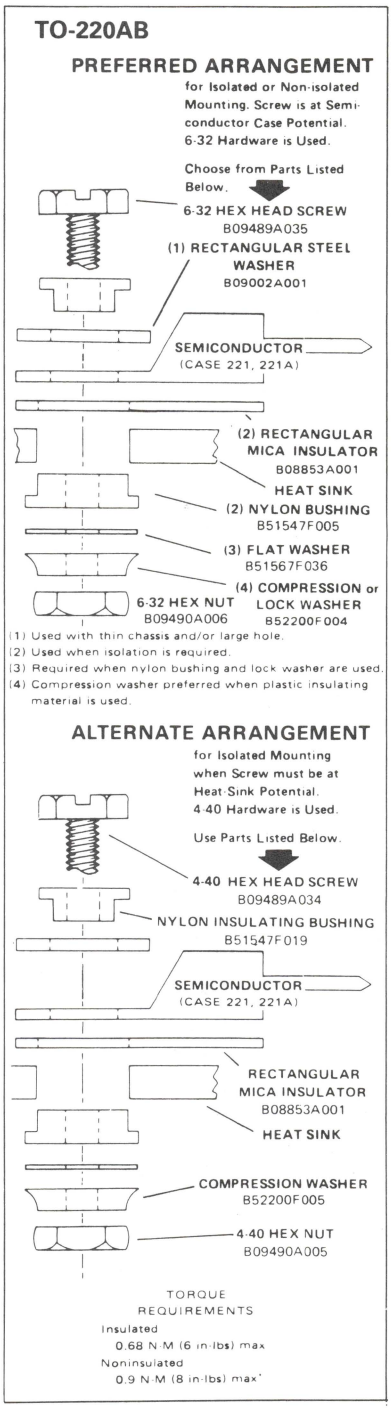

2

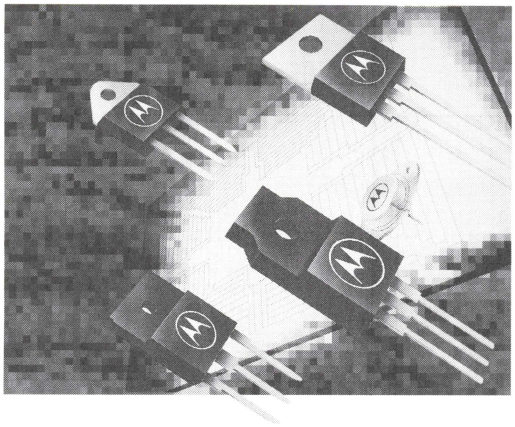

Data Sheets

3

The following power transistor data sheets are arranged in alphanumeric sequence, some data sheets may contain information applying to more than one transistor — e.g. 2N4398, 2N4399, 2N5745. To determine if a particular device type is covered by a data sheet in this section, either refer to the alphanumeric listing of the Index and Cross Reference on page 1-2 or simply turn to the proper sequence for indication of where the Data Sheet can be found.

2N3054
2N3054A

MEDIUM-POWER NPN SILICON TRANSISTORS

. . . designed for general purpose switching and amplifier applications.

- Excellent Safe Operating Area
- DC Current Gain Specified to 3.0 Amperes
- Complement to PNP Type 2N6049 or 2N4912

4 AMPERE

POWER TRANSISTORS
NPN SILICON

55 VOLTS
25 WATTS – 2N3054
75 WATTS – 2N3054A



*MAXIMUM RATINGS

Rating	Symbol	2N3054A	2N3054	Unit
Collector-Emitter Voltage	V_{CEO}	55		Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	60		Vdc
Collector-Base Voltage	V_{CB}	90		Vdc
Emitter-Base Voltage	V_{EB}	7.0		Vdc
Collector Current — Continuous Peak	I_C	4.0 10**		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	75 0.43	25 0.143	Watts W/°C
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	−65 to +200		°C

*Indicates JEDEC Registered Data
**Addition to JEDEC Registered Data

THERMAL CHARACTERISTICS

Characteristic	Symbol	2N3054A	2N3054	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.33	7.0	°C/W

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

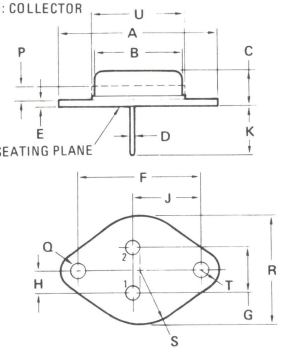

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

FIGURE 1 – POWER-TEMPERATURE DERATING

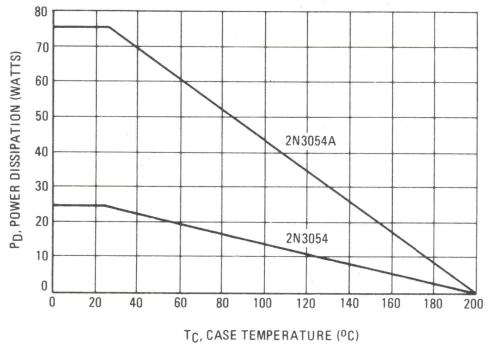

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
***OFF CHARACTERISTICS**				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	55	–	Vdc
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, R_{BE} = 100 Ω)	$V_{CER(sus)}$	60	–	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0)	I_{CEO}	–	500	μAdc
Collector Cutoff Current (V_{CE} = 90 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 90 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	– –	1.0 6.0	mAdc
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
***ON CHARACTERISTICS** (1)				
DC Current Gain (I_C = 0.5 Adc, V_{CE} = 4.0 Vdc) (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)	h_{FE}	25 5.0	150 –	–
Collector-Emitter Saturation Voltage (I_C = 500 mAdc, I_B = 50 mAdc) (I_C =3.0 Adc, I_B = 1.0 Adc)	$V_{CE(sat)}$	– –	1.0 6.0	Vdc
Base-Emitter On Voltage (I_C = 500 mAdc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	–	1.7	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain—Bandwidth Product (I_C = 200 mAdc, V_{CE} = 10 Vdc)	f_T	3.0	–	MHz
*Small-Signal Current Gain (I_C = 100 mAdc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)	h_{fe}	25	180	–
*Common-Emitter Cutoff Frequency (I_C = 100 mAdc, V_{CE} = 4.0 Vdc)	f_{hfe}	30	–	kHz

*Indicates JEDEC Registered Data

(1) Pulse test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

3

FIGURE 2 – SWITCHING TIME EQUIVALENT TEST CIRCUIT

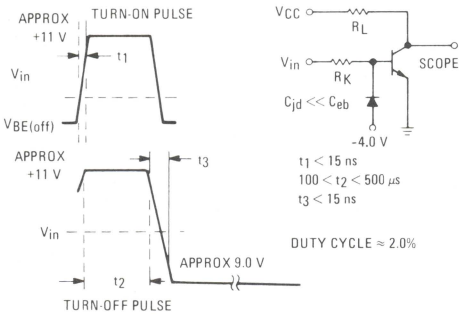

FIGURE 3 – TURN-ON TIME

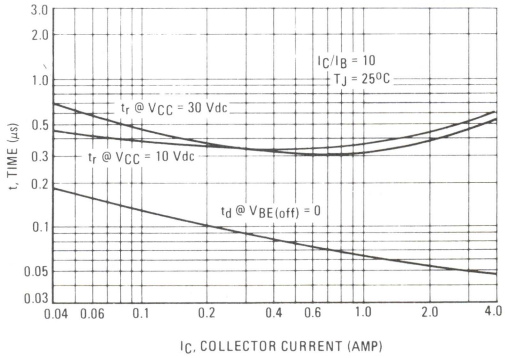

FIGURE 4 – THERMAL RESPONSE

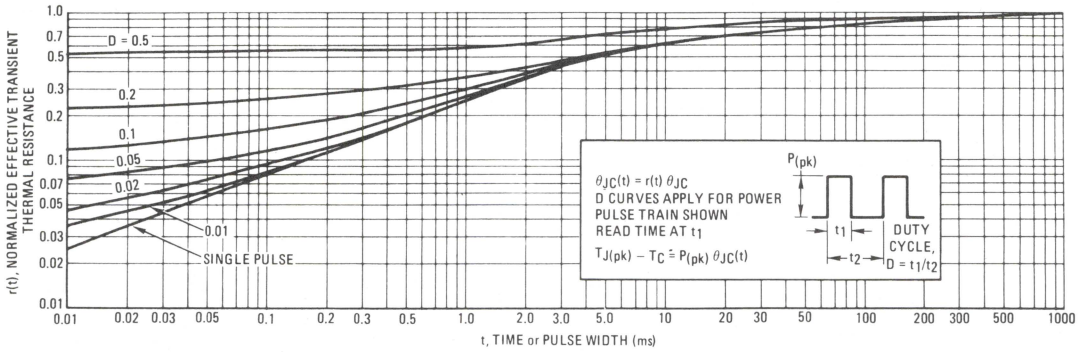

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

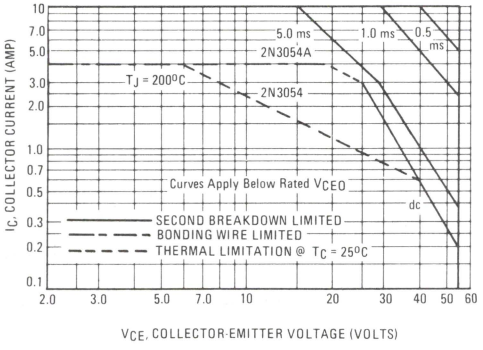

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

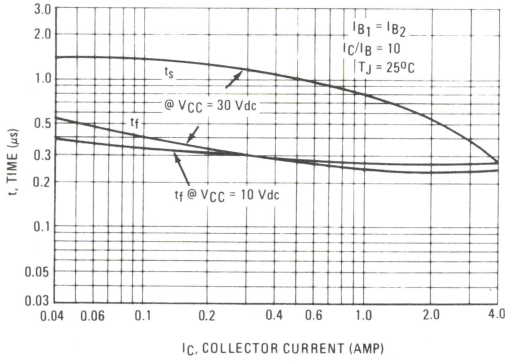

FIGURE 7 – CAPACITANCE

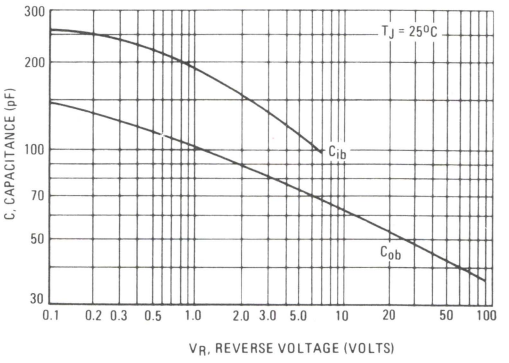

FIGURE 8 – DC CURRENT GAIN

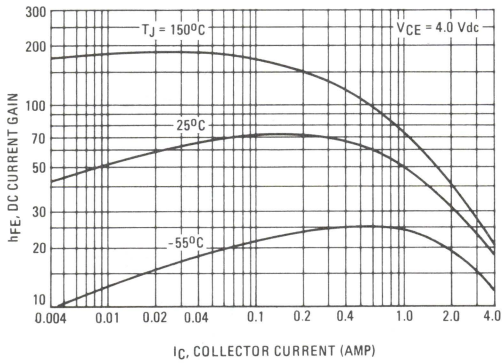

FIGURE 9 – COLLECTOR SATURATION REGION

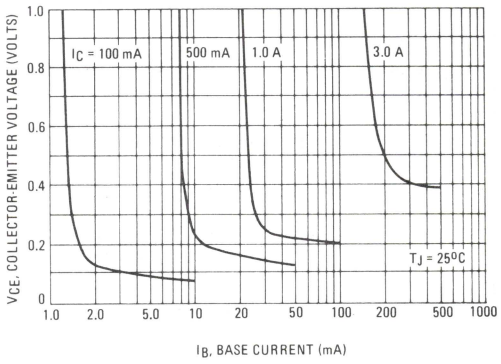

FIGURE 10 – TEMPERATURE COEFFICIENTS

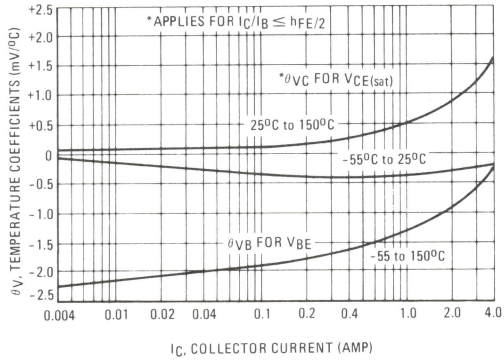

FIGURE 11 – "ON" VOLTAGES

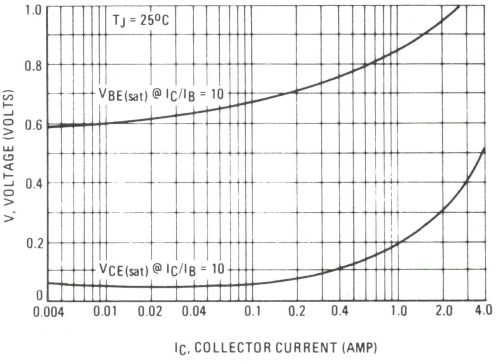

FIGURE 12 – COLLECTOR CUT-OFF REGION

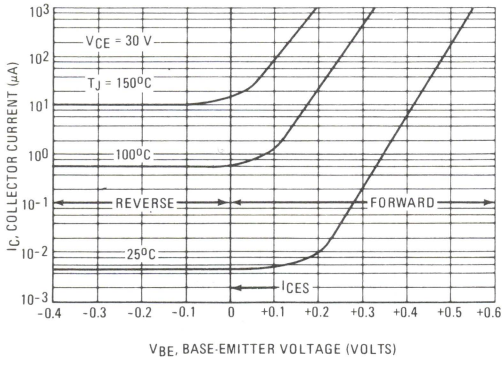

FIGURE 13 – EFFECTS OF BASE-EMITTER RESISTANCE

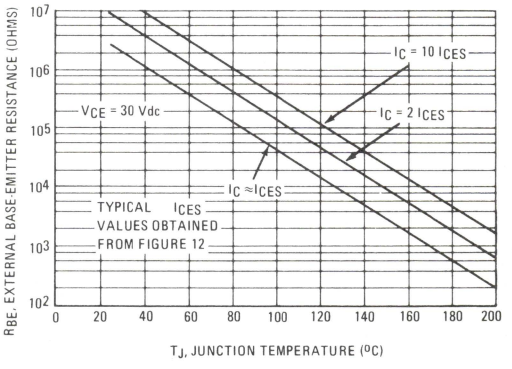

3

NPN
2N3055
PNP
MJ2955

COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose switching and amplifier applications.

- DC Current Gain – h_{FE} = 20-70 @ I_C = 4 Adc
- Collector-Emitter Saturation Voltage – $V_{CE(sat)}$ = 1.1 Vdc (Max) @ I_C = 4 Adc
- Excellent Safe Operating Area

15 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON

60 VOLTS
115 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Emitter Voltage	V_{CER}	70	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	7	Vdc
Collector Current – Continuous	I_C	15	Adc
Base Current	I_B	7	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	115 0.657	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.52	°C/W



NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ | Ø 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ | Ø 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

FIGURE 1 – POWER DERATING

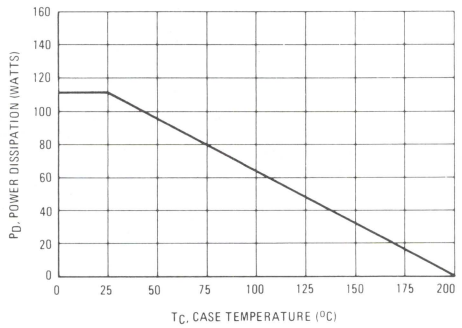

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
***OFF CHARACTERISTICS**				
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	$V_{CEO(sus)}$	60	–	Vdc
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, R_{BE} = 100 Ohms)	$V_{CER(sus)}$	70	–	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0)	I_{CEO}	–	0.7	mAdc
Collector Cutoff Current (V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	– –	1.0 5.0	mAdc
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)	I_{EBO}	–	5.0	mAdc
***ON CHARACTERISTICS (1)**				
DC Current Gain (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc) (I_C = 10 Adc, V_{CE} = 4.0 Vdc)	h_{FE}	20 5.0	70 –	–
Collector-Emitter Saturation Voltage (I_C = 4.0 Adc, I_B = 400 mAdc) (I_C = 10 Adc, I_B = 3.3 Adc)	$V_{CE(sat)}$	–	1.1 3.0	Vdc
Base-Emitter On Voltage (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	–	1.5	Vdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with Base Forward Biased (V_{CE} = 40 Vdc, t = 1.0 s; Nonrepetitive)	$I_{s/b}$	2.87	–	Adc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T	2.5	–	MHz
*Small-Signal Current Gain (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)	h_{fe}	15	120	–
*Small-Signal Current Gain Cutoff Frequency (V_{CE} = 4.0 Vdc, I_C = 1.0 Adc, f = 1.0 kHz)	f_{hfe}	10	–	kHz

* Indicates Within JEDEC Registration. (2N3055)

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

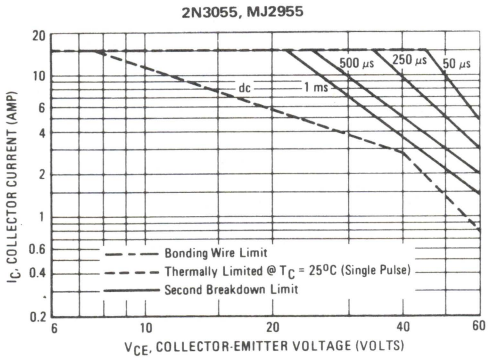

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature according to Figure 1.

3

NPN
2N3055

PNP
MJ2955

FIGURE 3 – DC CURRENT GAIN

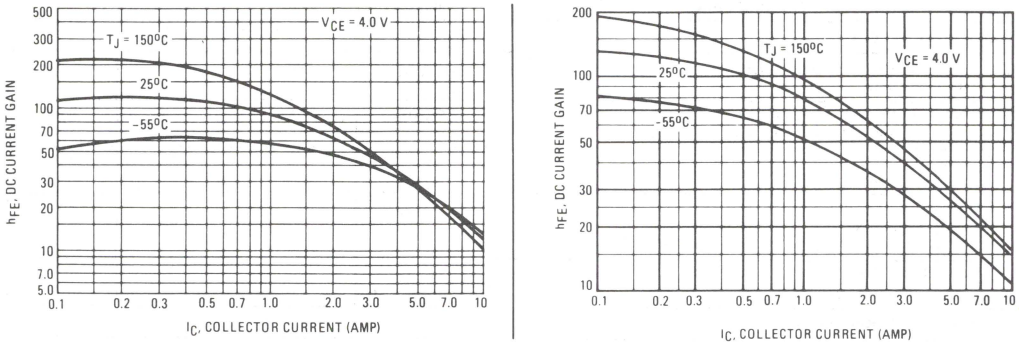

FIGURE 4 – COLLECTOR SATURATION REGION

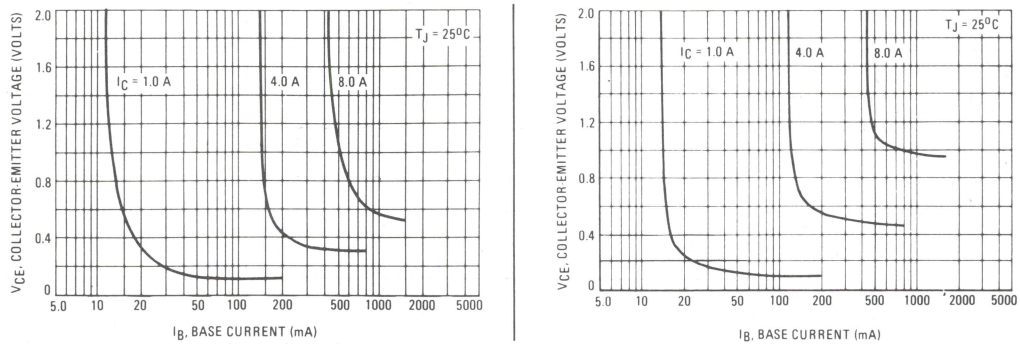

FIGURE 5 – "ON" VOLTAGES

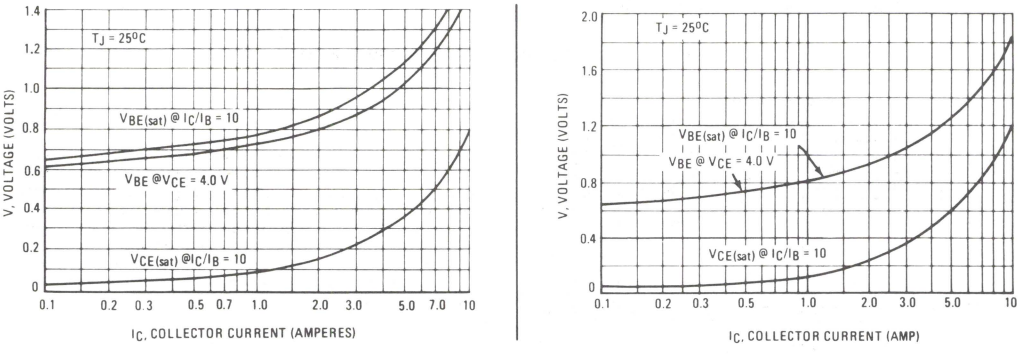

NPN **PNP**
2N3055A **MJ2955A**
MJ15015 **MJ15016**

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . PowerBase complementary transistors designed for high power audio, stepping motor and other linear applications. These devices can also be used in power switching circuits such as relay or solenoid drivers, dc-to-dc converters, inverters, or for inductive loads requiring higher safe operating area than the 2N3055 and MJ2955.

- Current-Gain — Bandwidth-Product @ I_C = 1.0 Adc
  f_T = 0.8 MHz (Min) — NPN
  = 2.2 MHz (Min) — PNP
- Safe Operating Area — Rated to 60 V and 120 V, Respectively

15 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

60, 120 VOLTS
115, 180 WATTS

*MAXIMUM RATINGS

Rating	Symbol	2N3055A MJ2955A	MJ15015 MJ15016	Unit
Collector-Emitter Voltage	V_{CEO}	60	120	Vdc
Collector-Base Voltage	V_{CBO}	100	200	Vdc
Collector-Emitter Voltage Base Reversed Biased	V_{CEV}	100	200	Vdc
Emitter-Base Voltage	V_{EBO}	7.0		Vdc
Collector Current — Continuous	I_C	15		Adc
Base Current	I_B	7.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	115 0.65	180 1.03	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.52	0.98	°C/W

*Indicates JEDEC Registered Data (2N3055A)

FIGURE 1 — POWER DERATING

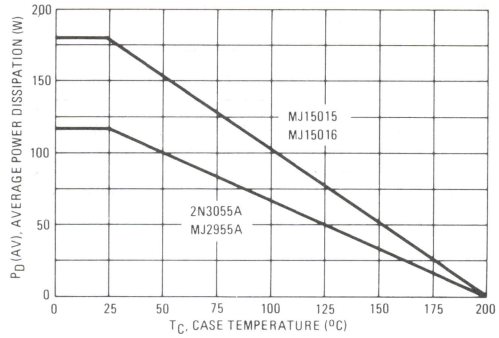



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-204AA OUTLINE SHALL APPLY.
2. DIAMETER V AND SURFACE W ARE DATUMS.
3. POSITIONAL TOLERANCE FOR HOLE Q:
⌖ ⌀ 0.25 (0.010) Ⓜ | W | V Ⓜ
4. POSITIONAL TOLERANCE FOR LEADS:
⌖ ⌀ 0.30 (0.012) Ⓜ | W | V Ⓜ | Q Ⓜ

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.150	0.165

CASE 1-04
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS (1)					
*Collector-Emitter Sustaining Voltage (I_C = 200 mAdc, I_B = 0)	2N3055A, MJ2955A MJ15015, MJ15016	$V_{CEO(sus)}$	60 120	– –	Vdc
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, $V_{BE(off)}$ = 0 Vdc)	2N3055A, MJ2955A		–	0.7	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 0 Vdc)	MJ15015, MJ15016		–	0.1	
*Collector Cutoff Current	2N3055A, MJ2955A	I_{CEV}	–	5.0	mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)	MJ15015, MJ15016		–	1.0	
Collector Cutoff Current	2N3055A, MJ2955A	I_{CEV}	–	30	mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	MJ15015, MJ15016		–	6.0	
*Emitter Cutoff Current	2N3055A, MJ2955A	I_{EBO}	–	5.0	mAdc
(V_{EB} = 7.0 Vdc, I_C = 0)	MJ15015, MJ15016		–	0.2	
***SECOND BREAKDOWN**					
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$			Adc
(t = 0.5 s non-repetitive)	2N3055A, MJ2955A		1.95	–	
(V_{CE} = 60 Vdc)	MJ15015, MJ15016		3.0	–	
***ON CHARACTERISTICS (1)**					
DC Current Gain		h_{FE}			–
(I_C = 4.0 Adc, V_{CE} = 2.0 Vdc)			10	70	
(I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)			20	70	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 4.0 Adc, I_B = 400 mAdc)			–	1.1	
(I_C = 10 Adc, I_B = 3.3 Adc)			–	3.0	
(I_C = 15 Adc, I_B = 7.0 Adc)			–	5.0	
Base-Emitter On Voltage		$V_{BE(on)}$	0.7	1.8	Vdc
(I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)					
***DYNAMIC CHARACTERISTICS**					
Current-Gain—Bandwidth Product	2N3055A, MJ15015	f_T	0.8	6.0	MHz
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 MHz)	MJ2955A, MJ15016		2.2	18	
Output Capacitance		C_{ob}	60	600	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)					

***SWITCHING CHARACTERISTICS (2N3055A only)**

RESISTIVE LOAD					
Delay Time	(V_{CC} = 30 Vdc, I_C = 4.0 Adc, I_{B1} = I_{B2} = 0.4 Adc, t_p = 25 μs Duty Cycle ≤ 2%)	t_d	–	0.5	μs
Rise Time		t_r	–	4.0	μs
Storage Time		t_s	–	3.0	μs
Fall Time		t_f	–	6.0	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.
*Indicates JEDEC Registered Data (2N3055A)

FIGURE 2 – DC CURRENT GAIN

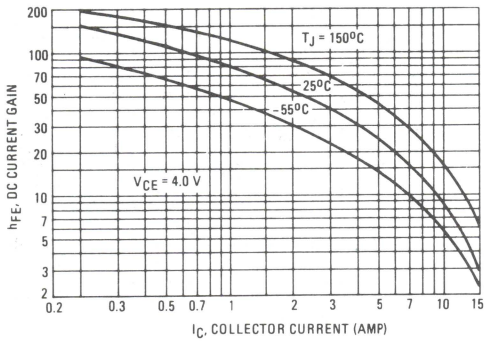

FIGURE 3 – COLLECTOR SATURATION REGION

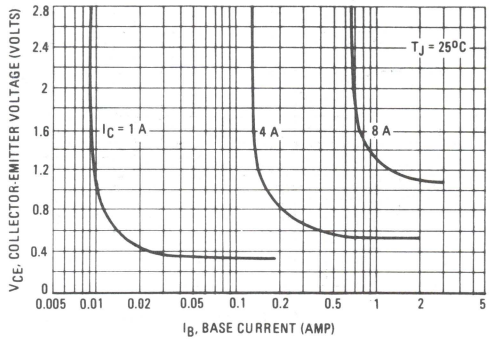

FIGURE 4 – "ON" VOLTAGES

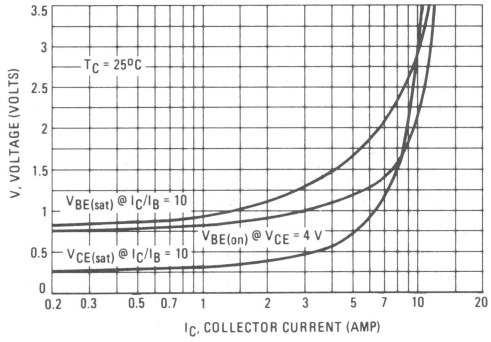

FIGURE 5 – CURRENT-GAIN–BANDWIDTH PRODUCT

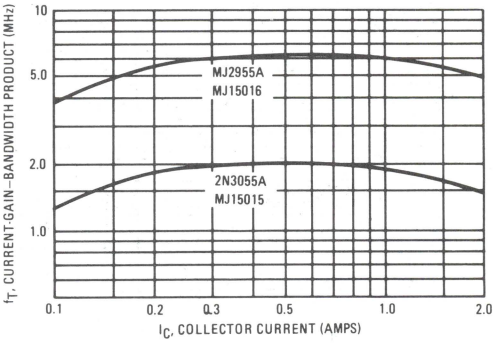

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT
(Circuit shown is for NPN)

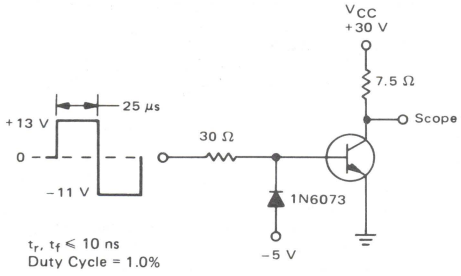

FIGURE 7 – TURN-ON TIME

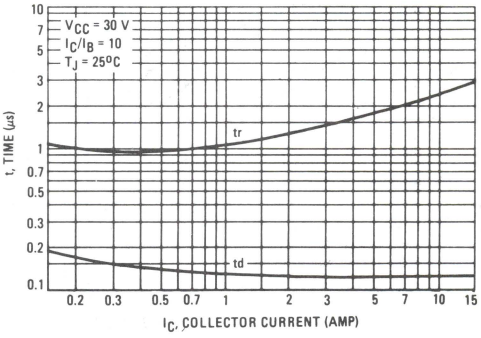

3

FIGURE 8 – TURN-OFF TIMES

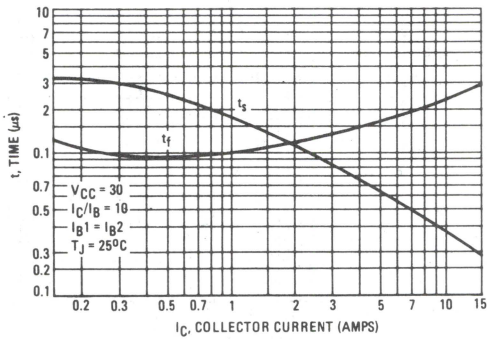

FIGURE 9 – CAPACITANCES

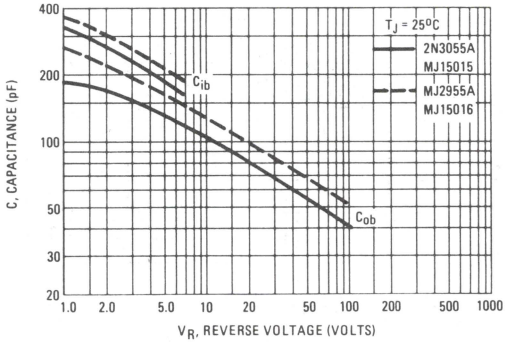

COLLECTOR CUT-OFF REGION

NPN

FIGURE 10 – 2N3055A, MJ15015

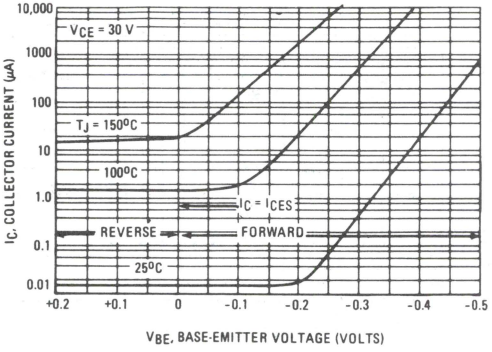

PNP

FIGURE 11 – MJ2955A, MJ15016

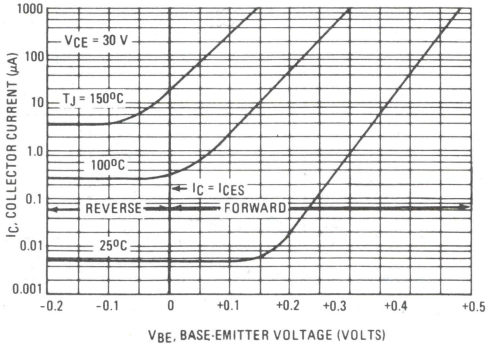

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA
2N3055A, MJ2955A

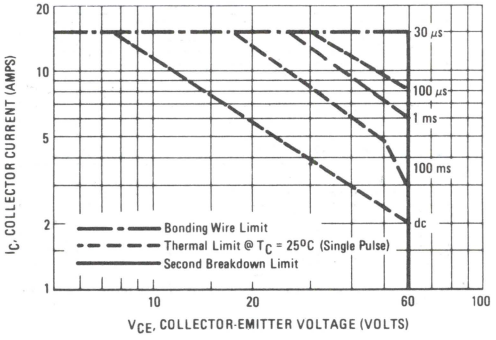

FIGURE 13 – FORWARD BIAS SAFE OPERATING AREA
MJ15015, MJ15016

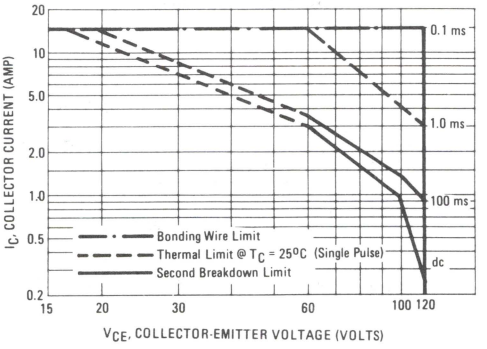

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe Operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 12 and 13 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature according to Figure 1.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N3441

NPN SILICON POWER TRANSISTOR

. . . 2N3441 transistor is designed for use in general-purpose switching and linear amplifier applications requiring high breakdown voltages. It is characterized for use as:

- Driver for High Power Outputs
- Series and Shunt Regulators
- Audio and Servo Amplifiers
- Solenoid and Relay Drivers
- Power Switching Circuits

3 AMPERES

NPN SILICON POWER TRANSISTOR

140 VOLTS
25 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	140	Vdc
Collector-Base Voltage	V_{CBO}	160	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector Current — Continuous	I_C	3	Adc
Base Current — Continuous	I_B	2	Adc
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	25 0.142	Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	7	$^oC/W$



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	140	–	Vdc
Collector Cutoff Current (V_{CE} = 140 Adc, I_B = 0)	I_{CEO}	–	100	mA
Collector Cutoff Current (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 V) (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 V @ 150°C)	I_{CEX}	– –	5.0 6.0	mA
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mA
ON CHARACTERISTICS				
DC Current Gain (1) (I_C = 0.5 Adc, V_{CE} = 4.0 V) (I_C = 2.7 Adc, V_{CE} = 4.0 V)	h_{FE}	 25 5.0	 100 –	–
Collector-Emitter Saturation Voltage (1) (I_C = 2.7 Adc, I_B = 0.9 Adc)	$V_{CE(sat)}$	–	6.0	Vdc
Base-Emitter On Voltage (1) (I_C = 2.7 Adc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	–	6.7	Vdc
DYNAMIC CHARACTERISTICS				
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 4.0 Vdc, f_{test} = 1 kHz)	h_{fe}	15	75	–
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 4.0 Vdc, f_{test} = 0.4 MHz)	$\|h_{fe}\|$	5.0	–	–

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

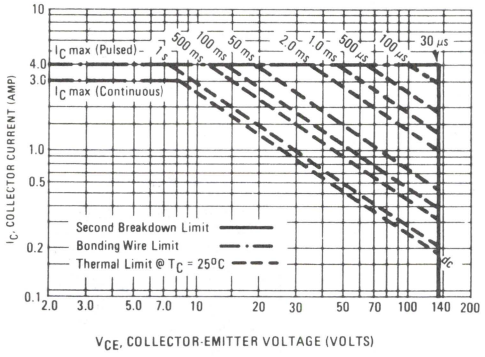

There are two limitations on the power-handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

2N3442
2N4347

HIGH-POWER INDUSTRIAL TRANSISTORS

NPN silicon power transistors designed for applications in industrial and commercial equipment including high fidelity audio amplifiers, series and shunt regulators and power switches.

- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 2.0 Adc – 2N4347
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 120 Vdc (Min) – 2N4347
  140 Vdc (Min) – 2N3442
- Excellent Second-Breakdown Capability

5.0 AND 10 AMPERE

POWER TRANSISTORS
NPN SILICON

120, 140 VOLTS
100, 117 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N4347	2N3442	Unit
Collector-Emitter Voltage	V_{CEO}	120	140	Vdc
Collector-Base Voltage	V_{CB}	140	160	Vdc
Emitter-Base Voltage	V_{EB}	7.0		Vdc
Collector Current – Continuous Peak	I_C	5.0 10	10 15**	Adc
Base Current – Continuous Peak	I_B	3.0 8.0	7.0 –	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	100 0.57	117 0.67	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	2N4347	2N3442	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	1.5	°C/W

*Indicates JEDEC Registered Data.
**This data guranteed in addition to JEDEC registered data.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀ 0.25 (0.010) Ⓜ T V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ ⌀ 0.30 (0.012) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N4347		120	–	
	2N3442		140	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 100 Vdc, I_B = 0)	2N4327		–	200	
(V_{CE} = 140 Vdc, I_B = 0)	2N3422		–	200	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 125 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N4347		–	2.0	
(V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N3442		–	5.0	
(V_{CE} = 120 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N4347		–	10	
(V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N3442		–	30	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 7.0 Vdc, I_C = 0)	2N4347, 2N3442		–	5.0	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc)	2N4347		15	60	
(I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)	2N4347		10	–	
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)	2N3442		20	70	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)	2N3442		7.5	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 200 mAdc)	2N4347		–	1.0	
(I_C = 5.0 Adc, I_B = 0.63 Adc)	2N4347		–	2.0	
(I_C = 10 Adc, I_B = 2.0 Adc)	2N3442		–	5.0	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 2.0 Adc; V_{CE} = 4.0 Vdc)	2N4347		–	2.0	
(I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)	2N4347		–	3.0	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)	2N3442		–	5.7	
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (2)		f_T			kHz
(I_C = 0.5 Adc, V_{CE} = 4.0 Vdc, f_{test} = 50 kHz)	2N4347		200	–	
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc, f_{test} = 40 kHz)	2N3442		80	–	
Small-Signal Current Gain		h_{fe}			–
(I_C = 0.5 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)	2N4347		40	–	
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)	2N3442		12	72	

*Indicates JEDEC Registered Data

NOTES: 1. Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

2. $f_T = |h_{fe}| \cdot f_{test}$

3

FIGURE 1 – POWER DERATING

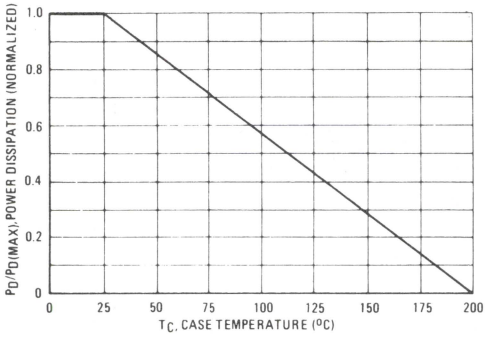

ACTIVE REGION SAFE OPERATING AREA INFORMATION

FIGURE 2 – 2N3442

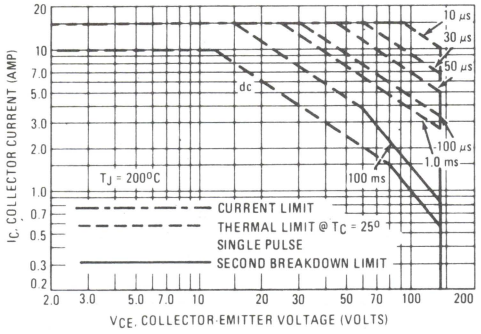

There are two limitations on the power-handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 2 and 3 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 3 – 2N4347

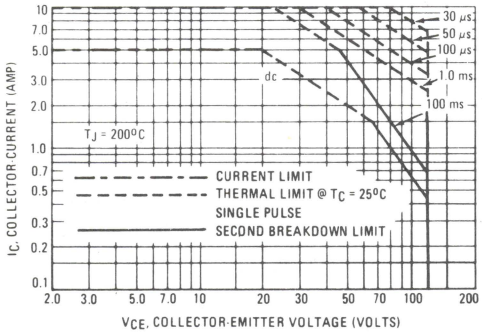

FIGURE 4 – DC CURRENT GAIN

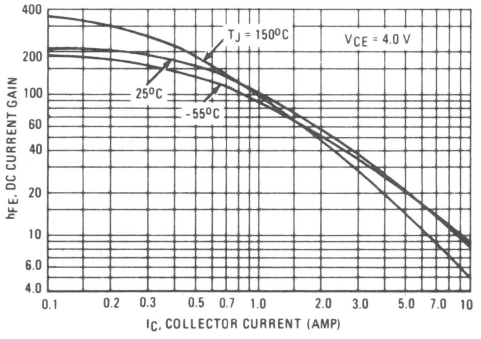

FIGURE 5 – COLLECTOR-SATURATION REGION

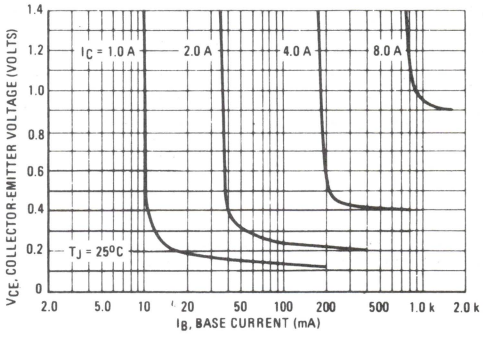

3

2N3447
2N3448

HIGH-SPEED SILICON ANNULAR NPN POWER TRANSISTORS

. . . for switching and amplifier applications

FEATURES

- Fast Switching: Total Switching Time = 1.2 μs (Typ) @ 5.0 A
- High Gain: h_{FE} = 40 to 120 @ 5.0 Amps
- Guaranteed DC Safe Area: 1.5 Amps (Min) @ V_{CE} = 40 Vdc
- Low $V_{CE(sat)}$: 1.0 Volt (Typ), 1.5 Volts (Max) @ 5.0 Amps
- Excellent Beta Linearity

APPLICATIONS

- Specified safe area of this series allows reliable design for inverters, converters, hammer, and servo drivers.
- Fast response makes it ideal for series regulators; high switching speeds enhance its use in switching regulators.
- Wide bandwidth and flat beta hold-up result in exceptional amplifier characteristics.

7.5 AMPERE

POWER TRANSISTORS SILICON NPN

60-80 VOLTS
115 WATTS



MAXIMUM RATING

Rating	Symbol	2N3447	2N3448	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	6.0	10	Vdc
Collector Current-Continuous	I_C	7.5		Adc
Base Current - Continuous	I_B	4.0		Adc
Total Device Dissipation	P_D	Figure 1, 2	Figure 1, 3	Watts
Operating Junction Temperature Range	T_J	−65 to +200		°C



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
⌖ Ø 0.25 (0.010) Ⓜ T V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
⌖ Ø 0.30 (0.012) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

FIGURE 1 – POWER DERATING CURVE

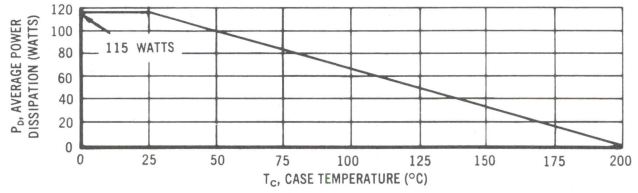

These transistors are also subject to safe area curves as indicated by Figures 2, 3. Both limits are applicable and must be observed.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Emitter-Base Cutoff Current		I_{EBO}				mAdc
(V_{EB} = 6.0 Vdc)	2N3447		—	—	0.25	
(V_{EB} = 10 VDc)	2N3448		—	—	0.25	
Collector-Emitter Cutoff Current		I_{CEX}				mAdc
(V_{CE} = 60 Vdc, V_{BE} = −1.0 Vdc)	2N3447		—	—	0.1	
(V_{CE} = 60 Vdc, V_{BE} = −1.0 Vdc, T_C = 150°C)	2N3447		—	—	1.0	
(V_{CE} = 80 Vdc, V_{BE} = −1.0 Vdc)	2N3448		—	—	0.1	
(V_{CE} = 80 Vdc, V_{BE} = −1.0 Vdc, T_C = 150°C)	2N3448		—	—	1.0	
Collector-Emitter Cutoff Current		I_{CEO}				mAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N3447		—	—	1.0	
(V_{CE} = 60 Vdc, I_B = 0)	2N3448		—	—	1.0	
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$				Vdc
(I_C = 1.0 mAdc, I_E = 0)	2N3447		80	—	—	
	2N3448		100	—	—	
Collector-Emitter Sustaining Voltage		$V_{CEO(sus)}$				Vdc
(I_C = 100 mAdc, I_B = 0)	2N3447		60	—	—	
	2N3448		80	—	—	
DC Current Gain		h_{FE}				—
(I_C = 0.5 Adc, V_{CE} = 5.0 Vdc)			40	85	—	
(I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)			40	75	120	
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.5 Adc)		$V_{CE(sat)}$	—	0.8	1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.5 Adc)		$V_{BE(sat)}$	—	1.0	1.5	Vdc
Base-Emitter Voltage (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)		V_{BE}	—	1.0	1.4	Vdc
Small Signal Current Gain		h_{fe}				—
(V_{CE} = 10 Vdc, I_C = 0.5 Adc, f = 1.0 kHz)			40	—	200	
(V_{CE} = 10 Vdc, I_C = 0.5 Adc, f = 10 MHz)			1.0	1.6	—	
Common Base Output Capacitance (V_{CB} = 10 Vdc, f = 0.1 MHz)		C_{ob}	—	260	400	pF
Switching Times						μs
(V_{CC} = 25 Vdc, R_L = 5.0 ohms, I_C = 5.0 A, I_{B1} = I_{B2} = 0.5 A)						
Delay Time plus Rise Time		$t_d + t_r$	—	0.15	0.35	
Storage Time		t_s	—	0.9	2.0	
Fall Time		t_f	—	0.15	0.35	

SAFE OPERATING AREAS

FIGURE 2 — 2N3447

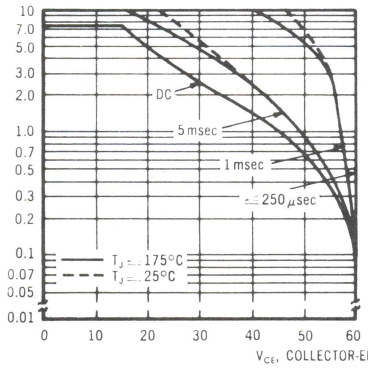

FIGURE 3 — 2N3448

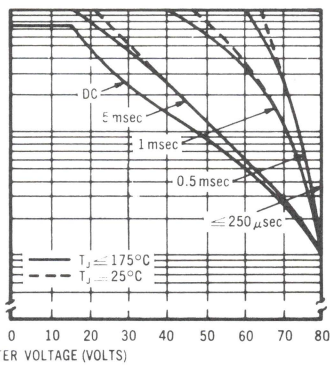

V_{CE}, COLLECTOR-EMITTER VOLTAGE (VOLTS)

The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not go into secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a collector-emitter short. (Duty cycle of the excursions make no significant change in these safe areas.) To insure operation below the maximum T_J, the power-temperature derating curve must be observed for both steady state and pulse power conditions.

3

NPN
2N3583 thru 2N3585
2N4240
PNP
2N6420 thru 2N6422

COMPLEMENTARY MEDIUM-POWER HIGH VOLTAGE POWER TRANSISTORS

. . . designed for high-speed switching and linear amplifier applications for high-voltage operational amplifiers, switching regulators, converters, inverters, deflection stages and high fidelity amplifiers.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 175 to 300 Vdc @ I_C = 200 mAdc
- Second Breakdown Collector Current –
  $I_{s/b}$ = 350 mAdc @ V_{CE} = 100 Vdc – NPN
  = 150 mAdc @ V_{CE} = 100 Vdc – PNP
- Usable DC Current Gain to 2.0 Adc

1.0 AND 2.0 AMPERE

POWER TRANSISTORS COMPLEMENTARY SILICON

250-500 VOLTS
35 WATTS

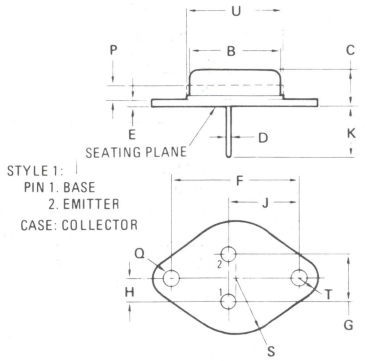

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

*MAXIMUM RATINGS

Rating	Symbol	2N3583 2N6420	2N3584 2N6421	2N3585 2N6422	2N4240	Unit
Collector-Emitter Voltage	V_{CEO}	175	250	300	300	Vdc
Collector-Base Voltage	V_{CB}	250	375	500	500	Vdc
Emitter-Base Voltage	V_{EB}	← 6.0 →				Vdc
Collector Current—Continuous	I_C	1.0	← 2.0 →			Adc
—Peak (1)		5.0	← 5.0 →			
Base Current	I_B	← 1.0 →				Adc
Total Power Dissipation @ T_C = 25°C,	P_D	← 35 →				Watts
Derate above 25°C		← 0.2 →				W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +200 →				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	5.0	°C/W

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	NPN	PNP	Symbol	NPN Min	NPN Max	PNP Min	PNP Max	Unit
***OFF CHARACTERISTICS (1)**								
Collector-Emitter Sustaining Voltage	2N3583	2N6420	$V_{CEO(sus)}$	175	–	175	–	Vdc
(I_C = 200 mAdc, I_B = 0) NPN	2N3584	2N6421		250	–	250	–	
	2N3585	2N6422		300	–	300	–	
(I_C = 50 mAdc, I_B = 0) PNP	2N4240			300	–	300	–	
Collector Cutoff Current			I_{CEO}					mAdc
(V_{CE} = 150 Vdc, I_B = 0)	2N3583	2N6420		–	10	–	10	
	2N3584	2N6421		–	5.0	–	5.0	
	2N3585	2N6422		–	5.0	–	5.0	
	2N4240			–	5.0	–	5.0	
Collector Cutoff Current			I_{CEX}					mAdc
(V_{CE} = 225 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N3583	2N6420		–	1.0	–	1.0	
(V_{CE} = 340 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N3584	2N6421		–	1.0	–	1.0	
(V_{CE} = 450 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N3585	2N6422		–	1.0	–	1.0	
	2N4240			–	2.0	–	2.0	
(V_{CE} = 225 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N3583	2N6420		–	3.0	–	3.0	
(V_{CE} = 300 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N3584	2N6421		–	3.0	–	3.0	
	2N3585	2N6422		–	3.0	–	3.0	
	2N4240			–	5.0	–	5.0	
Emitter Cutoff Current			I_{EBO}					mAdc
(V_{BE} = 6.0 Vdc, I_C = 0)	2N3583	2N6420		–	5.0	–	5.0	
	2N3584	2N6421		–	0.5	–	0.5	
	2N3585	2N6422		–	0.5	–	0.5	
	2N4240			–	0.5	–	0.5	
ON CHARACTERISTICS (1)								
DC Current Gain	All	All	h_{FE}					–
(I_C = 0.1 Adc, V_{CE} = 10 Vdc)				40	–	40	–	
*(I_C = 0.5 Adc, V_{CE} = 10 Vdc)	2N3583	2N6420		40	200	40	200	
*(I_C = 0.75 Adc, V_{CE} = 2.0 Vdc)	2N4240			10	100	10	100	
(I_C = 0.75 Adc, V_{CE} = 10 Vdc)	2N4240			30	150	30	150	
*(I_C = 1.0 Adc, V_{CE} = 2.0 Vdc)	2N3584	2N6421		8.0	80	8.0	80	
	2N3585	2N6422		8.0	80	8.0	80	
(I_C = 1.0 Adc, V_{CE} = 10 Vdc)	2N3583*	2N6420		10	–	10	–	
	2N3584	2N6421		25	100	25	100	
	2N3585	2N6422		25	100	25	100	
*Collector-Emitter Saturation Voltage			$V_{CE(sat)}$					Vdc
(I_C = 0.75 Adc, I_B = 75 mAdc)	2N4240			–	1.0	–	1.0	
(I_C = 1.0 Adc, I_B = 125 mAdc)	2N3583	2N6420		–	5.0	–	5.0	
	2N3584	2N6421		–	0.75	–	0.75	
	2N3585	2N6422		–	0.75	–	0.75	
*Base-Emitter Saturation Voltage			$V_{BE(sat)}$					Vdc
(I_C = 0.75 Adc, I_B = 75 mAdc)	2N4240			–	1.8	–	1.8	
(I_C = 1.0 Adc, I_B = 100 mAdc)	2N3584	2N6421		–	1.4	–	1.4	
	2N3585	2N6422		–	1.4	–	1.4	
Base-Emitter On Voltage	All	All	$V_{BE(on)}$					Vdc
(I_C = 1.0 Adc, V_{CE} = 10 Vdc)				–	1.4	–	1.4	

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	NPN	PNP	Symbol	NPN Min	NPN Max	PNP Min	PNP Max	Unit
DYNAMIC CHARACTERISTICS								
*Current Gain – Bandwidth Product[1] (I_C = 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 5.0 MHz)	2N3583 2N3584 2N3585 2N4240	2N6420 2N6421 2N6422	f_T	10 15	– –	10 15	– –	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	All		C_{ob}	–	120	–	120	pF
*Small-Signal Current Gain (I_C = 100 mAdc, V_{CE} = 30 Vdc, f = 1.0 kHz)	2N3583	2N6420	h_{fe}	25	350	25	350	–
***SWITCHING CHARACTERISTICS**								
Rise Time (V_{CC} = 200 Vdc, I_C = 1.0 Adc, R_L = 200 Ohms, I_{B1} = 100 mAdc)	2N3584 2N3585	2N6421 2N6422	t_r	–	3.0	–	3.0	μs
(V_{CC} = 200 Vdc, I_C = 0.75 Adc, R_L = 267 Ohms, I_{B1} = 75 mAdc)	2N4240			–	0.5	–	0.5	
Storage Time (V_{CC} = 200 Vdc, I_C = 1.0 Adc, I_{B1} = I_{B2} = 100 mAdc)	2N3584 2N3585	2N6421 2N6422	t_s	–	4.0	–	4.0	μs
(V_{CC} = 200 Vdc, I_C = 0.75 Adc, I_{B1} = I_{B2} = 75 mAdc)	2N4240			–	6.0	–	6.0	
Fall Time (V_{CC} = 200 Vdc, I_C = 1.0 Adc, I_{B1} = I_{B2} = 100 mAdc)	2N3584 2N3585	2N6421 2N6422	t_f	–	3.0	–	3.0	μs
(V_{CC} = 200 Vdc, I_C = 0.75 Adc, I_{B1} = I_{B2} = 75 mAdc)	2N4240			–	3.0	–	3.0	
Second Breakdown Collector Current (V_{CE} = 100 Vdc)	All	All	$I_{s/b}$	350	–	150	–	mAdc

*Indicates JEDEC Registered Data

(1) $f_T = |h_{fe}| \bullet f_{test}$.

3

FIGURE 1 – SWITCHING TIME TEST CIRCUIT

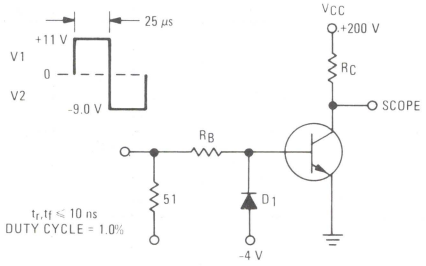

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS
D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA
FOR t_d and t_r, D1 IS DISCONNECTED AND V_2 = 0.
FOR PNP TEST CIRCUIT, REVERSE DIODE AND VOLTAGE POLARITIES.

NPN
2N3583 thru 2N3585, 2N4240

PNP
2N6420 thru 2N6422

FIGURE 2 – TURN-ON TIME

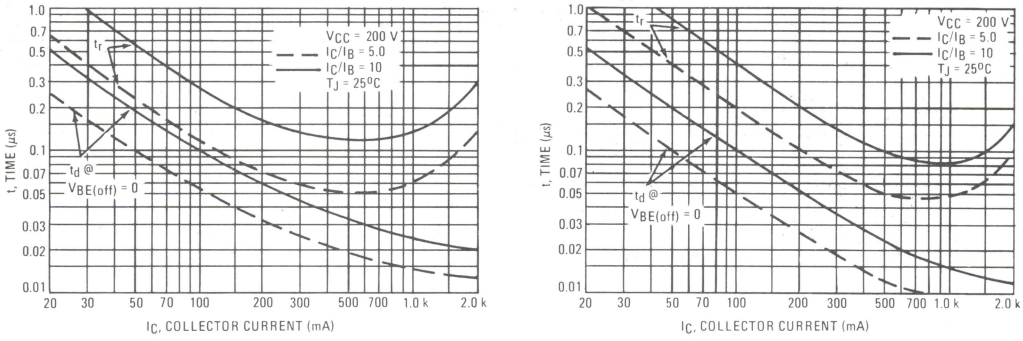

FIGURE 3 – TURN-OFF TIME

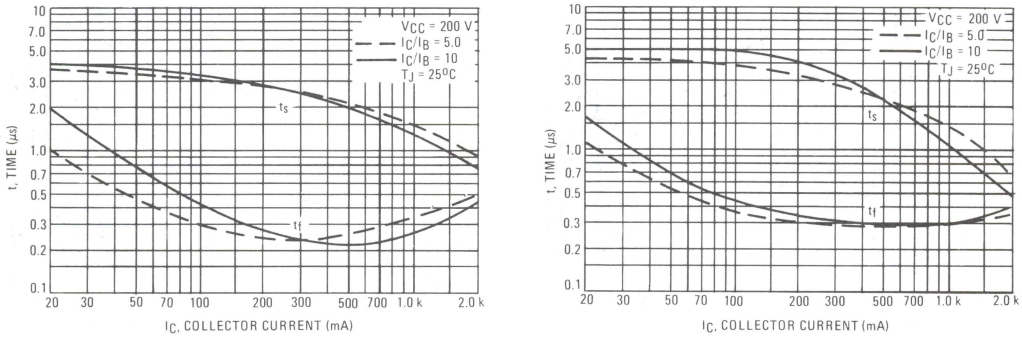

FIGURE 4 – CURRENT-GAIN – BANDWIDTH PRODUCT

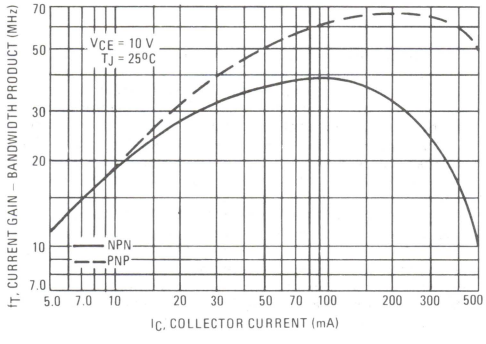

FIGURE 5 – CAPACITANCE

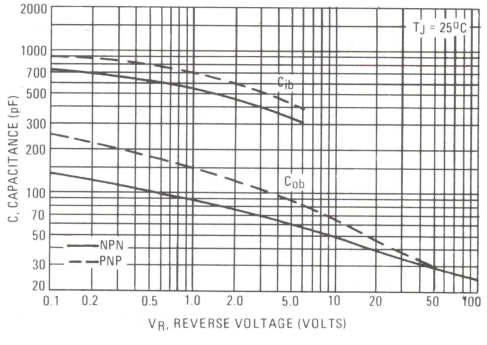

3

FIGURE 6 – THERMAL RESPONSE

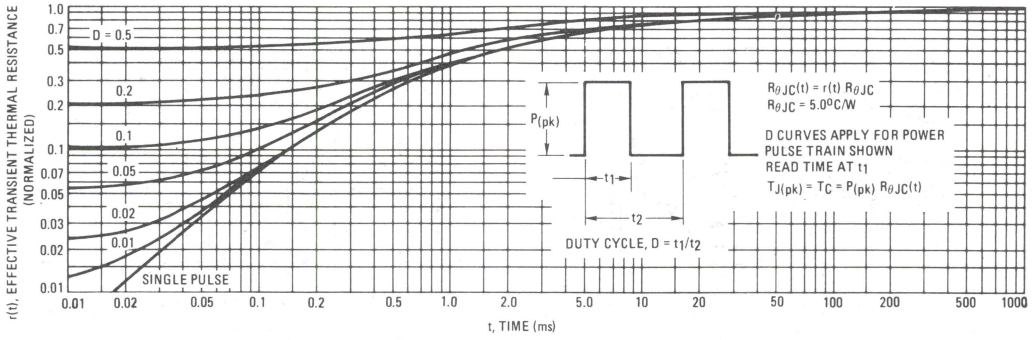

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 7 – 2N3583 thru 2N3585, 2N4240

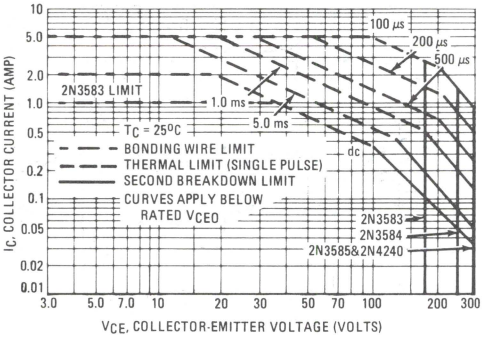

FIGURE 8 — 2N6420 thru 2N6422

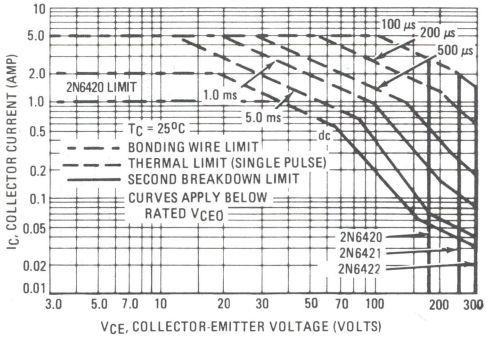

3

FIGURE 9 – POWER DERATING

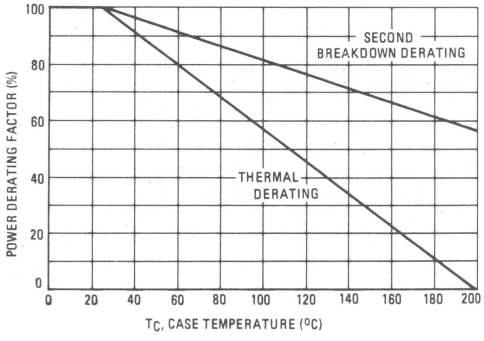

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 7 and 8 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature according to Figure 9.

$T_{J(pk)}$ may be calculated from the data in Figure 6. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 7 and 8 may be found at any case temperature by using the appropriate curve on Figure 9.

NPN
2N3583 thru 2N3585, 2N4240

PNP
2N6420 thru 2N6422

FIGURE 10 – DC CURRENT GAIN

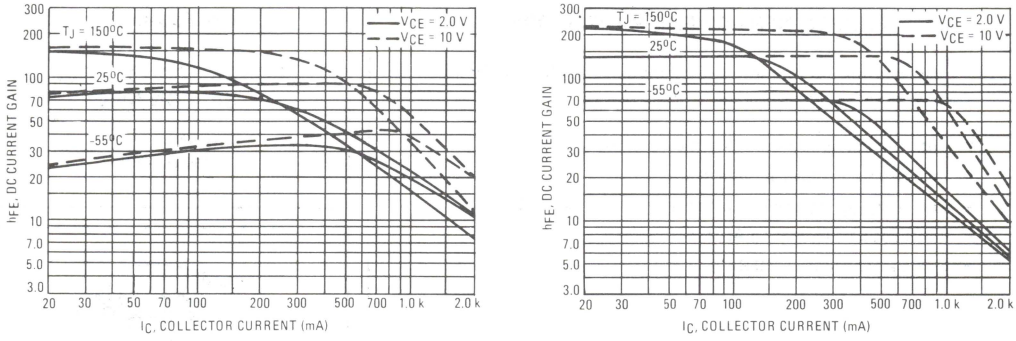

FIGURE 11 – COLLECTOR SATURATION REGION

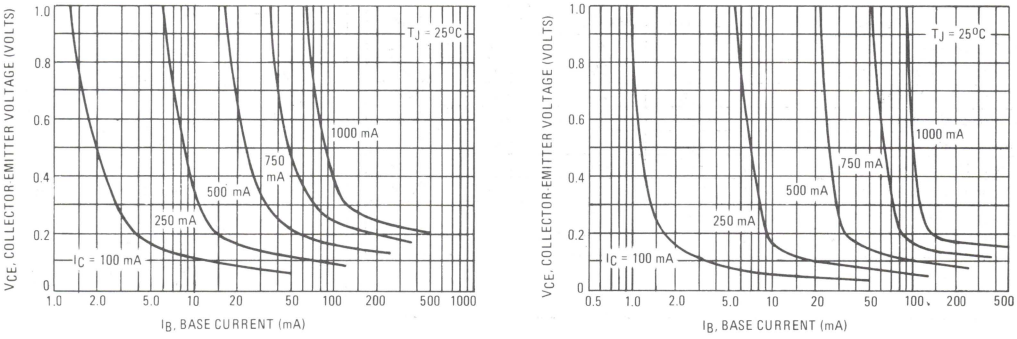

FIGURE 12 – "ON" VOLTAGES

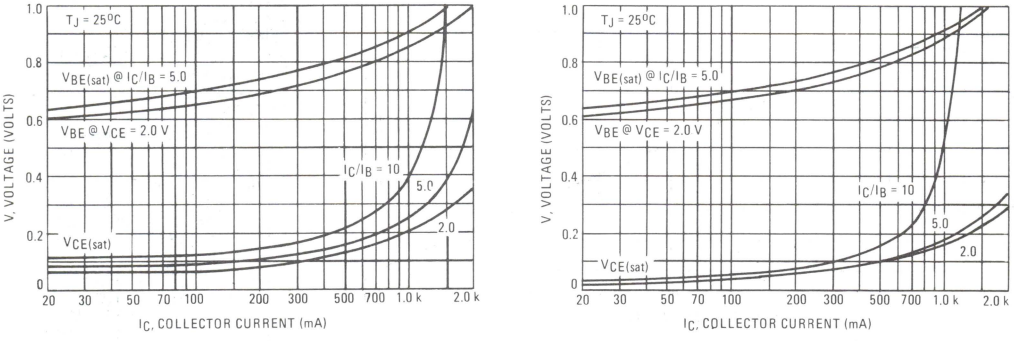

NOTE: DC CURRENT LIMIT FOR 2N3583, 2N6420 is 1.0 Amp.

NPN

2N3714 thru 2N3716

SILICON NPN POWER TRANSISTORS

. . . designed for medium-speed switching and amplifier applications. These devices feature:

- Total Switching Time at 3 A typically 1.15 μs
- Gain Ranges Specified at 1 A and 3 A
- Low $V_{CE(sat)}$: typically 0.5V at I_C = 5A and I_B = 0.5A
- Excellent Safe Operating Areas
- Complement to 2N3789-92

10 AMPERE

POWER TRANSISTORS SILICON NPN

60-80 VOLTS
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	2N3715	2N3714 2N3716	Unit
Collector-Base Voltage	V_{CB}	80	100	Volts
Collector-Emitter Voltage	V_{CEO}	60	80	Volts
Emitter-Base Voltage	V_{EB}	7.0	7.0	Volts
Collector Current	I_C	10	10	Amps
Base Current	I_B	4.0	4.0	Amps
Power Dissipation	P_D	150	150	Watts
Thermal Resistance	θ_{JC}	1.17	1.17	°C/W
Operating Junction and Storage Temperature Range	T_J and T_{stg}	-65 to +200		°C

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

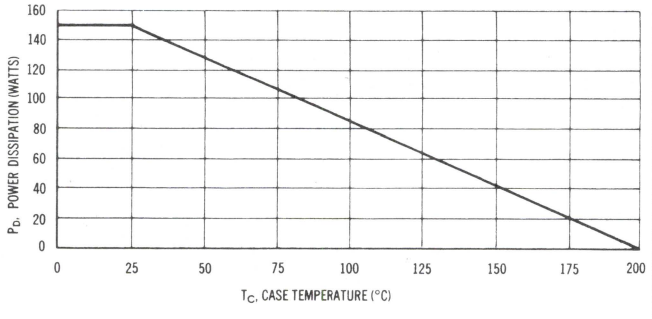

Safe Area Limits are indicated by Figures 12, 13. Both limits are applicable and must be observed.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
⌖ ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
Emitter-Base Cutoff Current (V_{EB} = 7 Vdc)	All Types	I_{EBO}	—	5	mAdc
Collector-Emitter Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 80 Vdc, V_{BE} = -1.5 Vdc)	2N3715		—	1	
(V_{CE} = 100 Vdc, V_{BE} = -1.5 Vdc)	2N3714, 2N3716		—	1	
(V_{CE} = 60 Vdc, V_{BE} = -1.5 Vdc, T_C = 150°C)	2N3715		—	10	
(V_{CE} = 80 Vdc, V_{BE} = -1.5 Vdc, T_C = 150°C)	2N3714, 2N3716		—	10	
Collector-Emitter Sustaining Voltage* (I_C = 200 mAdc, I_B = 0)	2N3715	$V_{CEO(sus)}$*	60	—	Vdc
	2N3714, 2N3716		80	—	
DC Current Gain*		h_{FE}*			—
(I_C = 1 Adc, V_{CE} = 2 Vdc)	2N3714		25	90	
	2N3715, 2N3716		50	150	
(I_C = 3 Adc, V_{CE} = 2 Vdc)	2N3714		15	—	
	2N3715, 2N3716		30	—	
Collector-Emitter Saturation Voltage* (I_C = 5 Adc, I_B = 0.5 Adc)	2N3714	$V_{CE(sat)}$*	—	1.0	Vdc
	2N3715, 2N3716		—	0.8	
Base-Emitter Saturation Voltage* (I_C = 5 Adc, I_B = 0.5 Adc)	2N3714	$V_{BE(sat)}$*	—	2.0	Vdc
	2N3715, 2N3716		—	1.5	
Base-Emitter Voltage* (I_C = 3 Adc, V_{CE} = 2 Vdc)	All Types	V_{BE}*	—	1.5	Vdc
Small Signal Current Gain (V_{CE} = 10 Vdc, I_C = 0.5 Adc, f = 1 MHz)	All Types	h_{fe}	4	—	—
Switching Times (Figure 2) (I_C = 5A, I_{B1} = I_{B2} = 0.5 Adc)			Typ		μs
Rise Time		t_r	0.45		
Storage Time		t_s	0.3		
Fall Time		t_f	0.4		

*Use sweep test to prevent overheating

3

FIGURE 2 – TYPICAL SWITCHING TIMES

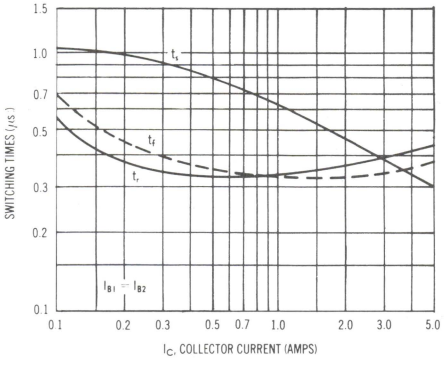

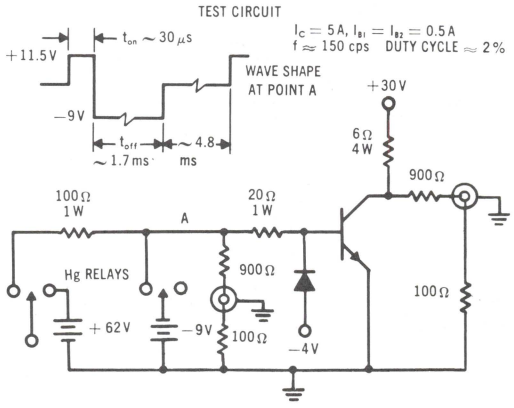

FIGURE 3 – COLLECTOR CURRENT versus BASE CURRENT

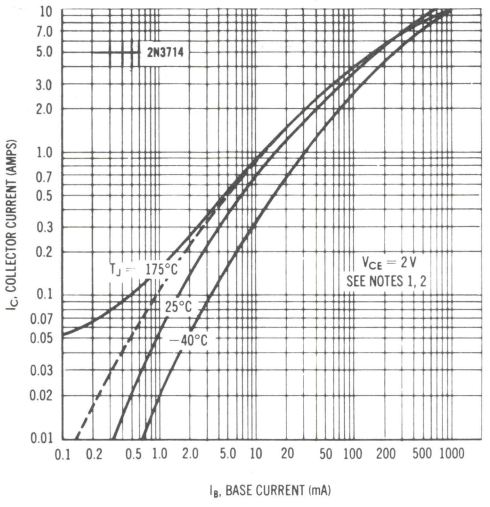

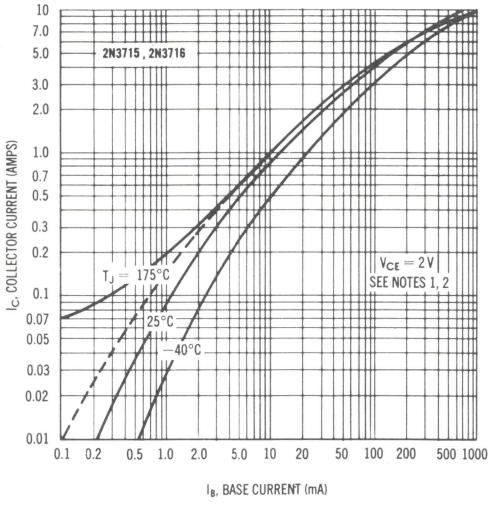

FIGURE 4 – BASE CURRENT-VOLTAGE VARIATIONS

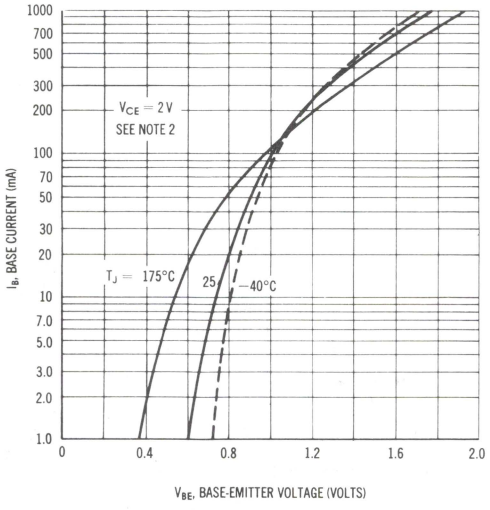

FIGURE 5 – COLLECTOR CURRENT-VOLTAGE VARIATIONS

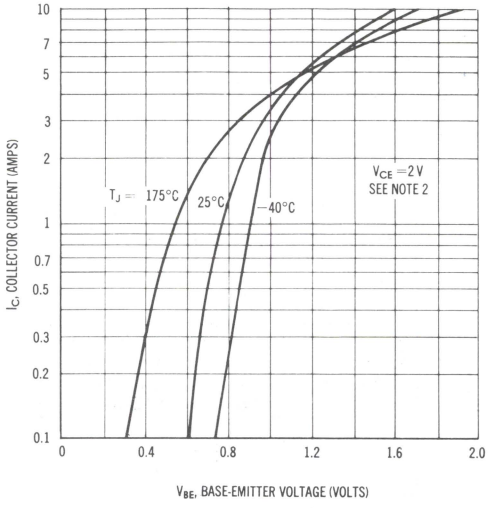

NOTE 1. Dotted line indicates metered base current plus the I_{CBO} of the transistor at 175°C.

NOTE 2. Pulse test: pulse width $\approx$ 200 μsec, duty cycle $\approx$ 1.5%

FIGURE 6 – COLLECTOR-EMITTER SATURATION VOLTAGE VARIATIONS

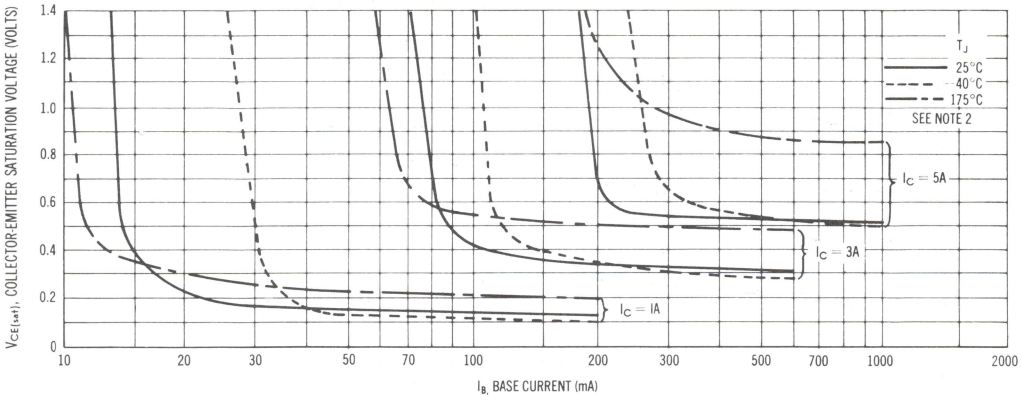

FIGURE 7 – BASE-EMITTER SATURATION VOLTAGE VARIATIONS

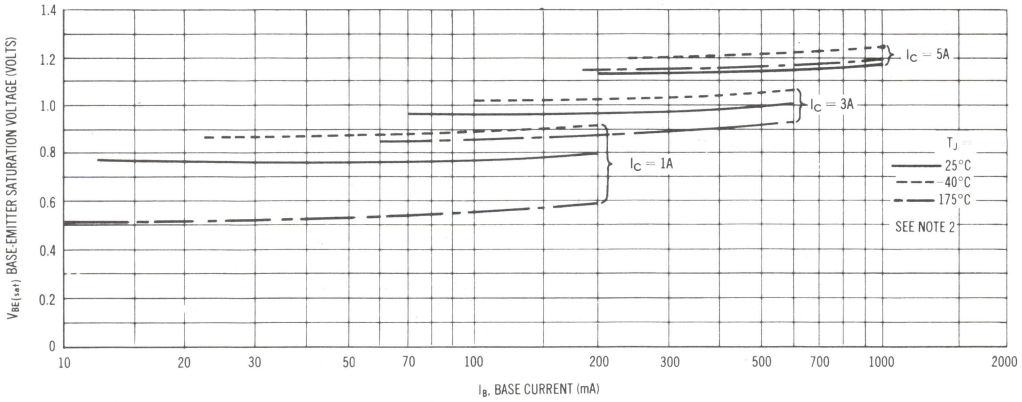

FIGURE 8 – COLLECTOR CURRENT versus BASE-EMITTER VOLTAGE

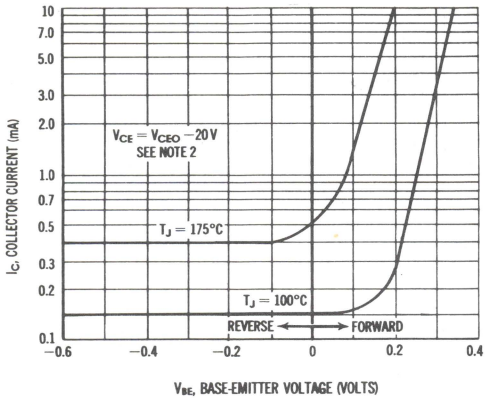

FIGURE 9 – COLLECTOR CURRENT versus BASE-EMITTER RESISTANCE

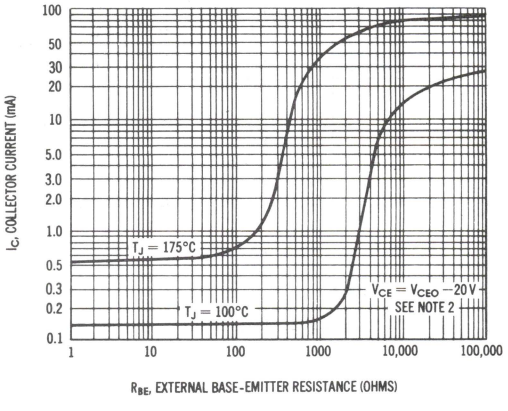

3

FIGURE 10 – CURRENT GAIN VARIATIONS

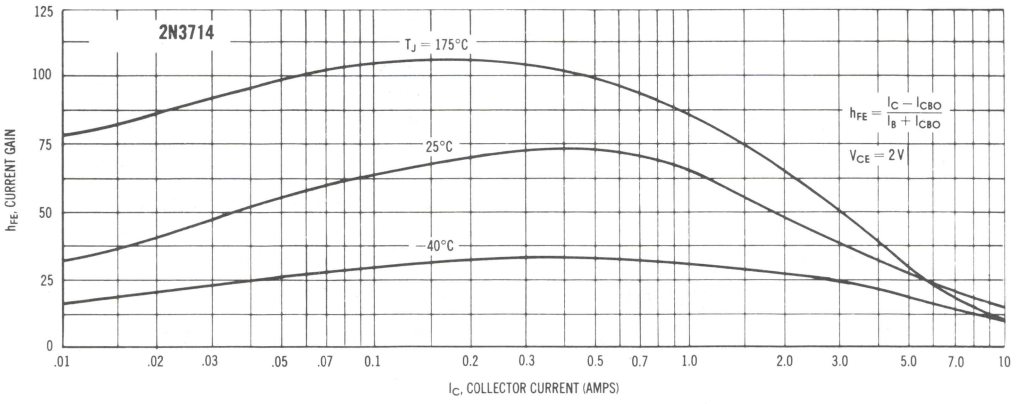

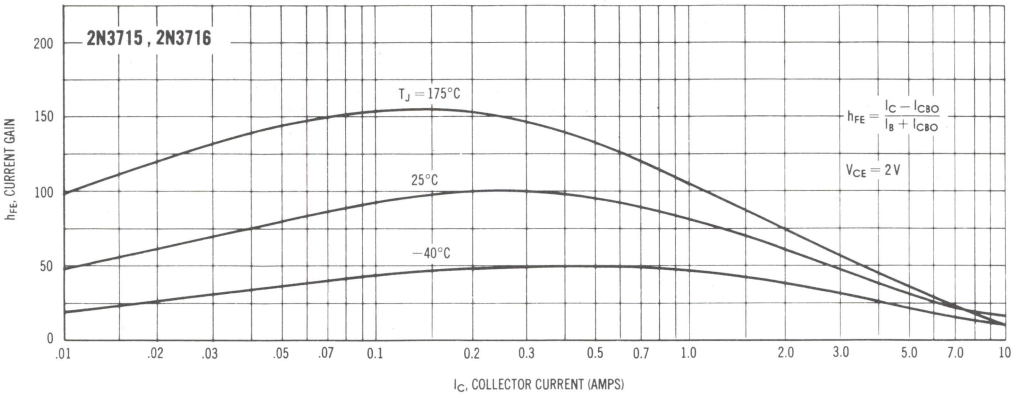

3

FIGURE 11 – CURRENT GAIN – BANDWIDTH PRODUCT versus COLLECTOR CURRENT

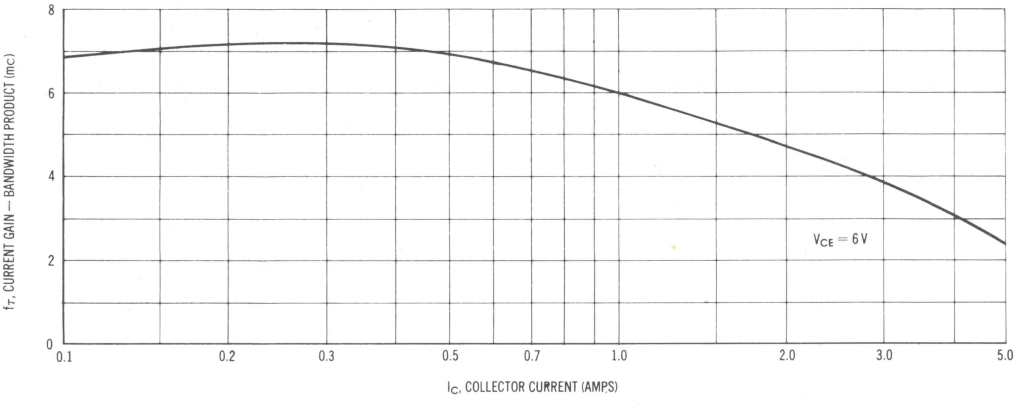

SAFE OPERATING AREAS

FIGURE 12 – 2N3715

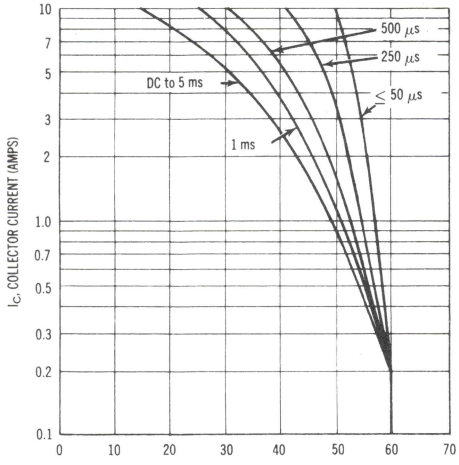

FIGURE 13 – 2N3714, 2N3716

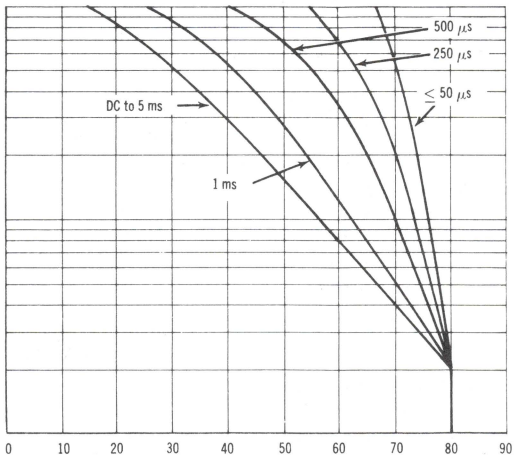

V_{CE}, COLLECTOR-EMITTER VOLTAGE (VOLTS)

The Safe Operating Area Curves indicate I_C — V_{CE} limits below which the device will not go into secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a collector-emitter short. (Duty cycle of the excursions make no significant change in these safe areas.) To insure operation below the maximum T_J, the power-temperature derating curve must be observed for both steady state and pulse power conditions.

3

2N3719, 2N3720
2N3867, 2N3868
2N6303

SILICON PNP POWER TRANSISTORS

. . . designed for high-speed, medium-current switching and high-frequency amplifier applications.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 40 Vdc (Min) – 2N3719,2N3867
  = 60 Vdc (Min) – 2N3720,2N3868
  = 80 Vdc (Min) – 2N6303
- DC Current Gain –
  h_{FE} = 25-180 @ I_C = 1.0 Adc – 2N3719,2N3720
  = 40-200 @ I_C = 1.5 Adc – 2N3867
  = 30-150 @ I_C = 1.5 Adc – 2N3868,2N6303
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.75 Vdc @ I_C = 1.0 Adc – 2N3719,2N3720
  = 0.75 Vdc @ I_C = 1.5 Adc – 2N3867,2N3868, 2N6303
- High Current-Gain – Bandwidth Product –
  f_T = 90 MHz (Typ)
- 2N3867 JAN and 2N3868 JAN also Available

3 AMPERE

POWER TRANSISTORS PNP SILICON

40,60,80 VOLTS
6 WATTS

***MAXIMUM RATINGS**

Rating	Symbol	2N3719 2N3867	2N3720 2N3868	2N6303	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	4.0			Vdc
Collector Current – Continuous Peak	I_C	3.0 10			Adc
Base Current	I_B	0.5			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	6.0 34.3			Watts mW/°C
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 5.71			Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	29	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	175	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

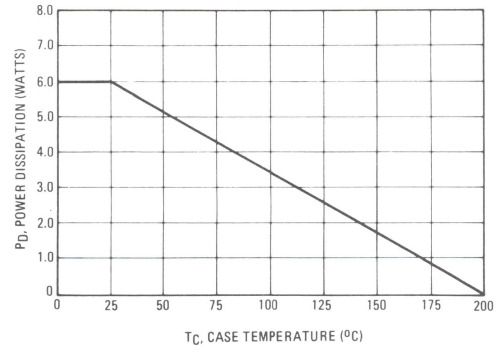

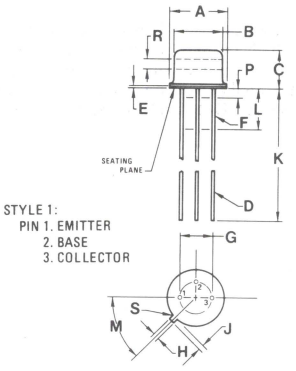

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	8.51	9.40	0.335	0.370
B	7.75	8.51	0.305	0.335
C	6.10	6.60	0.240	0.260
D	0.406	0.533	0.016	0.021
E	0.229	3.18	0.009	0.125
F	0.406	0.483	0.016	0.019
G	5.08 BSC		0.200 BSC	
H	0.711	0.864	0.028	0.034
J	0.734	1.14	0.029	0.045
K	38.10	44.45	1.500	1.750
L	6.35	–	0.250	–
M	45° BSC		45° BSC	
N	—		—	
P	–	1.27	–	0.050
R	2.54	–	0.100	–
S	–	0.25	–	0.010

All JEDEC dimensions and notes apply.

CASE 31-03
TO-205AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 20 mAdc, I_B = 0)	2N3867		40	–	
	2N3868		60	–	
	2N6303		80	–	
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$			Vdc
(I_C = 100 μAdc, I_E = 0)	2N3867		40	–	
	2N3868		60	–	
	2N6303		80	–	
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$			Vdc
(I_E = 100 μAdc, I_C = 0)			4.0	–	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 2.0 Vdc)			–	1.0	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = Rated V_{CB}, I_E = 0, T_C = 150°C)			–	150	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)	2N3867		50	–	
	2N3868, 2N6303		35	–	
(I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)	2N3867		40	200	
	2N3868, 2N6303		30	150	
(I_C = 2.5 Adc, V_{CE} = 3.0 Vdc)	2N3867		25	–	
	2N3868, 2N6303		20	–	
(I_C = 3.0 Adc, V_{CE} = 5.0 Vdc)	2N3867		20	–	
	2N3868, 2N6303				
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			–	0.5	
(I_C = 1.5 Adc, I_B = 150 mAdc)			–	0.75	
(I_C = 2.5 Adc, I_B = 250 mAdc)			–	1.3	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			–	1.0	
(I_C = 1.5 Adc, I_B = 150 mAdc)			0.9	1.4	
(I_C = 2.5 Adc, I_B = 250 mAdc)			–	2.0	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (2)		f_T			MHz
(I_C = 100 mAdc, V_{CE} = 5.0 Vdc, f_{test} = 20 MHz)			60	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)			–	120	
Input Capacitance		C_{ib}			pF
(V_{EB} = 3.0 Vdc, I_C = 0, f = 0.1 MHz)			–	1000	
SWITCHING CHARACTERISTICS					
Delay Time	(V_{CC} = 30 Vdc, $V_{BE(off)}$ = 0,	t_d	–	35	ns
Rise Time	I_C = 1.5 Adc, I_{B1} = 150 mAdc)	t_r	–	65	ns
Storage Time	(V_{CC} = 30 Vdc, I_C = 1.5 Adc,	t_s	–	325	ns
Fall Time	I_{B1} = I_{B2} = 150 mAdc)	t_f	–	75	ns

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = |h_{fe}| \bullet f_{test}$.

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 20 mAdc, I_B = 0)	2N3719		40	–	
	2N3720		60	–	
Collector Cutoff Current		I_{CEX}			
(V_{CE = 40 Vdc, $V_{BE(off)}$ = 2.0 Vdc)	2N3719		–	10	μAdc
(V_{CE = 60 Vdc, $V_{BE(off)}$ = 2.0 Vdc)	2N3720		–	10	
(V_{CE = 40 Vdc, $V_{BE(off)}$ = 2.0 Vdc, T_C = 150°C)	2N3719		–	1.0	mAdc
(V_{CE = 60 Vdc, $V_{BE(off)}$ = 2.0 Vdc, T_C = 150°C)	2N3720		–	1.0	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB = 40 Vdc, I_E = 0)	2N3719		–	10	
(V_{CB = 60 Vdc, I_E = 0)	2N3720		–	10	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE = 4.0 Vdc, I_C = 0)			–	1.0	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 500 mAdc, V_{CE = 1.5 Vdc)			20	–	
(I_C = 1.0 Adc, V_{CE = 1.5 Vdc)			25	180	
(I_C = 1.0 Adc, V_{CE = 1.5 Vdc, T_C = -40°C)			15	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 100 mAdc, T_C = -40°C to +100°C)			–	0.75	
(I_C = 3.0 Adc, I_B = 300 mAdc, T_C = -40°C to +100°C)			–	1.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 100 mAdc, T_C = -40°C to +100°C)			–	1.5	
(I_C = 3.0 Adc, I_B = 300 mAdc, T_C = -40°C to +100°C)			–	2.3	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (2)		f_T			MHz
(I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 30 MHz)			60	–	
Output Capacitance		C_{ob}			pF
(V_{CB = 10 Vdc, I_E = 0, f = 0.1 MHz)			–	120	
Input Capacitance		C_{ib}			pF
(V_{EB = 0.5 Vdc, I_C = 0, f = 0.1 MHz)			–	1000	
SWITCHING CHARACTERISTICS					
Turn-On Time		t_{on}			ns
(V_{CC = 12 Vdc, $V_{BE(off)}$ = 0, I_C = 1.0 Adc, I_{B1} = 0.1 Adc)			–	100	
Turn-Off Time		t_{off}			ns
(V_{CC = 12 Vdc, I_C = 1.0 Adc, I_{B1} = I_{B2} = 100 mAdc)			–	400	

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2.0%. (2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

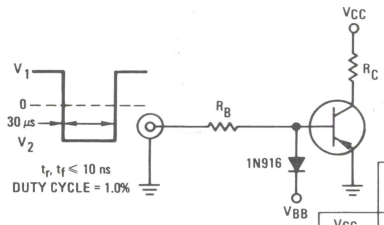

	2N3719 2N3720	2N3867 2N3868 2N6303
V_{CC}	-12 V	-30 V
R_C	12 Ω	19 Ω
R_B	100 Ω	100 Ω
V_1	+8.0 V	13.6 V
V_2	-11 V	-16.4 V
V_{BB}	≈ 3.0 V	≈ 3.0 V

NOTE:
For information on Figures 3 and 6, R_B and R_C were varied to obtain desired test conditions.
For t_d and t_r specifications, remove diode and set V_1 = 0.

FIGURE 3 – TURN-ON TIME

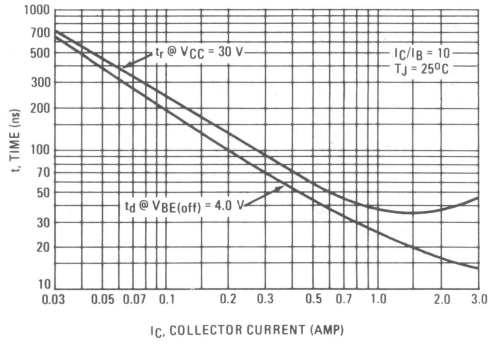

FIGURE 4 – THERMAL RESISTANCE

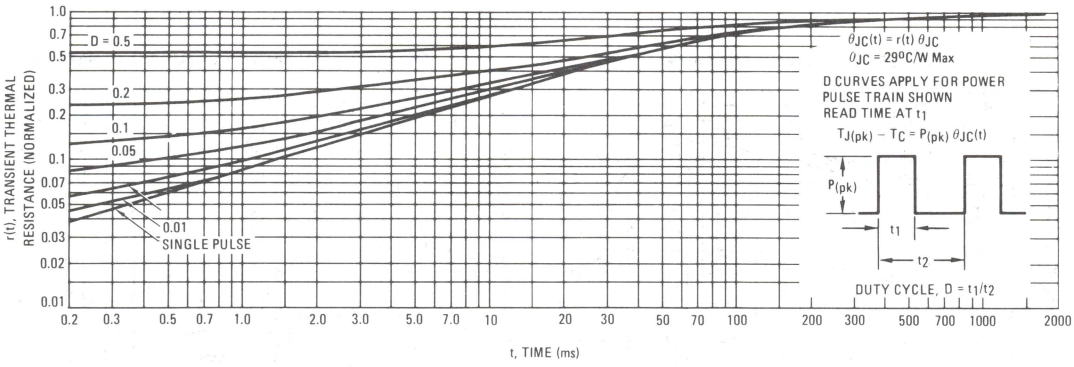

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

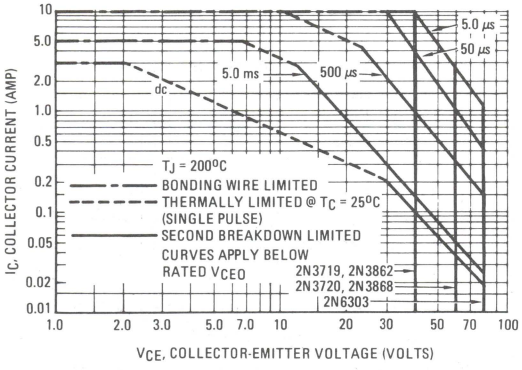

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

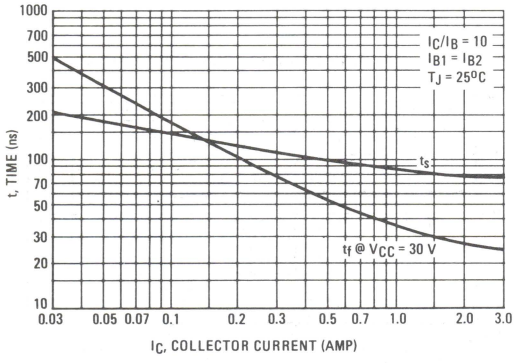

FIGURE 7 – CAPACITANCE

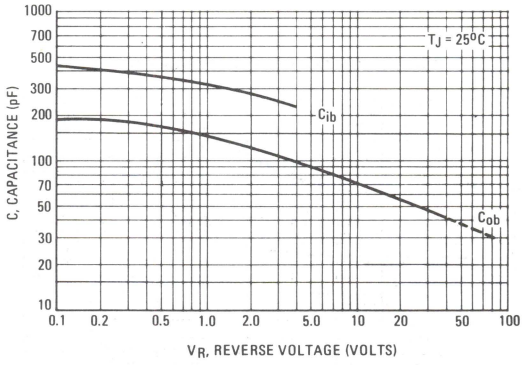

3

FIGURE 8 – DC CURRENT GAIN

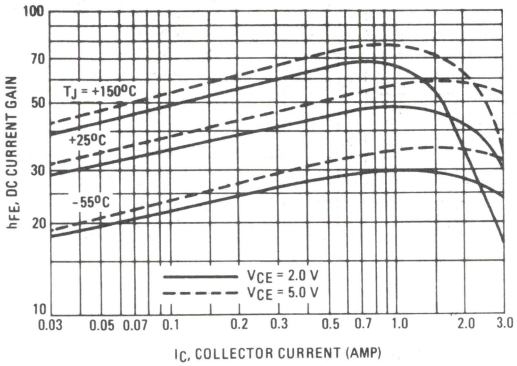

FIGURE 9 – COLLECTOR SATURATION REGION

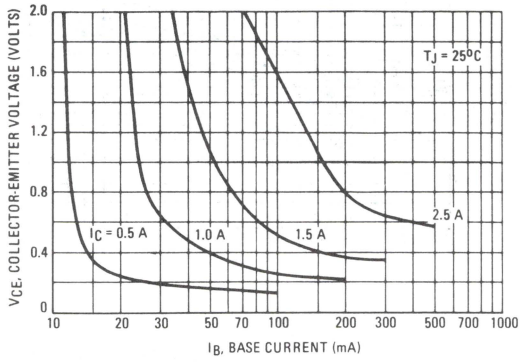

FIGURE 10 – "ON" VOLTAGES

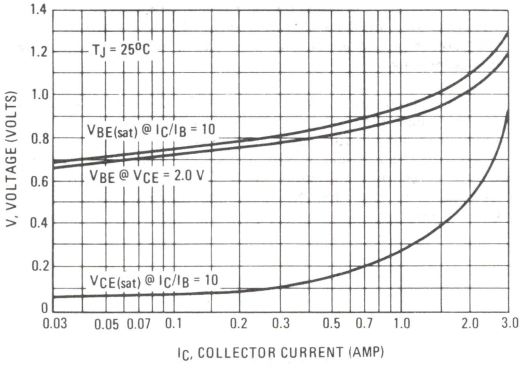

FIGURE 11 – TEMPERATURE COEFFICIENTS

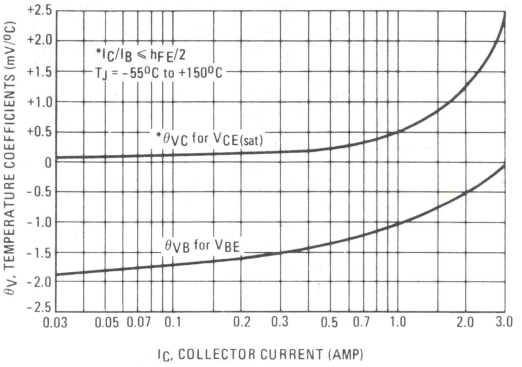

FIGURE 12 – COLLECTOR CUT-OFF REGION

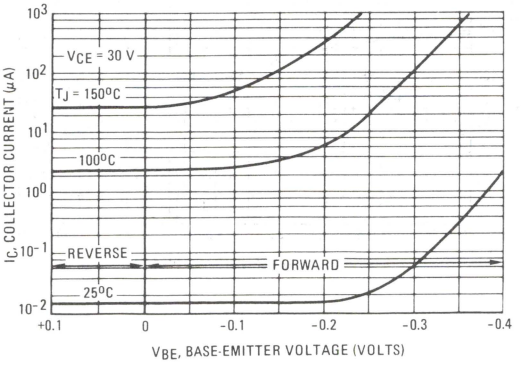

FIGURE 13 – BASE CUT-OFF REGION

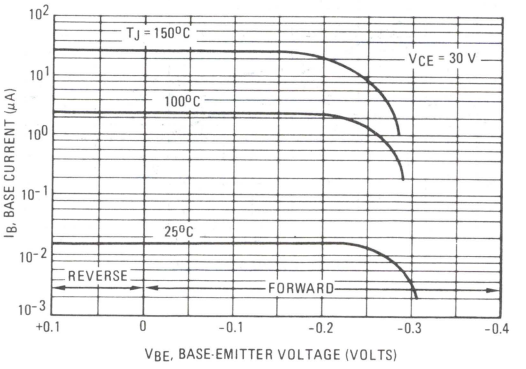

3

2N3738
2N3739

HIGH VOLTAGE SILICON POWER TRANSISTORS

. . . designed for high-speed switching, linear amplifier applications, high-voltage operational amplifiers, switching regulators, converters, inverters, deflection stages and high fidelity amplifiers.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 225 Vdc @ I_C = 5.0 mAdc (2N3738)
  = 300 Vdc @ I_C = 5.0 mAdc (2N3739)
- DC Current Gain –
  h_{FE} = 40-200 @ I_C = 100 mAdc
- Current-Gain – Bandwidth Product –
  f_T = 10 MHz (Min) @ I_C = 100 mAdc
- $I_{S/b}$ Rated to 2.0 Amperes

1.0 AMPERE

POWER TRANSISTORS
NPN SILICON

225, 300 VOLTS
20 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N3738	2N3739	Unit
Collector-Emitter Voltage	V_{CEO}	225	300	Vdc
Collector-Base Voltage	V_{CB}	250	325	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current – Continuous – Peak	I_C	1.0 2.0		Adc
Base Current – Continuous – Peak	I_B	0.50 1.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.133		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	7.5	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

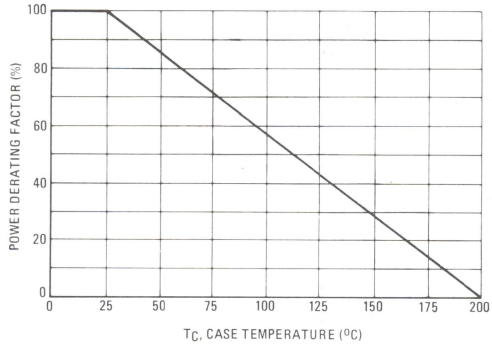



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
***OFF CHARACTERISTICS**					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 5.0 mAdc, I_B = 0)	2N3738		225	–	
	2N3739		300	–	
Collector-Emitter Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 125 Vdc, I_B = 0)	2N3738		–	0.25	
(V_{CE} = 200 Vdc, I_B = 0)	2N3739		–	0.25	
Collector-Base Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 250 Vdc, I_E = 0)	2N3738		–	0.1	
(V_{CB} = 325 Vdc, I_E = 0)	2N3739		–	0.1	
Collector Cutoff Current		I_{CEV}			mAdc
(V_{CE} = 250 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N3738		–	0.5	
(V_{CE} = 300 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N3739		–	0.5	
(V_{CE} = 125 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 100°C)	2N3738		–	1.0	
(V_{CE} = 200 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 100°C)	2N3739		–	1.0	
Emitter-Base Cutoff Current		I_{EBO}			mAdc
(V_{EB} = 6.0 Vdc)			–	0.1	
***ON CHARACTERISTICS**					
DC Current Gain (1)		h_{FE}			–
(I_C = 50 mAdc, V_{CE} = 10 Vdc)			30	–	
(I_C = 100 mAdc, V_{CE} = 10 Vdc)			40	200	
(I_C = 250 mAdc, V_{CE} = 10 Vdc)			25	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 250 mAdc, I_B = 25 mAdc)			–	2.5	
Base-Emitter "ON" Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 100 mAdc, V_{CE} = 10 Vdc)			–	1.0	
SMALL SIGNAL CHARACTERISTICS					
Current-Gain – Bandwidth Product (2)		f_T			MHz
(I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)			10	–	
*Output Capacitance		C_{ob}			pF
(V_{CB} = 100 Vdc, I_E = 0, f = 100 kHz)			–	20	
*Small-Signal Current Gain		h_{fe}			–
(I_C = 100 mAdc, V_{CE} = 20 Vdc, f = 1.0 kHz)			35	–	

3

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

(2) $f_T = |h_{fe}| \bullet$ frequency

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

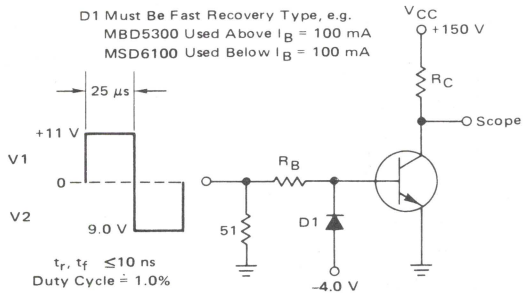

R_B and R_C Varied to Obtain Desired Current Levels

For t_d and t_r, D1 is disconnected and V2 = 0
For PNP test circuit, reverse diode and voltage polarities.

FIGURE 3 – THERMAL RESPONSE

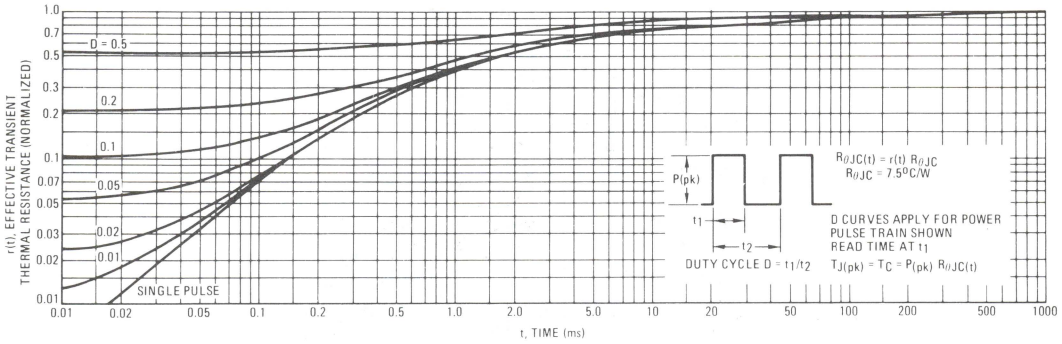

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 4 – 2N3738, 2N3739

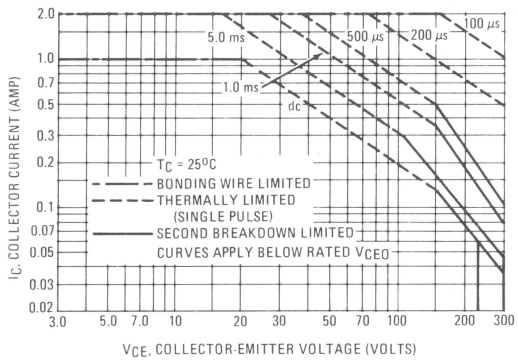

FIGURE 5 — 2N6425

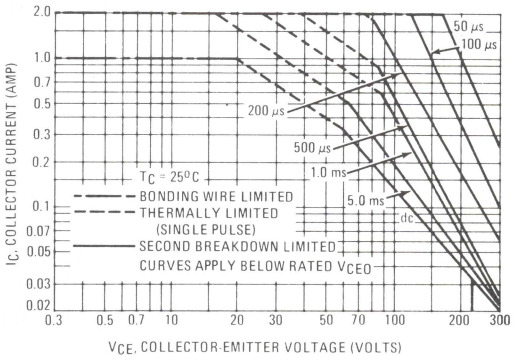

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 4 and 5 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 175^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 3. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 4 and 5 may be found at any case temperature by using the appropriate curve on Figure 1.

2N3738, 2N3739

FIGURE 6 – DC CURRENT GAIN

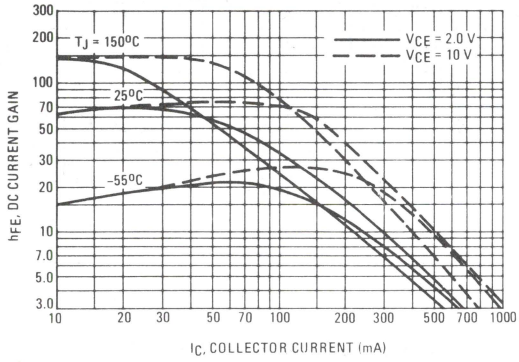

FIGURE 7 – COLLECTOR SATURATION REGION

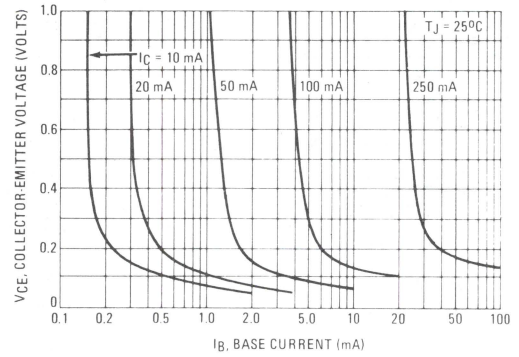

FIGURE 8 – "ON" VOLTAGE

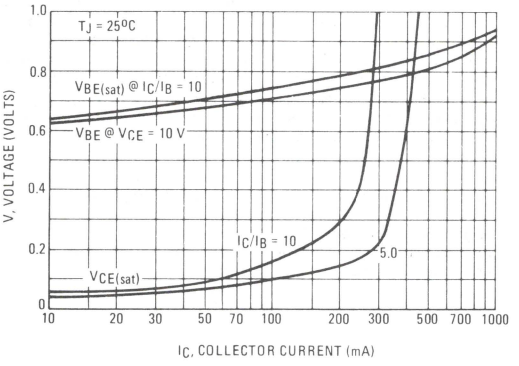

2N3740
2N3741,A

MEDIUM-POWER PNP TRANSISTORS

. . . ideal for use as drivers, switches and medium-power amplifier applications. These devices feature:

- Low Saturation Voltage – 0.6 $V_{CE(sat)}$ @ I_C = 1.0 Amp
- High Gain Characteristics – h_{FE}@ I_C = 250 mA: 30–100
- Excellent Safe Area Limits (See Figure 2)
- Low Collector Cutoff Current – 100 nA (Max) 2N3740, 2N3741A
- Complementary to NPN 2N3766 (2N3740) and 2N3767 (2N3741)

POWER TRANSISTORS

PNP SILICON

60–80 VOLTS
25 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N3740	2N3741 2N3741A	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	7.0	7.0	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Collector Current – Continuous – Peak (Note 1)	I_C	4.0 10		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	25 0.143		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

Note 1: See Figure 2

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

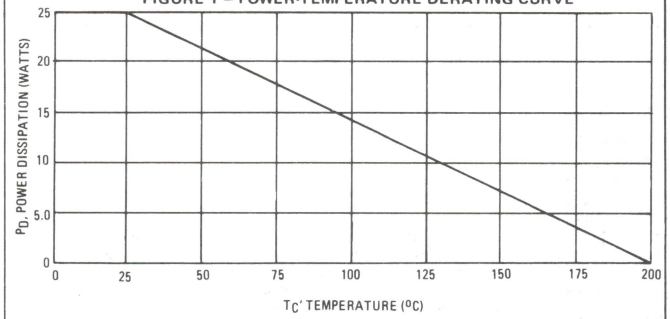

Safe Area Curves are indicated by Figure 2.
Both limits are applicable and must be observed.

*Indicates JEDEC Registered Data.

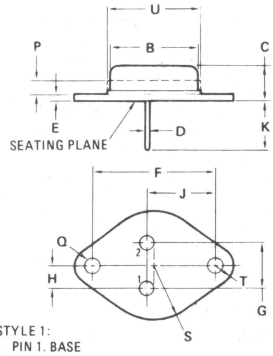

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage ① (I_C = 100 mAdc, I_B = 0)	2N3740, 2N3741, 2N3741A	$V_{CEO(sus)}$ ①	60 80	— —	Vdc
Emitter Base Cutoff Current (V_{EB} = 7.0 Vdc)	2N3740, 2N3741 2N3741A	I_{EBO}	— —	0.5 100	mAdc nAdc
Collector Cutoff Current		I_{CEX}			
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N3740		— —	100 100	μAdc nAdc
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N3741 2N3741A		— —	100 100	μAdc nAdc
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N3740		— —	1.0 0.5	mAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N3741 2N3741A		— —	1.0 0.5	mAdc
Collector-Emitter Cutoff Current		I_{CEO}			
(V_{CE} = 40 Vdc, I_B = 0)	2N3740		— —	1.0 1.0	mAdc μAdc
(V_{CE} = 60 Vdc, I_B = 0)	2N3741 2N3741A		— —	1.0 1.0	mAdc μAdc
Collector Base Cutoff Current		I_{CBO}			
(V_{CB} = 60 Vdc, I_E = 0)	2N3740		— —	100 100	μAdc nAdc
(V_{CB} = 80 Vdc, I_E = 0)	2N3741 2N3741A		— —	100 100	μAdc nAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE} ①			—
(I_C = 100 mAdc, V_{CE} = 1.0 Vdc)			40	—	
(I_C = 250 mAdc, V_{CE} = 1.0 Vdc)			30	100	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)			20	—	
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)			10	—	
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 125 mAdc)		$V_{CE(sat)}$ ①	—	0.6	Vdc
Base-Emitter Voltage (I_C = 250 mAdc, V_{CE} = 1.0 Vdc)		V_{BE} ①	—	1.0	Vdc
TRANSIENT CHARACTERISTICS					
Current-Gain—Bandwidth Product (I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	3.0 4.0†	— —	MHz
Common Base Output Capacitance (V_{CB} = 10 Vdc, I_C = 0, f = 100 kHz)		C_{ob}	—	100	pF
Small-Signal Current Gain (I_C = 50 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	25	—	—

*Indicates JEDEC Registered Data.

†Motorola guarantees this value in addition to the JEDEC registered data shown.

① Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

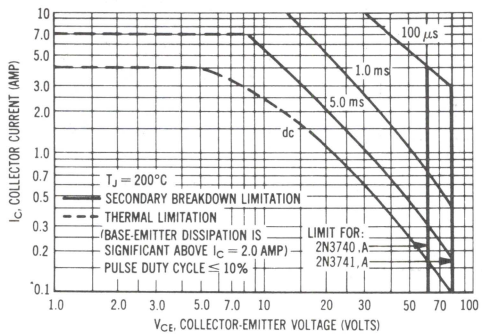

The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 3 – CURRENT GAIN

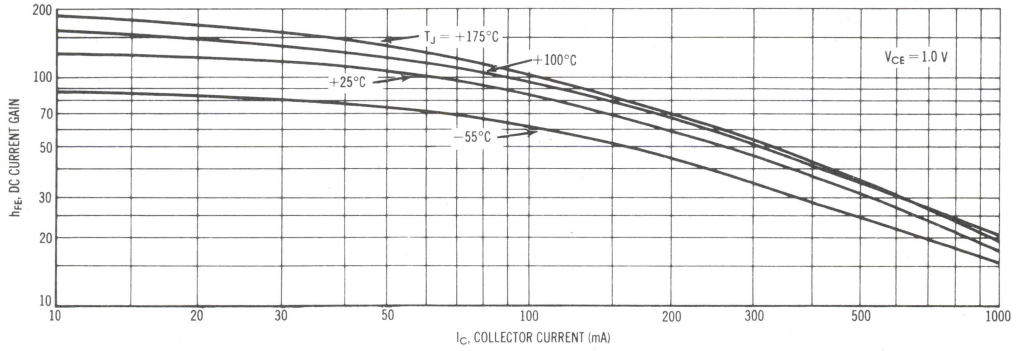

SATURATION REGION CHARACTERISTICS

FIGURE 4 – COLLECTOR SATURATION REGION

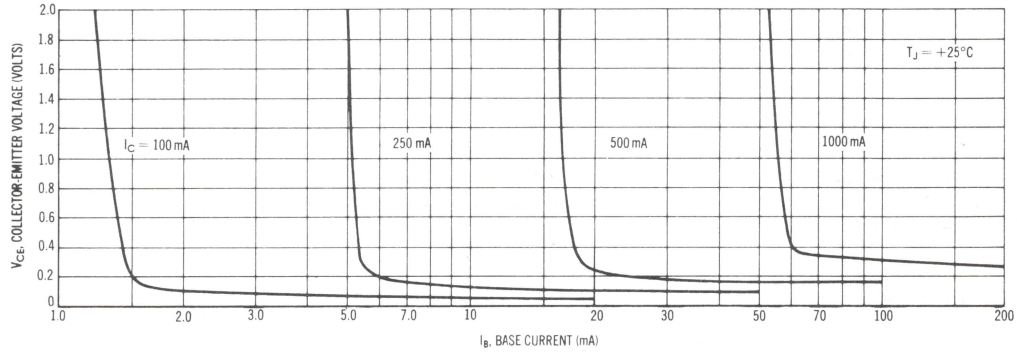

FIGURE 5 – "ON" VOLTAGES

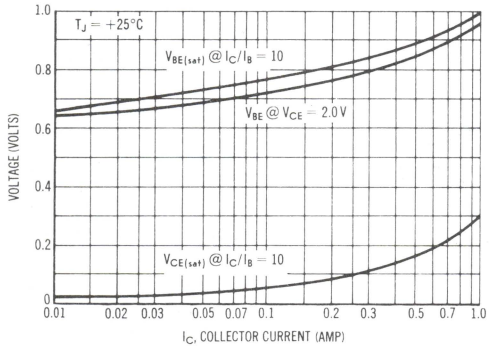

FIGURE 6 – TEMPERATURE COEFFICIENTS

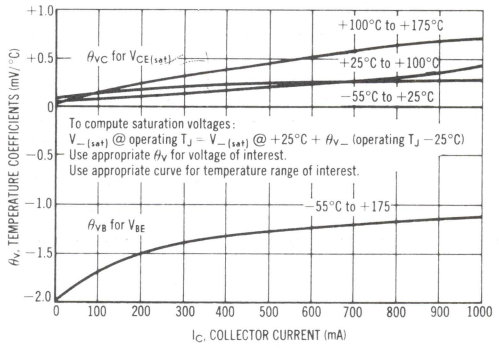

3

2N3766
2N3767

MEDIUM-POWER NPN SILICON TRANSISTORS

. . . for use in driver circuits, switching, and medium-power-amplifiers applications. These high performance devices feature:

- Low Saturation Voltage — 1.0 $V_{CE(sat)}$ @ I_C = 500 mA
- High Gain Characteristics — h_{FE} = 40–160 @ I_C = 500 mA
- Packaged in the Compact, High-Efficiency TO-213AA Package
- Complementary to PNP 2N3740 (2N3766) and 2N3741 (2N3767)

4 AMPERE POWER TRANSISTORS

NPN SILICON
60-80 VOLTS
20 WATTS

MAXIMUM RATINGS

Rating	Symbol	2N3766	2N3767	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current	I_C	4.0		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.133		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	7.5	°C/W

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

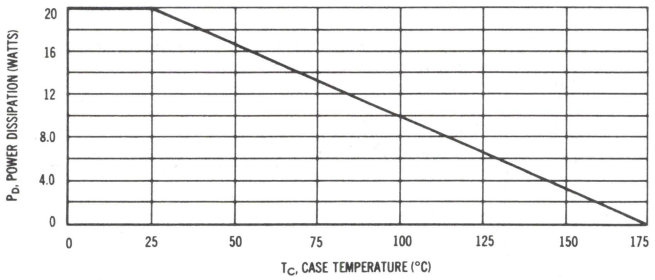

Safe Area Curves are indicated by Figure 2. Both limits are applicable and must be observed.

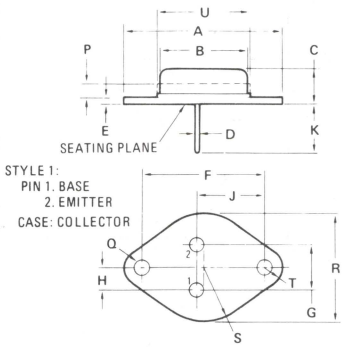

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Voltage [1] (I_C = 100 mAdc, I_B = 0)	2N3766	$V_{(BR)CEO}$	60	—	Vdc
	2N3767		80	—	
Emitter-Base Cutoff Current (V_{EB} = 6.0 Vdc)		I_{EBO}	—	0.75	mAdc
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 80 Vdc, V_{BE} = 1.5 Vdc)	2N3766		—	0.1	
(V_{CE} = 100 Vdc, V_{BE} = 1.5 Vdc)	2N3767		—	0.1	
(V_{CE} = 50 Vdc, V_{BE} = 1.5 Vdc, T_C = 150°C)	2N3766		—	1.0	
(V_{CE} = 70 Vdc, V_{BE} = 1.5 Vdc, T_C = 150°C)	2N3767		—	1.0	
Collector-Emitter Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 60 Vdc, I_B = 0)	2N3766		—	0.7	
(V_{CE} = 80 Vdc, I_B = 0)	2N3767		—	0.7	
Collector-Base Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 80 Vdc, I_E = 0)	2N3766		—	0.1	
(V_{CB} = 100 Vdc, I_E = 0)	2N3767		—	0.1	
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			—
(I_C = 50 mAdc, V_{CE} = 5.0 Vdc)			30	—	
(I_C = 500 mAdc, V_{CE} = 5.0 Vdc)			40	160	
(I_C = 1.0 Adc, V_{CE} = 10 Vdc)			20	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)			—	2.5	
(I_C = 500 mAdc, I_B = 50 mAdc)			—	1.0	
Base-Emitter Voltage (I_C = 1.0 Adc, V_{CE} = 10 Vdc)		V_{BE}	—	1.5	Vdc
TRANSIENT CHARACTERISTICS					
Current-Gain - Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)		f_T	10	—	MHz
Common-Base Output Capacitance (V_{CB} = 10 Vdc, I_C = 0 Adc, f = 100 kHz)		C_{ob}	—	50	pF
Small-Signal Current Gain (I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	40	—	—

[1] Pulse Test: Pulse Width ≤300μs, Duty Cycle ≤2.0%.

FIGURE 2 – ACTIVE REGION SAFE AREAS

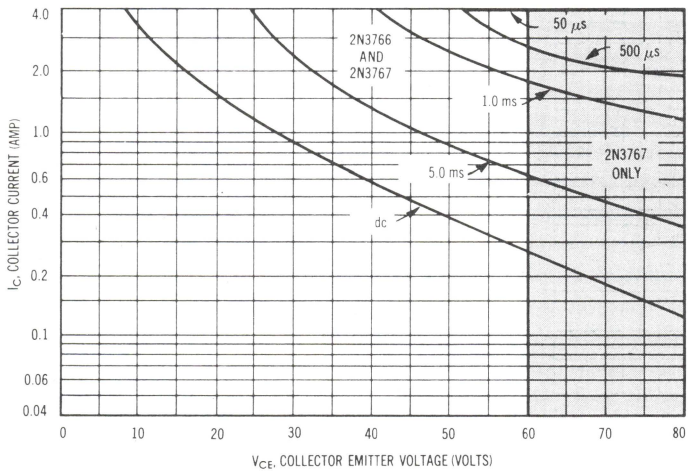

The Safe Operating Area Curves indicate I_C-V_{CE} limits below which the device will not go into secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a collector-emitter short. (Case temperature and duty cycle of the excursions make no significant change in these safe areas.) The load line may exceed the BV_{CEO} voltage limit only if the collector current has been reduced to 20 mA or less before or at the BV_{CES} limit; then and only then may the load line be extended to the absolute maximum voltage rating of BV_{CBO}. To insure operation below the maximum T_J, the power-temperature derating curve must be observed for both steady state and pulse power conditions.

LARGE SIGNAL CHARACTERISTICS

FIGURE 3 – TRANSCONDUCTANCE

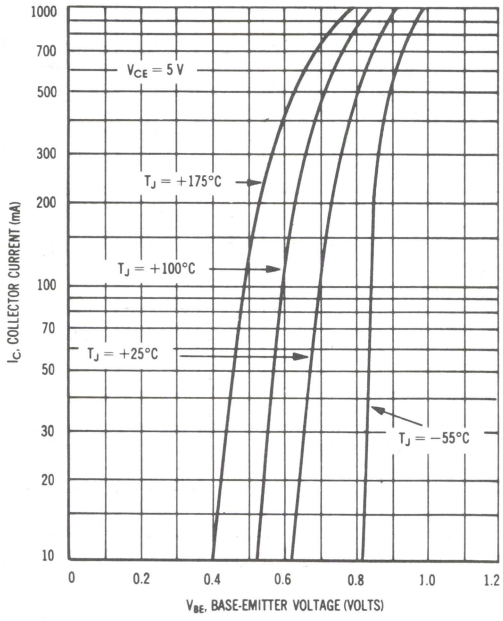

FIGURE 5 – INPUT ADMITTANCE

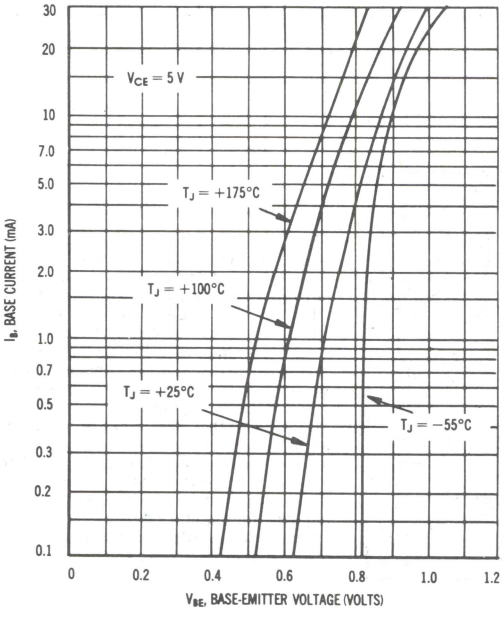

CUT-OFF CHARACTERISTICS

FIGURE 4 – TRANSCONDUCTANCE

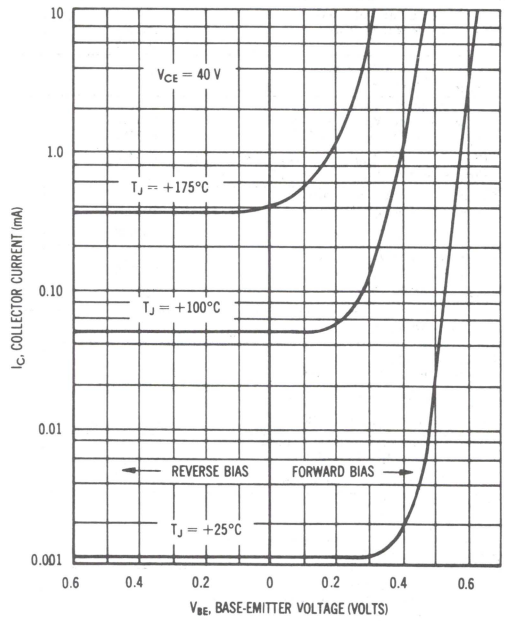

FIGURE 6 – EFFECT OF BASE-EMITTER RESISTANCE

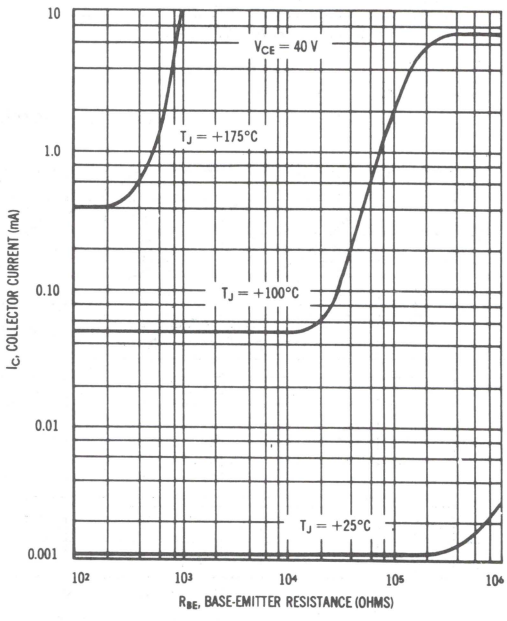

3

FIGURE 7 – CURRENT GAIN

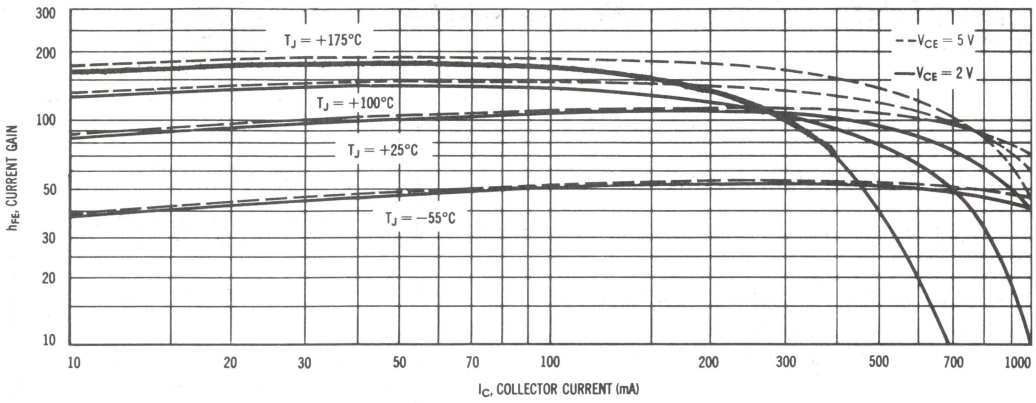

FIGURE 8 – COLLECTOR SATURATION REGION

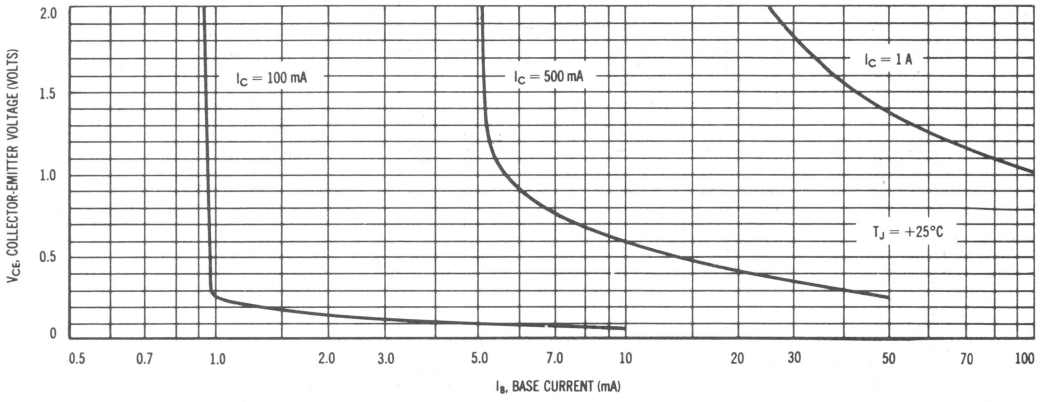

3

FIGURE 9 – "ON" VOLTAGES

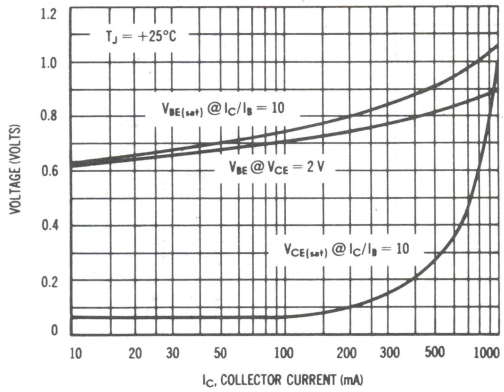

FIGURE 10 – TEMPERATURE COEFFICIENTS

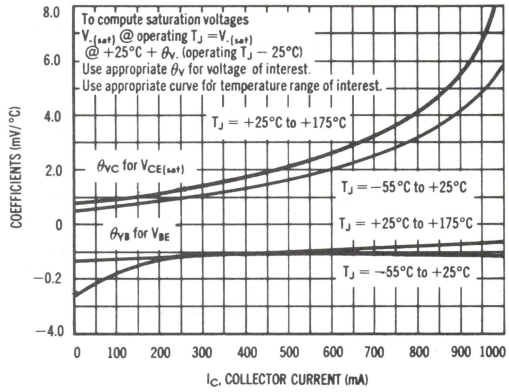

2N3771
2N3772

HIGH POWER NPN SILICON POWER TRANSISTORS

. . . designed for linear amplifiers, series pass regulators, and inductive switching applications.

- Forward Biased Second Breakdown Current Capability

  $I_{S/b}$ = 3.75 Adc @ V_{CE} = 40 Vdc – 2N3771
  = 2.5 Adc @ V_{CE} = 60 Vdc – 2N3772

20 and 30 AMPERE

POWER TRANSISTORS NPN SILICON

40 and 60 VOLTS
150 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N3771	2N3772	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	Vdc
Collector-Emitter Voltage	V_{CEX}	50	80	Vdc
Collector-Base Voltage	V_{CB}	50	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0	7.0	Vdc
Collector Current — Continuous Peak	I_C	**30** 30	**20** 30	Adc
Base Current — Continuous Peak	I_B	7.5 15	5.0 15	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	150 0.855		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	2N3771, 2N3772	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

*Indicates JEDEC Registered Data



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

FIGURE 1 – POWER DERATING

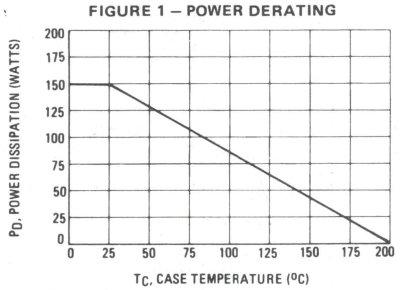

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
*Collector-Emitter Sustaining Voltage (1)	2N3771	$V_{CEO(sus)}$	40	–	Vdc
(I_C = 0.2 Adc, I_B = 0)	2N3772		60	–	
Collector-Emitter Sustaining Voltage	2N3771	$V_{CEX(sus)}$	50	–	Vdc
(I_C = 0.2 Adc, $V_{EB(off)}$ = 1.5 Vdc, R_{BE} = 100 Ohms)	2N3772		80	–	
Collector-Emitter Sustaining Voltage	2N3771	$V_{CER(sus)}$	45	–	Vdc
(I_C = 0.2 Adc, R_{BE} = 100 Ohms)	2N3772		70	–	
*Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N3771		–	10	
(V_{CE} = 50 Vdc, I_B = 0)	2N3772		–	10	
(V_{CE} = 25 Vdc, I_B = 0)					
*Collector Cutoff Current		I_{CEV}			mAdc
(V_{CE} = 50 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N3771		–	2.0	
(V_{CE} = 100 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N3772		–	5.0	
(V_{CE} = 45 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6257		–	4.0	
(V_{CE} = 30 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N3771		–	10	
	2N3772		–	10	
(V_{CE} = 45 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)					
*Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 50 Vdc, I_E = 0)	2N3771		–	2.0	
(V_{CB} = 100 Vdc, I_E = 0)	2N3772		–	5.0	
*Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)	2N3771		–	5.0	
(V_{BE} = 7.0 Vdc, I_C = 0)	2N3772		–	5.0	
***ON CHARACTERISTICS**					
DC Current Gain (1)		h_{FE}			–
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)	2N3771		15	60	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)	2N3772		15	60	
(I_C = 8.0 Adc, V_{CE} = 4.0 Vdc)					
(I_C = 30 Adc, V_{CE} = 4.0 Vdc)	2N3771		5.0	–	
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)	2N3772		5.0	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 15 Adc, I_B = 1.5 Adc)	2N3771		–	2.0	
(I_C = 10 Adc, I_B = 1.0 Adc)	2N3772		–	1.4	
(I_C = 30 Adc, I_B = 6.0 Adc)	2N3771		–	4.0	
(I_C = 20 Adc, I_B = 4.0 Adc)	2N3772		–	4.0	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)	2N3771		–	2.7	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)	2N3772		–	2.2	
(I_C = 8.0 Adc, V_{CE} = 4.0 Vdc)					
***DYNAMIC CHARACTERISTICS**					
Current-Gain—Bandwidth Product		f_T	0.2	–	MHz
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f_{test} = 50 kHz)					
Small-Signal Current Gain		h_{fe}	40	–	–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)					
SECOND BREAKDOWN					
Second Breakdown Energy with Base Forward Biased		$I_{S/b}$			Adc
t = 1.0 s (non-repetitive)					
(V_{CE} = 40 Vdc)	2N3771		3.75	–	
(V_{CE} = 60 Vdc)	2N3772		2.5	–	

*Indicates JEDEC Registered Data

(1) Pulse Test: 300 μs, Rep. Rate 60 cps.

3

FIGURE 2 – THERMAL RESPONSE – 2N3771, 2N3772

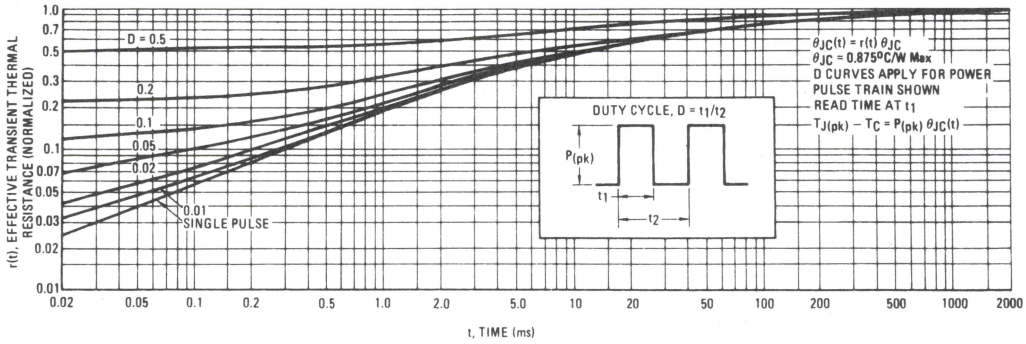

FIGURE 3 – ACTIVE-REGION SAFE OPERATING AREA – 2N3771, 2N3772

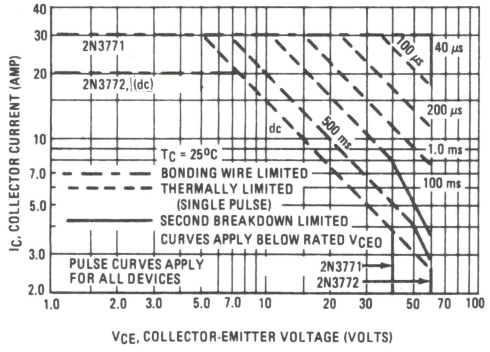

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

Figure 3 is based upon JEDEC registered Data. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^{\circ}C$. $T_{J(pk)}$ may be calculated from the data of Figure 2. Using data of Figure 2 and the pulse power limits of Figure 3, $T_{J(pk)}$ will be found to be less than $T_{J(max)}$ for pulse widths of 1 ms and less. When using Motorola transistors, it is permissible to increase the pulse power limits until limited by $T_{J(max)}$.

FIGURE 4 – SWITCHING TIME TEST CIRCUIT

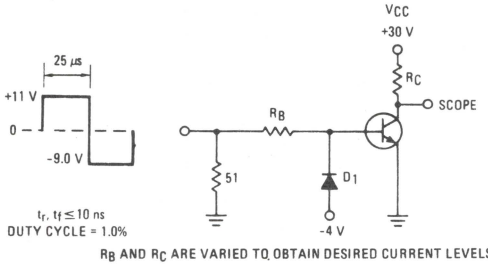

RB AND RC ARE VARIED TO OBTAIN DESIRED CURRENT LEVELS

D1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

FIGURE 5 – TURN-ON TIME

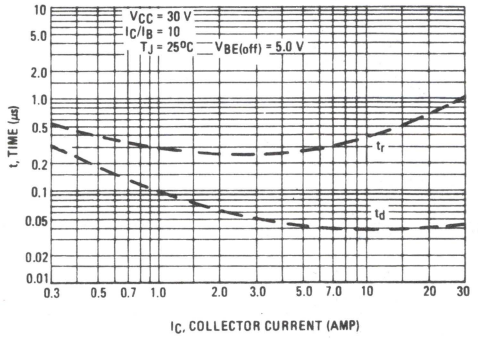

FIGURE 6 – TURN-OFF TIME

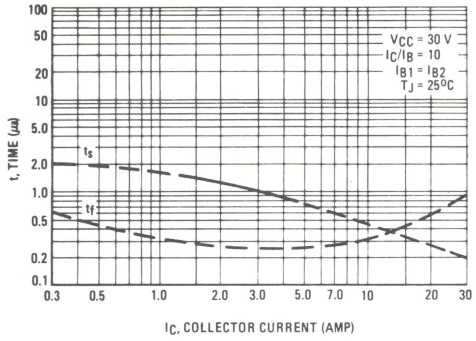

FIGURE 7 – CAPACITANCE

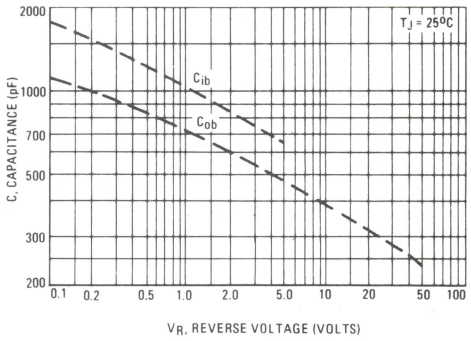

FIGURE 8 – DC CURRENT GAIN

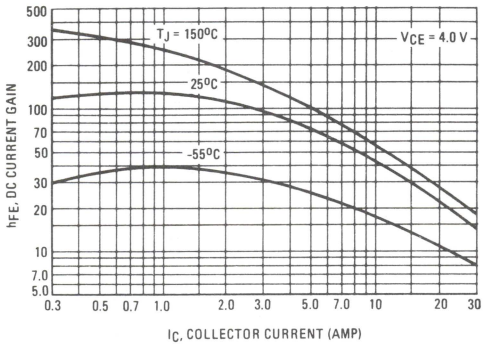

FIGURE 9 – COLLECTOR SATURATION REGION

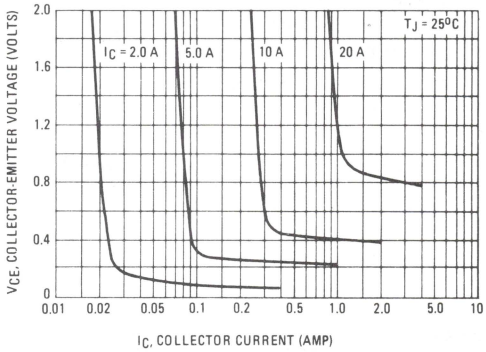

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
2N3773
PNP
2N6609

COMPLEMENTARY SILICON POWER TRANSISTORS

The 2N3773 and 2N6609 are PowerBase power transistors designed for high power audio, disk head positioners and other linear applications. These devices can also be used in power switching circuits such as relay or solenoid drivers, dc to dc converters or inverters.

- High Safe Operating Area (100% Tested)
  150 W @ 100 V
- Completely Characterized for Linear Operation
- High DC Current Gain and Low Saturation Voltage
  h_{FE} = 15 (Min) @ 8 A, 4 V
  $V_{CE(sat)}$ = 1.4 V (Max) @ I_C = 8 A, I_B = 0.8 A
- For Low Distortion Complementary Designs

16 AMPERE
COMPLEMENTARY
POWER TRANSISTORS

140 VOLTS
150 WATTS





STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ ⌀0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

*MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector Emitter Voltage	V_{CEO}	140	Vdc
Collector-Emitter Voltage	V_{CEX}	160	Vdc
Collector-Base Voltage	V_{CBO}	160	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector Current — Continuous — Peak (1)	I_C	16 30	Adc
Base Current — Continuous — Peak (1)	I_B	4 15	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	150 0.855	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS (1)				
*Collector-Emitter Breakdown Voltage (I_C = 0.2 Adc, I_B = 0)	$V_{CEO(sus)}$	140	–	Vdc
*Collector-Emitter Sustaining Voltage (I_C = 0.1 Adc, $V_{BE(off)}$ = 1.5 Vdc, R_{BE} = 100 Ohms)	$V_{CEX(sus)}$	160	–	Vdc
Collector-Emitter Sustaining Voltage (I_C = 0.2 Adc, R_{BE} = 100 Ohms)	$V_{CER(sus)}$	150	–	Vdc
*Collector Cutoff Current (V_{CE} = 120 Vdc, I_B = 0)	I_{CEO}	–	10	mAdc
*Collector Cutoff Current (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	– –	2 10	mAdc
Collector Cutoff Current (V_{CB} = 140 Vdc, I_E = 0)	I_{CBO}	–	2	mAdc
*Emitter Cutoff Current (V_{BE} = 7 Vdc, I_C = 0)	I_{EBO}	–	5	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain *(I_C = 8 Adc, V_{CE} = 4 Vdc) (I_C = 16 Adc, V_{CE} = 4 Vdc)	h_{FE}	15 5	60	–
Collector-Emitter Saturation Voltage *(I_C = 8 Adc, I_B = 800 mAdc) (I_C = 16 Adc, I_B = 3.2 Adc)	$V_{CE(sat)}$	– –	1.4 4	Vdc
*Base-Emitter On Voltage (I_C = 8 Adc, V_{CE} = 4 Vdc)	$V_{BE(on)}$	–	2.2	Vdc
DYNAMIC CHARACTERISTICS				
Magnitude of Common-Emitter Small-Signal, Short-Circuit, Forward Current Transfer Ratio (I_C = 1 A, f = 50 kHz)	$\|h_{fe}\|$	4	–	–
*Small-Signal Current Gain (I_C = 1 Adc, V_{CE} = 4 Vdc, f = 1 kHz)	h_{fe}	40	–	–
SECOND BREAKDOWN CHARACTERISTICS				
Second Breakdown Collector Current with Base Forward Biased t = 1 s (non-repetitive), V_{CE} = 100 V, See Figure 12	$I_{S/b}$	1.5	–	Adc

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

*Indicates JEDEC Registered Data

3

NPN

FIGURE 1 – DC CURRENT GAIN

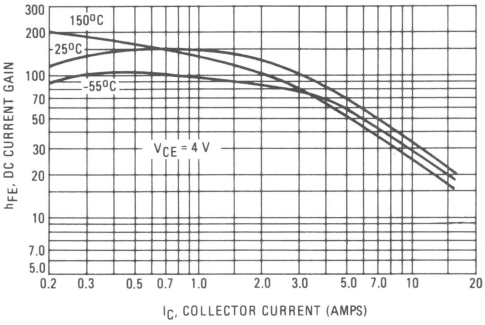

PNP

FIGURE 2 – DC CURRENT GAIN

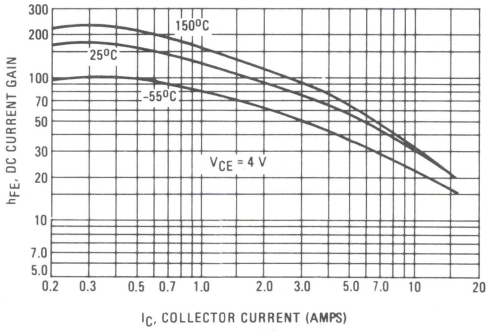

FIGURE 3 – COLLECTOR SATURATION REGION

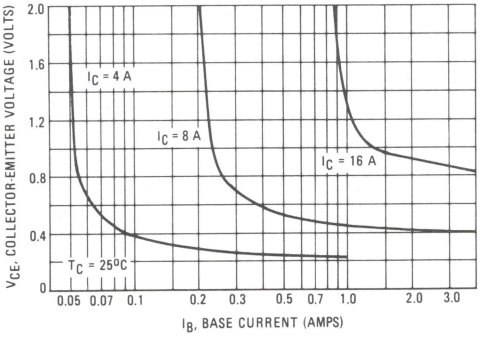

FIGURE 4 – COLLECTOR SATURATION REGION

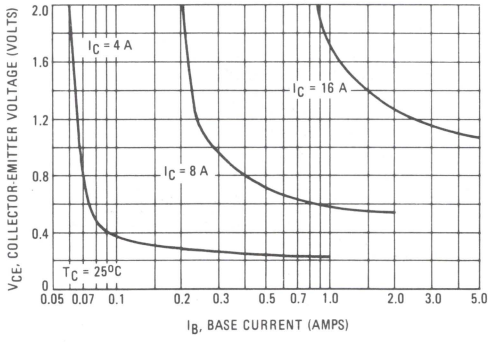

FIGURE 5 – "ON" VOLTAGE

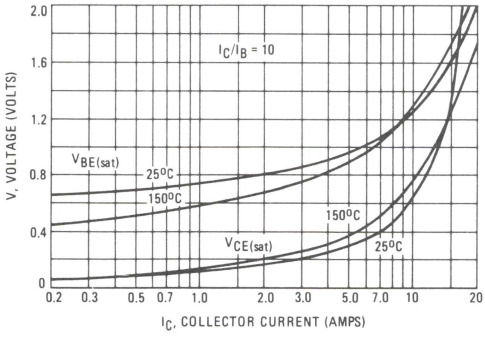

FIGURE 6 – "ON" VOLTAGE

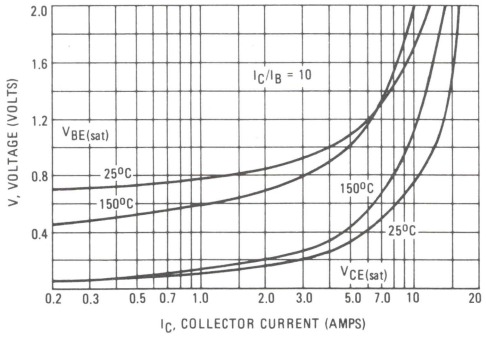

3

FIGURE 7 – FORWARD BIAS SAFE OPERATING AREA

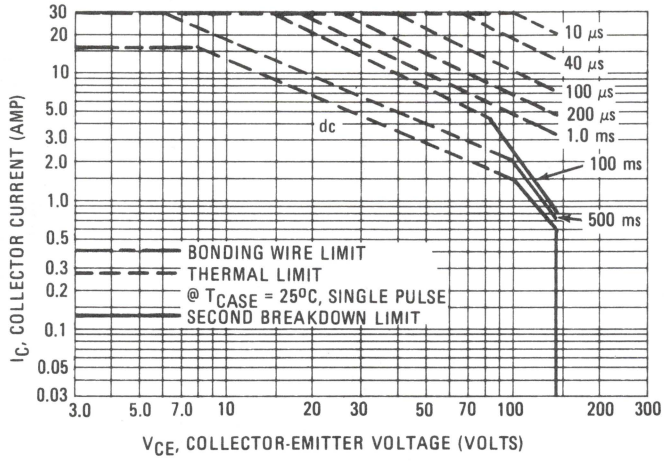

There are two limitations on the powerhandling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation: i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 7 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 8 – POWER DERATING

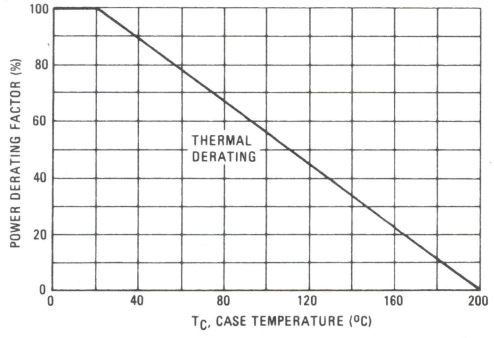

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N3789 thru 2N3792

SILICON PNP POWER TRANSISTORS

. . . designed for medium-speed switching and amplifier applications. These devices feature:

- Total Switching Time @ 3 A ≈ 1 μs (typ)
- Two Gain Ranges:
  h_{FE} (min) = 15 and 30 @ 3 A (2N3789, 2N3790)
  25 and 50 @ 1 A (2N3791, 2N3792)
- Low $V_{CE(sat)}$ = 0.5 V (typ) @ I_C = 4.0 A, I_B = 0.4 A
- Excellent Safe Area Limits
- Complementary NPN types available — 2N3713 thru 2N3716

10 AMPERE

POWER TRANSISTORS PNP SILICON

60-80 VOLTS
150 WATTS



MAXIMUM RATINGS

Characteristic	Symbol	2N3789 2N3791	2N3790 2N3792	Unit
Collector-Base Voltage	V_{CB}	60	80	Volts
Collector-Emitter Voltage	V_{CEO}	60	80	Volts
Emitter-Base Voltage	V_{EB}	7.0	7.0	Volts
Collector Current (Continuous)	I_C	10	10	Amps
Base Current (Continuous)	I_B	4.0	4.0	Amps
Power Dissipation	P_D	150	150	Watts
Thermal Resitance	θ_{JC}	1.17	1.17	°C/W
Junction Operating and Storage Temperature Range	T_J, T_{stg}	−65 to +200		°C

FIGURE 1 — POWER-TEMPERATURE DERATING CURVE

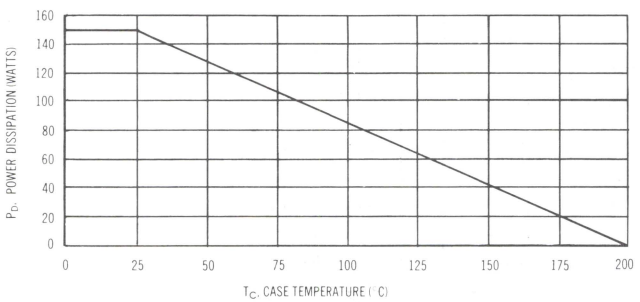

Safe Area Limits are indicated by Figures 15, 16. Both limits are applicable and must be observed.

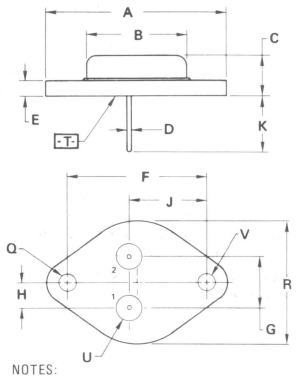

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | Ø.13 (0.005) Ⓜ | T | V Ⓜ
   FOR LEADS:
   ⌖ | Ø.13 (0.005) Ⓜ T | V Ⓜ | Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (Tc = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
Collector-Emitter Sustaining Voltage*		$V_{CEO(sus)}$*			Vdc
(I_C = 200 mAdc, I_B = 0)	2N3789, 2N3791		60	–	
	2N3790, 2N3792		80	–	
Collector-Emmiter Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 60 Vdc, V_{BE} = -1.5 Vdc)	2N3789, 2N3791		–	1	
(V_{CE} = 80 Vdc, V_{BE} = -1.5 Vdc)	2N3790, 2N3792		–	1	
(V_{CE} = 60 Vdc, V_{BE} = -1.5 Vdc, T_C = 150°C)	2N3789, 2N3791		–	5	
(V_{CE} = 80 Vdc, V_{BE} = -1.5 Vdc, T_C = 150°C)	2N3790, 2N3792		–	5	
Emitter-Base Cutoff Current		I_{EBO}			mAdc
(V_{EB} = 7 Vdc)	All Types		–	5	
DC Current Gain*		h_{FE}*			–
(I_C = 1 Adc, V_{CE} = 2 Vdc)	2N3789, 2N3790		25	90	
	2N3791, 2N3792		50	180	
(I_C = 3 Adc, V_{CE} = 2 Vdc)	2N3789, 2N3790		15	–	
	2N3791, 2N3792		30	–	
Collector-Emitter Saturation Voltage*		$V_{CE(sat)}$*			Vdc
(I_C = 4 Adc, I_B = 0.4 Adc)	2N3789, 2N3790		–	1.0	
(I_C = 5 Adc, I_B = 0.5 Adc)	2N3791, 2N3792		–	1.0	
Base-Emitter On Voltage*		$V_{BE(on)}$*			Vdc
(I_C = 5 A, V_{CE} = 2 Vdc)	2N3789, 2N3790		–	2.0	
	2N3791, 2N3792		–	1.8	
(I_C = 10 Adc, V_{CE} = 4 Vdc)	All Types		–	4.0	
Current Gain – Bandwidth Product		f_T			MHz
(V_{CE} = 10 Vdc, I_C = 0.5 Adc, f = 1 MHz)	All Types		4	–	

*Sweep Test: 1/2 sine wave cycle @ 60 cps.

FIGURE 2 – TYPICAL SWITCHING TIMES AND TEST CIRCUIT

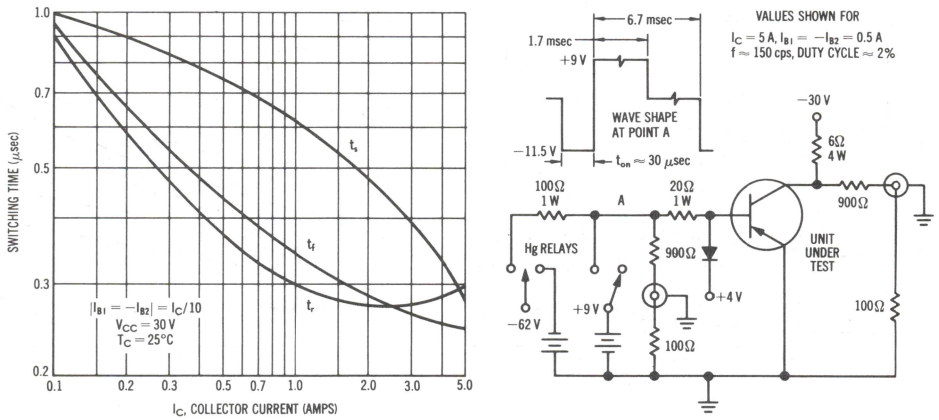

FIGURE 3 – CURRENT GAIN VARIATIONS

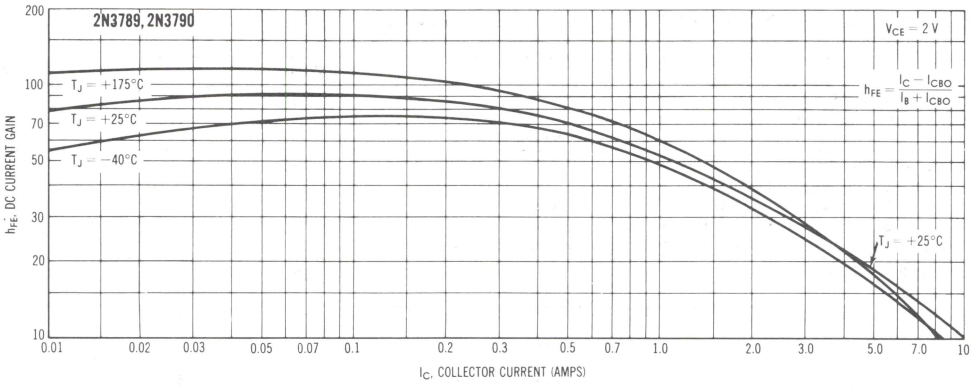

FIGURE 4 – CURRENT GAIN VARIATIONS

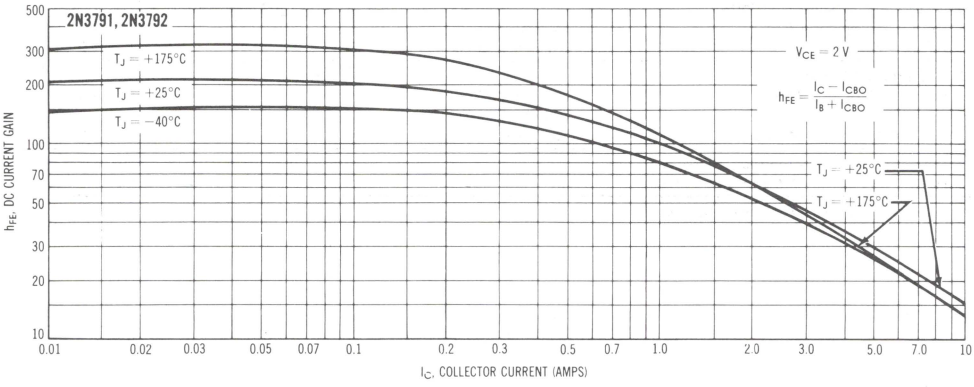

3

FIGURE 5 – SATURATION VOLTAGES

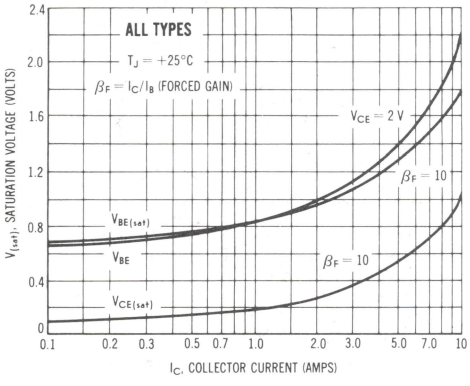

FIGURE 6 – TEMPERATURE COEFFICIENTS

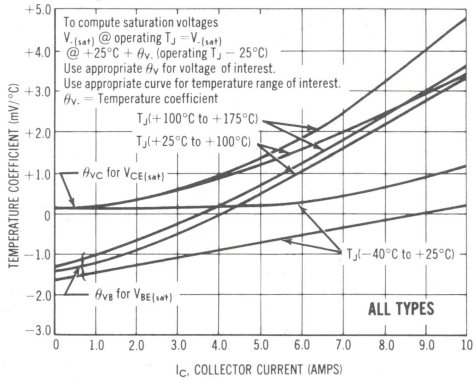

SAFE OPERATING AREAS

FIGURE 7 – 2N3789, 2N3791

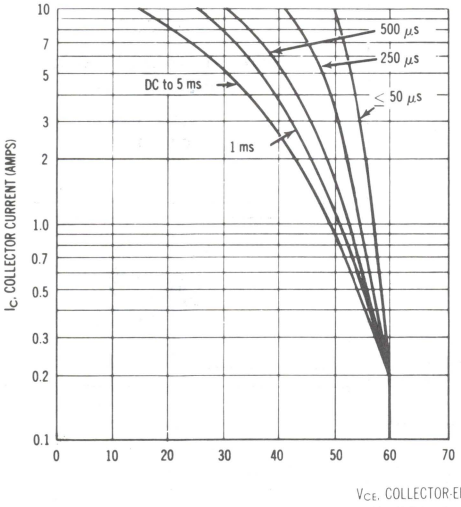

FIGURE 8 – 2N3790, 2N3792

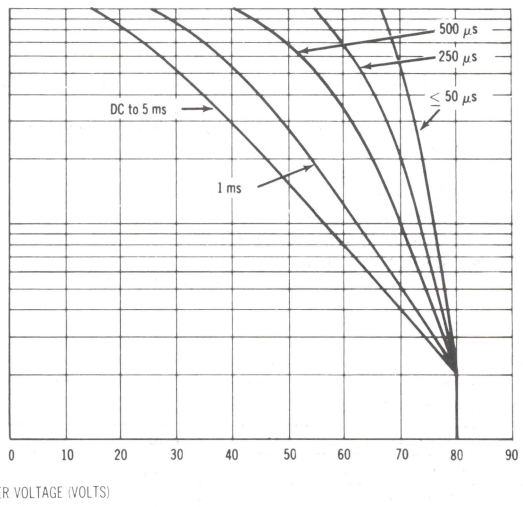

V_{CE}, COLLECTOR-EMITTER VOLTAGE (VOLTS)

The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not go into secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a collector-emitter short. (Duty cycle of the excursions make no significant change in these safe areas.) To insure operation below the maximum T_J, the power-temperature derating curve must be observed for both steady state and pulse power conditions.

FIGURE 9 – CUT-OFF REGION TRANSCONDUCTANCE

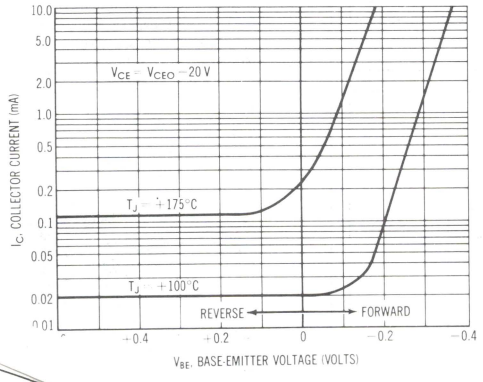

V_{BE}, BASE-EMITTER VOLTAGE (VOLTS)

FIGURE 10 – COLLECTOR CUT-OFF CURRENT versus BASE-EMITTER RESISTANCE

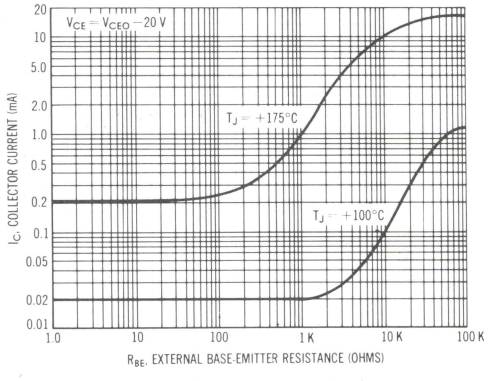

R_{BE}, EXTERNAL BASE-EMITTER RESISTANCE (OHMS)

3

2N3867, 2N3868
See Page 3-32

NPN
2N3902

HIGH VOLTAGE NPN SILICON TRANSISTORS

. . . designed for use in high-voltage inverters, converters, switching regulators and line operated amplifiers.

- High Collector-Emitter Voltage – V_{CEX} = 700 Vdc
- Excellent DC Current Gain – h_{FE} = 10 (Min) @ I_C = 2.5 Adc
- Low Collector-Emitter Saturation Voltage – $V_{CE(sat)}$ = 0.8 Vdc (Max) @ I_C = 1.0 Adc

3.5 AMPERE
POWER TRANSISTORS
NPN SILICON
400 VOLTS
100 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N3902	Unit
Collector-Emitter Voltage	V_{CEO}	400	Vdc
Collector-Emitter Voltage	V_{CEX}	700	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current – Continuous	I_C	3.5	Adc
Base Current	I_B	2.0	Adc
Total Device Dissipation @ T_C = 75°C Derate above 75°C	P_D	100 1.33	Watts W/°C
Operating Junction Temperature Range	T_J	–65 to +150	°C
Storage Temperature Range	T_{stg}	–65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.75	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

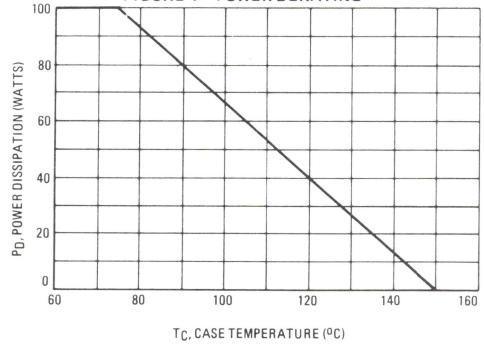

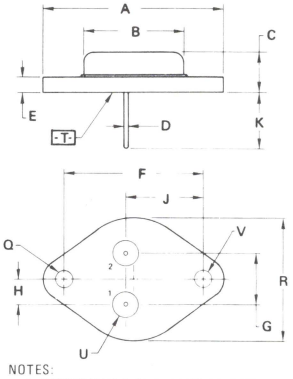

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | Ø.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | Ø.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0) (See Figure 12)	$V_{CEO(sus)}$	325	–	Vdc
Collector Cutoff Current (V_{CE} = 400 Vdc, I_B = 0)	I_{CEO}	–	0.25	mAdc
Collector Cutoff Current (V_{CE} = 700 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	I_{CEX}	–	2.5	mAdc
(V_{CE} = 400 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)		–	0.5	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	5.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	30	90	–
(I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)		10	–	
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)	$V_{CE(sat)}$	–	0.8	Vdc
(I_C = 2.5 Adc, I_B - 0.5 Adc)		–	2.5	
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B - 0.1 Adc)	$V_{BE(sat)}$	–	1.5	Vdc
(I_C 2.5 Adc, I_B 0.5 Adc)		–	2.0	
DYNAMIC CHARACTERISTICS				
Current-Gain—Bandwidth Product (I_C = 0.2 Adc, V_{CE} = 10 Vdc)	f_T	2.8	–	MHz

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

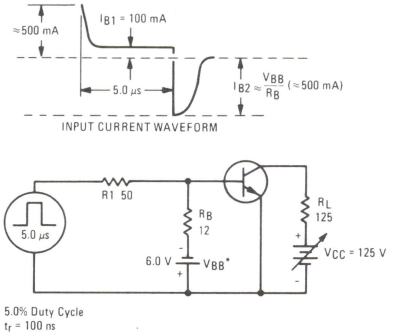

FIGURE 3 – TURN-ON TIME

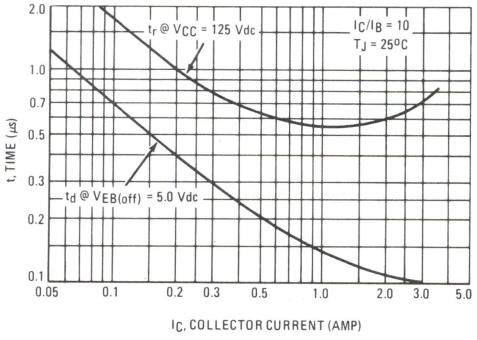

FIGURE 4 – THERMAL RESPONSE

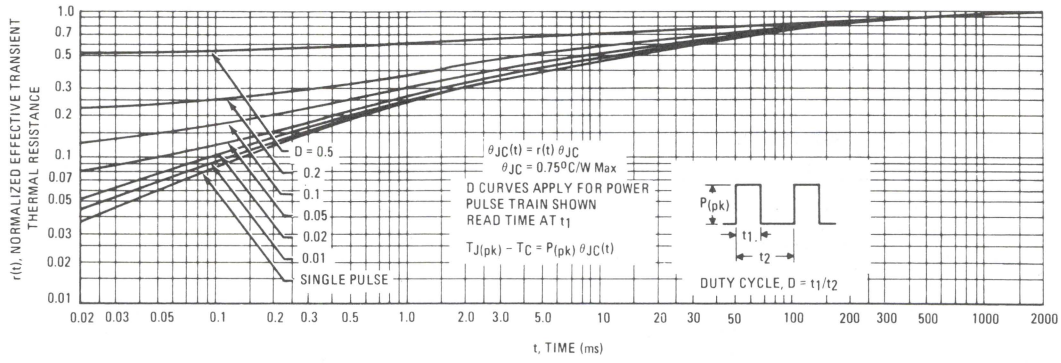

FIGURE 5 – ACTIVE-REGION SAFE-OPERATING AREA

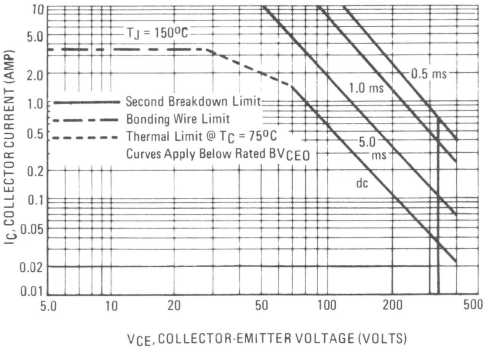

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Pulse curves are valid for duty cycles of 10% provided $T_{J(pk)} \leq 150^oC$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

FIGURE 6 – TURN-OFF TIME

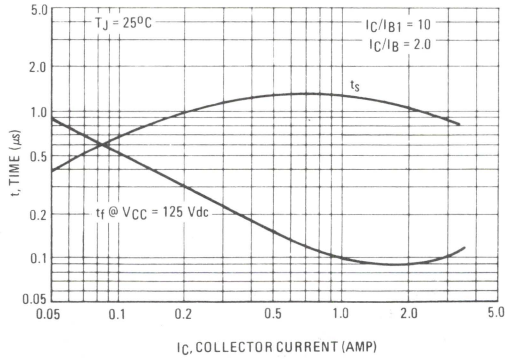

FIGURE 7 – CAPACITANCE

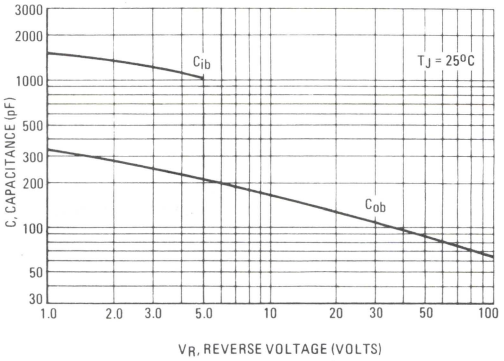

3

FIGURE 8 – DC CURRENT GAIN

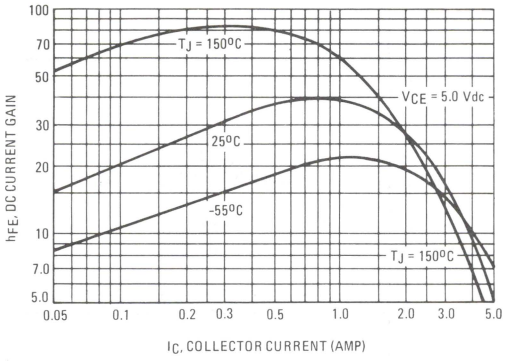

FIGURE 9 – "ON" VOLTAGES

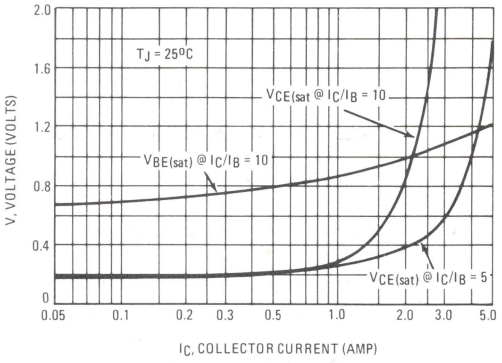

FIGURE 10 – COLLECTOR CUT-OFF REGION

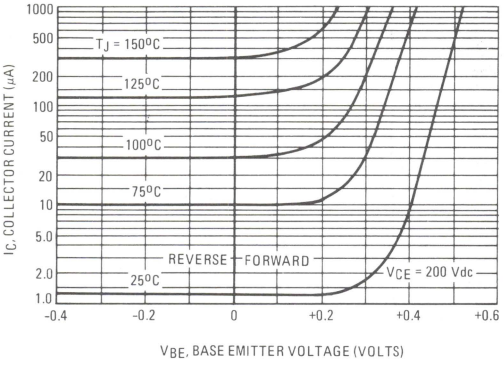

FIGURE 11 – TEMPERATURE COEFFICIENTS

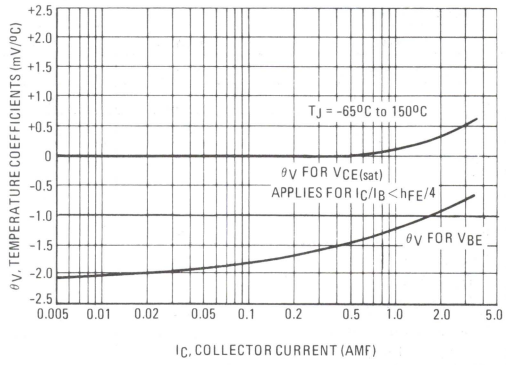

FIGURE 12 – COLLECTOR-EMITTER SUSTAINING VOLTAGE TEST CIRCUITS AND LOAD LINES

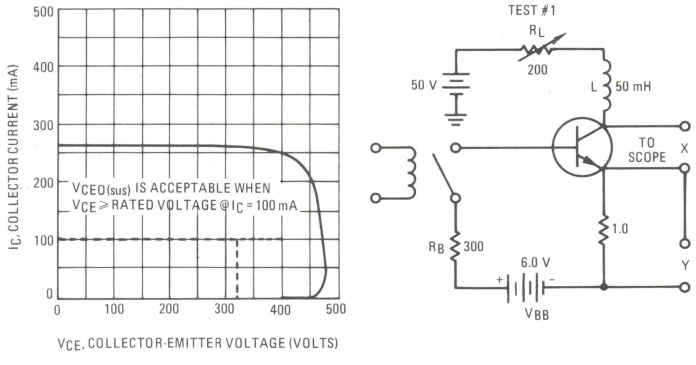

3

2N4233A

MEDIUM-POWER SILICON TRANSISTOR

. . . designed for general-purpose power amplifier and switching applications.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 0.7 Vdc (Max) @ I_C = 1.5 Adc
- Low Leakage Current — I_{CEX} = 0.1 mAdc (Max)
- Excellent DC Current Gain — h_{FE} = 25-100 @ I_C = 1.5 Adc
- High Current Gain — Bandwidth Product — f_T = 4.0 MHz @ I_C = 0.25 Adc

5.0 AMPERE
SILICON
POWER TRANSISTOR

80 VOLTS
75 WATTS

***MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CB}	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous Peak	I_C	 5.0 10	Adc
Base Current	I_B	2.0	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	 75 0.43	 Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	°C

*** THERMAL CHARACTERISTICS**

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	2.32	°C/W

*Indicates JEDEC registered data. (All values meet or exceed JEDEC registered data).

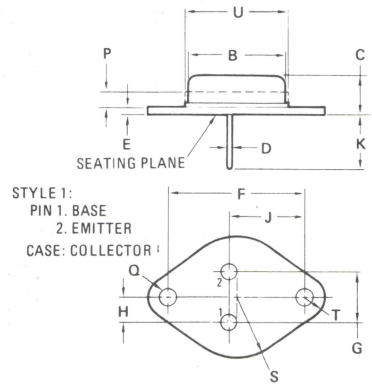

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

FIGURE 1 – POWER DERATING

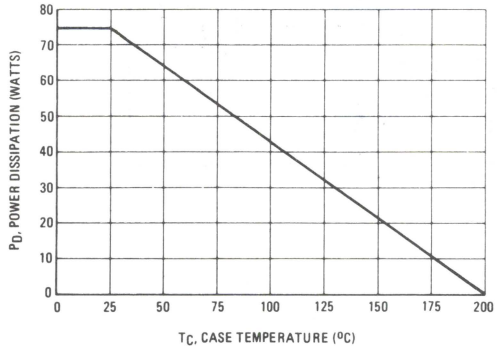

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
***OFF CHARACTERISTICS**				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	80	—	Vdc
Collector Cutoff Current (V_{CE} = 70 Vdc, I_B = 0)	I_{CEO}	—	1.0	mAdc
Collector Cutoff Current (V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	— —	0.1 1.0	mAdc
Collector Cutoff Current (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	—	0.05	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	—	0.5	mAdc
ON CHARACTERISTICS				
DC Current Gain (1) *(I_C = 0.5 Adc, V_{CE} = 2.0 Vdc) *(I_C = 1.5 Adc, V_{CE} = 2.0 Vdc) *(I_C = 3.0 Adc, V_{CE} = 2.0 Vdc) *(I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)	h_{FE}	 40 25 10 4.0	 — 100 — —	—
*Collector-Emitter Saturation Voltage (1) (I_C = 1.5 Adc, I_B = 0.15 Adc) (I_C = 3.0 Adc, I_B = 0.3 Adc) (I_C = 5.0 Adc, I_B = 1.25 Adc)	$V_{CE(sat)}$	 — — —	 0.7 2.0 4.0	Vdc
*Base-Emitter On Voltage (1) (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$	—	1.4	Vdc
***DYNAMIC CHARACTERISTICS**				
Current Gain — Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)	f_T	4.0	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	—	300	pF
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)	h_{fe}	20	—	—

*Indicates JEDEC registered data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

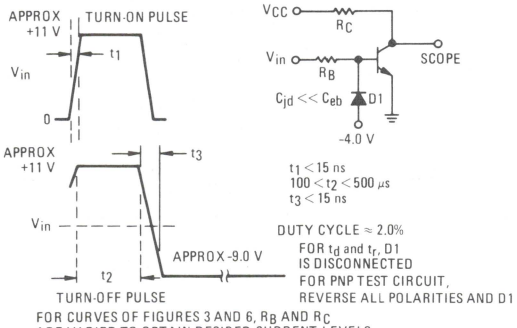

FOR CURVES OF FIGURES 3 AND 6, R_B AND R_C ARE VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

FIGURE 3 – TURN "ON" TIME

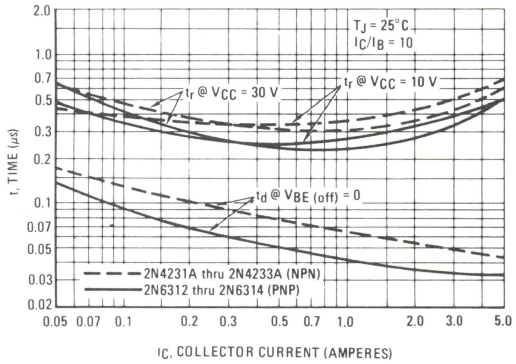

FIGURE 4 – THERMAL RESPONSE

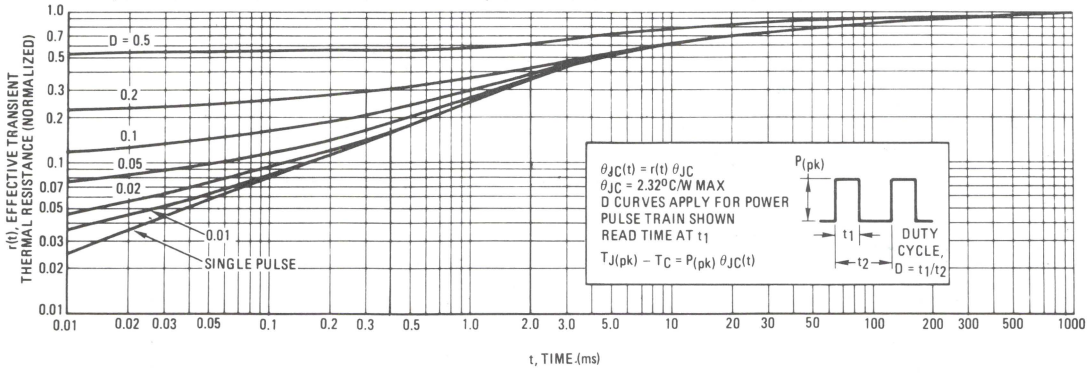

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

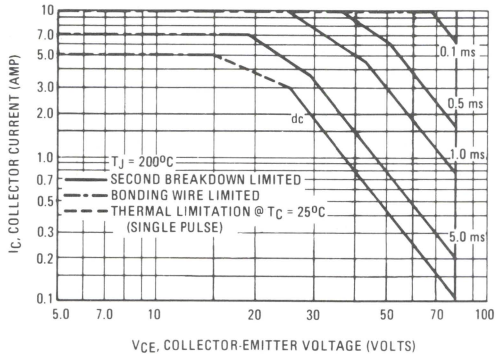

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200°C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power than can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN "OFF" TIME

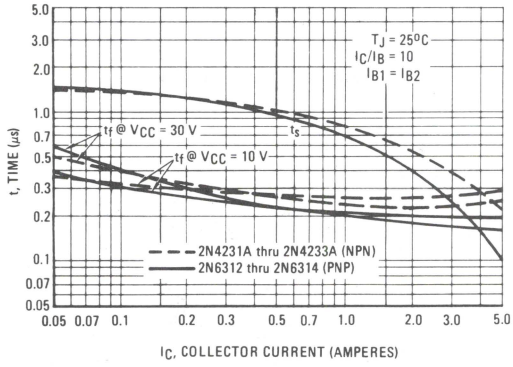

FIGURE 7 – CAPACITANCE

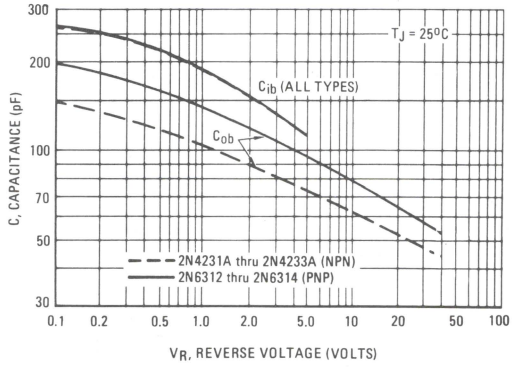

FIGURE 8 – DC CURRENT GAIN

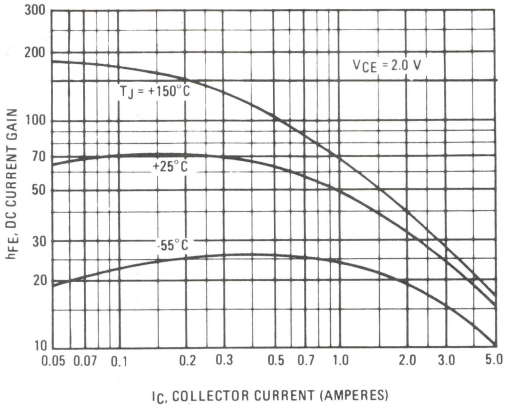

FIGURE 9 – COLLECTOR SATURATION REGION

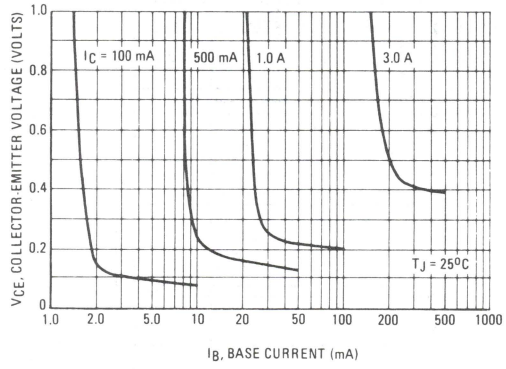

FIGURE 10 – "ON" VOLTAGES

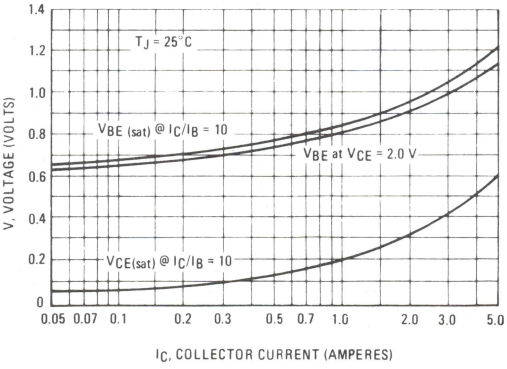

2N4347
See Page 3-15

2N4398, 2N4399 2N5745

PNP SILICON HIGH-POWER TRANSISTORS

. . . designed for use in power amplifier and switching circuits.

- Low Collector-Emitter Saturation Voltage —
  I_C = 15 Adc, $V_{CE(sat)}$ = 1.0 Vdc (Max) 2N4398,99
  = 1.5 Vdc (Max) 2N5745
- DC Current Gain Specified — 1.0 to 30 Adc
- Complements to NPN 2N5301, 2N5302, 2N5303

20, 30 AMPERE
POWER TRANSISTORS
PNP SILICON

40–60–180 VOLTS
200 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N4398	2N4399	2N5745	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous Peak	I_C	30 50	30 50	20 50	Adc
Base Current — Continuous Peak	I_B	7.5 15			Adc
Total Device Dissipation @ T_A = 25°C** Derate above 25°C	P_D	5.0 28.6			Watts mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.15			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	35	°C/W

*Indicates JEDEC Registered Data
**Motorola guarantees this data in addition to JEDEC Registered Data.

FIGURE 1 — POWER-TEMPERATURE DERATING CURVE

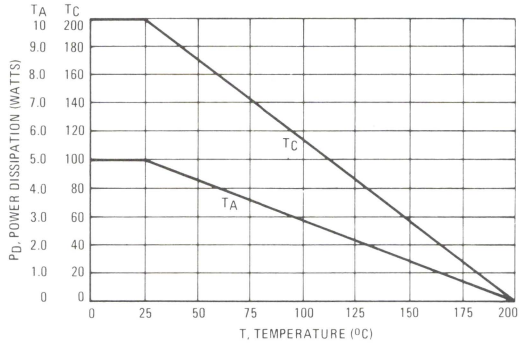

Safe Area Curves are indicated by Figure 13. All limits are applicable and must be observed.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ Ø 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ Ø 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N4398		40	—	
	2N4399		60	—	
	2N5745		80	—	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N4398		—	5.0	
(V_{CE} = 60 Vdc, I_B = 0)	2N4399		—	5.0	
(V_{CE} = 80 Vdc, I_B = 0)	2N5745		—	5.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N4398		—	5.0	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N4399		—	5.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5745		—	5.0	
(V_{CE} = 30 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N4398, 2N4399		—	10	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5745		—	10	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 40 Vdc, I_E = 0)	2N4398		—	1.0	
(V_{CB} = 60 Vdc, I_E = 0)	2N4399		—	1.0	
(V_{CB} = 80 Vdc, I_E = 0)	2N5745		—	1.0	
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)		I_{EBO}	—	5.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			—
(I_C = 1.0 Adc, V_{CE} = 2.0 Vdc)	All Types		40	—	
(I_C = 10 Adc, V_{CE} = 2.0 Vdc)	2N5745		15	60	
(I_C = 15 Adc, V_{CE} = 2.0 Vdc)	2N4398, 2N4399		15	60	
(I_C = 20 Adc, V_{CE} = 2.0 Vdc)	2N5745		5.0	—	
(I_C = 30 Adc, V_{CE} = 4.0 Vdc)	2N4398, 2N4399		5.0	—	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)	2N4398, 2N4399		—	0.75	
	2N5745		—	1.0	
(I_C = 15 Adc, I_B = 1.5 Adc)	2N4398, 2N4399		—	1.0	
	2N5745		—	1.5	
(I_C = 20 Adc, I_B = 2.0 Adc)	2N4398, 2N4399		—	2.0	
(I_C = 20 Adc, I_B = 4.0 Adc)	2N5745		—	2.0	
(I_C = 30 Adc, I_B = 6.0 Adc)	2N4398, 2N4399		—	4.0	
Base Emitter Saturation Voltage (1)		$V_{BE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)**	2N4398, 2N4399		—	1.6	
	2N5745		—	1.7	
(I_C = 15 Adc, I_B = 1.5 Adc)	2N4398, 2N4399		—	1.85	
	2N5745		—	2.0	
(I_C = 20 Adc, I_B = 2.0 Adc)**	2N4398, 2N4399		—	2.5	
(I_C = 20 Adc, I_B = 4.0 Adc)	2N5745		—	2.5	
Base-Emitter On Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 10 Adc, V_{CE} = 2.0 Vdc)	2N5745		—	1.5	
(I_C = 15 Adc, V_{CE} = 2.0 Vdc)	2N4398, 2N4399		—	1.7	
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)	2N5745		—	2.5	
(I_C = 30 Adc, V_{CE} = 4.0 Vdc)	2N4398, 2N4399		—	3.0	
DYNAMIC CHARACTERISTICS					
Current-Gain Bandwidth Product (2)		f_T			MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	2N4398, 2N4399		4.0	—	
	2N5745		2.0	—	
Small-Signal Current Gain (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	40	—	—
SWITCHING CHARACTERISTICS					
Rise Time	2N4398, 2N4399	t_r	—	0.4	μs
	2N5745		—	1.0	
Storage Time (V_{CC} = 30 Vdc, I_C = 10 Adc, I_{B1} = I_{B2} = 1.0 Adc)	2N4398, 2N4399	t_s	—	1.5	μs
	2N5745		—	2.0	
Fall Time	2N4398, 2N4399	t_f	—	0.6	μs
	2N5745		—	1.0	

*Indicates JEDEC Registered Data.
**Motorola Guarantees this Data in Addition to JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
(2) f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.

SWITCHING TIME EQUIVALENT TEST CIRCUITS

FIGURE 2 – TURN-ON TIME

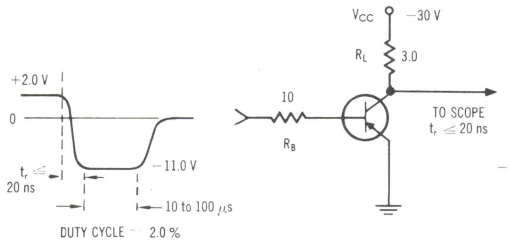

FIGURE 3 – TURN-OFF TIME

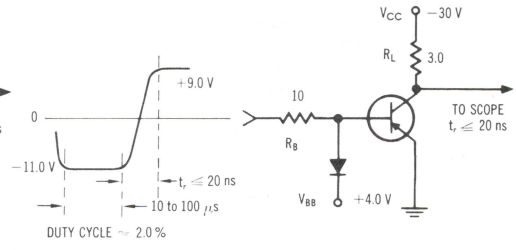

TYPICAL "ON" REGION CHARACTERISTICS

FIGURE 4 – DC CURRENT GAIN

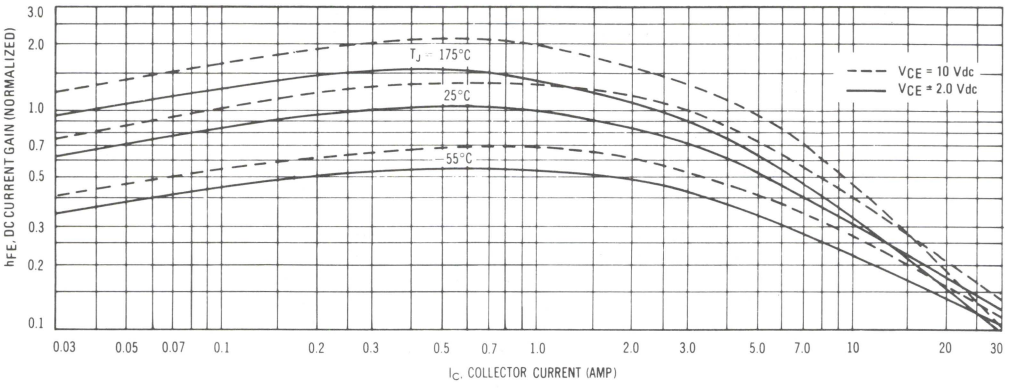

FIGURE 5 – COLLECTOR SATURATION REGION

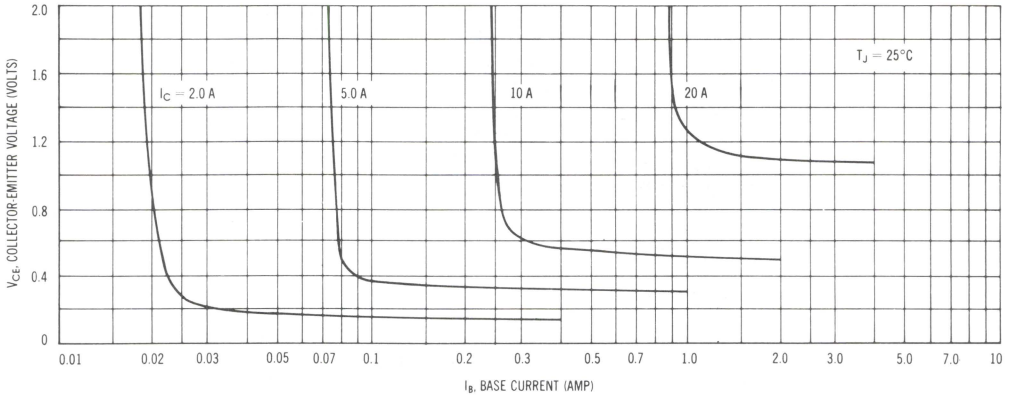

FIGURE 6 – "ON" VOLTAGES

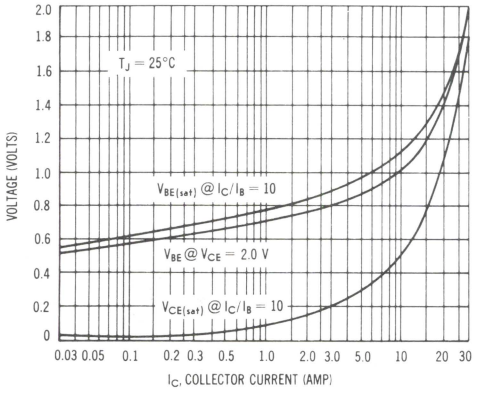

FIGURE 7 – TEMPERATURE COEFFICIENTS

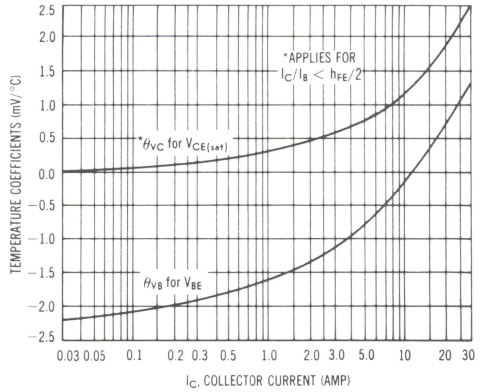

RATINGS AND THERMAL DATA

FIGURE 8 – ACTIVE REGION SAFE OPERATING AREA

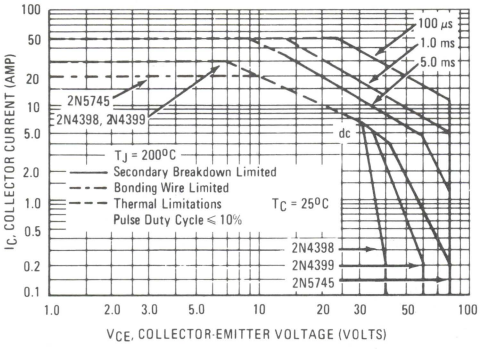

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 8 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 9. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 9 – THERMAL RESPONSE

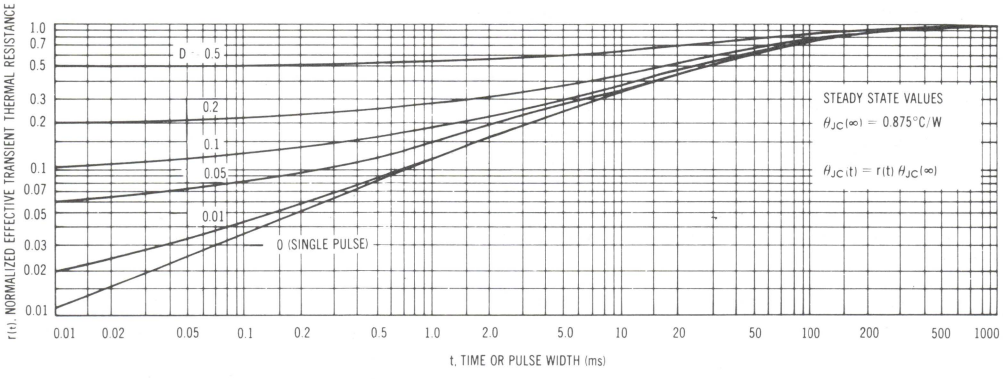

DESIGN NOTE: USE OF TRANSIENT THERMAL RESISTANCE DATA

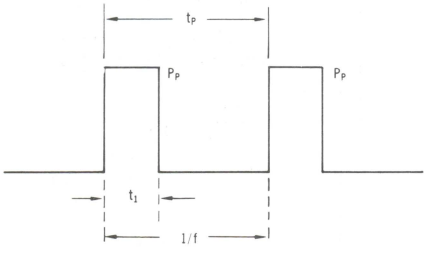

DUTY CYCLE D $t_1 f = \frac{t_1}{t_P}$

PEAK PULSE POWER P_P

A train of periodical power pulses can be represented by the model as shown in Figure A. Using the model and the device thermal reponse, the normalized effective transient thermal resistance of Figure 9 was calculated for various duty cycles.

To find $\theta_{JC}(t)$, multiply the value obtained from Figure 9 by the steady state value $\theta_{JC}(\infty)$.

Example:
The 2N4398 is dissipating 100 watts under the following conditions: t_1 = 1.0 ms, t_P = 5.0 ms. (D = 0.2)

Using Figure 9, at a pulse width of 1.0 ms and D = 0.2, the reading of r (t) is 0.28.

The peak rise in junction temperature is therefore
$\triangle T = r(t) \times P_P \times \theta_{JC}(\infty) = 0.28 \times 100 \times 0.875 = 24.5^oC$

2N4898 thru 2N4900

MEDIUM-POWER PNP SILICON TRANSISTORS

. . . designed for driver circuits, switching, and amplifier applications. These high-performance devices feature:

- Low Saturation Voltage — $V_{CE(sat)}$ = 0.6 V max @ I_C = 1.0 Amp
- Excellent Safe Operating Area
- Gain Specified to I_C = 1.0 Ampere
- 2N4900 Complementary to NPN 2N4912

4 AMPERE

GENERAL PURPOSE POWER TRANSISTORS

40-80 VOLTS
25 WATTS

MAXIMUM RATINGS

Rating	Symbol	2N4898	2N4899	2N4900	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	← 5.0 →			Vdc
Collector Current — Continuous*	I_C*	← 1.0 →			Adc
		← 4.0 →			
Base Current	I_B	← 1.0 →			Adc
Total Device Dissipation T_C = 25°C	P_D	← 25 →			Watts
Derate above 25°C		← 0.143 →			W/°C
Operating & Storage Junction Temperature Range	T_J, T_{stg}	← −65 to +200 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Reistance, Junction to Case	θ_{JC}	7.0	°C/W

*The 1.0 Amp maximum I_C value is based upon JEDEC current gain requirements.

The 4.0 Amp maximum value is based upon actual current-handling capability of the device (see Figure 5).

FIGURE 1 — POWER-TEMPERATURE DERATING CURVE

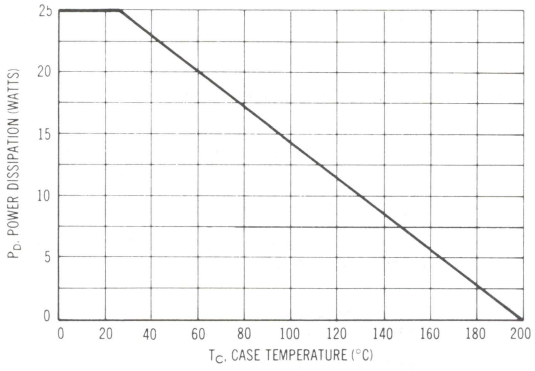

Safe Area Curves are indicated by Figure 5. All limits are applicable and must be observed.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	2N4898	$V_{CEO(sus)}$*	40	-	Vdc
	2N4899		60	-	
	2N4900		80	-	
Collector Cutoff Current (V_{CE} = 20 Vdc, I_B = 0)	2N4898	I_{CEO}	-	0.5	mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N4899		-	0.5	
(V_{CE} = 40 Vdc, I_B = 0)	2N4900		-	0.5	
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, $V_{BE(off)}$ = 1.5 Vdc)		I_{CEX}	-	0.1	mAdc
(V_{CE} = Rated V_{CEO}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			-	1.0	
Collector Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)		I_{CBO}	-	0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	-	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain* (I_C = 50 mAdc, V_{CE} = 1.0 Vdc)		h_{FE}*	40	-	-
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)			20	100	
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)			10	-	
Collector-Emitter Saturation Voltage* (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$*	-	0.6	Vdc
Base-Emitter Saturation Voltage* (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{BE(sat)}$*	-	1.3	Vdc
Base-Emitter On Voltage* (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$*	-	1.3	Vdc
SMALL SIGNAL CHARACTERISTICS					
Current-Gain—Bandwidth Product (I_C - 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	3.0	-	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	-	100	pF
Small-Signal Current Gain (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	25	-	-

* Pulse Test: PW ≈ 300 μs, Duty Cycle ≈ 2.0%

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

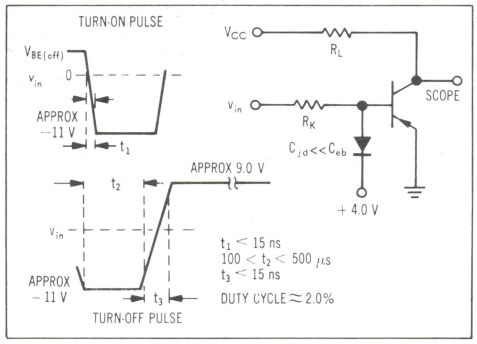

FIGURE 3 – TURN-ON TIME

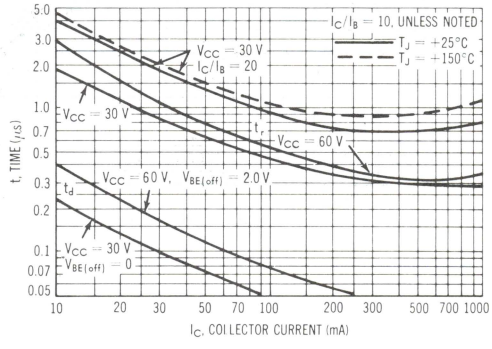

3

FIGURE 4 – THERMAL RESPONSE

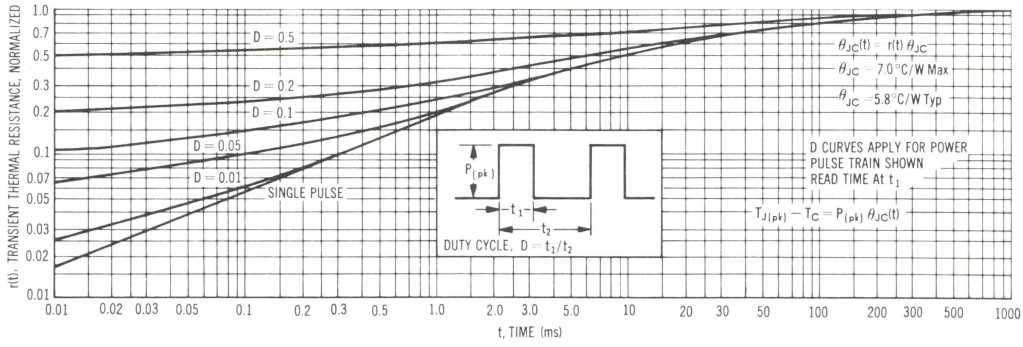

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

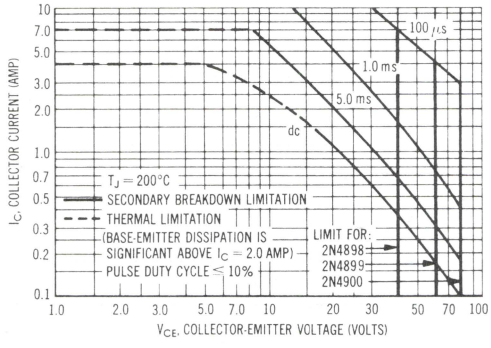

The safe operating area curves indicate I_C—V_{CE} limits of the transistor which must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

The data of Figure 5 is based upon $T_{J(pk)} = 200°C$; T_C is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power which can be handled to values less than the limitations imposed by secondary breakdown.

3

FIGURE 6 – STORAGE TIME

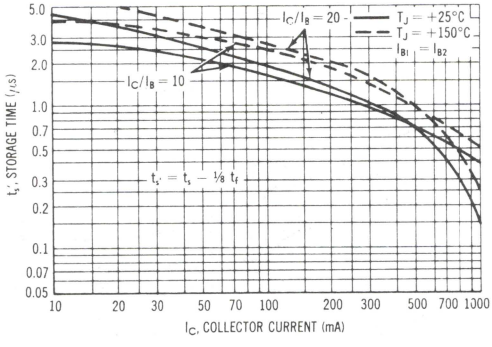

FIGURE 7 – FALL TIME

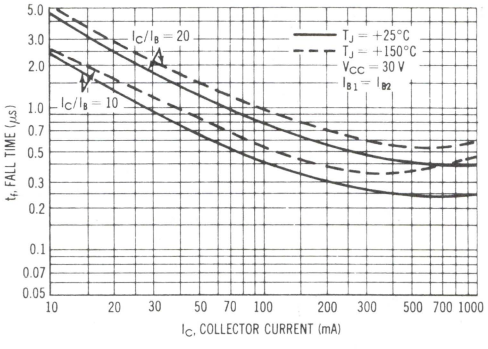

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N4912

NPN SILICON TRANSISTOR

. . . designed for driver circuits, switching, and amplifier applications. This high-performance device features:

- Low Saturation Voltage – $V_{CE(sat)}$ = 0.6 V max @ I_C = 1.0 Amp
- Excellent Safe Operating Area
- Gain Specified to I_C = 1.0 Amp
- Complement to PNP 2N4900

1 AMPERE

NPN SILICON POWER TRANSISTOR

80 VOLTS
25 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CB}	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current – Continuous*	I_C*	1.0	Adc
Base Current – Continuous	I_B	1.0	Adc
Total Device Dissipation T_C = 25°C Derate above 25°C	P_D	25 0.143	Watts mW/°C
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	7.0	°C/W

*The 1.0 Amp maximum I_C value is based upon JEDEC current gain requirements.

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

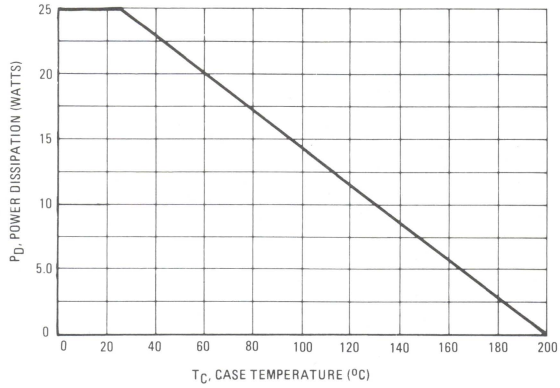

Safe Area Curves are indicated by Figure 5. All limits are applicable and must be observed.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 0.1 Adc, I_B = 0)	$V_{CEO(sus)}$	80	–	Vdc
Collector Cutoff Current (V_{CE} = 40 Vdc, I_B = 0)	I_{CEO}	–	0.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = Rated V_{CEO}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	 - –	 0.1 1.0	mAdc
Collector Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)	I_{CBO}	–	0.1	mAdc
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 50 mAdc, V_{CE} = 1.0 Vdc) (I_C = 500 mAdc, V_{CE} = 1.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)	h_{FE}	 40 20 10	 – 100 –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)	$V_{CE(sat)}$	–	0.6	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)	$V_{BE(sat)}$	–	1.3	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} - 1.0 Vdc)	$V_{BE(on)}$	–	1.3	Vdc
SMALL SIGNAL CHARACTERISTICS				
Current-Gain – Bandwidth Product (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T	3.0	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)	C_{ob}	–	100	pF
Small-Signal Current Gain (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)	h_{fe}	25	–	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

3

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

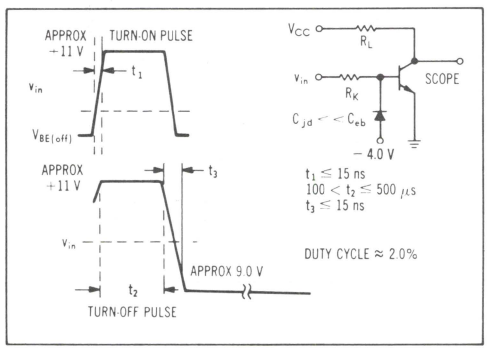

FIGURE 3 – TURN-ON TIME

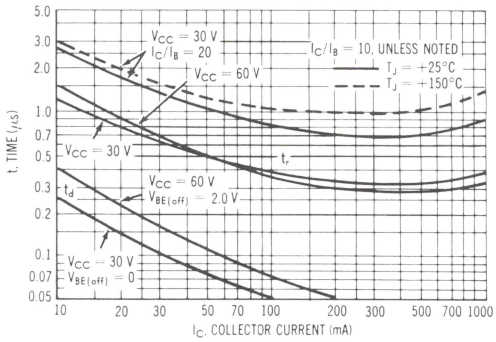

FIGURE 4 – THERMAL RESPONSE

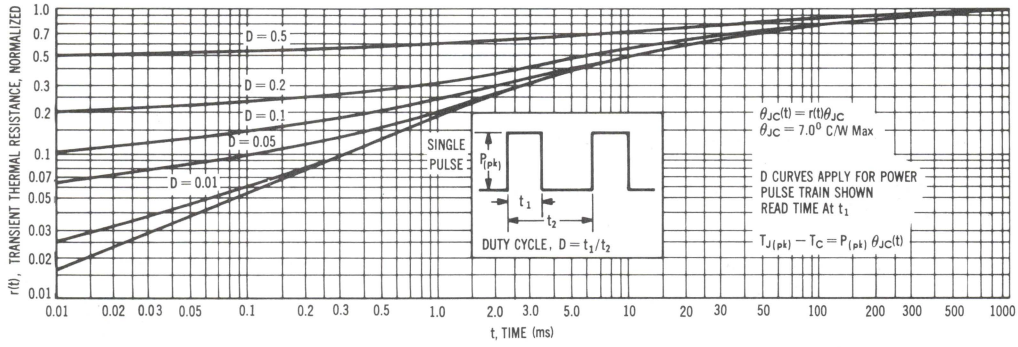

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

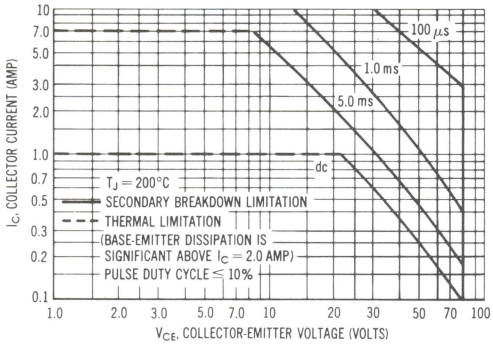

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200°C$; T_C is variable depending on conditions. Pulse curves are valid for duty cycles of 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

FIGURE 6 – STORAGE TIME

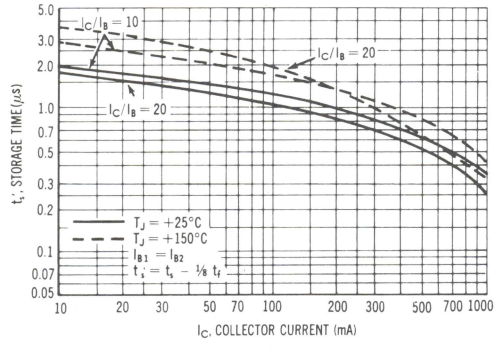

FIGURE 7 – FALL TIME

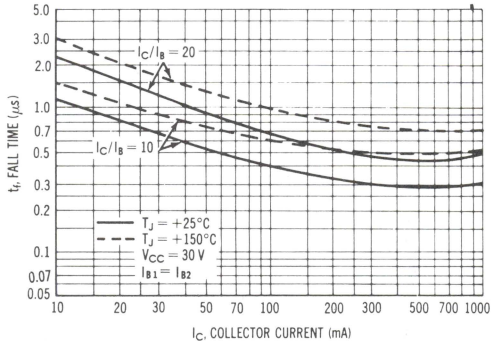

3

2N4918 thru 2N4920

MEDIUM-POWER PLASTIC PNP SILICON TRANSISTORS

. . . designed for driver circuits, switching, and amplifier applications. These high-performance plastic devices feature:

- Low Saturation Voltage – $V_{CE(sat)}$ = 0.6 Vdc (Max) @ I_C = 1.0 Amp
- Excellent Power Dissipation Due to Thermopad Construction – P_D = 30 @ T_C = 25°C
- Excellent Safe Operating Area
- Gain Specified to I_C = 1.0 Amp
- Complement to NPN 2N4921, 2N4922, 2N4923

3 AMPERE GENERAL-PURPOSE POWER TRANSISTORS

40-80 VOLTS
30 WATTS



*MAXIMUM RATINGS

Ratings	Symbol	2N4918	2N4919	2N4920	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	← 5.0 →			Vdc
Collector Current – Continuous (1)	I_C*	← 1.0 →			Adc
		← 3.0 →			
Base Current	I_B	← 1.0 →			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	30 0.24			Watts W/°C
Operating & Storage Junction Temperature Range	T_J, T_{stg}	← −65 to +150 →			°C

THERMAL CHARACTERISTICS (2)

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	4.16	°C/W

*Indicates JEDEC Registered Data for 2N4918 Series

(1) The 1.0 Amp maximum I_C value is based upon JEDEC current gain requirements. The 3.0 Amp maximum value is based upon actual current-handling capability of the device (See Figure 5).

(2) Recommend use of thermal compound for lowest thermal resistance.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-225AA

FIGURE 1 – POWER DERATING

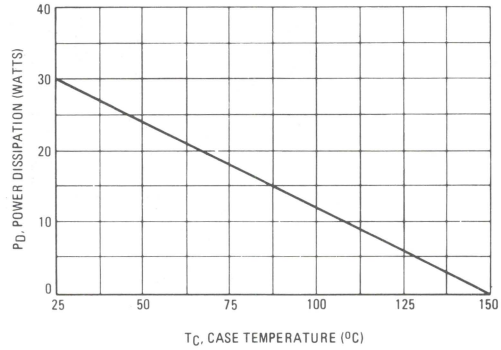

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 0.1 Adc, I_B = 0)	2N4918	$V_{CEO(sus)}$	40	–	Vdc
	2N4919		60	–	
	2N4920		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 20 Vdc, I_B = 0)	2N4918		–	0.5	
(V_{CE} = 30 Vdc, I_B = 0)	2N4919		–	0.5	
(V_{CE} = 40 Vdc, I_B = 0)	2N4920		–	0.5	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CEO}, $V_{BE(off)}$ = 1.5 Vdc)			–	0.1	
(V_{CE} = Rated V_{CEO}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)			–	0.5	
Collector Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)		I_{CBO}	–	0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 50 mAdc, V_{CE} = 1.0 Vdc)			40	–	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)			**30**	**150**	
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)			10	–	
Collector-Emitter Saturation Voltage (1) (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	–	0.6	Vdc
Base-Emitter Saturation Voltage (1) (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{BE(sat)}$	–	1.3	Vdc
Base-Emitter On Voltage (1) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	–	1.3	Vdc
SMALL-SIGNAL CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	3.0	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	100	pF
Small-Signal Current Gain (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	25	–	–

*Indicates JEDEC Registered Data

(1) Pulse Test: PW ≈ 300 μs, Duty Cycle ≈ 2.0%

3

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

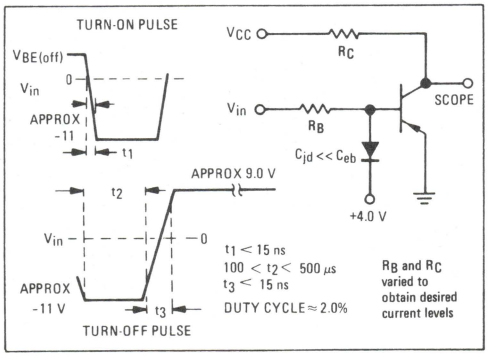

FIGURE 3 – TURN-ON TIME

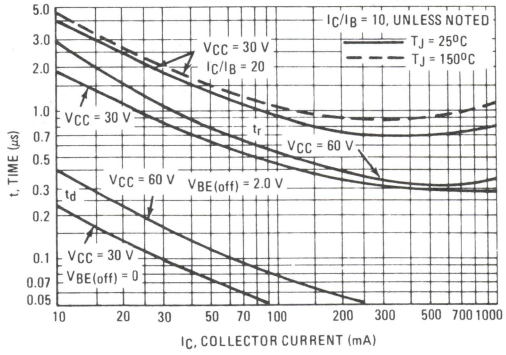

FIGURE 4 – THERMAL RESPONSE

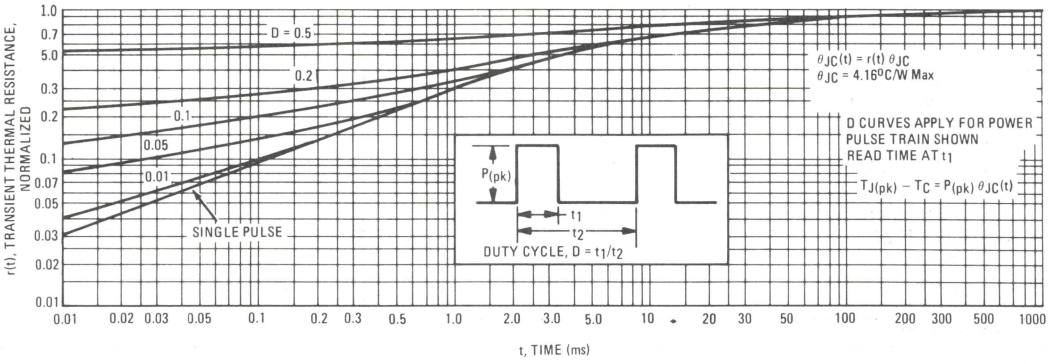

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

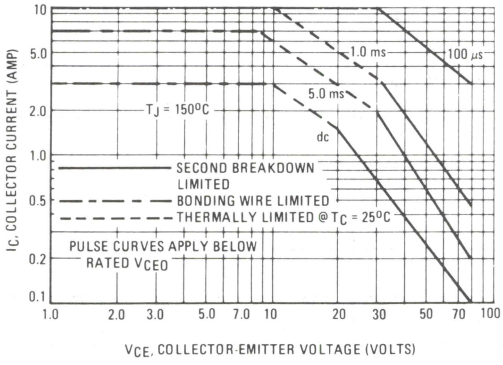

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – STORAGE TIME

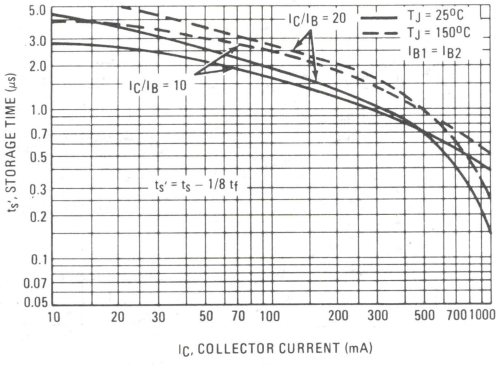

FIGURE 7 – FALL TIME

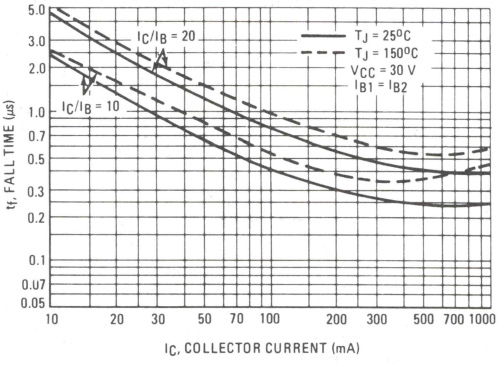

TYPICAL DC CHARACTERISTICS

FIGURE 8 – CURRENT GAIN

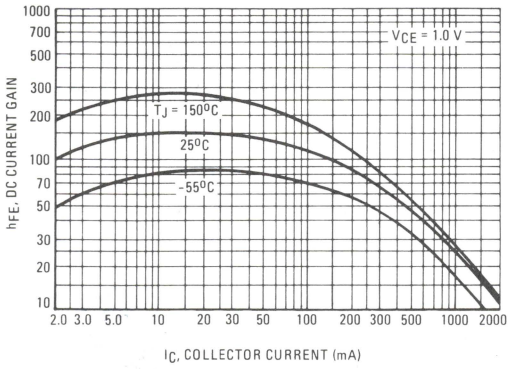

FIGURE 9 – COLLECTOR SATURATION REGION

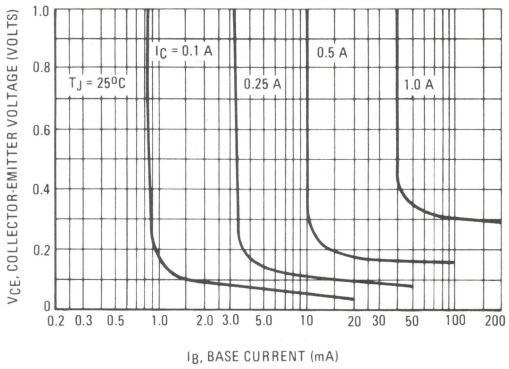

FIGURE 10 – EFFECTS OF BASE-EMITTER RESISTANCE

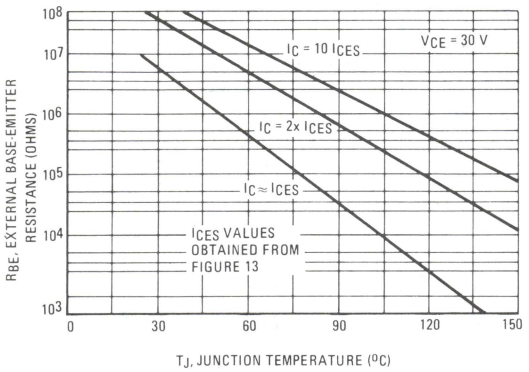

FIGURE 11 – "ON" VOLTAGE

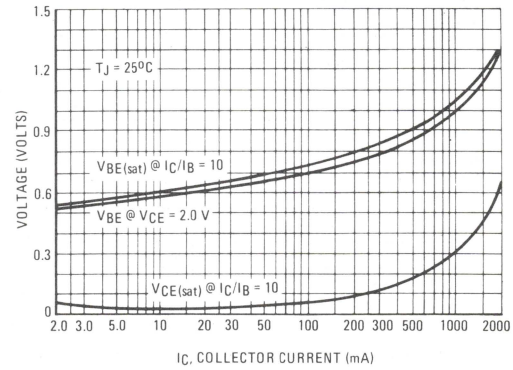

FIGURE 12 – COLLECTOR CUTOFF REGION

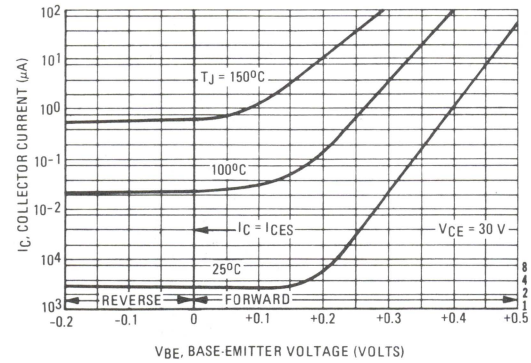

FIGURE 13 – TEMPERATURE COEFFICIENTS

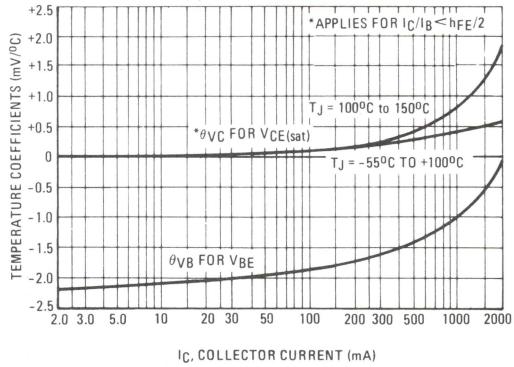

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N4921 thru 2N4923

MEDIUM-POWER PLASTIC NPN SILICON TRANSISTORS

. . . designed for driver circuits, switching, and amplifier applications. These high-performance plastic devices feature:

- Low Saturation Voltage – $V_{CE(sat)}$ = 0.6 Vdc (Max) @ I_C = 1.0 Amp
- Excellent Power Dissipation Due to Thermopad Construction – P_D = 30 W @ T_C = 25°C
- Excellent Safe Operating Area
- Gain Specified to I_C = 1.0 Amp
- Complement to PNP 2N4918, 2N4919, 2N4920

3 AMPERE GENERAL-PURPOSE POWER TRANSISTORS

40-80 VOLTS
30 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N4921	2N4922	2N4923	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous (1)	I_C	1.0 3.0			Adc
Base Current — Continuous	I_B	1.0			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	30 0.24			Watts W/°C
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS (2)

Characteristic	Symbol		Unit
Thermal Resistance, Junction to Case	θ_{JC}	4.16	°C/W

(1) The 1.0 Amp maximum I_C value is based upon JEDEC current gain requirements. The 3.0 Amp maximum value is based upon actual current-handling capability of the device (see Figures 5 and 6).
(2) Recommend use of thermal compound for lowest thermal resistance.
*Indicates JEDEC Registered Data.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-225AA

FIGURE 1 – POWER DERATING

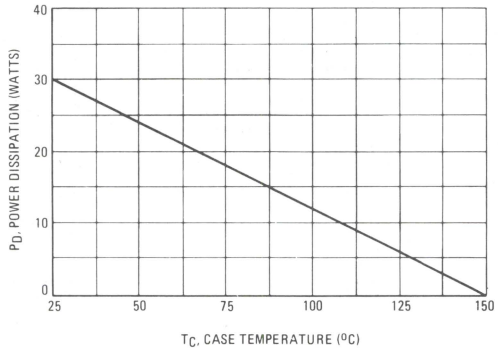

Safe Area Curves are indicated by Figure 5. All limits are applicable and must be observed

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 0.1 Adc, I_B = 0)	2N4921		40	–	
	2N4922		60	–	
	2N4923		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 20 Vdc, I_B = 0)	2N4921		–	0.5	
(V_{CE} = 30 Vdc, I_B = 0)	2N4922		–	0.5	
(V_{CE} = 40 Vdc, I_B = 0)	2N4923		–	0.5	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CEO}, $V_{EB(off)}$ = 1.5 Vdc)			–	0.1	
(V_{CE} = Rated V_{CEO}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)			–	0.5	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = Rated V_{CB}, I_E = 0)			–	0.1	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{EB} = 5.0 Vdc, I_C = 0)			–	1.0	
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 50 mAdc, V_{CE} = 1.0 Vdc)			40	–	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)			30	150	
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)			10	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)			–	0.6	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)			–	1.3	
Base-Emitter On Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)			–	1.3	
SMALL-SIGNAL CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T			MHz
(I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)			3.0	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)			–	100	
Small-Signal Current Gain		h_{fe}			–
(I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)			25	–	

(1) Pulse Test: PW ≈ 300 μs, Duty Cycle ≈ 2.0%.

*Indicates JEDEC Registered Data

3

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

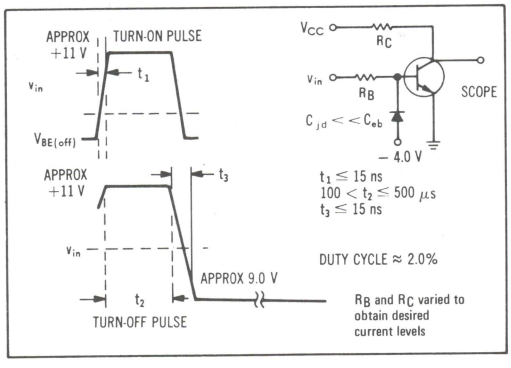

FIGURE 3 – TURN-ON TIME

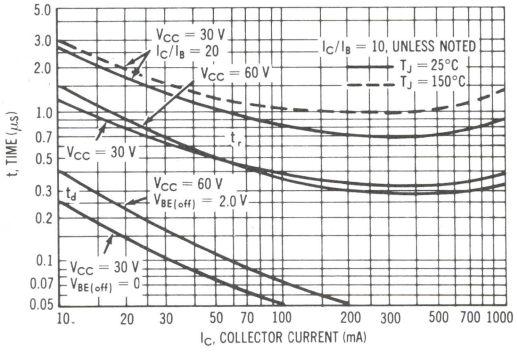

FIGURE 4 – THERMAL RESPONSE

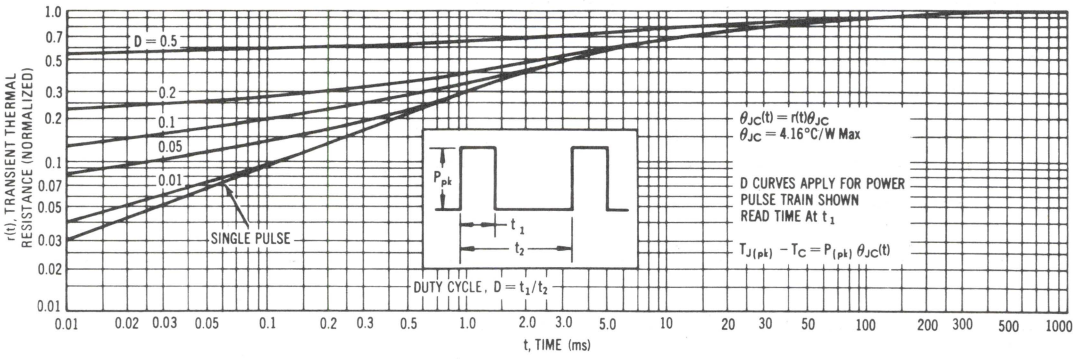

FIGURE 5 – ACTIVE – REGION SAFE OPERATING AREA

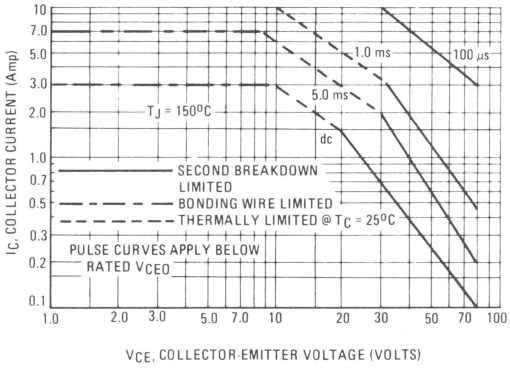

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C \cdot V_{CE}$ operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150^oC$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – STORAGE TIME

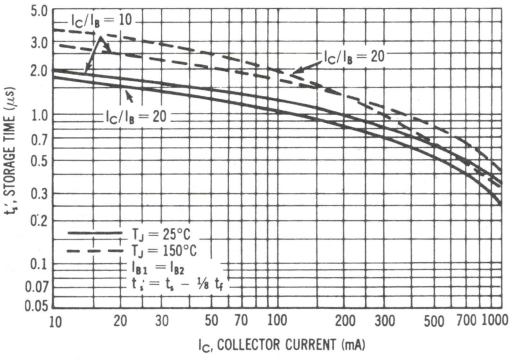

FIGURE 7 – FALL TIME

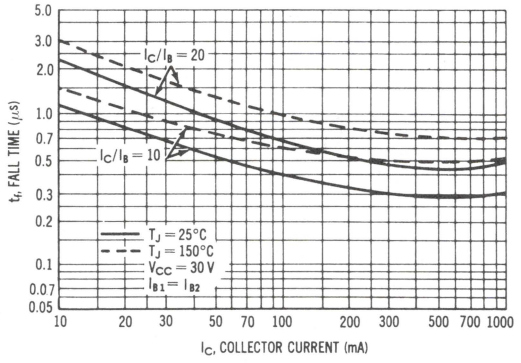

FIGURE 8 – CURRENT GAIN

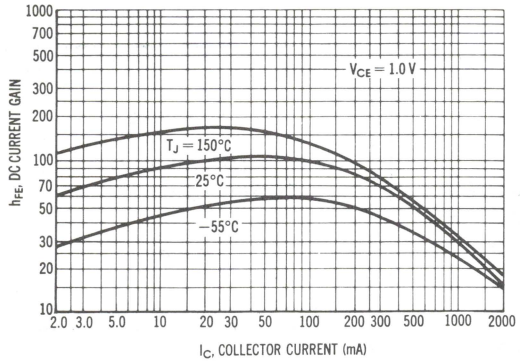

FIGURE 9 – COLLECTOR SATURATION REGION

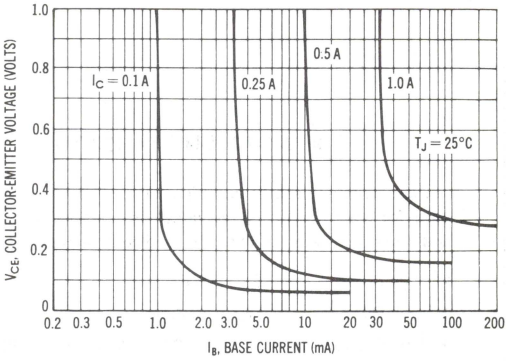

FIGURE 10 – EFFECTS OF BASE-EMITTER RESISTANCE

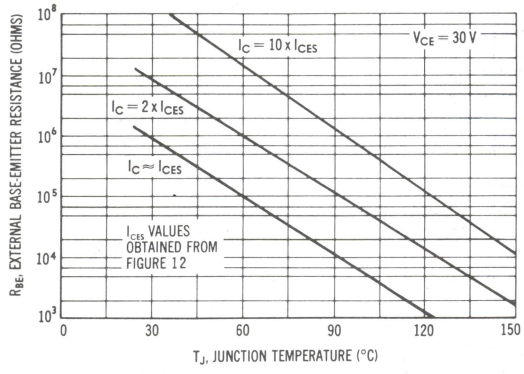

FIGURE 11 – "ON" VOLTAGE

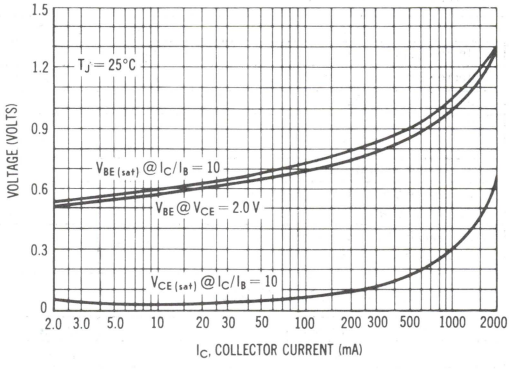

FIGURE 12 – COLLECTOR CUTOFF REGION

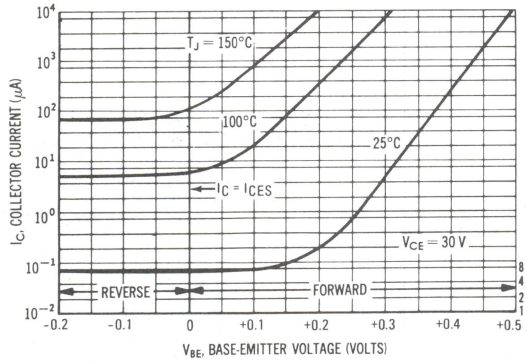

FIGURE 13 – TEMPERATURE COEFFICIENTS

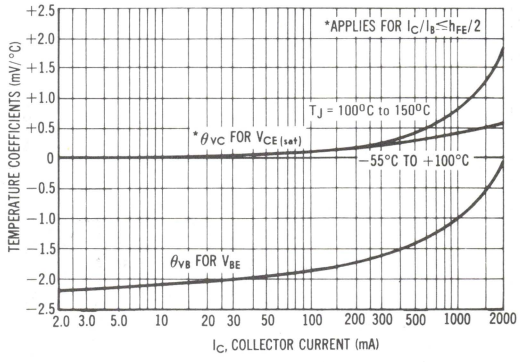

3

2N5038
2N5039

NPN SILICON TRANSISTORS

. . . fast switching speeds and high current capacity ideally suit these parts for use in switching regulators, inverters, wide-band amplifiers and power oscillators in industrial and commercial applications.

- High Speed – t_f = 0.5 μs (Max)
- High Current – $I_{C(max)}$ = 30 Amps
- Low Saturation – $V_{CE(sat)}$ = 2.5 V (Max) @ I_C = 20 Amps

20 AMPERE

NPN SILICON POWER TRANSISTORS

75 and 90 VOLTS
140 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5038	2N5039	Unit
Collector-Base Voltage	V_{CBO}	150	120	Vdc
Collector-Emitter Voltage	V_{CEV}	150	120	Vdc
Emitter-Base Voltage	V_{EBO}	7		Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	20 30		Adc
Base Current – Continuous	I_B	5		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	140 0.8		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 10 ms, Duty Cycle ≤ 50%.

FIGURE 1 – SWITCHING TIME TEST CIRCUIT

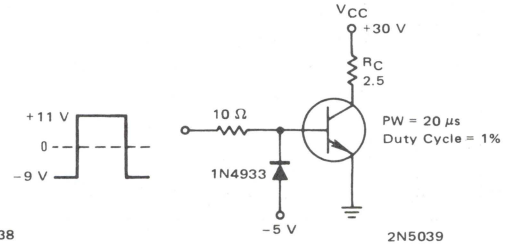

2N5038
I_C = 12 Amps
I_{B1} = I_{B2} = 1.2 Amps

2N5039
I_C = 10 Amps
I_{B1} = I_{B2} = 1.0 Amps



STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.151	0.165

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

CASE 1-04
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted).

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5038		90	–	
	2N5039		75	–	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 V)	2N5038		–	50	
(V_{CE} = 110 Vdc, $V_{BE(off)}$ = 1.5 V)	2N5039		–	50	
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5038		–	10	
(V_{CE} = 85 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5039		–	10	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{EB} = 5 Vdc, I_C = 0)	2N5038		–	5	
	2N5039		–	15	
(V_{EB} = 7 Vdc, I_C = 0)	Both		–	50	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 12 Adc, V_{CE} = 5 Vdc)	2N5038		20	100	
(I_C = 10 Adc, V_{CE} = 5 Vdc)	2N5039		20	100	
Collector-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 5 Adc)		$V_{CE(sat)}$	–	2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 5 Adc)		$V_{BE(sat)}$	–	3.3	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common-Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio (I_C = 2 Adc, V_{CE} = 10 Vdc, f = 5 MHz)		$\|h_{fe}\|$	12	–	–
SWITCHING CHARACTERISTICS					
RESISTIVE LOAD					
Rise Time (V_{CC} = 30 Vdc)		t_r	–	0.5	μs
Storage Time (I_C = 12 Adc, I_{B1} = I_{B2} = 1.2 Adc)	2N5038	t_s	–	1.5	μs
Fall Time (I_C = 10 Adc, I_{B1} = I_{B2} = 1 Adc)	2N5039	t_f	–	0.5	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

FIGURE 2 – FORWARD BIAS SAFE OPERATING AREA

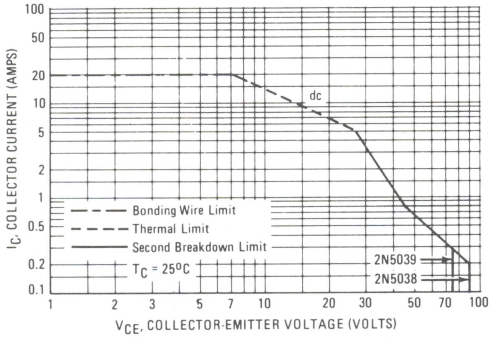

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

Second breakdown pulse limits are valid for duty cycles to 10%. At high case temperatures, thermal limitations may reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N5190 thru 2N5192

SILICON NPN POWER TRANSISTORS

. . . for use in power amplifier and switching circuits, – excellent safe area limits. Complement to PNP 2N5193, 2N5194, 2N5195

4 AMPERE
POWER TRANSISTORS
SILICON NPN

40-80 VOLTS
40 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5190	2N5191	2N5192	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current	I_C	4.0			Adc
Base Current	I_B	1.0			Adc
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	40 320			Watts $mW/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150			^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.12	$^oC/W$

*ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 0.1 Adc, I_B = 0)	2N5190 2N5191 2N5192	$V_{CEO(sus)}$	 40 60 80	 – – –	Vdc
Collector Cutoff Current (V_{CE} = 40 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0) (V_{CE} = 80 Vdc, I_B = 0)	 2N5190 2N5191 2N5192	I_{CEO}	 – – –	 1.0 1.0 1.0	mAdc
Collector Cutoff Current (V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc, $T_C = 125^oC$) (V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, $T_C = 125^oC$) (V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, $T_C = 125^oC$)	 2N5190 2N5191 2N5192 2N5190 2N5191 2N5192	I_{CEX}	 – – – – – –	 0.1 0.1 0.1 2.0 2.0 2.0	mAdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	 2N5190 2N5191 2N5192	I_{CBO}	 – – –	 0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain(1) (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc) (I_C = 4.0 Adc, V_{CE} = 2.0 Vdc)	 2N5190 2N5191 2N5192 2N5190 2N5191 2N5192	h_{FE}	 25 25 20 10 10 7.0	 100 100 80 – – –	–
Collector-Emitter Saturation Voltage(1) (I_C = 1.5 Adc, I_B = 0.15 Adc) (I_C = 4.0 Adc, I_B = 1.0 Adc)		$V_{CE(sat)}$	 –	 0.6 1.4	Vdc
Base-Emitter On Voltage (1) (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	–	1.2	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	2.0	–	MHz

(1) Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2.0%.
*Indicates JEDEC Registered Data



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-225AA

3

FIGURE 1 – DC CURRENT GAIN

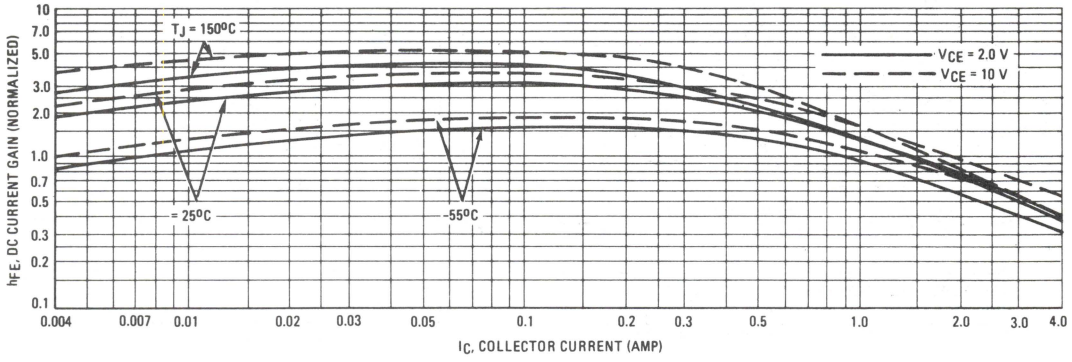

FIGURE 2 – COLLECTOR SATURATION REGION

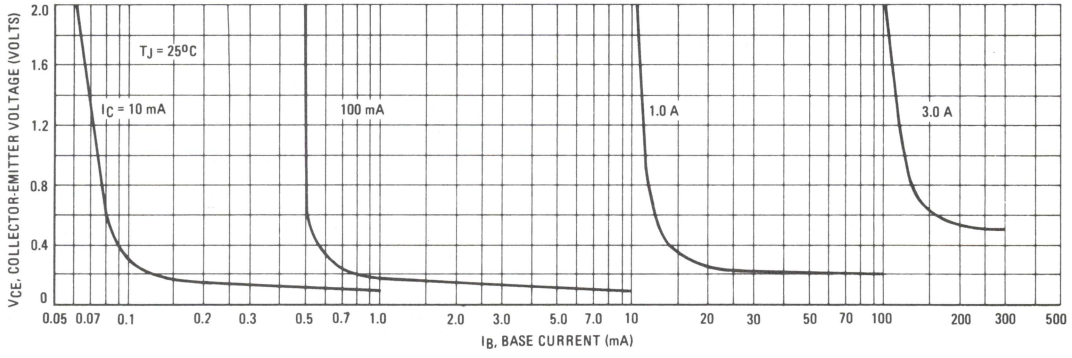

FIGURE 3 – "ON" VOLTAGES

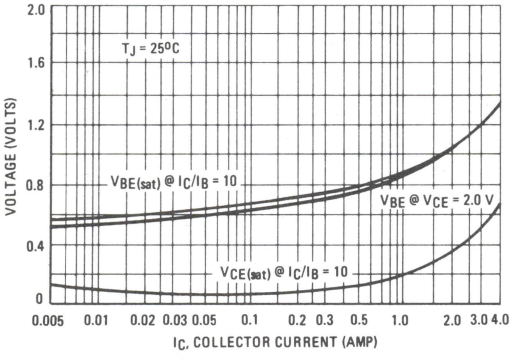

FIGURE 4 – TEMPERATURE COEFFICIENTS

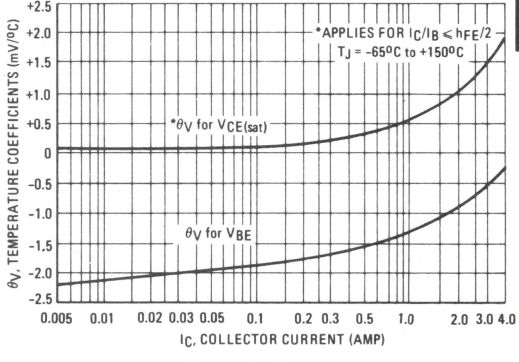

3

FIGURE 5 – COLLECTOR CUT-OFF REGION

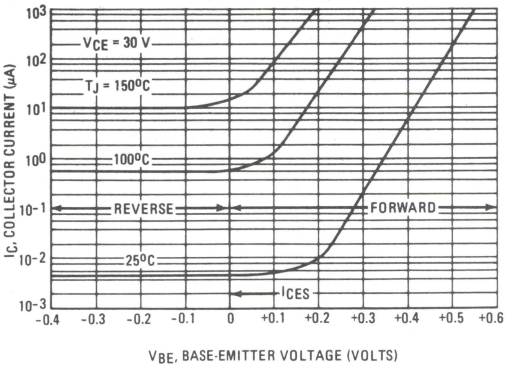

FIGURE 6 – EFFECTS OF BASE-EMITTER RESISTANCE

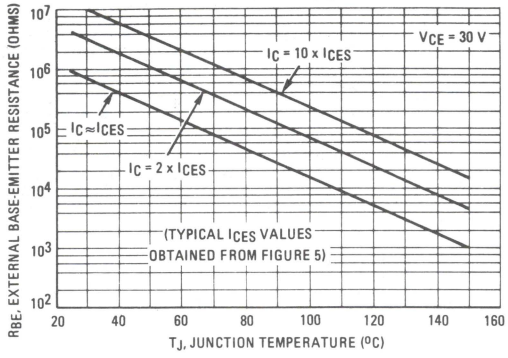

FIGURE 7 – SWITCHING TIME EQUIVALENT CIRCUIT

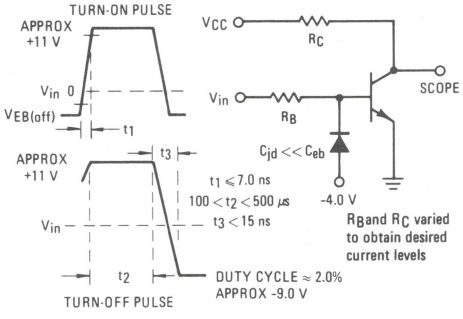

FIGURE 8 – CAPACITANCE

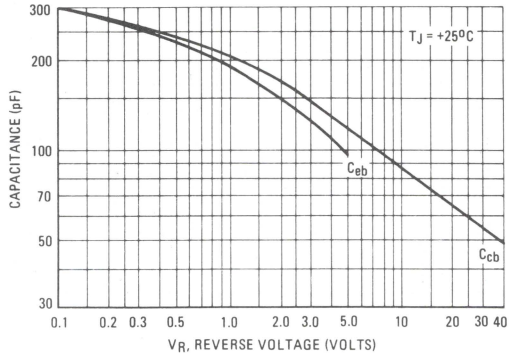

3

FIGURE 9 – TURN-ON TIME

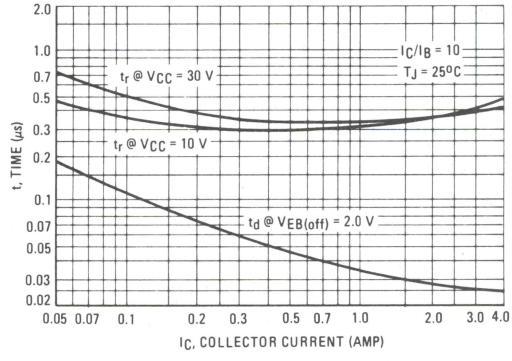

FIGURE 10 – TURN-OFF TIME

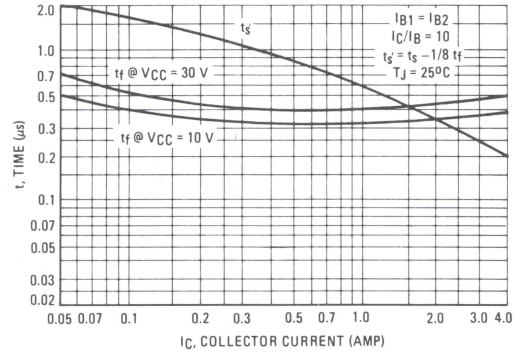

FIGURE 11 RATING AND THERMAL DATA
ACTIVE-REGION SAFE OPERATING AREA

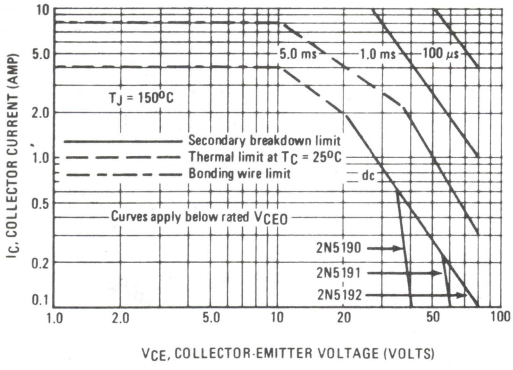

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 12 – THERMAL RESPONSE

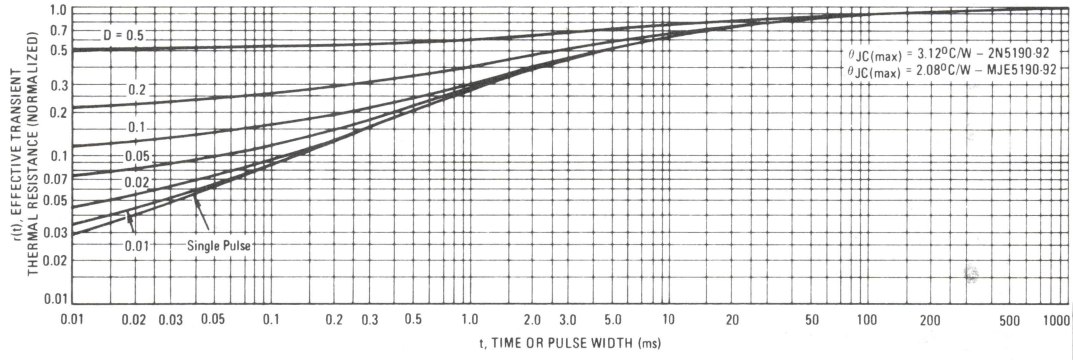

3

DESIGN NOTE: USE OF TRANSIENT THERMAL RESISTANCE DATA

FIGURE A

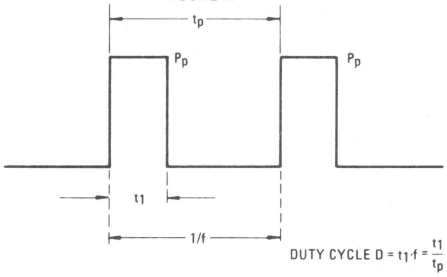

A train of periodical power pulses can be represented by the model shown in Figure A. Using the model and the device thermal response, the normalized effective transient thermal resistance of Figure 12 was calculated for various duty cycles.

To find $\theta_{JC}(t)$, multiply the value obtained from Figure 12 by the steady state value θ_{JC}.

Example:

The 2N5190 is dissipating 50 watts under the following conditions: t_1 = 0.1 ms, t_p = 0.5 ms. (D = 0.2).

Using Figure 12, at a pulse width of 0.1 ms and D = 0.2, the reading of r(t_1, D) is 0.27.

The peak rise in junction temperature is therefore:

$$\triangle T = r(t) \times P_P \times \theta_{JC} = 0.27 \times 50 \times 3.12 = 42.2°C$$

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N5193 thru 2N5195

SILICON PNP POWER TRANSISTORS

. . . for use in power amplifier and switching circuits, – excellent safe area limits. Complement to NPN 2N5190, 2N5191, 2N5192

4 AMPERE
POWER TRANSISTORS
SILICON PNP

40-80 VOLTS



*MAXIMUM RATINGS

Rating	Symbol	2N5193	2N5194	2N5195	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	← 5.0 →			Vdc
Collector Current	I_C	← 4.0 →			Adc
Base Current	I_B	← 1.0 →			Adc
Total Power Dissipation @ $T_C = 25^oC$	P_D	← 40 →			Watts
Derate above 25^oC		← 320 →			$mW/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +150 →			$^oC/W$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.12	$^oC/W$

*ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 0.1 Adc, I_B = 0)	2N5193		40		
	2N5194		60		
	2N5195		80		
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N5193		–	1.0	
(V_{CE} = 60 Vdc, I_B = 0)	2N5194		–	1.0	
(V_{CE} = 80 Vdc, I_B = 0)	2N5195		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5193		–	0.1	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5194		–	0.1	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5195		–	0.1	
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	2N5193		–	2.0	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	2N5194		–	2.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	2N5195		–	2.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 40 Vdc, I_E = 0)	2N5193		–	0.1	
(V_{CB} = 60 Vdc, I_E = 0)	2N5194		–	0.1	
(V_{CB} = 80 Vdc, I_E = 0)	2N5195		–	0.1	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)			–	1.0	
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)	2N5193		25	100	
	2N5194		25	100	
	2N5195		20	80	
(I_C = 4.0 Adc, V_{CE} = 2.0 Vdc)	2N5193		10	–	
	2N5194		10	–	
	2N5195		7.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 1.5 Adc, I_B = 0.15 Adc)			–	0.6	
(I_C = 4.0 Adc, I_B = 1.0 Adc)			–	1.4	
Base-Emitter On Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)			–	1.2	
DYNAMIC CHARACTERISTICS					
Current-Gain-Bandwidth Product		f_T			MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)			2.0	–	

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-225AA

3

FIGURE 1 – DC CURRENT GAIN

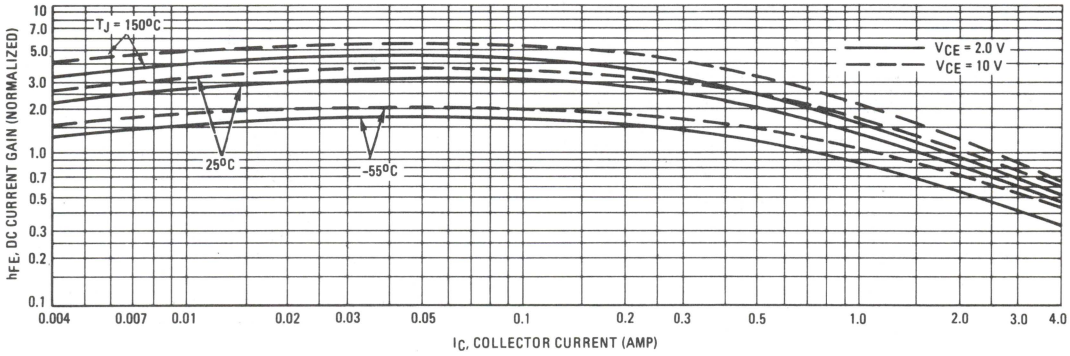

FIGURE 2 – COLLECTOR SATURATION REGION

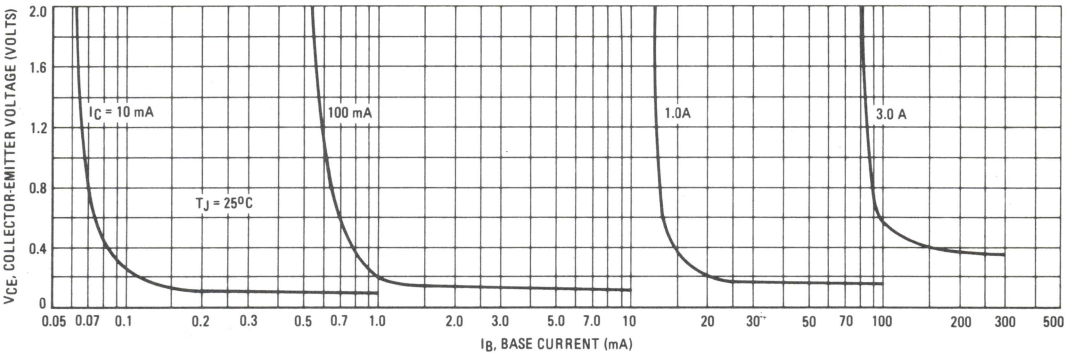

3

FIGURE 3 – "ON" VOLTAGE

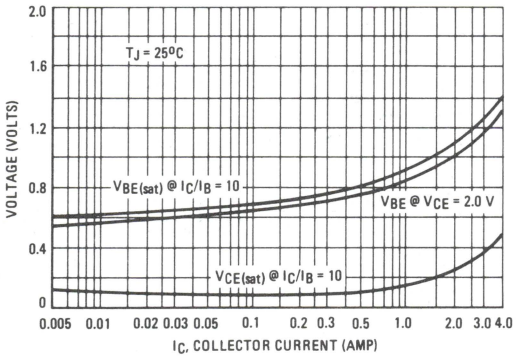

FIGURE 4 – TEMPERATURE COEFFICIENTS

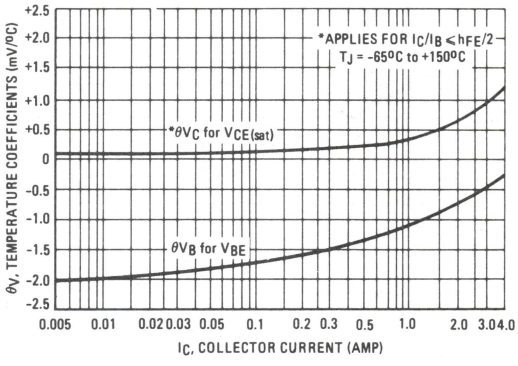

FIGURE 5 – COLLECTOR CUT-OFF REGION

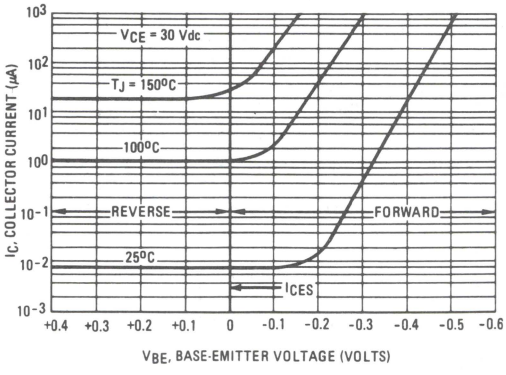

FIGURE 6 – EFFECTS OF BASE-EMITTER RESISTANCE

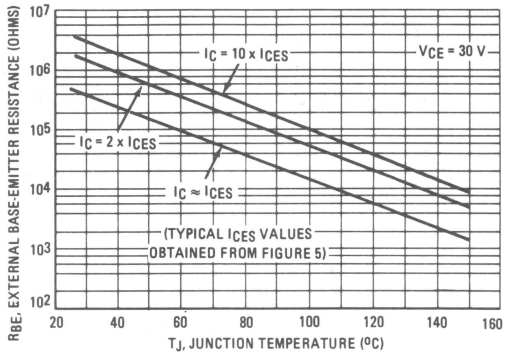

FIGURE 7 – SWITCHING TIME EQUIVALENT CIRCUIT

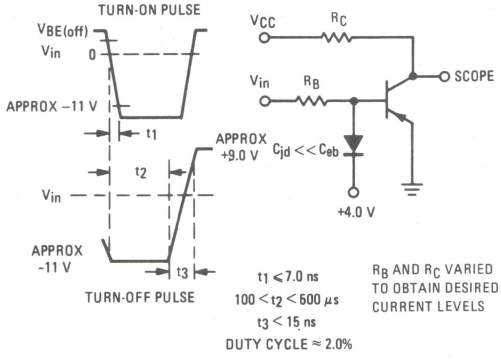

FIGURE 8 – CAPACITANCE

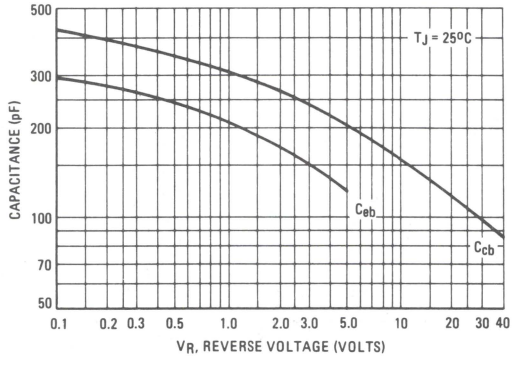

FIGURE 9 – TURN-ON TIME

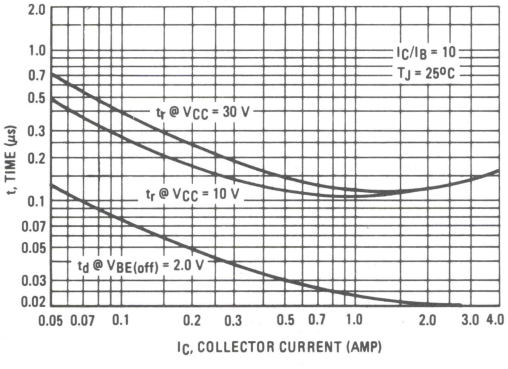

FIGURE 10 – TURN-OFF TIME

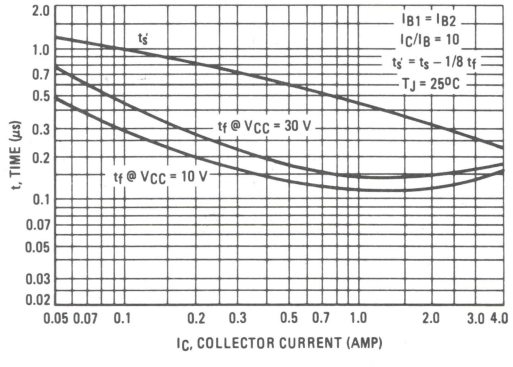

3

FIGURE 11

RATING AND THERMAL DATA
ACTIVE-REGION SAFE OPERATING AREA

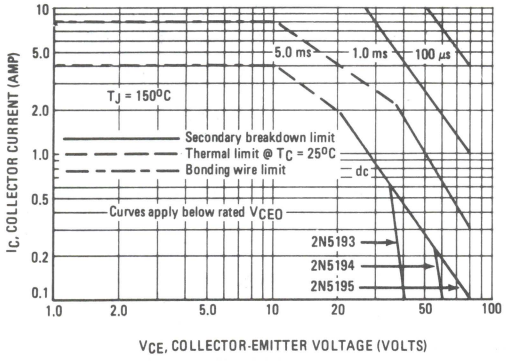

Note 1:

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on $T_{J(pk)}$ = 150°C. T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. At high-case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 12 – THERMAL RESPONSE

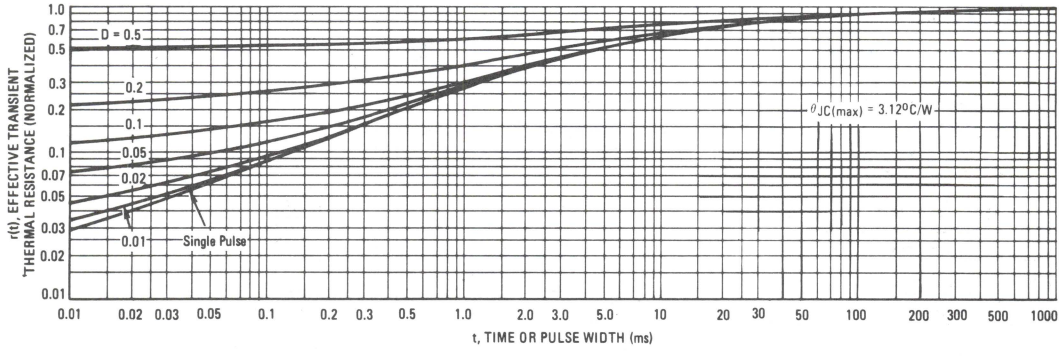

3

DESIGN NOTE: USE OF TRANSIENT THERMAL RESISTANCE DATA

FIGURE A

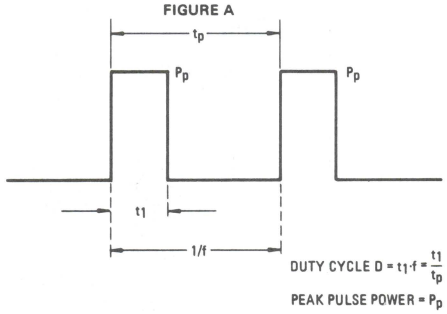

A train of periodical power pulses can be represented by the model shown in Figure A. Using the model and the device thermal response, the normalized effective transient thermal resistance of Figure 12 was calculated for various duty cycles.

To find $\theta_{JC}(t)$, multiply the value obtained from Figure 12 by the steady state value θ_{JC}.

Example:

The 2N5193 is dissipating 50 watts under the following conditions: t_1 = 0.1 ms, tp = 0.5 ms. (D = 0.2).

Using Figure 12, at a pulse width of 0.1 ms and D = 0.2, the reading of r(t_1, D) is 0.27.

The peak rise in junction temperature is therefore:

$$\Delta T = r(t) \times P_P \times \theta_{JC} = 0.27 \times 50 \times 3.12 = 42.2^{\circ}C$$

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N5301
2N5302
2N5303

HIGH-POWER NPN SILICON TRANSISTORS

. . . for use in power amplifier and switching circuits applications.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 80 Vdc (Min) @ I_C = 200 mAdc (2N5303)
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.75 Vdc (Max) @ I_C = 10 Adc (2N5301, 2N5302)
  1.0 Vdc (Max) @ I_C = 10 Adc (2N5303)
- Excellent Safe Operating Area –
  200 Watt dc Power Rating to 30 Vdc (2N5303)
- Complements to PNP 2N4398, 2N4399 and 2N5745

20 AND 30 AMPERE
POWER TRANSISTORS
NPN SILICON
40–60–80 VOLTS
200 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5301	2N5302	2N5303	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Collector Current – Continuous	I_C	30	30	20	Adc
Base Current	I_B	← 7.5 →			Adc
Total Device Dissipation @ T_C=25°C Derate above 25°C	P_D	← 200 → ← 1.14 →			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← −65 to +200 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W
Thermal Resistance, Case to Ambient	θ_{CA}	34	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER TEMPERATURE DERATING CURVE

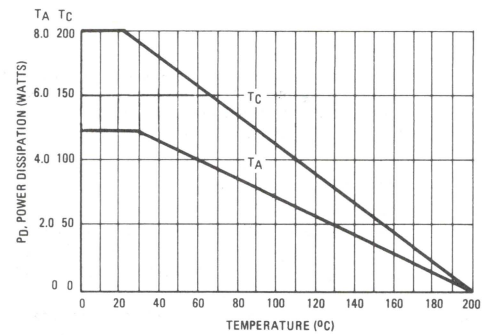



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ | ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ | ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
***OFF CHARACTERISTICS**					
Collector-Emitter Sustaining Voltage (Note 1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5301		40	–	
	2N5302		60	–	
	2N5303		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N5301		–	5.0	
(V_{CE} = 60 Vdc, I_B = 0)	2N5302		–	5.0	
(V_{CE} = 80 Vdc, I_B = 0)	2N5303		–	5.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5301		–	1.0	
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5302		–	1.0	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5303		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5301		–	10	
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5302		–	10	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5303		–	10	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 40 Vdc, I_E = 0)	2N5301		–	1.0	
(V_{CB} = 60 Vdc, I_E = 0)	2N5302		–	1.0	
(V_{CB} = 80 Vdc, I_E = 0)	2N5303		–	1.0	
Emitter Cutoff Current		I_{EBO}	–	5.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain (Note 1)		h_{FE}			–
*(I_C = 1.0 Adc, V_{CE} = 2.0 Vdc)	ALL TYPES		40	–	
*(I_C = 10 Adc, V_{CE} = 2.0 Vdc)	2N5303		15	60	
*(I_C = 15 Adc, V_{CE} = 2.0 Vdc)	2N5301,2N5302		15	60	
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)	2N5303		5.0	–	
(I_C = 30 Adc, V_{CE} = 4.0 Vdc)	2N5301,2N5302		5.0	–	
*Collector-Emitter Saturation Voltage (Note 1)		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)	2N5301,2N5302		–	0.75	
(I_C = 10 Adc, I_B = 1.0 Adc)	2N5303		–	1.0	
(I_C = 15 Adc, I_B = 1.5 Adc)	2N5303		–	1.5	
(I_C = 20 Adc, I_B = 2.0 Adc)	2N5301,2N5302		–	2.0	
(I_C = 20 Adc, I_B = 4.0 Adc)	2N5303		–	2.0	
(I_C = 30 Adc, I_B = 6.0 Adc)	2N5301,2N5302		–	3.0	
*Base-Emitter Saturation Voltage (Note 1)		$V_{BE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)	ALL TYPES		–	1.7	
(I_C = 15 Adc, I_B = 1.5 Adc)	2N5301,2N5302		–	1.8	
(I_C = 15 Adc, I_B = 1.5 Adc)	2N5303		–	2.0	
(I_C = 20 Adc, I_B = 2.0 Adc)	2N5301,2N5302		–	2.5	
(I_C = 20 Adc, I_B = 4.0 Adc)	2N5303		–	2.5	
*Base-Emitter On Voltage (Note 1)		$V_{BE(on)}$			Vdc
(I_C = 10 Adc, V_{CE} = 2.0 Vdc)	2N5303		–	1.5	
(I_C = 15 Adc, V_{CE} = 2.0 Vdc)	2N5301,2N5302		–	1.7	
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)	2N5303		–	2.5	
(I_C = 30 Adc, V_{CE} = 4.0 Vdc)	2N5301,2N5302		–	3.0	
***DYNAMIC CHARACTERISTICS**					
Current-Gain—Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	2.0	–	MHz
Small-Signal Current Gain (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	40	–	–
***SWITCHING CHARACTERISTICS**					
Rise Time	(V_{CC} = 30 Vdc, I_C = 10 Adc, I_{B1} = I_{B2} = 1.0 Adc)	t_r	–	1.0	μs
Storage Time		t_s	–	2.0	μs
Fall Time		t_f	–	1.0	μs

*Indicates JEDEC Registered Data.
Note 1: Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

SWITCHING TIME EQUIVALENT TEST CIRCUITS

FIGURE 2 – TURN-ON TIME

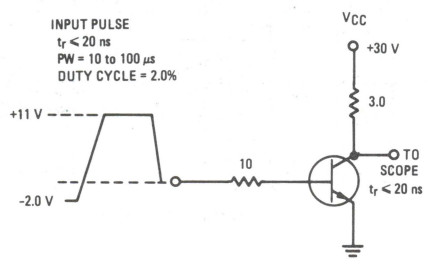

FIGURE 3 – TURN-OFF TIME

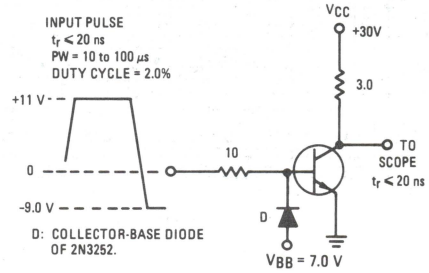

FIGURE 4 – THERMAL RESPONSE

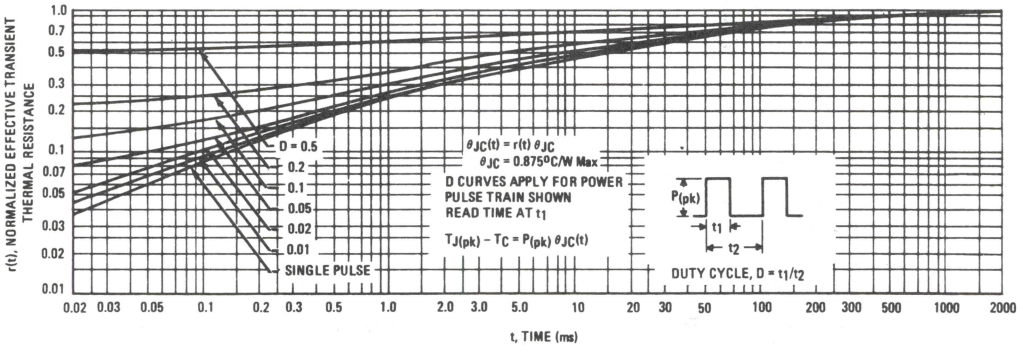

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

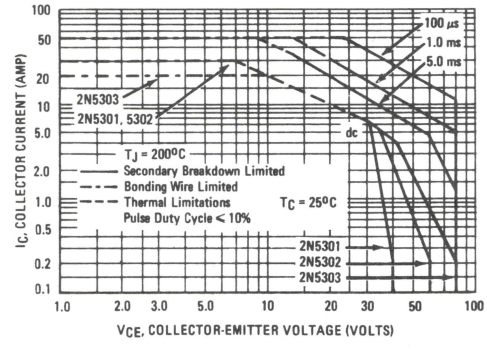

FIGURE 6 – CAPACITANCE versus VOLTAGE

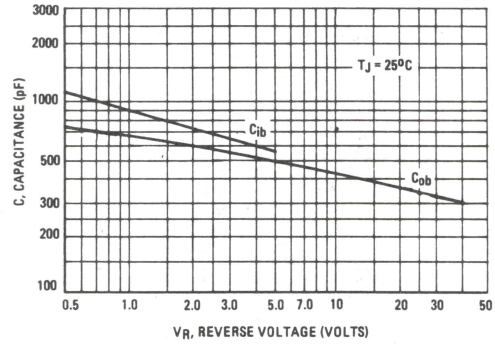

FIGURE 7 – TURN-ON TIME

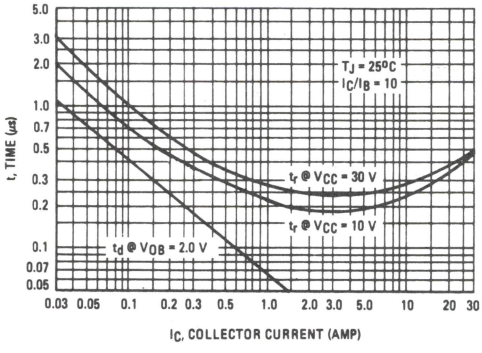

FIGURE 8 – TURN-OFF TIME

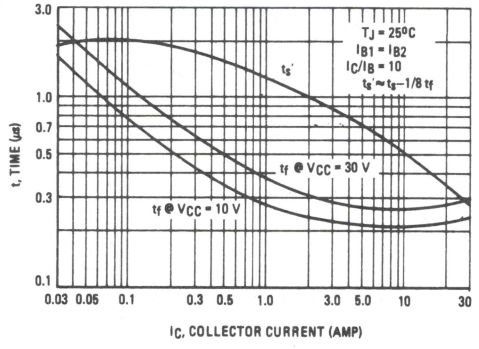

FIGURE 9 – DC CURRENT GAIN

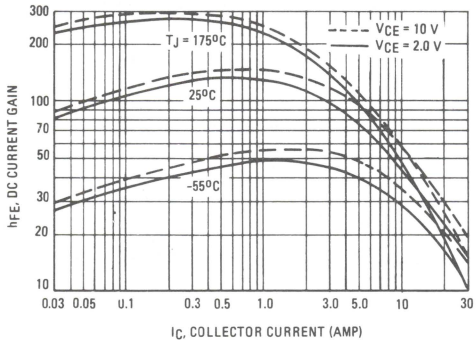

FIGURE 10 – COLLECTOR SATURATION REGION

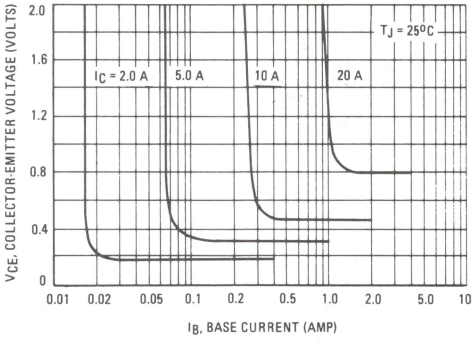

FIGURE 11 – EFFECTS OF BASE-EMITTER RESISTANCE

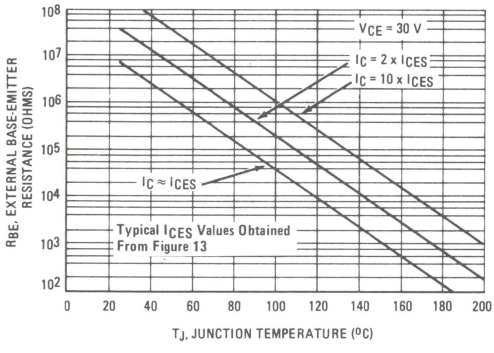

FIGURE 12 – "ON" VOLTAGES

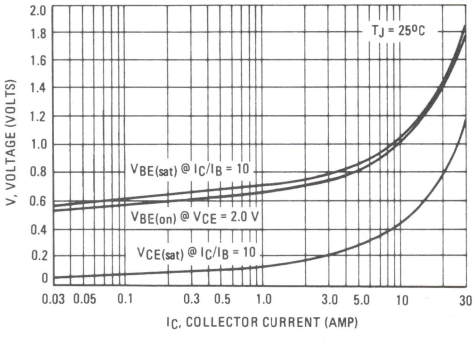

FIGURE 13 – COLLECTOR CUT-OFF REGION

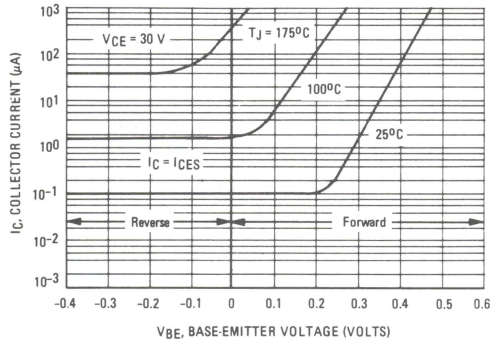

FIGURE 14 – TEMPERATURE COEFFICIENTS

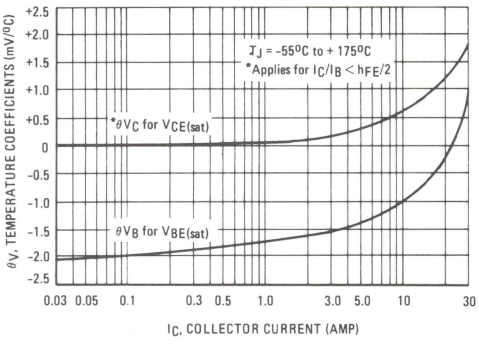

3

2N5336 thru 2N5339

MEDIUM-POWER NPN SILICON TRANSISTORS

. . . designed for switching and wide band amplifier applications.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.2 Vdc (Max) @ I_C = 5.0 Amp
- DC Current Gain Specified to 5 Amperes
- Excellent Safe Operating Area
- Packaged in the Compact TO-205AD Case for Critical Space-Limited Applications
- Complement to 2N6190 thru 2N6193

5 AMPERE
POWER TRANSISTORS
NPN SILICON

80–100 VOLTS
6 WATTS



MAXIMUM RATINGS

Rating	Symbol	2N5336 2N5337	2N5338 2N5339	Unit
Collector-Emitter Voltage	V_{CEO}	80	100	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous	I_C	5.0		Adc
Base Current	I_B	1.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	6.0 34.3		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	29.2	°C/W





DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	8.89	9.40	0.350	0.370
B	8.00	8.51	0.315	0.335
C	6.10	6.60	0.240	0.260
D	0.406	0.533	0.016	0.021
E	0.229	3.18	0.009	0.125
F	0.406	0.483	0.016	0.019
G	4.83	5.33	0.190	0.210
H	0.711	0.864	0.028	0.034
J	0.737	1.02	0.029	0.040
K	12.70	–	0.500	–
L	6.35	–	0.250	–
M	45° NOM		45° NOM	
P	–	1.27	–	0.050
Q	90° NOM		90° NOM	
R	2.54	–	0.100	–

All JEDEC dimensions and notes apply.

CASE 79-02
TO-205AD

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

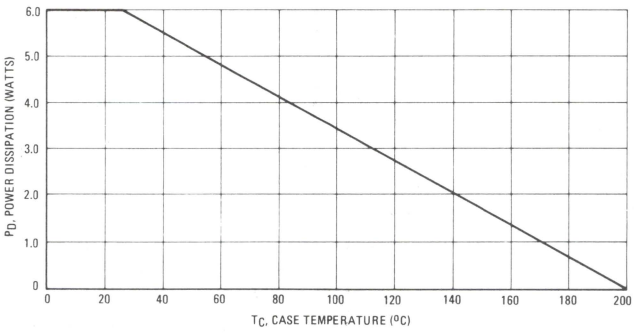

Safe Area Curves are indicated by Figure 5. All limits are applicable and must be observed.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C, unless otherwise noted)

Characteristic		Fig. No.	Symbol	Min	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage*		–	$V_{CEO(sus)}$*			Vdc
(I_C = 50 mAdc, I_B = 0)	2N5336, 2N5337			80	–	
	2N5338, 2N5339			100	–	
Collector Cutoff Current		–	I_{CEO}			μAdc
(V_{CE} = 75 Vdc, I_B = 0)	2N5336, 2N5337			–	100	
(V_{CE} = 90 Vdc, I_B = 0)	2N5338, 2N5339			–	100	
Collector Cutoff Current		12	I_{CEX}			μAdc
(V_{CE} = 75 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5336, 2N5337			–	10	
(V_{CE} = 90 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5338, 2N5339			–	10	
(V_{CE} = 75 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5336, 2N5337			–	1.0	mAdc
(V_{CE} = 90 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5338, 2N5339			–	1.0	
Collector Cutoff Current		–	I_{CBO}			μAdc
(V_{CB} = 80 Vdc, I_E = 0)	2N5336, 2N5337			–	10	
(V_{CB} = 100 Vdc, I_E = 0)	2N5338, 2N5339			–	10	
Emitter Cutoff Current		–	I_{EBO}			μAdc
(V_{BE} = 6.0 Vdc, I_C = 0)				–	100	
ON CHARACTERISTICS						
DC Current Gain*		8	h_{FE}*			–
(I_C = 500 mAdc, V_{CE} = 2.0 Vdc)	2N5336, 2N5338			30	–	
	2N5337, 2N5339			60	–	
(I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)	2N5336, 2N5338			30	120	
	2N5337, 2N5339			60	240	
(I_C = 5.0 Adc, V_{CE} = 2.0 Vdc)	2N5336, 2N5338			20	–	
	2N5337, 2N5339			40	–	
Collector-Emitter Saturation Voltage*		9, 11, 13	$V_{CE(sat)}$*			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)				–	0.7	
(I_C = 5.0 Adc, I_B = 0.5 Adc)				–	1.2	
Base-Emitter Saturation Voltage*		11, 13	$V_{BE(sat)}$*			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)				–	1.2	
(I_C = 5.0 Adc, I_B = 0.5 Adc)				–	1.8	
DYNAMIC CHARACTERISTICS						
Current-Gain–Bandwidth Product		–	f_T			MHz
(I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 10 MHz)				30	–	
Output Capacitance		7	C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)				–	250	
Input Capacitance		7	C_{ib}			pF
(V_{BE} = 2.0 Vdc, I_C = 0, f = 100 kHz)				–	1,000	
SWITCHING CHARACTERISTICS						
Delay Time	(V_{CC} = 40 Vdc, $V_{EB(off)}$ = 3.0 Vdc,	2, 3	t_d	–	100	ns
Rise Time	(I_C = 2.0 Adc, I_{B1} = 0.2 Adc)		t_r	–	100	ns
Storage Time	(V_{CC} = 40 Vdc, I_C = 2.0 Adc,	2, 6	t_s	–	2.0	μs
Fall Time	I_{B1} = I_{B2} = 0.2 Adc)		t_f	–	200	ns

*Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

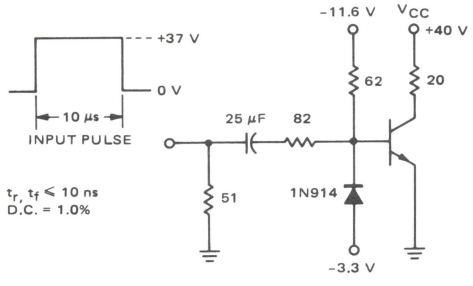

FIGURE 3 – TURN-ON TIME

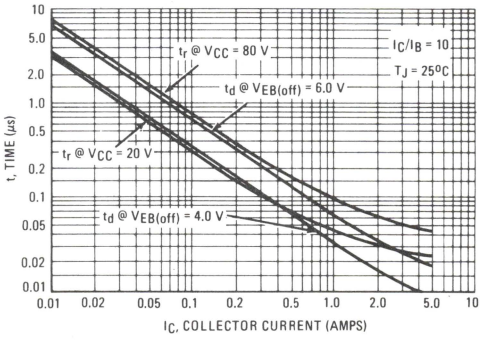

FIGURE 4 – THERMAL RESPONSE

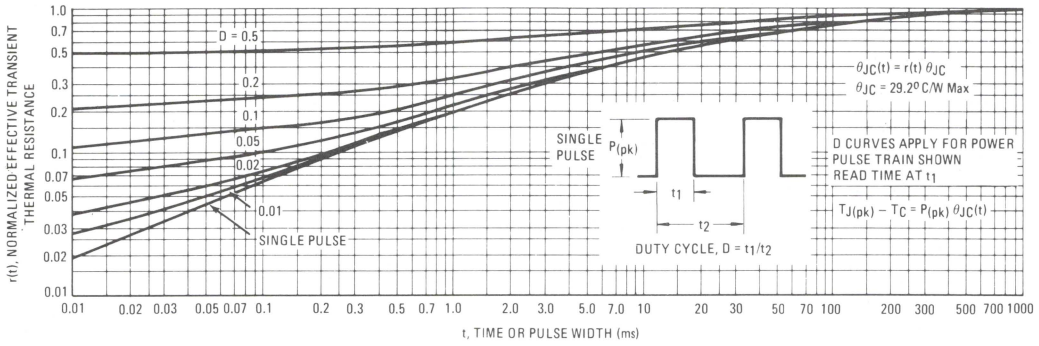

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

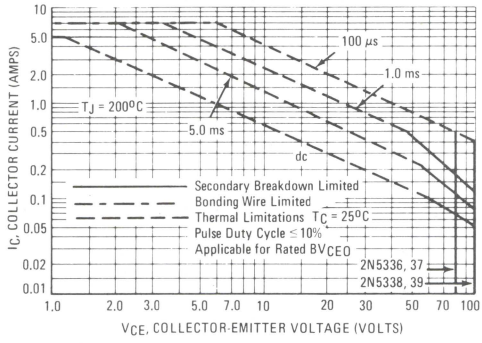

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Pulse curves are valid for duty cycles of 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

FIGURE 6 – TURN-OFF TIME

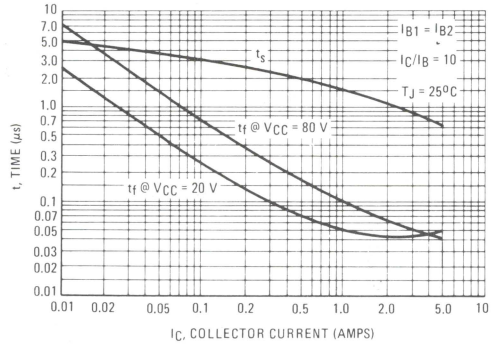

FIGURE 7 – CAPACITANCE versus VOLTAGE

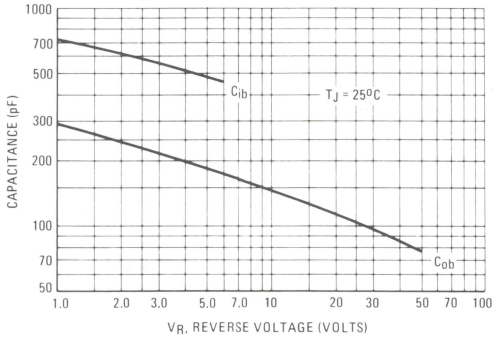

FIGURE 8 – DC CURRENT GAIN

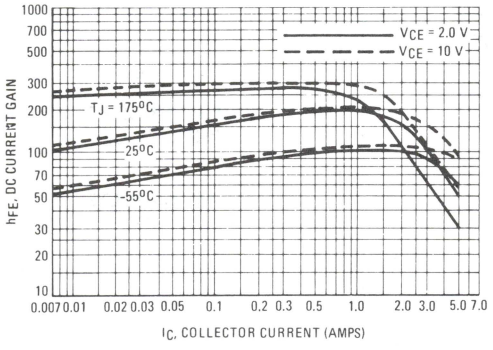

FIGURE 9 – COLLECTOR SATURATION REGION

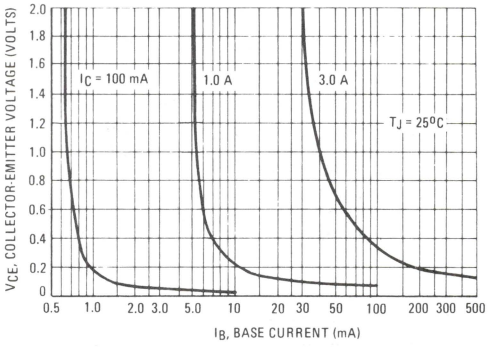

FIGURE 10 – EFFECTS OF BASE-EMITTER RESISTANCE

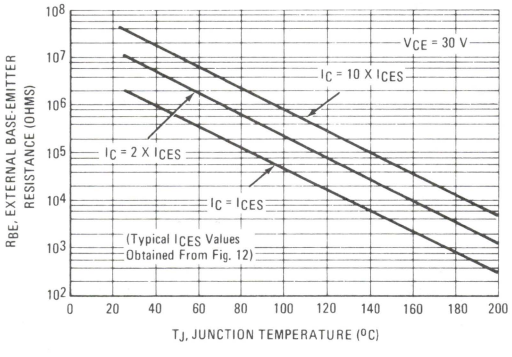

FIGURE 11 – ON VOLTAGES

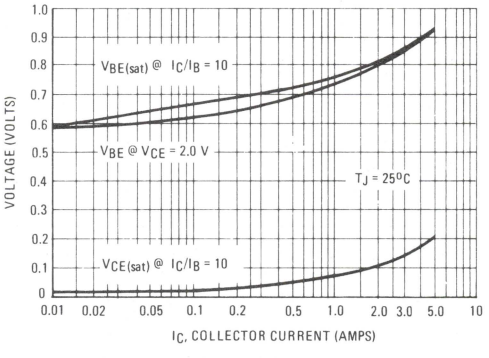

FIGURE 12 – COLLECTOR CUT-OFF REGION

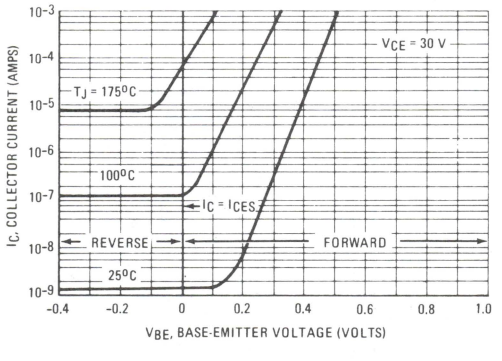

FIGURE 13 – TEMPERATURE COEFFICIENTS

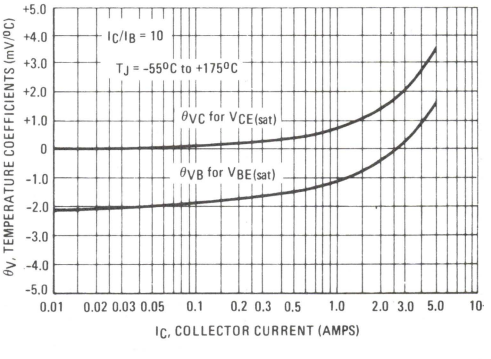

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N5344

HIGH VOLTAGE POWER PNP SILICON TRANSISTOR

. . . designed for high-voltage switching and amplifier applications.

- High Voltage Rating — V_{CEO} = 250 Vdc
- Fast Switching Time — Typically Less Than 550 ns
  Total @ V_{CC} = 100 Vdc
- High Current-Gain-Bandwidth Product —
  f_T = 60 MHz (Min) @ I_C = 100 mAdc
- Packaged in the Compact, High-Efficiency TO-213AA Case

1 AMPERE

POWER TRANSISTOR
PNP SILICON

250-300 VOLTS
40 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	250	Vdc
Collector-Base Voltage	V_{CB}	250	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	1.0	Adc
Base Current — Continuous	I_B	0.5	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 228	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	4.38	°C/W

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

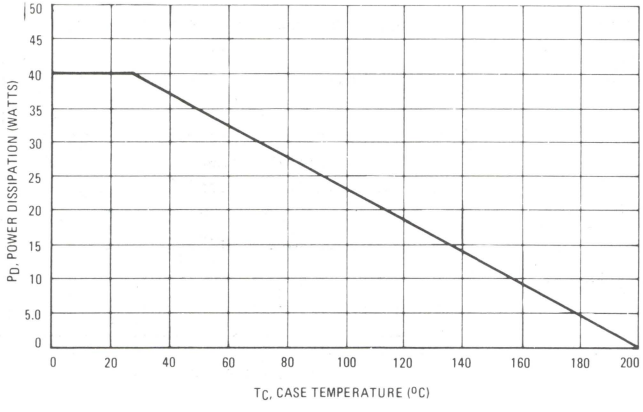

Safe Area Curves Are Indicated By Figure 5.
All Limits Are Applicable And Must Be Observed



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Fig. No.	Symbol	Min	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (1) (I_C = 10 mAdc, I_B = 0)	2N5344	5	$V_{CEO(sus)}$	250	—	Vdc
Collector Cutoff Current (V_{CE} = 225 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5344	10, 12	I_{CEX}	—	100	μAdc
(V_{CE} = 225 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5344			—	1.0	mAdc
Collector Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)		—	I_{CBO}	—	0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		—	I_{EBO}	—	0.1	mAdc
ON CHARACTERISTICS						
DC Current Gain (1) (I_C = 500 mAdc, V_{CE} = 5.0 Vdc)		8	h_{FE}	25	150	—
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)				7.0	—	
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.2 Adc)		9, 11, 13	$V_{CE(sat)}$	—	3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.2 Adc)		11, 13	$V_{BE(sat)}$	—	1.5	Vdc
DYNAMIC CHARACTERISTICS						
Current-Gain—Bandwidth Product (I_C = 100 mAdc, V_{CE} = 20 Vdc, f = 10 MHz)		—	f_T	60	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0)		7	C_{ob}	—	200	pF
SWITCHING CHARACTERISTICS						
Turn-On	(V_{CC} = 100 Vdc, I_C = 500 mAdc, I_{B1} = I_{B2} = 50 mAdc)	2, 3	t_{on}	—	200	ns
Turn-Off	(V_{CC} = 100 Vdc, I_C = 500 mAdc, I_{B1} = I_{B2} = 50 mAdc)	2, 6	t_{off}	—	700	ns

(1) Pulse Test: Pulse Width ≈ 300 μs, Duty Cycle ≈ 2.0%.

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

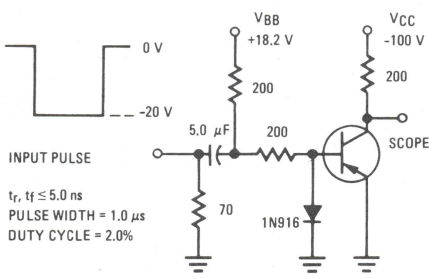

FIGURE 3 – TURN-ON TIME

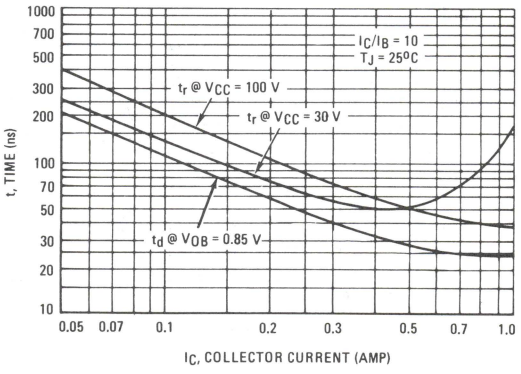

FIGURE 4 – THERMAL RESPONSE

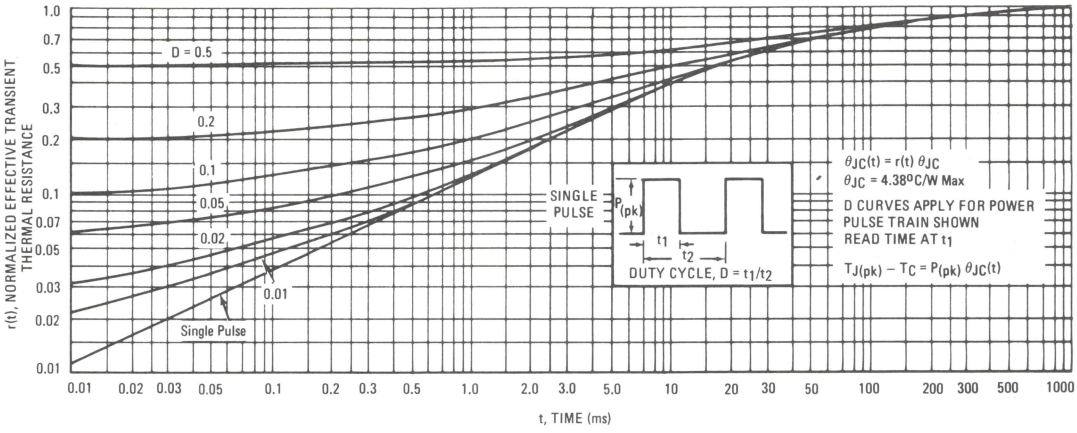

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

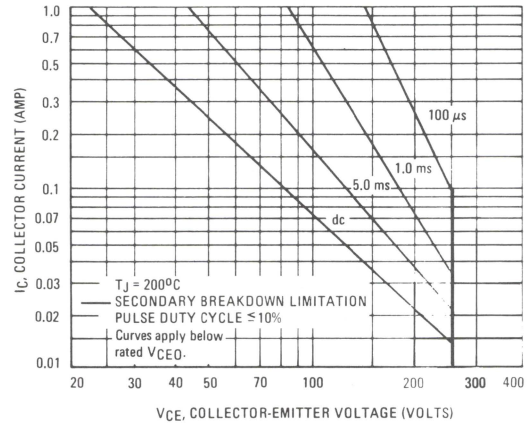

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Pulse curves are valid for duty cycles of 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

FIGURE 6 – TURN-OFF TIME

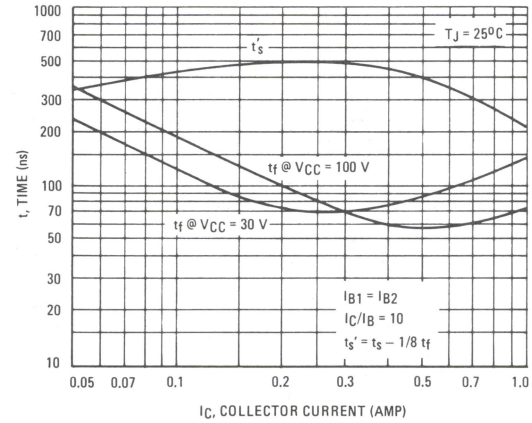

FIGURE 7 – CAPACITANCES

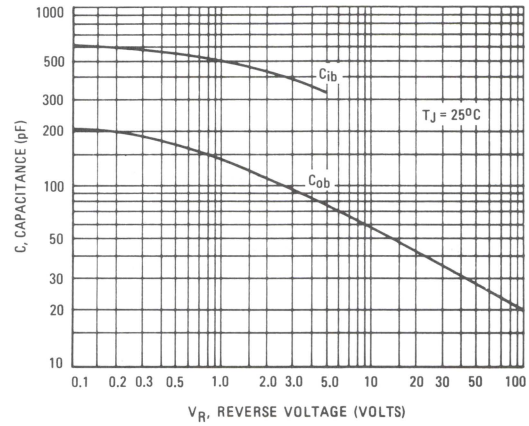

TYPICAL DC CHARACTERISTICS

FIGURE 8 – DC CURRENT GAIN

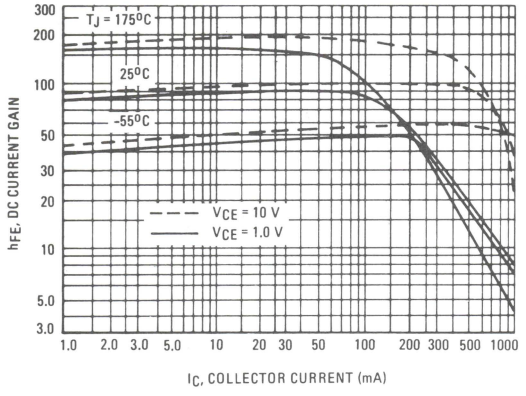

FIGURE 9 – COLLECTOR SATURATION REGION

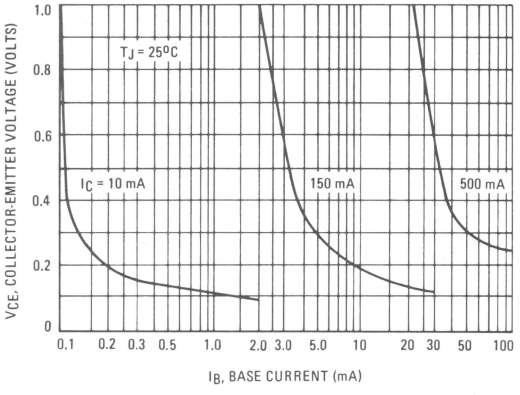

FIGURE 10 – EFFECTS OF BASE-EMITTER RESISTANCE

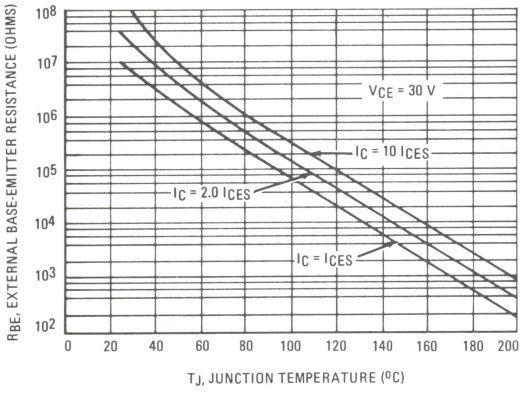

FIGURE 11 – "ON" VOLTAGES

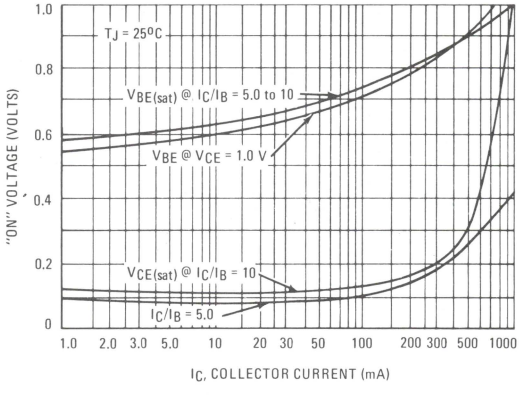

FIGURE 12 – COLLECTOR CUT-OFF REGION

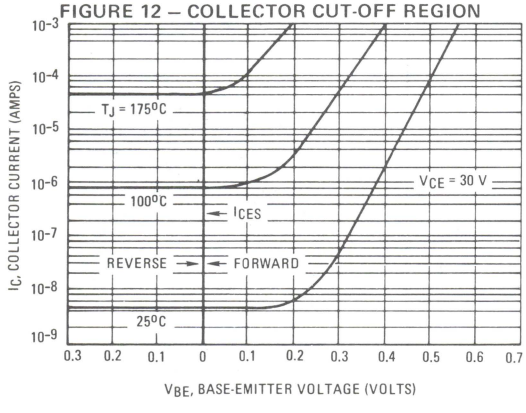

FIGURE 13 – TEMPERATURE COEFFICIENTS

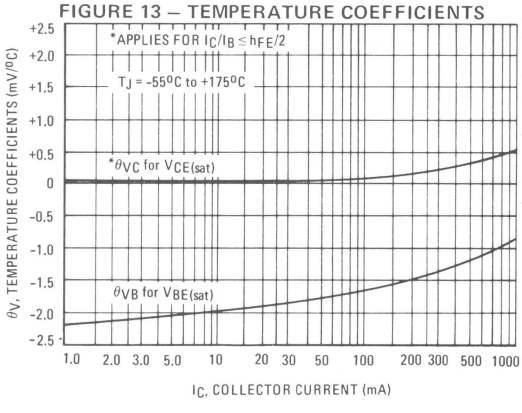

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N5428 thru 2N5430

MEDIUM-POWER NPN SILICON TRANSISTORS

. . . designed for switching and wide-band amplifier applications.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.2 Vdc (Max) @ I_C = 7.0 Adc
- DC Current Gain Specified to 7 Amperes
- Excellent Safe Operating Area
- Packaged in the Compact TO-213AA Case

7 AMPERE

POWER TRANSISTORS NPN SILICON

80–100 VOLTS
40 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N5428	2N5429 2N5430	Unit
Collector-Emitter Voltage	V_{CEO}	80	100	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous	I_C	7.0		Adc
Base Current	I_B	1.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 228		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	4.37	°C/W

* Indicates JEDEC Registered Data

FIGURE 1 — POWER-TEMPERATURE DERATING CURVE

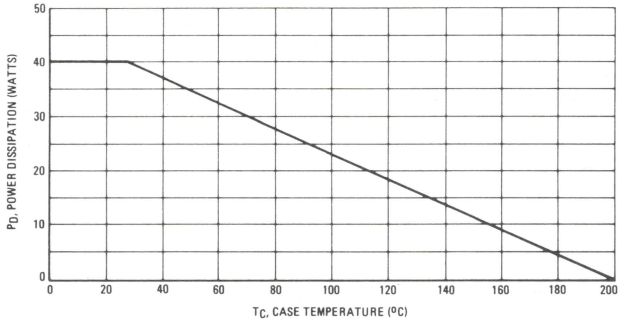

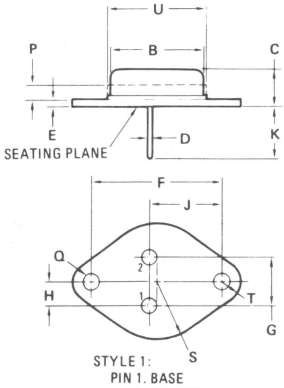

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C, unless otherwise noted)

Characteristic		Fig. No.	Symbol	Min	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (1)		–	$V_{CEO(sus)}$*			Vdc
(I_C = 50 mAdc, I_B = 0)	2N5428			80	–	
	2N5429, 2N5430			100	–	
Collector Cutoff Current		–	I_{CEO}			μAdc
(V_{CE} = 75 Vdc, I_B = 0)	2N5428			–	100	
(V_{CE} = 90 Vdc, I_B = 0)	2N5429, 2N5430			–	100	
Collector Cutoff Current		12	I_{CEX}			μAdc
(V_{CE} = 75 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5428			–	10	
(V_{CE} = 90 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5429, 2N5430			–	10	
(V_{CE} = 75 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5428			–	1.0	mAdc
(V_{CE} = 90 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5429, 2N5430			–	1.0	
Collector Cutoff Current		–	I_{CBO}			μAdc
(V_{CB} = Rated V_{CB}, I_E = 0)				–	10	
Emitter Cutoff Current		–	I_{EBO}			μAdc
(V_{BE} = 6.0 Vdc, I_C = 0)				–	100	
ON CHARACTERISTICS (1)						
DC Current Gain		8	h_{FE}*			–
(I_C = 500 mAdc, V_{CE} = 2.0 Vdc)	2N5429			30	–	
	2N5428, 2N5430			60	–	
(I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)	2N5429			30	120	
	2N5428, 2N5430			60	240	
(I_C = 5.0 Adc, V_{CE} = 2.0 Vdc)	2N5429			20	–	
	2N5428, 2N5430			40	–	
Collector-Emitter Saturation Voltage		9, 11, 13	$V_{CE(sat)}$*			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)				–	0.7	
(I_C = 7.0 Adc, I_B = 0.7 Adc)				–	1.2	
Base-Emitter Saturation Voltage		11, 13	$V_{BE(sat)}$*			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)				–	1.2	
(I_C = 7.0 Adc, I_B = 0.7 Adc)				–	2.0	
DYNAMIC CHARACTERISTICS						
Current-Gain–Bandwidth Product		–	f_T			MHz
(I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)				30	–	
Output Capacitance		7	C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)				–	250	
Input Capacitance		7	C_{ib}			pF
(V_{BE} = 2.0 Vdc, I_C = 0, f = 100 kHz)				–	1,000	
SWITCHING CHARACTERISTICS						
Delay Time	(V_{CC} = 40 Vdc, $V_{EB(off)}$ = 3.0 Vdc,	2, 3	t_d	–	100	ns
Rise Time	(I_C = 2.0 Adc, I_{B1} = 200 mAdc)		t_r	–	100	ns
Storage Time	(V_{CC} = 40 Vdc, I_C = 2.0 Adc,	2, 6	t_s	–	2.0	μs
Fall Time	I_{B1} = I_{B2} = 200 mAdc)		t_f	–	200	ns

*Indicates JEDEC Registered Data. (1)Pulse Test: Pulse Width ≈ 300 μs, Duty Cycle ≈ 2.0%.

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

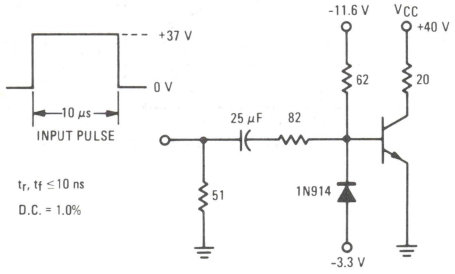

FIGURE 3 – TURN-ON TIME

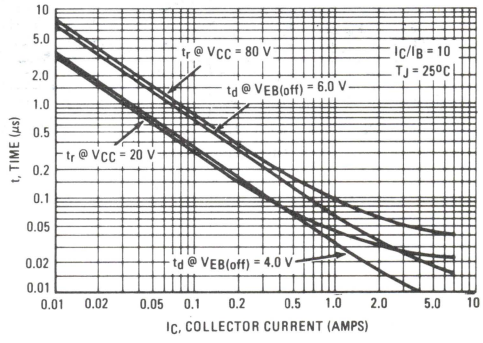

FIGURE 4 – THERMAL RESPONSE

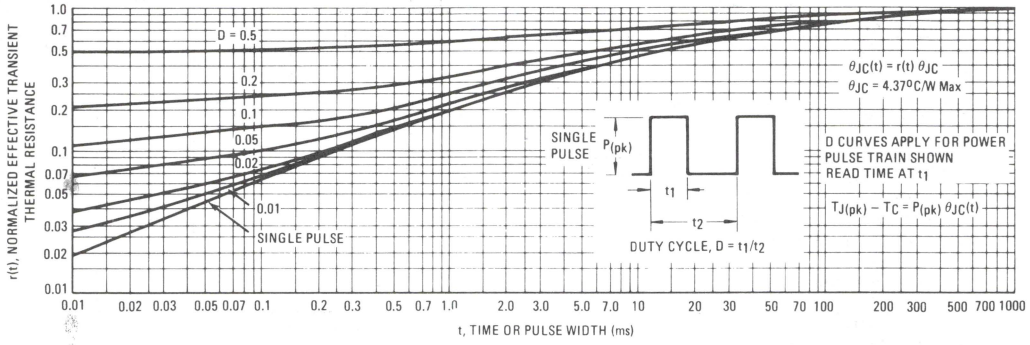

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

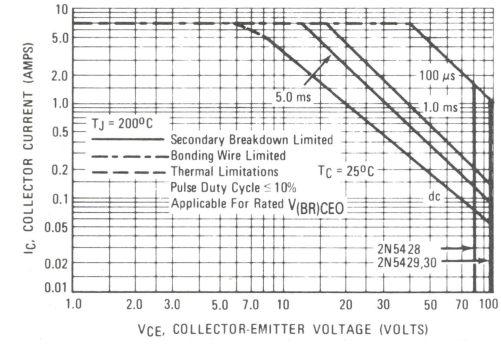

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Pulse curves are valid for duty cycles of 10% provided $T_{J(pk)} \leq 200^{o}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

FIGURE 6 – TURN-OFF TIME

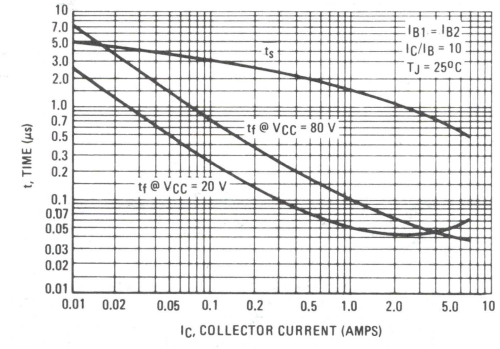

FIGURE 7 – CAPACITANCE versus VOLTAGE

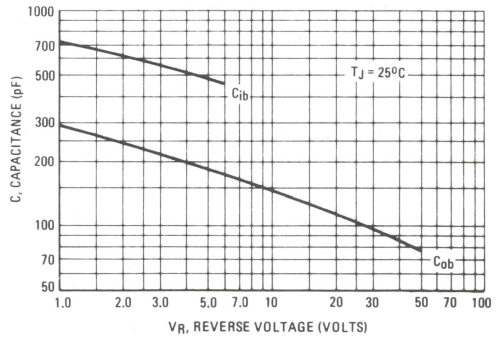

3

FIGURE 8 – DC CURRENT GAIN

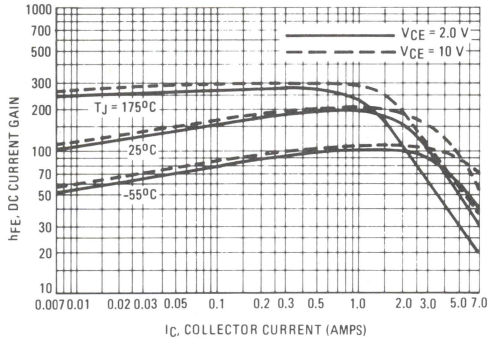

FIGURE 9 – COLLECTOR SATURATION REGION

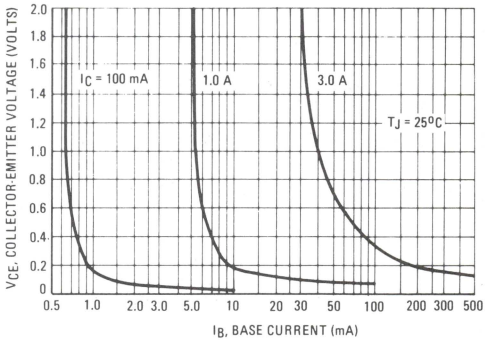

FIGURE 10 – EFFECTS OF BASE-EMITTER RESISTANCE

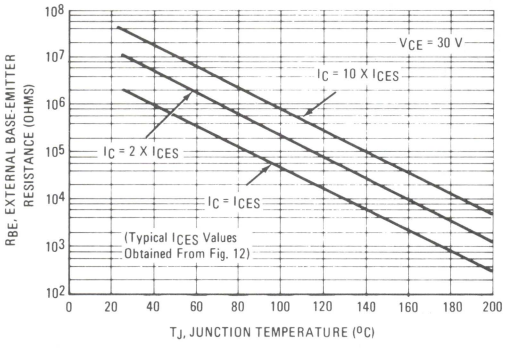

FIGURE 11 – "ON" VOLTAGES

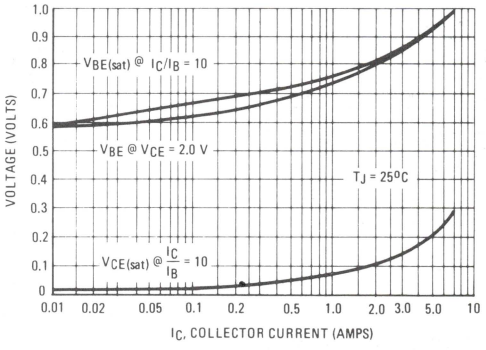

FIGURE 12 – COLLECTOR CUT-OFF REGION

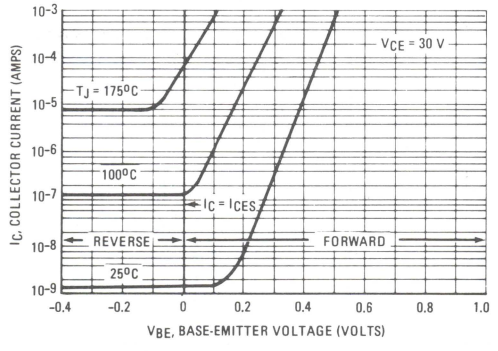

FIGURE 13 – TEMPERATURE COEFFICIENTS

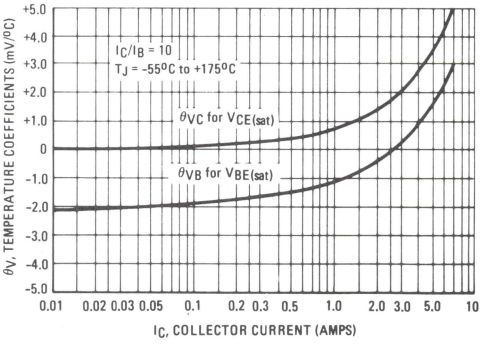

3

NPN	PNP
2N5629	2N6029
2N5630	2N6030
2N5631	2N6031

HIGH-VOLTAGE – HIGH POWER TRANSISTORS

. . . designed for use in high power audio amplifier applications and high voltage switching regulator circuits.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 100 Vdc – 2N5629, 2N6029
  = 120 Vdc – 2N5630, 2N6030
  = 140 Vdc – 2N5631, 2N6031
- High DC Current Gain – @ I_C = 8.0 Adc
  h_{FE} = 25 (Min) – 2N5629, 2N6029
  = 20 (Min) – 2N5630, 2N6030
  = 15 (Min) – 2N5631, 2N6031
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 10 Adc

16 AMPERE

POWER TRANSISTORS
COMPLEMENTARY SILICON

100-120-140 VOLTS
200 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5629 2N6029	2N5630 2N6030	2N5631 2N6031	Unit
Collector-Emitter Voltage	V_{CEO}	100	120	140	Vdc
Collector-Base Voltage	V_{CB}	100	120	140	Vdc
Emitter-Base Voltage	V_{EB}	← 7.0 →			Vdc
Collector Current Continuous	I_C	← 16 →			Adc
Peak		← 20 →			
Base Current Continuous	I_B	← 5.0 →			Adc
Total Device Dissipation @ T_C = 25°C	P_D	← 200 →			Watts
Derate above 25°C		← 1.14 →			W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200			°C

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

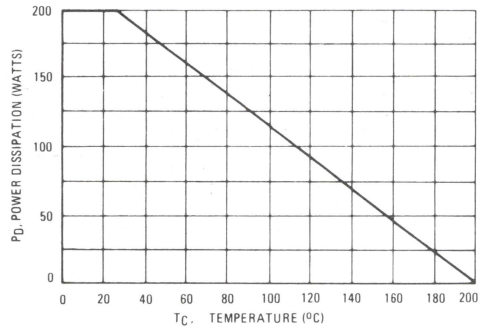

Safe Area Curves are indicated by Figure 5. All Limits are applicable and must be observed.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌀ ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	2N5629, 2N6029 2N5630, 2N6030 2N5631, 2N6031	$V_{CEO(sus)}$	 100 120 140	 — —	Vdc
Collector-Emitter Cutoff Current (V_{CE} = 50 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0) (V_{CE} = 70 Vdc, I_B = 0)	 2N5629, 2N6029 2N5630, 2N6030 2N5631, 2N6031	I_{CEO}	 — — —	 2.0 2.0 2.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEX}	 — —	 2.0 7.0	mAdc
Collector-Base Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)		I_{CBO}	—	2.0	mAdc
Emitter-Base Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)		I_{EBO}	—	5.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 8.0 Adc, V_{CE} = 2.0 Vdc) (I_C = 16 Adc, V_{CE} = 2.0 Vdc)	2N5629, 2N6029 2N5630, 2N6030 2N5631, 2N6031 All Types	h_{FE}	 25 20 15 4.0	 100 80 60 —	—
Collector-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 16 Adc, I_B = 4.0 Adc)	All Types	$V_{CE(sat)}$	 — —	 1.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc)		$V_{BE(sat)}$	—	1.8	Vdc
Base-Emitter On Voltage (I_C = 8.0 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	—	1.5	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (2) (I_C = 1.0 Adc, V_{CE} = 20 Vdc, f_{test} = 0.5 MHz)		f_T	1.0	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N5629, 30, 31 2N6029, 30, 31	C_{ob}	—	500 1000	pF
Small-Signal Current Gain (I_C = 4.0 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	15	—	—

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≥ 2.0%.
(2) $f_T = |h_{fe}| \bullet f_{test}$

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

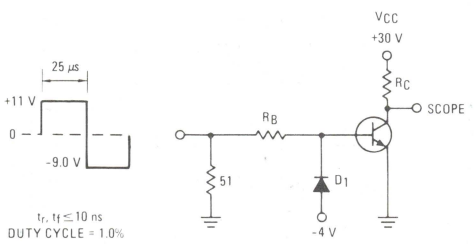

t_r, $t_f \leq 10$ ns
DUTY CYCLE = 1.0%

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ~100 mA
MSD6100 USED BELOW I_B ~100 mA

For PNP test circuit, reverse all polarities and D1.

FIGURE 3 – TURN-ON TIME

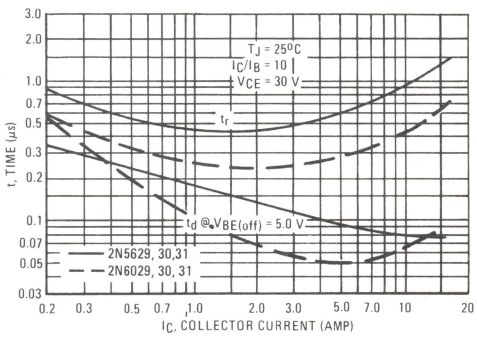

FIGURE 4 – THERMAL RESPONSE

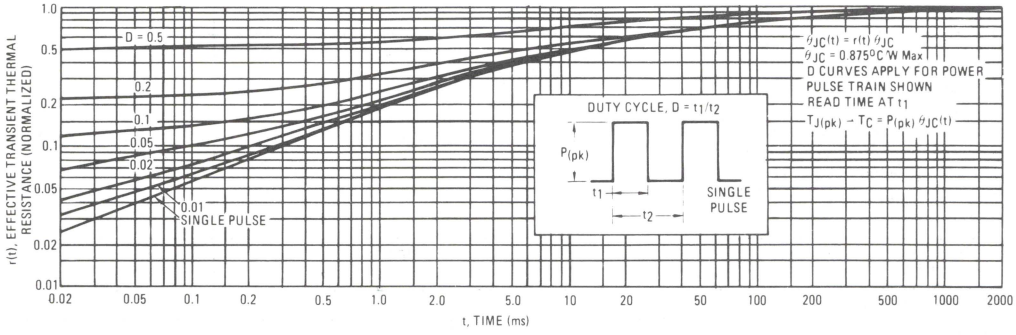

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

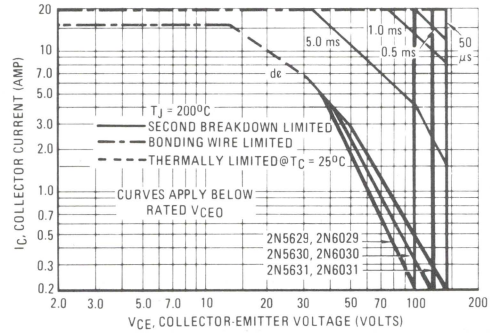

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

NPN
2N5629, 2N5630, 2N5631

PNP
2N6029, 2N6030, 2N6031

FIGURE 6 – TURN-OFF TIME

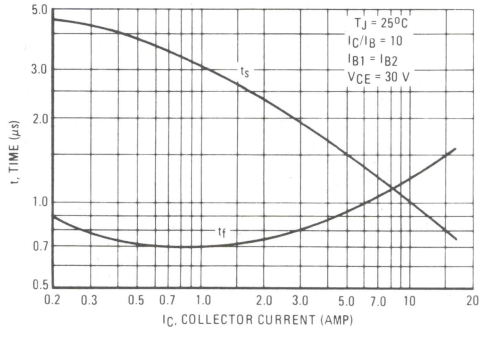

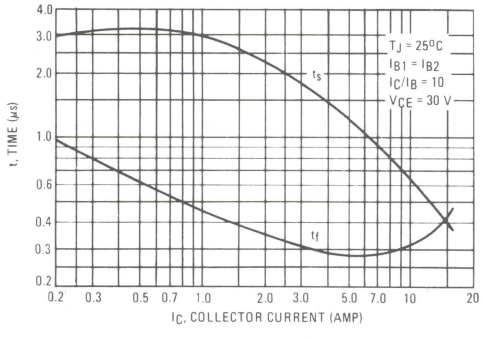

NPN
2N5629, 2N5630, 2N5631

PNP
2N6029, 2N6030, 2N6031

FIGURE 7 – CAPACITANCE

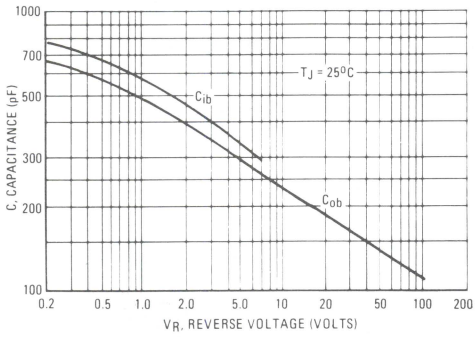

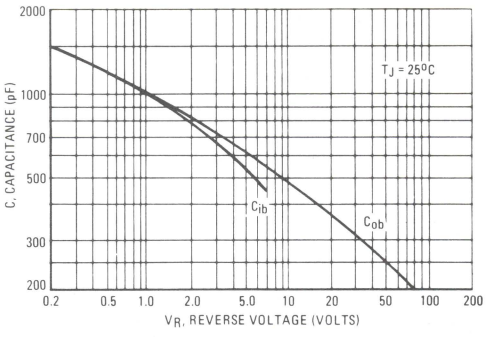

FIGURE 8 – DC CURRENT GAIN

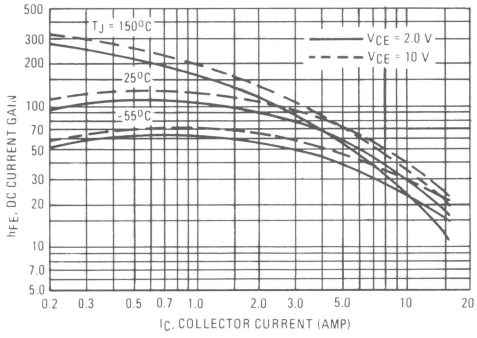

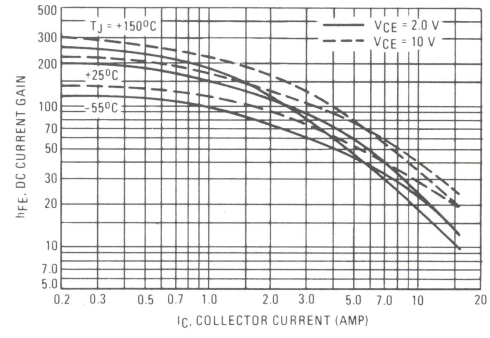

FIGURE 9 – COLLECTOR SATURATION REGION

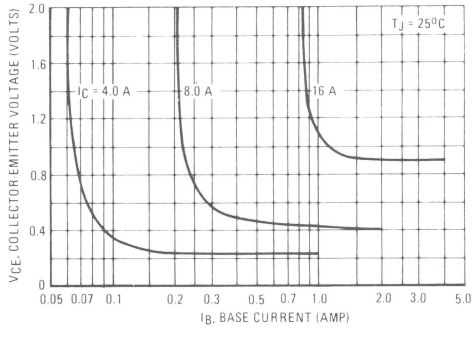

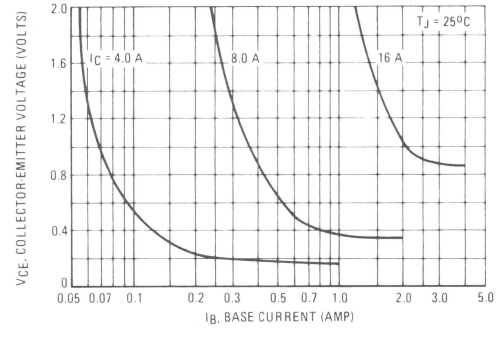

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N5655
2N5656
2N5657

PLASTIC NPN SILICON HIGH-VOLTAGE POWER TRANSISTOR

. . . designed for use in line-operated equipment such as audio output amplifiers; low-current, high-voltage converters; and AC line relays

- Excellent DC Current Gain – h_{FE} = 30-250 @ I_C = 100 mAdc
- Current-Gain – Bandwidth Product – f_T = 10 MHz (Min) @ I_C = 50 mAdc
- Packaged in Thermopad Case for Low Cost

0.5 AMPERE

POWER TRANSISTORS NPN SILICON

250–300–350 VOLTS
20 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5655	2N5656	2N5657	Unit
Collector-Emitter Voltage	V_{CEO}	250	300	350	Vdc
Collector-Base Voltage	V_{CB}	275	325	375	Vdc
Emitter-Base Voltage	V_{EB}	← 6.0 →			Vdc
Collector Current – Continuous	I_C	← 0.5 →			Adc
Peak		← 1.0 →			
Base Current	I_B	← 0.25 →			Adc
Total Power Dissipation @ T_C = 25°C	P_D	20			Watts
Derate above 25°C		0.16			W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	°C/W

*Indicates JEDEC Registered Data



NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-225AA

FIGURE 1 – POWER DERATING

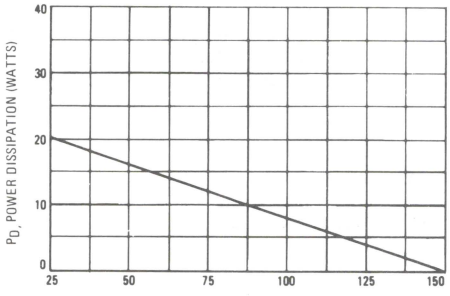

FIGURE 2 – SUSTAINING VOLTAGE TEST CIRCUIT



Safe Area Limits are indicated by Figures 3 and 4. Both limits are applicable and must be observed.

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc (inductive), L = 50 mH)	2N5655	$V_{CEO(sus)}$	250	–	Vdc
	2N5656		300	–	
	2N5657		350	–	
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	2N5655	$V_{(BR)CEO}$	250	–	Vdc
	2N5656		300	–	
	2N5657		350	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 150 Vdc, I_B = 0)	2N5655		–	0.1	
(V_{CE} = 200 Vdc, I_B = 0)	2N5656		–	0.1	
(V_{CE} = 250 Vdc, I_B = 0)	2N5657		–	0.1	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 250 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5655		–	0.1	
(V_{CE} = 300 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5656		–	0.1	
(V_{CE} = 350 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5657		–	0.1	
(V_{CE} = 150 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 100°C)	2N5655		–	1.0	
(V_{CE} = 200 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 100°C)	2N5656		–	1.0	
(V_{CE} = 250 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 100°C)	2N5657		–	1.0	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 275 Vdc, I_E = 0)	2N5655		–	10	
(V_{CB} = 325 Vdc, I_E = 0)	2N5656		–	10	
(V_{CB} = 375 Vdc, I_E = 0)	2N5657		–	10	
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}		10	μAdc
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 50 mAdc, V_{CE} = 10 Vdc)			25	–	
(I_C = 100 mAdc, V_{CE} = 10 Vdc)			30	250	
(I_C = 250 mAdc, V_{CE} = 10 Vdc)			15	–	
(I_C = 500 mAdc, V_{CE} = 10 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 100 mAdc, I_B = 10 mAdc)			–	1.0	
(I_C = 250 mAdc, I_B = 25 mAdc)			–	2.5	
(I_C = 500 mAdc, I_B = 100 mAdc)			–	10	
Base-Emitter Voltage (1) (I_C = 100 mAdc, V_{CE} = 10 Vdc)		V_{BE}	–	1.0	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (2) (I_C = 50 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)		f_T	10	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	25	pF
Small-Signal Current Gain (I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	20	–	–

*Indicates JEDEC Registered Data for 2N5655 Series.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity.

FIGURE 3 – ACTIVE-REGION SAFE OPERATING AREA

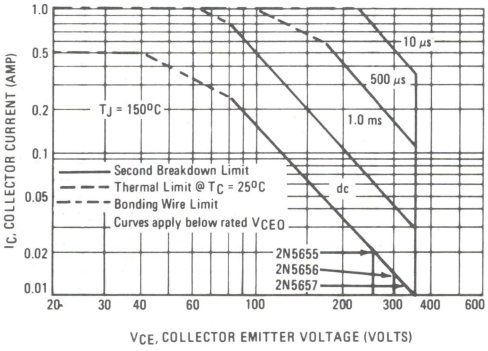

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 4 – CURRENT GAIN

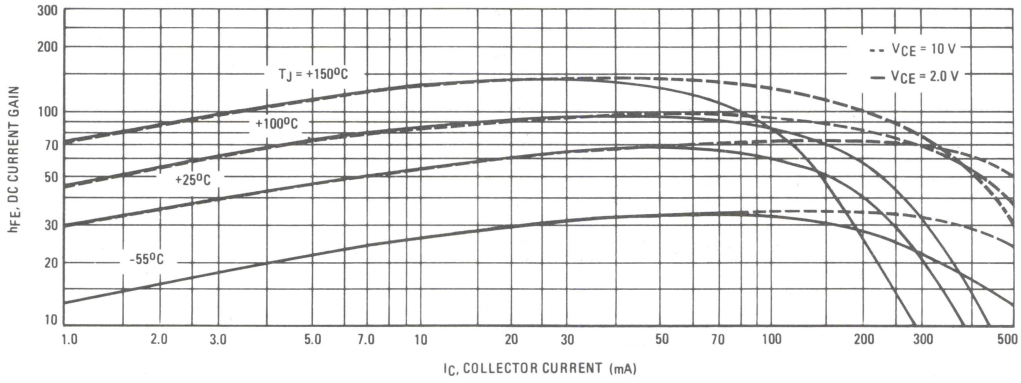

FIGURE 5 – "ON" VOLTAGES

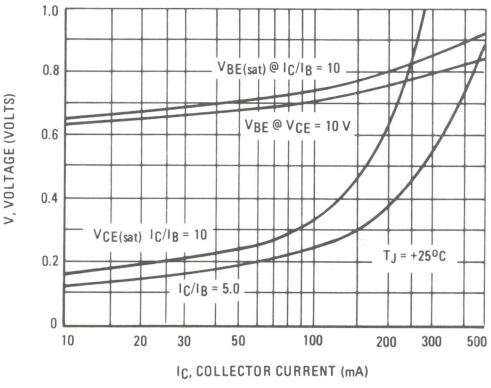

FIGURE 6 – CAPACITANCE

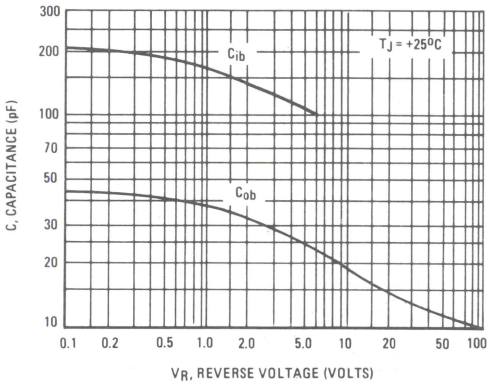

FIGURE 7 – TURN-ON TIME

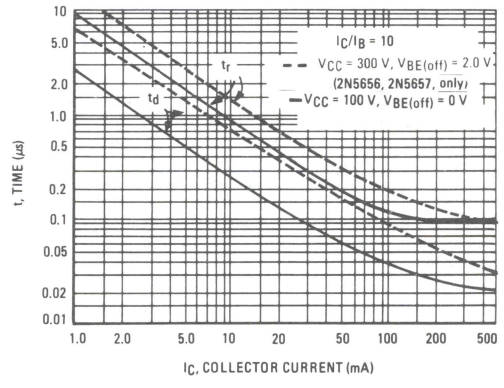

FIGURE 8 – TURN-OFF TIME

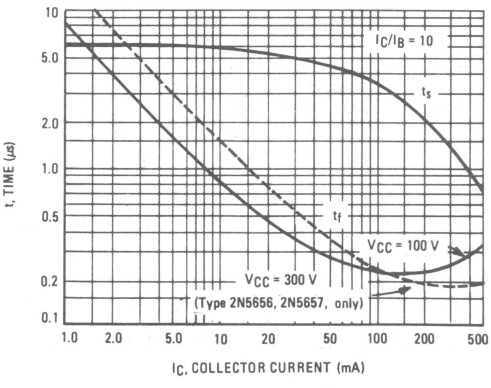

3

PNP
2N5683, 2N5684
NPN
2N5685, 2N5686

HIGH-CURRENT COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for use in high-power amplifier and switching circuit applications.

- High Current Capability — I_C Continuous = 50 Amperes.
- DC Current Gain — h_{FE} = 15 - 60 @ I_C = 25 Adc
- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 25 Adc

50 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60–80 VOLTS
300 WATTS

*MAXIMUM RATINGS

Rating	Symbol	2N5683 2N5685	2N5684 2N5686	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous	I_C	50		Adc
Base Current	I_B	15		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	300 1.715		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.584	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

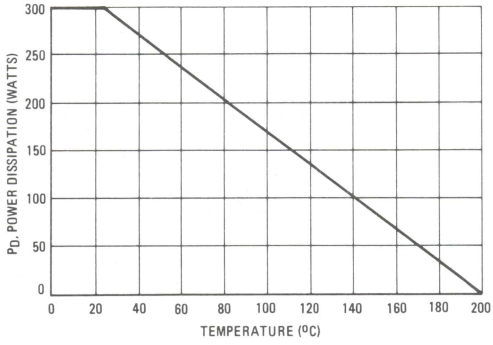

Safe Area Curves are indicated by Figure 5. All limits are applicable and must be observed.

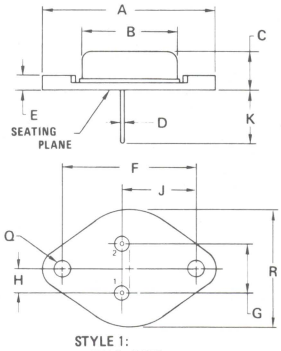

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Note 1)		$V_{CEO(sus)}$			Vdc
(I_C = 0.2 Adc, I_B = 0)	2N5683, 2N5685		60	–	
	2N5684, 2N5686		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N5683, 2N5685		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N5684, 2N5686		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5683, 2N5685		–	2.0	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N5684, 2N5686		–	2.0	
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5683, 2N5685		–	10	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5684, 2N5686		–	10	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	2N5683, 2N5685		–	2.0	
(V_{CB} = 80 Vdc, I_E = 0)	2N5684, 2N5686		–	2.0	
Emitter Cutoff Current		I_{EBO}	–	5.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain (Note 1)		h_{FE}			–
(I_C = 25 Adc, V_{CE} = 2.0 Vdc)			15	60	
(I_C = 50 Adc, V_{CE} = 5.0 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage (Note 1)		$V_{CE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.5 Adc)			–	1.0	
(I_C = 50 Adc, I_B = 10 Adc)			–	5.0	
Base-Emitter Saturation Voltage (Note 1)		$V_{BE(sat)}$	–	2.0	Vdc
(I_C = 25 Adc, I_B = 2.5 Adc)					
Base-Emitter On Voltage (Note 1)		$V_{BE(on)}$	–	2.0	Vdc
(I_C = 25 Adc, V_{CE} = 2.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product		f_T	2.0	–	MHz
(I_C = 5.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)					
Output Capacitance	2N5683, 2N5684	C_{ob}	–	2000	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N5685, 2N5686		–	1200	
Small-Signal Current Gain		h_{fe}	15	–	
(I_C = 10 Adc, V_{CE} = 5.0 Vdc, f = 1.0 kHz)					

*Indicates JEDEC Registered Data

Note 1: Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

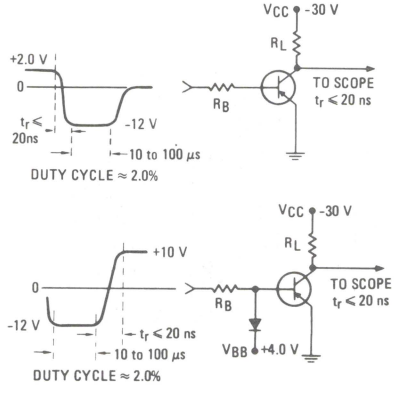

FOR CURVES OF FIGURES 3 & 6, R_B & R_L ARE VARIED.
INPUT LEVELS ARE APPROXIMATELY AS SHOWN.
FOR NPN CIRCUITS, REVERSE ALL POLARITIES.

FIGURE 3 – TURN-ON TIME

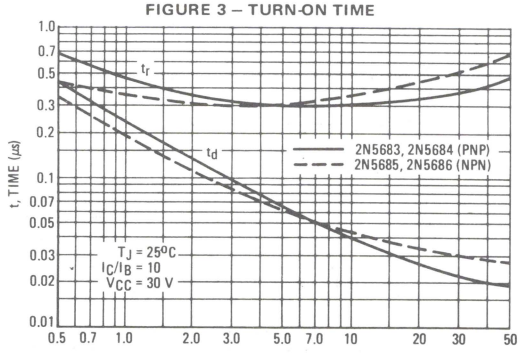

FIGURE 4 – THERMAL RESPONSE

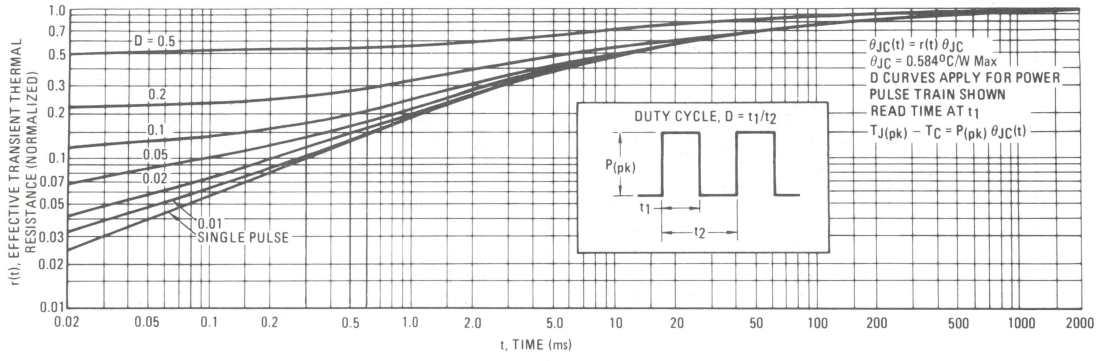

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

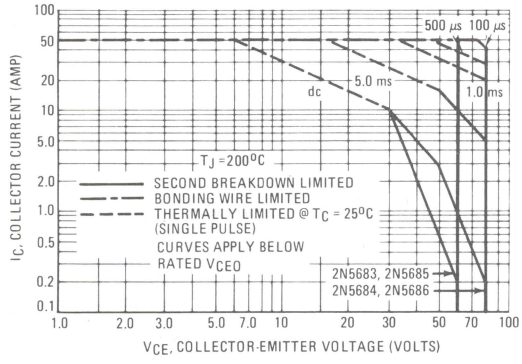

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

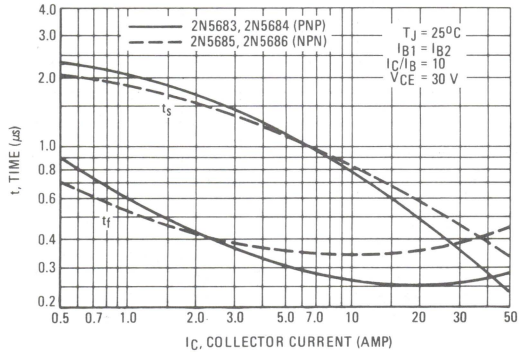

FIGURE 7 – CAPACITANCE

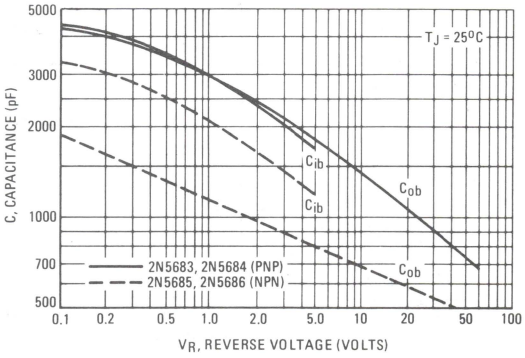

3

PNP
2N5683, 2N5684

NPN
2N5685, 2N5686

FIGURE 8 – DC CURRENT GAIN

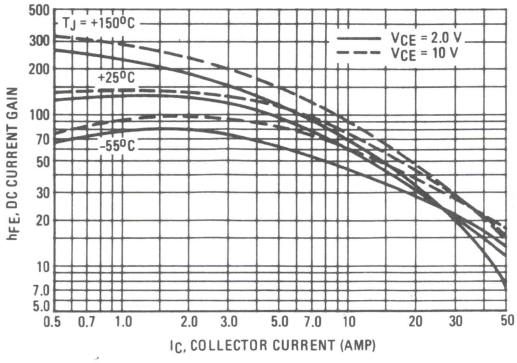

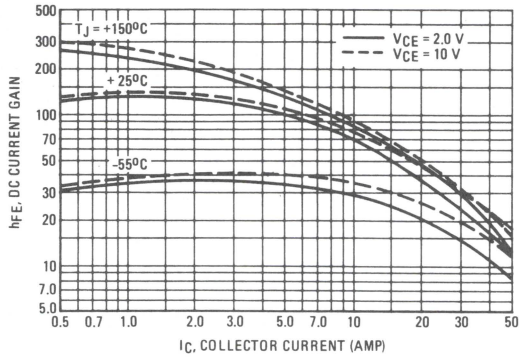

FIGURE 9 – COLLECTOR SATURATION REGION

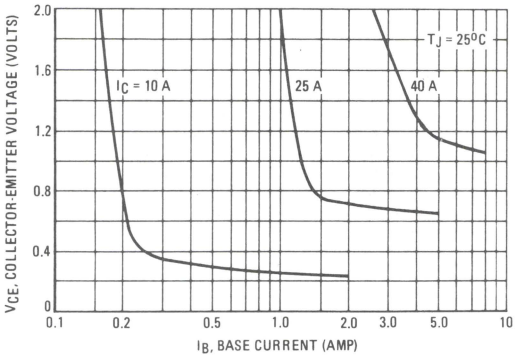

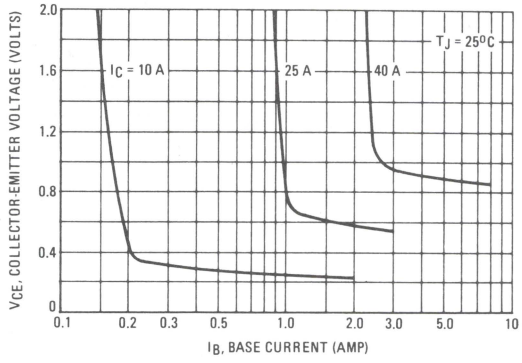

FIGURE 10 – "ON" VOLTAGES

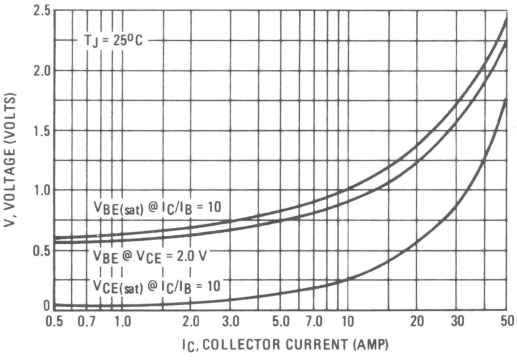

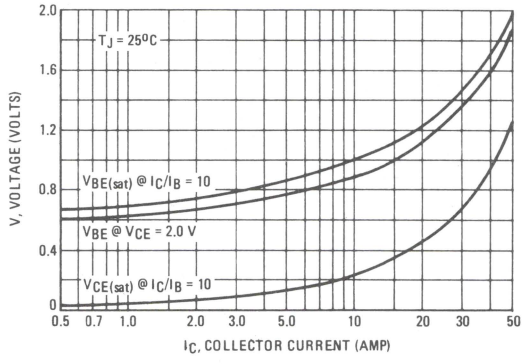

3

2N5758
2N5760

HIGH-VOLTAGE HIGH-POWER SILICON TRANSISTORS

. . . designed for use in high power audio amplifier applications and high voltage switching regulator circuits.

- High Collector-Emitter Sustaining Voltage —
  $V_{CEO(sus)}$ = 100 Vdc (Min) — 2N5758
  = 140 Vdc (Min) — 2N5760
- DC Current Gain @ I_C = 3.0 Adc —
  h_{FE} = 25 (Min) — 2N5758
  = 15 (Min) — 2N5760
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 3.0 Adc

6 AMPERE
POWER TRANSISTORS
NPN SILICON
100–140 VOLTS
150 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N5758	2N5760	Unit
Collector-Emitter Voltage	V_{CEO}	100	140	Vdc
Collector-Base Voltage	V_{CB}	100	140	Vdc
Emitter-Base Voltage	V_{EB}	7.0		Vdc
Collector Current — Continuous Peak	I_C	6.0 10		Adc
Base Current	I_B	4.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	150 0.857		Watts W/°C
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

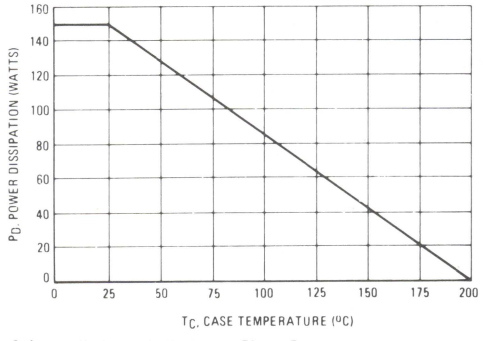

Safe area limits are indicated by Figure 5.
Both limits are applicable and must be observed.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5758		100	–	
	2N5760		120	–	
			140		
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 50 Vdc, I_B = 0)	2N5758		–	1.0	
(V_{CE} = 60 Vdc, I_B = 0)			–	1.0	
(V_{CE} = 70 Vdc, I_B = 0)	2N5760		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)			–	1.0	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	5.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = Rated V_{CB}, I_E = 0)			–	1.0	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 7.0 Vdc, I_C = 0)			–	1.0	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 2.0 Vdc)	2N5758		25	100	
			—	—	
	2N5760		15	60	
(I_C = 6.0 Adc, V_{CE} = 2.0 Vdc)	All Types		5.0	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 0.3 Adc)			–	1.0	
(I_C = 6.0 Adc, I_B = 1.2 Adc)			–	2.0	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 3.0 Adc, V_{CE} = 2.0 Vdc)			–	1.5	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T			MHz
(I_C = 0.5 Adc, V_{CE} = 20 Vdc, f_{test} = 0.5 MHz)			1.0	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)			–	300	
Small-Signal Current Gain		h_{fe}			–
(I_C = 2.0 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)			15	–	

*Indicates JEDEC Registered Data
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%
(2) $f_T = |h_{fe}| \bullet f_{test}$

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

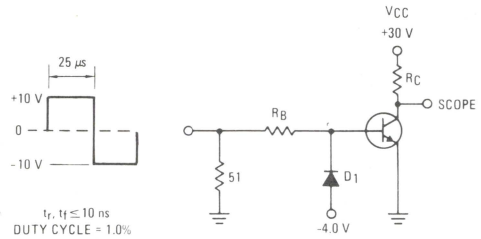

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈100 mA
MSD6100 USED BELOW I_B ≈100 mA

*For PNP test circuit, reverse all polarities and D1.

FIGURE 3 – TURN-ON TIME

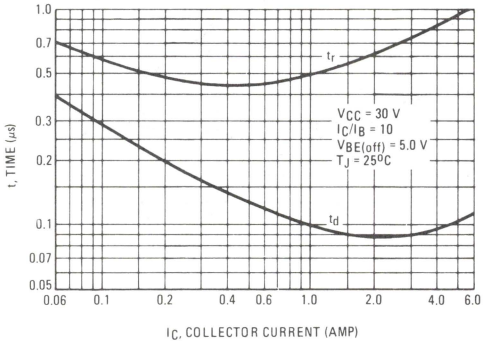

FIGURE 4 – THERMAL RESPONSE

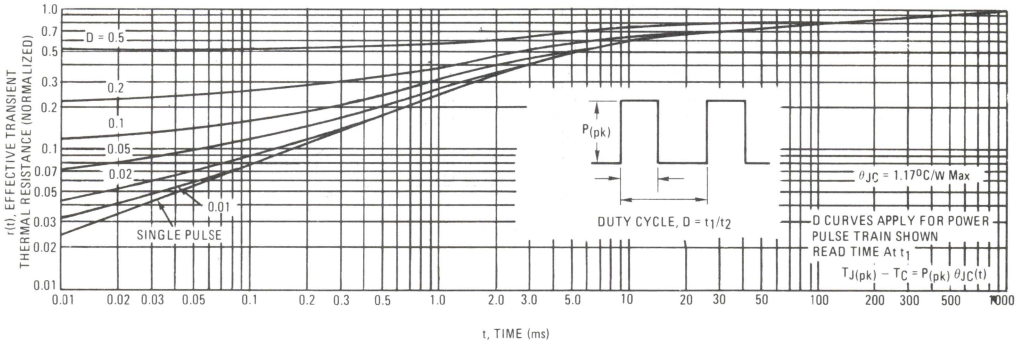

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

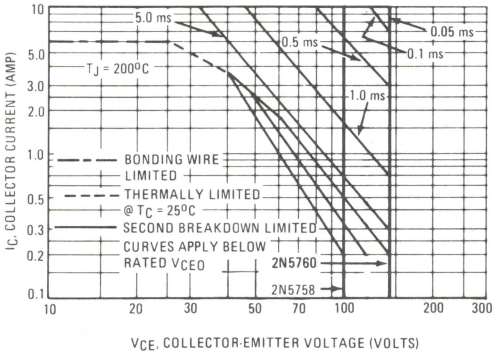

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

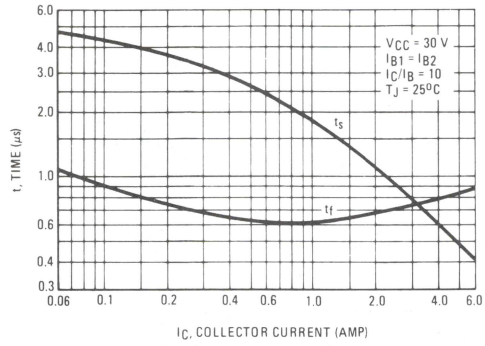

FIGURE 7 – CAPACITANCE

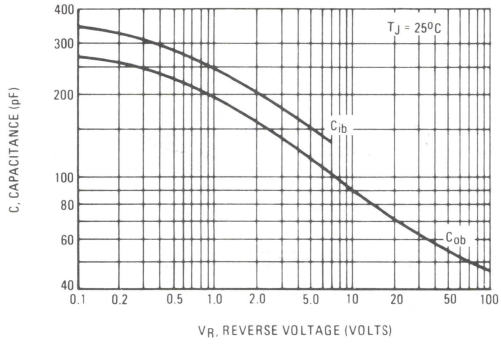

3

FIGURE 8 – DC CURRENT GAIN

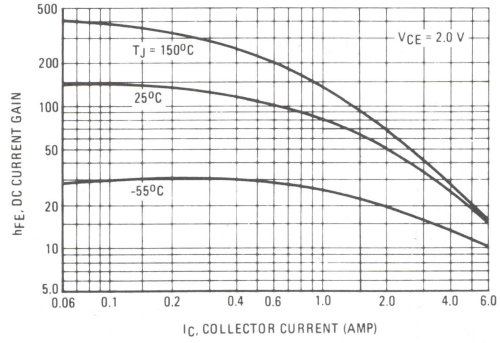

PNP
2N5875, 2N5876
NPN
2N5877, 2N5878

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . designed for general-purpose power amplifier and switching applications.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 5.0 Adc
- Low Leakage Current — I_{CEX} = 0.5 mAdc (Max) @ Rated Voltage
- Excellent DC Current Gain — h_{FE} = 20 (Min) @ I_C = 4.0 Adc
- High Current Gain — Bandwidth Product — f_T = 4.0 MHz (Min) @ I_C = 0.5 A

10 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60-80 VOLTS
150 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5875 2N5877	2N5876 2N5878	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous Peak	I_C	10 20		Adc
Base Current	I_B	4.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	150 0.857		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

FIGURE 1 — POWER DERATING

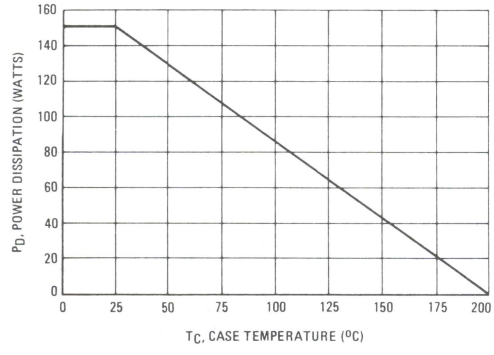



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
⌖ ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5875, 2N5877		60	–	
	2N5876, 2N5878		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N5875, 2N5877		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N5876, 2N5878		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5875, 2N5877		–	0.5	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5876, 2N5878		–	0.5	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5875, 2N5877		–	5.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5876, 2N5878		–	5.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	2N5875, 2N5877		–	0.5	
(V_{CB} = 80 Vdc, I_E = 0)	2N5876, 2N5878		–	0.5	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{EB} = 5.0 Vdc, I_E = 0)					
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)			35	–	
(I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)			20	100	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)			4.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 5.0 Adc, I_B = 0.5 Adc)			–	1.0	
(I_C = 10 Adc, I_B = 2.5 Adc)			–	3.0	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$	–	2.5	Vdc
(I_C = 10 Adc, I_B = 2.5 Adc)					
Base-Emitter On Voltage (1)		$V_{BE(on)}$	–	1.5	Vdc
(I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (2)		f_T	4.0	–	MHz
(I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)					
Output Capacitance		C_{ob}	–		pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	2N5875, 2N5876		–	500	
	2N5877, 2N5878		–	300	
Small-Signal Current Gain		h_{fe}	20	–	–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)					
SWITCHING CHARACTERISTICS					
Rise Time	(V_{CC} = 30 Vdc, I_C = 4.0 Adc, I_{B1} = I_{B2} = 0.4 Adc, See Figure 2)	t_r	–	0.7	μs
Storage Time		t_s	–	1.0	μs
Fall Time		t_f	–	0.8	μs

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
(2) $f_T = |h_{fe}| \bullet f_{test}$

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

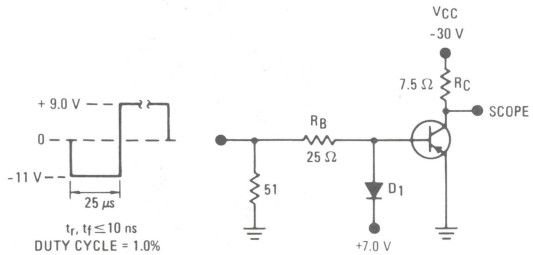

FOR CURVES OF FIGURES 3 and 6, R_B and R_C ARE VARIED TO OBTAIN DESIRED CURRENT LEVELS

For NPN test circuit, reverse all polarities.

D_1 MUST BE FAST RECOVERY TYPE, e.g.
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

FIGURE 3 – TURN-ON TIME

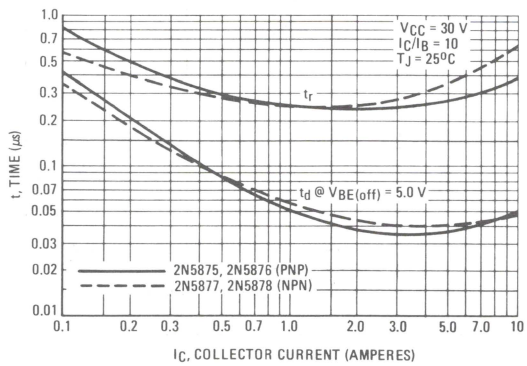

FIGURE 4 – THERMAL RESPONSE

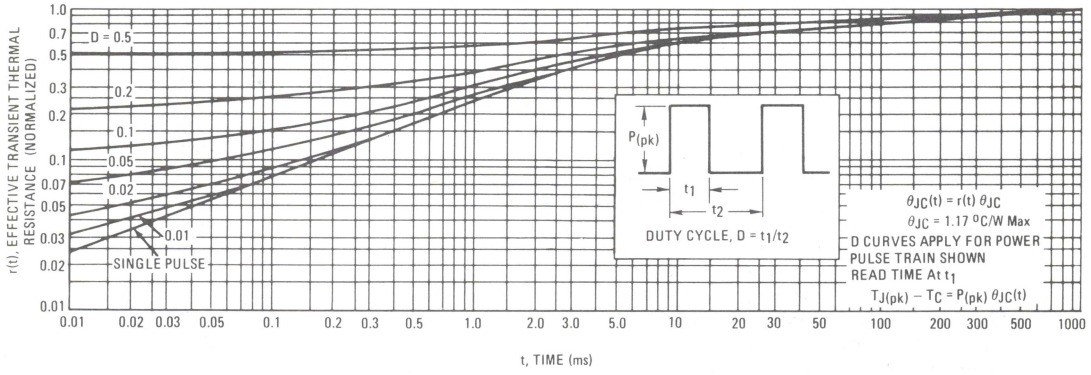

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

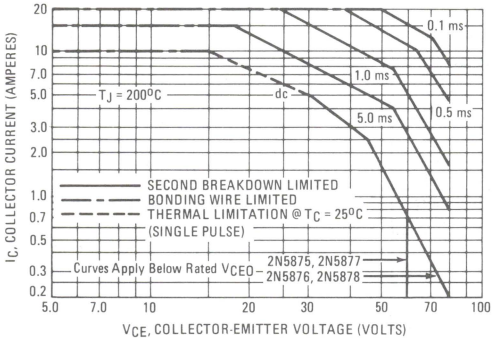

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

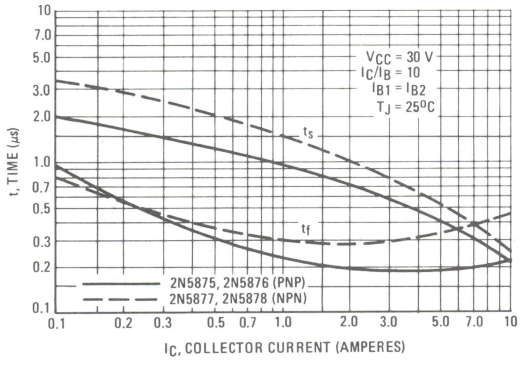

FIGURE 7 – CAPACITANCE

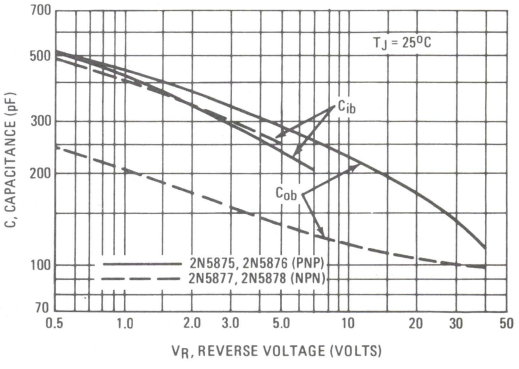

PNP
2N5879, 2N5880
NPN
2N5881, 2N5882

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . designed for general-purpose power amplifier and switching applications.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 60 Vdc (Min) – 2N5879, 2N5881
  = 80 Vdc (Min) – 2N5880, 2N5882
- DC Current Gain –
  h_{FE} = 20 (Min) @ I_C = 6.0 Adc
- Low Collector – Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 7.0 Adc
- High Current – Gain-Bandwidth Product –
  f_T = 4.0 MHz (Min) @ I_C = 1.0 Adc
- Recommended for New Circuit Designs

15 AMPERE
COMPLEMENTARY SILICON POWER TRANSISTORS
60–80 VOLTS
160 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5879 2N5881	2N5880 2N5882	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous Peak	I_C	15 30		Adc
Base Current	I_B	5.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	160 0.915		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.1	°C/W

*Indicates JEDEC registered data. Limits and conditions differ on some parameters and re-registration reflecting these changes has been requested. All above values meet or exceed present JEDEC registered data.

FIGURE 1 – POWER DERATING

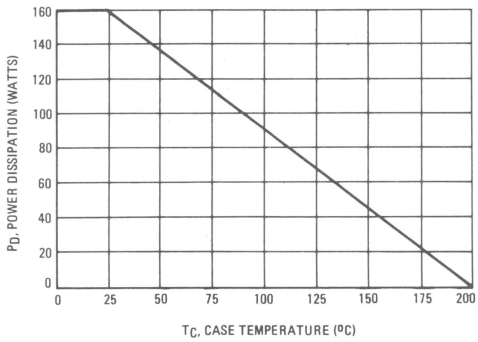



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5879, 2N5881		60	–	
	2N5880, 2N5882		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N5879, 2N5881		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N5880, 2N5882		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5879, 2N5881		–	0.5	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5880, 2N5882		–	0.5	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5879, 2N5881		–	5.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5880, 2N5882		–	5.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	2N5879, 2N5881		–	0.5	
(V_{CB} = 80 Vdc, I_E = 0)	2N5880, 2N5882		–	0.5	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{EB} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc)			35	–	
(I_C = 6.0 Adc, V_{CE} = 4.0 Vdc)			20	100	
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)			4.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 7.0 Adc, I_B = 0.7 Adc)			–	1.0	
(I_C = 15 Adc, I_B = 3.75 Adc)			–	4.0	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$	–	2.5	Vdc
(I_C = 15 Adc, I_B = 3.75 Adc)					
Base-Emitter On Voltage (1)		$V_{BE(on)}$	–	1.5	Vdc
(I_C = 6.0 Adc, V_{CE} = 4.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (2)		f_T	4.0	–	MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)					
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)	2N5879, 2N5880		–	600	
	2N5881, 2N5882		–	400	
Small-Signal Current Gain		h_{fe}	20	–	–
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)					
SWITCHING CHARACTERISTICS					
Rise Time	(V_{CC} = 30 Vdc, I_C = 6.0 Adc,	t_r	–	0.7	μs
Storage Time	I_{B1} = I_{B2} = 0.6 Adc See Figure 2)	t_s	–	1.0	μs
Fall Time		t_f	–	0.8	μs

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%
(2) $f_T = |h_{fe}| \bullet f_{test}$

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

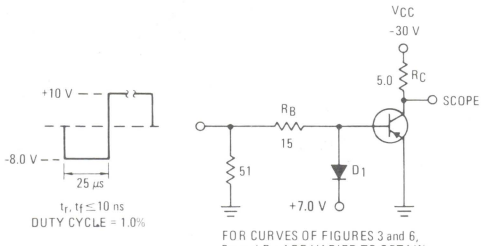

FOR CURVES OF FIGURES 3 and 6, R_B and R_C ARE VARIED TO OBTAIN DESIRED CURRENT LEVELS
D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ~ 100 mA
MSD6100 USED BELOW I_B ~ 100 mA

For NPN test circuit, reverse all polarities.

FIGURE 3 – TURN-ON TIME

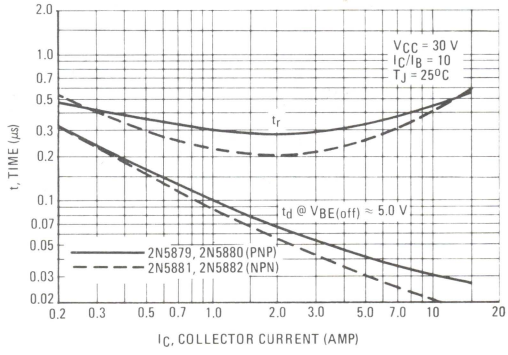

3

FIGURE 4 – THERMAL RESPONSE

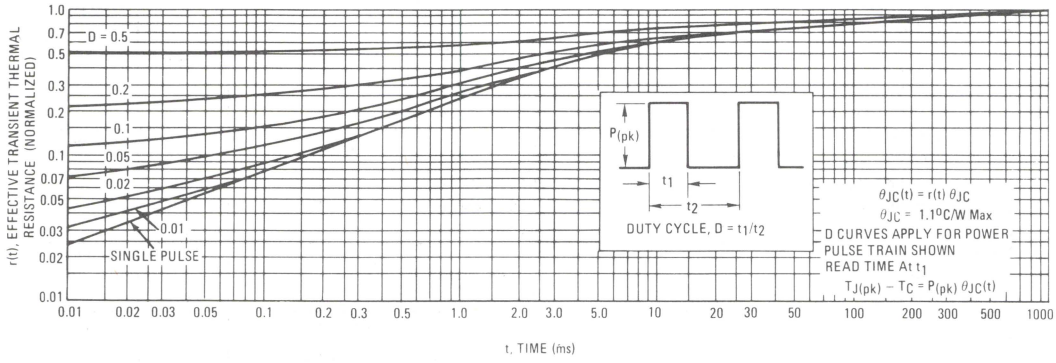

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

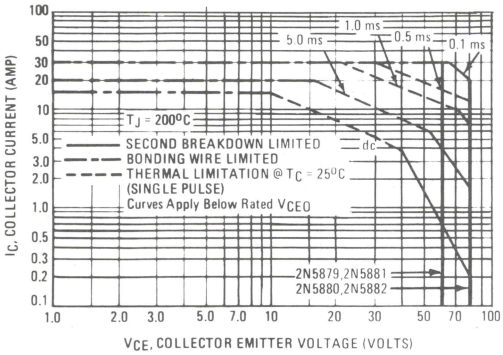

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

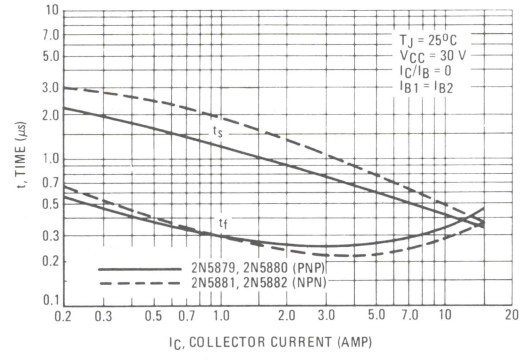

FIGURE 7 – CAPACITANCE

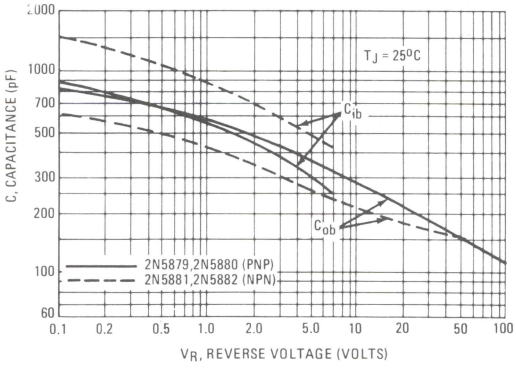

PNP
2N5879, 2N5880

NPN
2N5881, 2N5882

FIGURE 8 – DC CURRENT GAIN

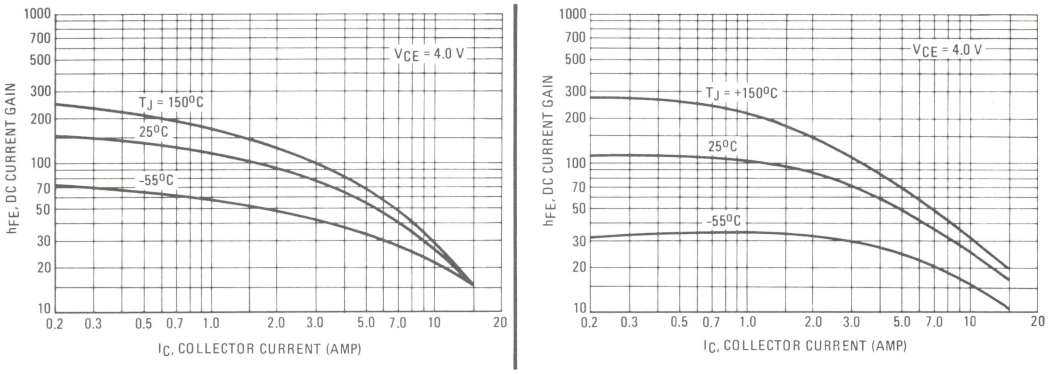

FIGURE 9 – COLLECTOR SATURATION REGION

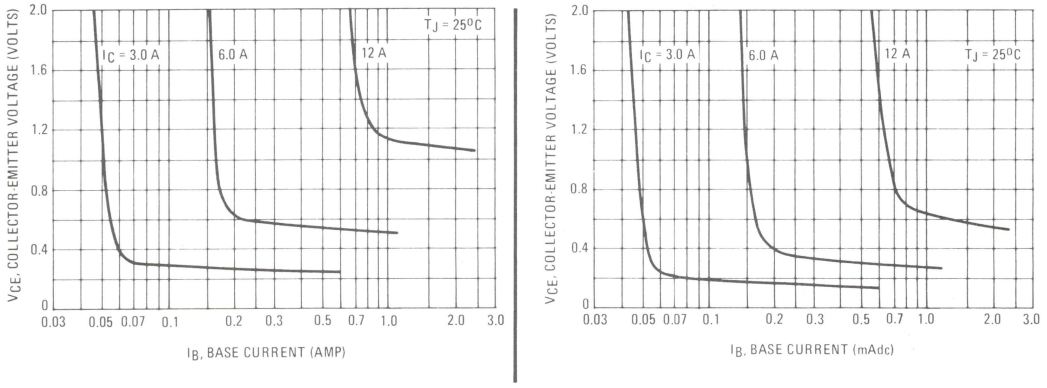

FIGURE 10 – "ON" VOLTAGES

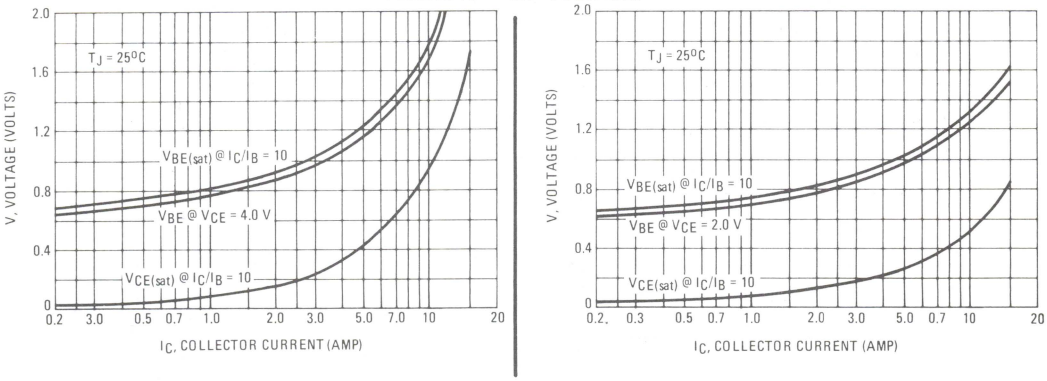

3

PNP
2N5883, 2N5884
NPN
2N5885, 2N5886

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . designed for general-purpose power amplifier and switching applications.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.0 Vdc, (max) at I_C = 15 Adc
- Low Leakage Current I_{CEX} = 1.0 mAdc (max) at Rated Voltage
- Excellent DC Current Gain — h_{FE} = 20 (min) at I_C = 10 Adc
- High Current Gain Bandwidth Product — f_T = 4.0 MHz (min) at I_C = 1.0 Adc

25 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

60-80 VOLTS
200 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5883 2N5885	2N5884 2N5886	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous Peak	I_C	25 50		Adc
Base Current	I_B	7.5		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.15		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W

*Indicates JEDEC registered data. Limits and conditions differ on some parameters and registration reflecting these changes has been requested. All above values meet or exceed present JEDEC registered data.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
⌖ ⌀ 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
⌖ ⌀ 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

FIGURE 1 — POWER DERATING

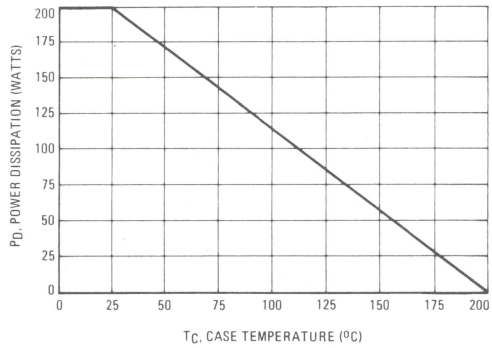

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N5883, 2N5885		60	–	
	2N5884, 2N5886		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N5883, 2N5885		–	2.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N5884, 2N5886		–	2.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5883, 2N5885		–	1.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5884, 2N5886		–	1.0	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5883, 2N5885		–	10	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N5884, 2N5886		–	10	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	2N5883, 2N5885		–	1.0	
(V_{CB} = 80 Vdc, I_E = 0)	2N5884, 2N5886		–	1.0	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{EB} = 5.0 Vdc, I_C = 0					
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)			35	–	
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)			20	100	
(I_C = 25 Adc, V_{CE} = 4.0 Vdc)			4.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 15 Adc, I_B = 1.5 Adc)			–	1.0	
(I_C = 25 Adc, I_B = 6.25 Adc)			–	4.0	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$	–	2.5	Vdc
(I_C = 25 Adc, I_B = 6.25 Adc)					
Base-Emitter On Voltage (1)		$V_{BE(on)}$	–	1.5	Vdc
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (2)		f_T	4.0	–	MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)					
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	2N5883, 2N5884		–	1000	
	2N5885, 2N5886		–	500	
Small-Signal Current Gain		h_{fe}	20	–	–
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc, f_{test} = 1.0 kHz)					
SWITCHING CHARACTERISTICS					
Rise Time	(V_{CC} = 30 Vdc, I_C = 10 Adc, I_{B1} = I_{B2} = 1.0 Adc)	t_r	–	0.7	μs
Storage Time		t_s	–	1.0	μs
Fall Time		t_f	–	0.8	μs

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%. (2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 – SWITCHING TIME EQUIVALENT TEST CIRCUITS

TURN-ON TIME

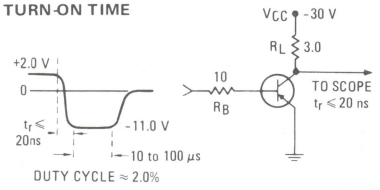

TURN-OFF TIME

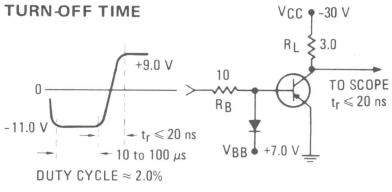

FOR CURVES OF FIGURES 3 & 6, R_B & R_L ARE VARIED.
INPUT LEVELS ARE APPROXIMATELY AS SHOWN.
FOR NPN, REVERSE ALL POLARITIES

FIGURE 3 – TURN-ON TIME

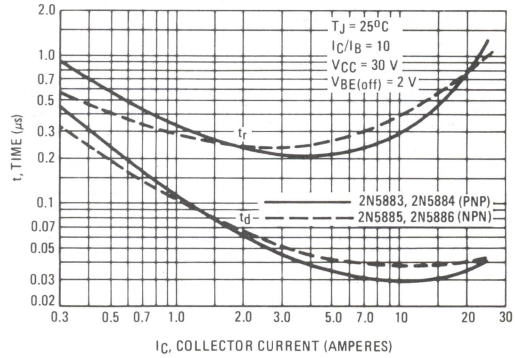

FIGURE 4 – THERMAL RESPONSE

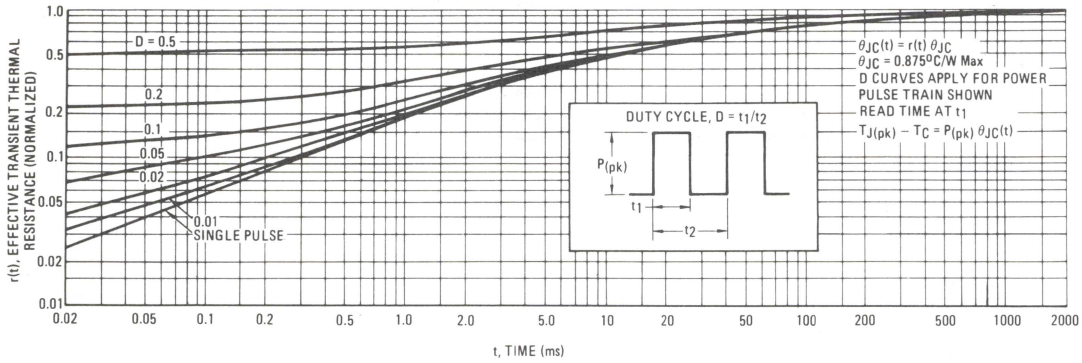

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

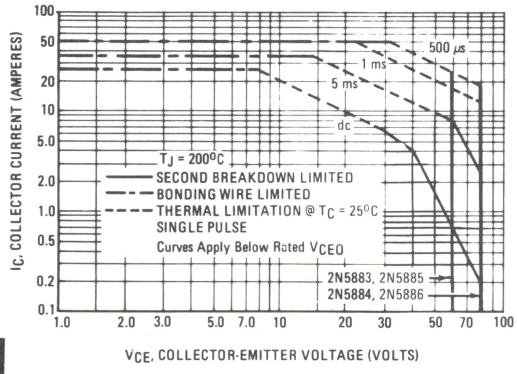

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

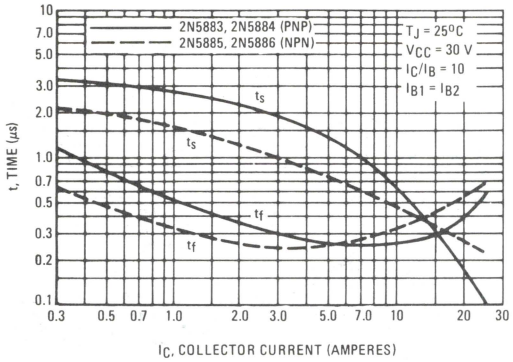

FIGURE 7 – CAPACITANCE

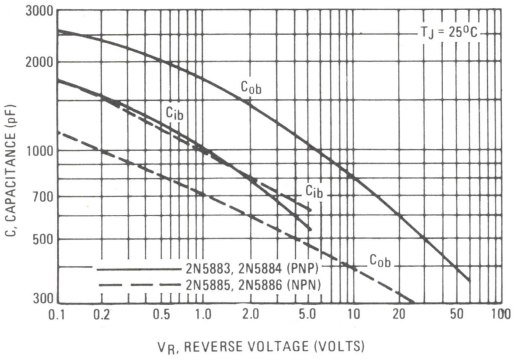

PNP DEVICES
2N5883 and 2N5884

NPN DEVICES
2N5885 and 2N5886

FIGURE 8 – DC CURRENT GAIN

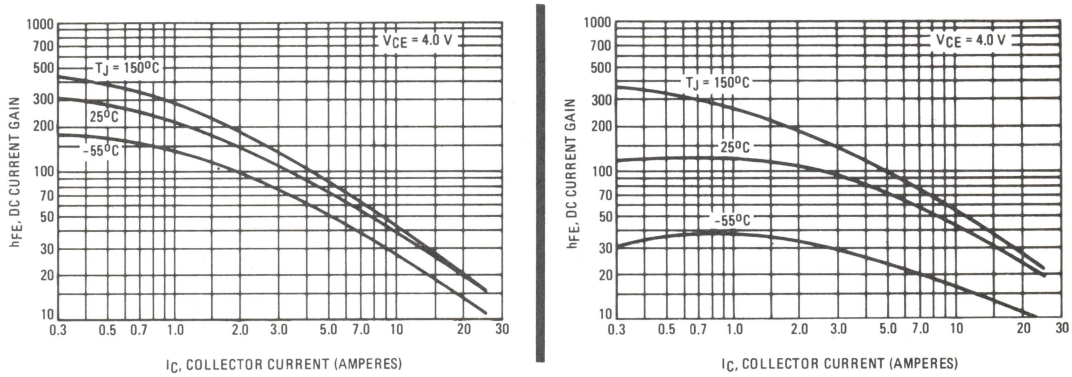

FIGURE 9 – COLLECTOR SATURATION REGION

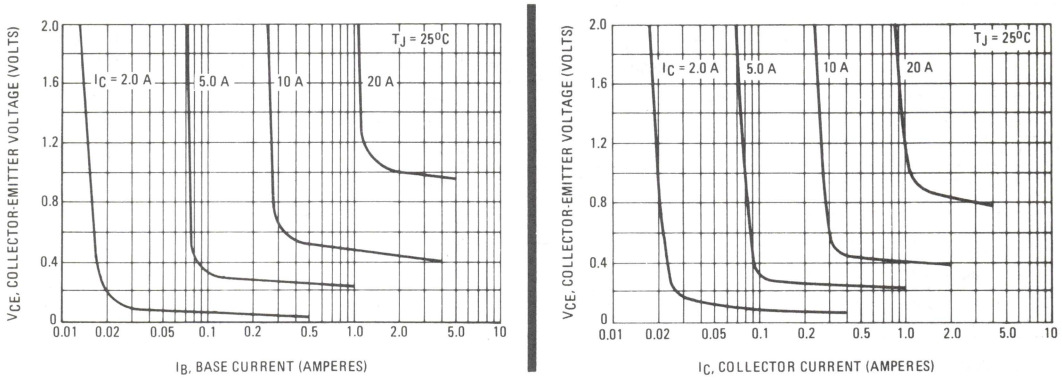

FIGURE 10 – "ON" VOLTAGES

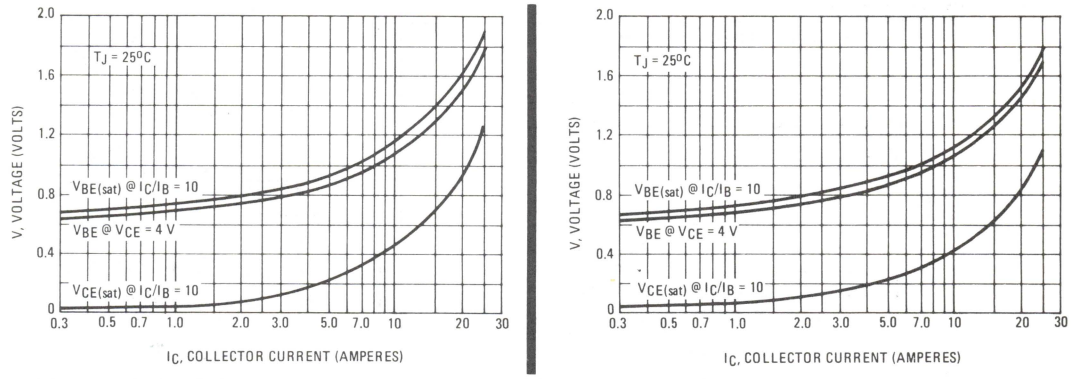

PNP
2N5986, 2N5987
2N5988
NPN
2N5989, 2N5991

HIGH POWER PLASTIC COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for use in general-purpose amplifier and switching circuits.

- Collector-Base Voltage – V_{CBO} = 60 Vdc – 2N5986, 2N5989
  = 80 Vdc – 2N5987
  = 100 Vdc – 2N5988, 2N5991
- Collector-Emitter Voltage – V_{CEO} = 40 Vdc – 2N5986, 2N5989
  = 60 Vdc – 2N5987
  = 80 Vdc – 2N5988, 2N5991
- DC Current Gain –
  h_{FE} = 20-120 @ I_C = 6.0 Adc
  = 7.0 (Min) @ I_C = 12 Adc
- Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.7 Vdc (Max) @ I_C = 6.0 Adc

12 AMPERE

POWER TRANSISTORS COMPLEMENTARY SILICON

40, 60, 80 VOLTS
100 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N5986 2N5989	2N5987	2N5988 2N5991	Unit
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current – Continuous Peak	I_C	12 20			Adc
Base Current	I_B	4.0			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	100 0.8			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.25	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

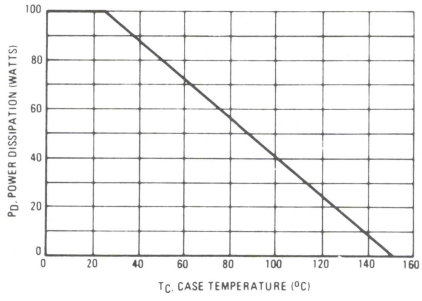



STYLE 2:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. DIM "D" UNCONTROLLED IN ZONE "H"
2. DIM "F" DIA THRU
3. HEAT SINK CONTACT AREA (BOTTOM)
4. LEADS WITHIN 0.005" RAD OF TRUE POSITION (TP) AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	16.13	16.38	0.635	0.645
B	12.57	12.83	0.495	0.505
C	3.18	3.43	0.125	0.135
D	1.09	1.24	0.043	0.049
F	3.51	3.76	0.138	0.148
G	4.22 BSC		0.166 BSC	
H	2.67	2.92	0.105	0.115
J	0.813	0.864	0.032	0.034
K	15.11	16.38	0.595	0.645
M	9° TYP		9° TYP	
Q	4.70	4.95	0.185	0.195
R	1.91	2.16	0.075	0.085
U	6.22	6.48	0.245	0.255
V	2.03	–	0.080	–

CASE 90-05
TO-225AB

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 0.2 Adc, I_B = 0)	2N5986, 2N5989	$V_{CEO(sus)}$	40	–	Vdc
	2N5987		60	–	
	2N5988, 2N5991		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 20 Vdc, I_B = 0)	2N5986, 2N5989		–	2.0	
(V_{CE} = 30 Vdc, I_B = 0)	2N5987		–	2.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N5988, 2N5991		–	2.0	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5986, 2N5989		–	200	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5987		–	200	
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N5988, 2N5991		–	200	
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	2N5986, 2N5989		–	2.0	mAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	2N5987		–	2.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	2N5988, 2N5991		–	2.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)			40	–	
(I_C = 6.0 Adc, V_{CE} = 2.0 Vdc)			20	120	
(I_C = 12 Adc, V_{CE} = 2.0 Vdc)			7.0	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 6.0 Adc, I_B = 0.6 Adc)			–	0.6	
(I_C = 12 Adc, I_B = 1.8 Adc)			–	1.7	
Base-Emitter Saturation Voltage (I_C = 12 Adc, I_B = 1.8 Adc)		$V_{BE(sat)}$	–	2.5	Vdc
Base-Emitter On Voltage (I_C = 6.0 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	–	1.4	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)		f_T	2.0	–	MHz
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	2N5986 thru 2N5988		–	500	
	2N5989, 2N5991		–	300	
Small-Signal Current Gain (I_C = 2.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)		h_{fe}	20	–	–

*Indicates JEDEC Registered Data.

(1) $f_T = |h_{fe}| \bullet f_{test}$

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

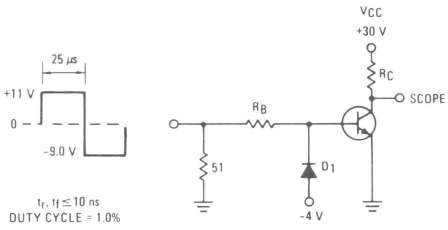

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

For PNP test circuit reverse diode and voltage polarities.

FIGURE 3 – TURN-ON TIME

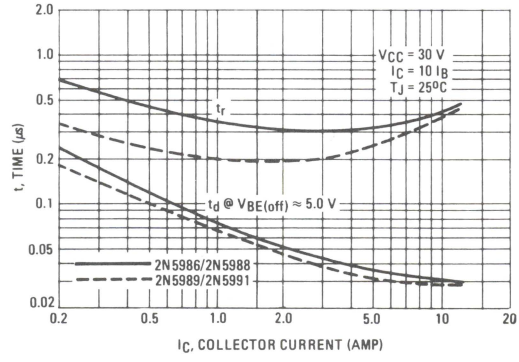

FIGURE 4 – THERMAL RESPONSE

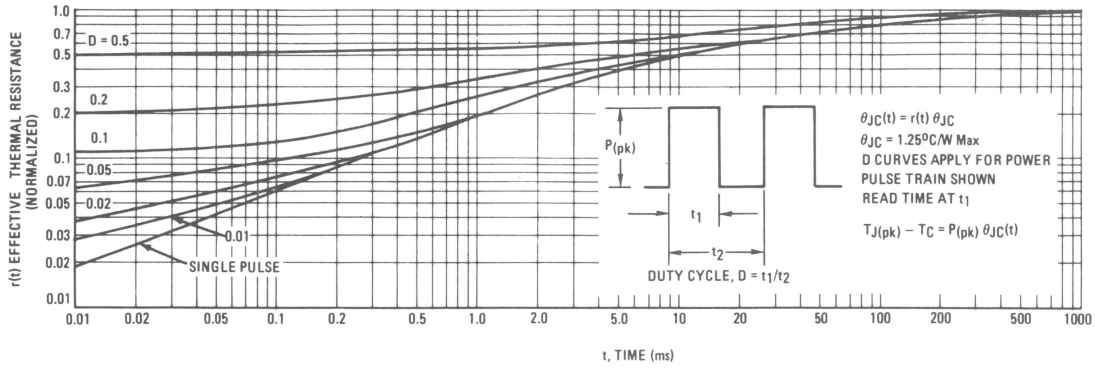

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

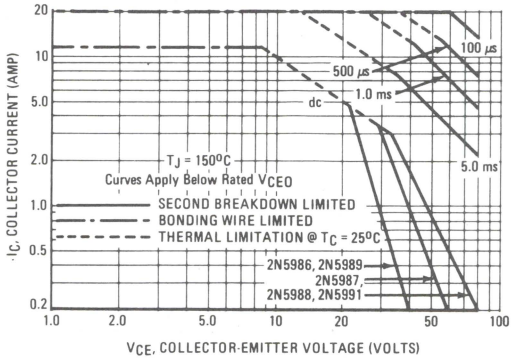

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$ $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

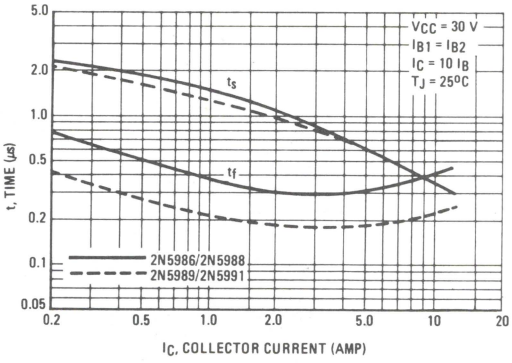

FIGURE 7 – CAPACITANCE

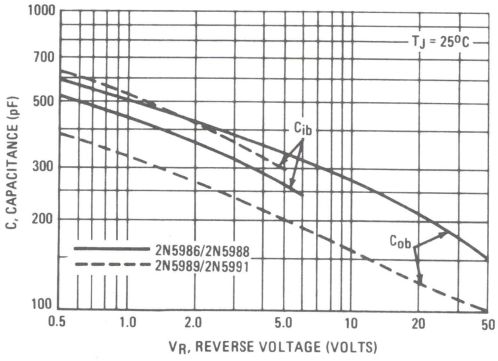

3

PNP
2N5986 thru 2N5988

NPN
2N5989, 2N5991

FIGURE 8 – DC CURRENT GAIN

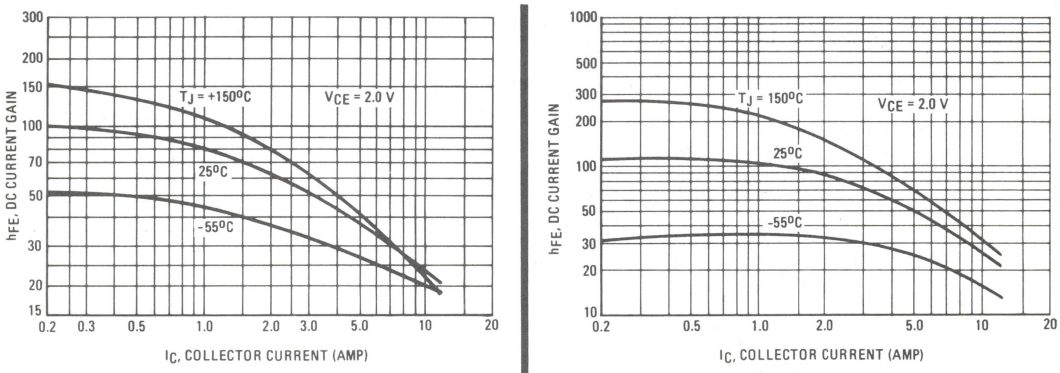

FIGURE 9 – COLLECTOR SATURATION REGION

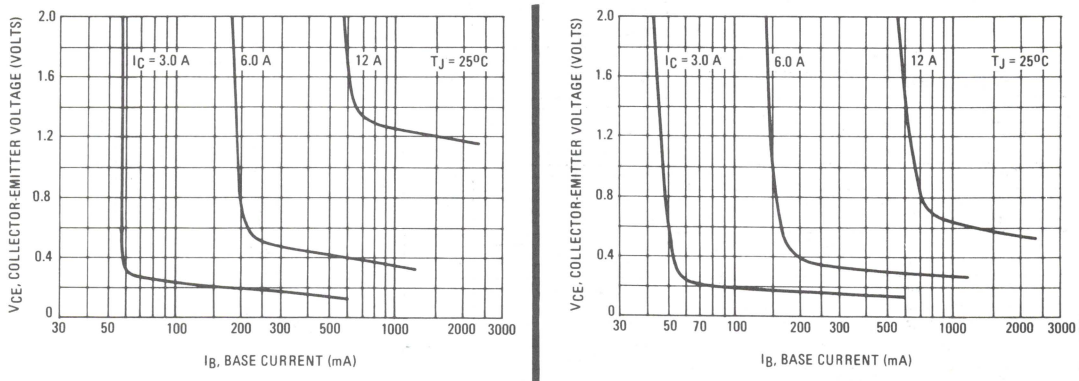

FIGURE 10 – "ON" VOLTAGES

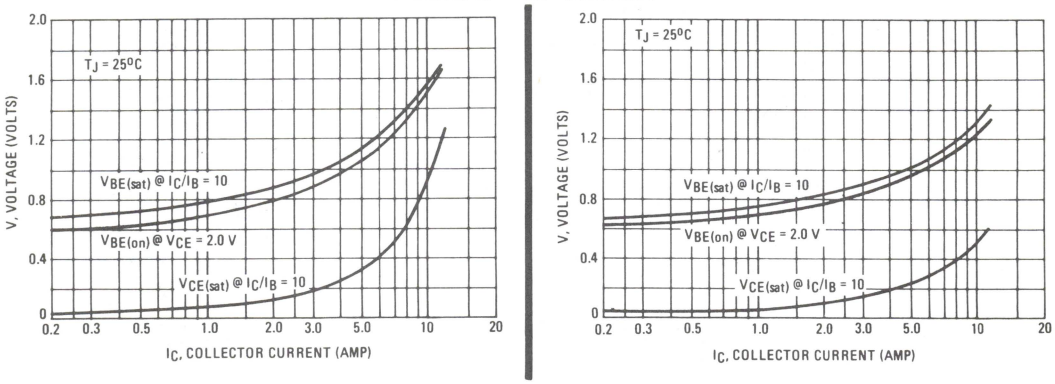

3

2N6029 thru 2N6031
See Page 3-112

PNP	NPN
2N6034	2N6037
2N6035	2N6038
2N6036	2N6039

PLASTIC DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain — h_{FE} = 2000 (Typ) @ I_C = 2.0 Adc
- Collector-Emitter Sustaining Voltage — @ 100 mAdc
  $V_{CEO(sus)}$ = 40 Vdc (Min) — 2N6034, 2N6037
  = 60 Vdc (Min) — 2N6035, 2N6038
  = 80 Vdc (Min) — 2N6036, 2N6039
- Forward Biased Second Breakdown Current Capability
  $I_{S/b}$ = 1.5 Adc @ 25 Vdc
- Monolithic Construction with Built-In Base-Emitter Resistors to Limit Leakage Multiplication
- Space-Saving High Performance-to-Cost Ratio TO-225AA Plastic Package

DARLINGTON 4-AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

40, 60, 80 VOLTS
40 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6034 2N6037	2N6035 2N6038	2N6036 2N6039	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous Peak	I_C	4.0 8.0			Adc
Base Current	I_B	100			mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 0.32			Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.5 0.012			Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.12	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	83.3	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

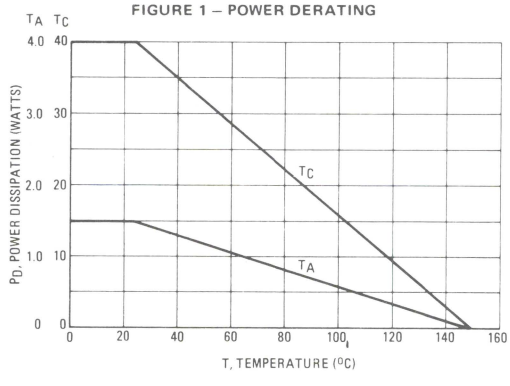



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-225AA

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage		$V_{CEO(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0)	2N6034, 2N6037		40	–	
	2N6035, 2N6038		60	–	
	2N6036, 2N6039		80	–	
Collector-Cutoff Current		I_{CEO}			μA
(V_{CE} = 40 Vdc, I_B = 0)	2N6034, 2N6037		–	100	
(V_{CE} = 60 Vdc, I_B = 0)	2N6035, 2N6038		–	100	
(V_{CE} = 80 Vdc, I_B = 0)	2N6036, 2N6039		–	100	
Collector Cutoff Current		I_{CEX}			μA
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6034, 2N6037		–	100	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6035, 2N6038		–	100	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6036, 2N6039		–	100	
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc T_C = 125°C)	2N6034, 2N6037		–	500	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc T_C = 125°C)	2N6035, 2N6038		–	500	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc T_C = 125°C)	2N6036, 2N6039		–	500	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 40 Vdc, I_E = 0)	2N6034, 2N6037		–	0.5	
(V_{CB} = 60 Vdc, I_E = 0)	2N6035, 2N6038		–	0.5	
(V_{CB} = 80 Vdc, I_E = 0)	2N6036, 2N6039		–	0.5	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 0.5 Adc, V_{CE} = 3.0 Vdc)			500	–	
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)			750	15,000	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			100	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 8.0 mAdc)			–	2.0	
(I_C = 4.0 Adc, I_B = 40 mAdc)			–	3.0	
Base-Emitter Saturation Voltage (I_C = 4.0 Adc, I_B = 40 mAdc)		$V_{BE(sat)}$	–	4.0	Vdc
Base-Emitter On Voltage (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)		$V_{BE(on)}$	–	2.8	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current-Gain (I_C = 0.75 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	25	–	–
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E =0, f = 0.1 MHz)	2N6034, 2N6035, 2N6036		–	200	
	2N6037, 2N6038, 2N6039		–	100	

*Indicates JEDEC Registered Data.

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

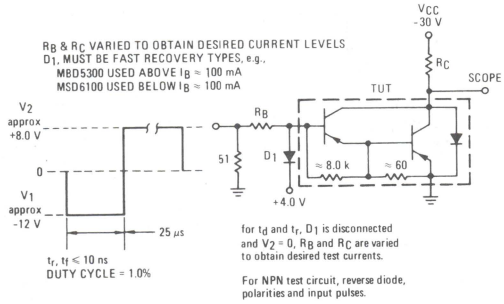

FIGURE 3 – SWITCHING TIMES

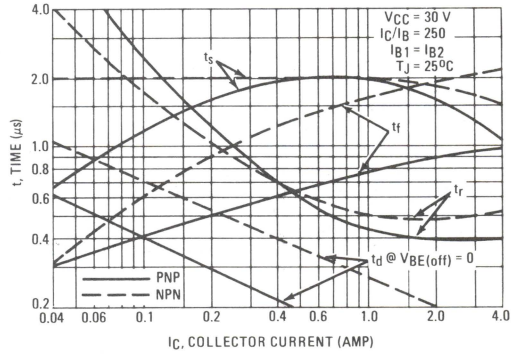

3

FIGURE 4 – THERMAL RESPONSE

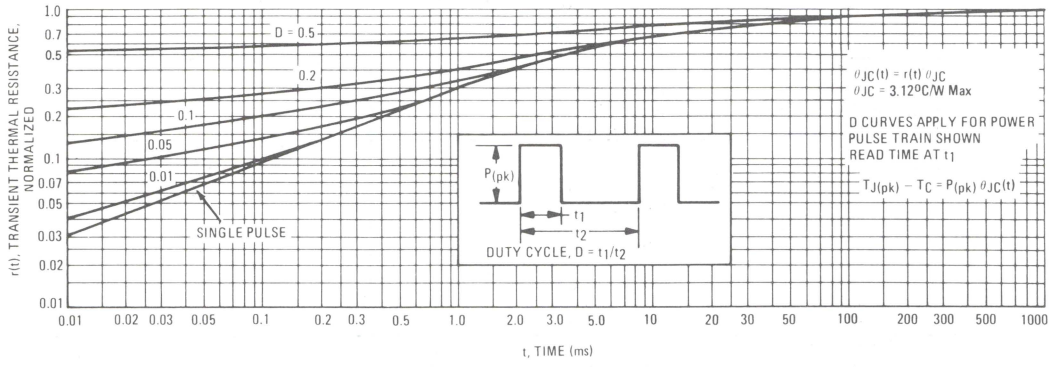

ACTIVE-REGION SAFE-OPERATING AREA

FIGURE 5 – 2N6034, 2N6035, 2N6036

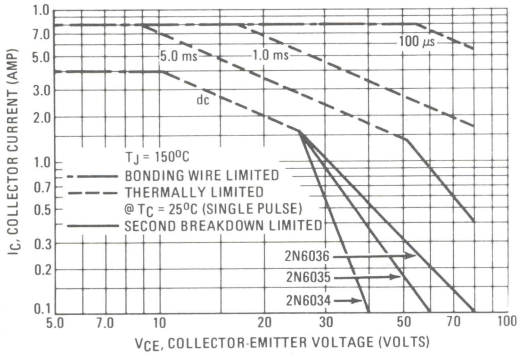

FIGURE 6 – 2N6037 2N6038, 2N6039

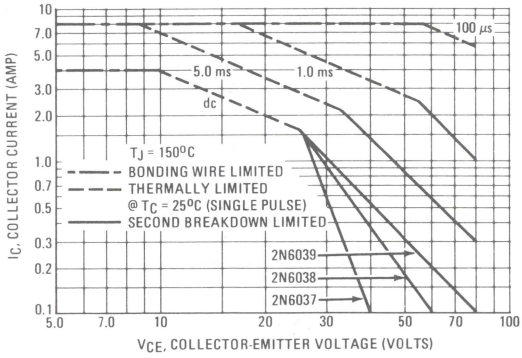

3

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 5 and 6 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 7 – CAPACITANCE

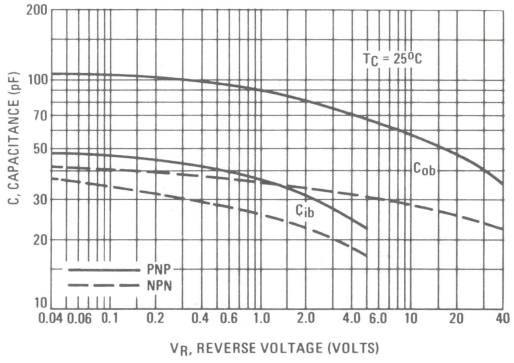

PNP
2N6034, 2N6035, 2N6036

NPN
2N6037, 2N6038, 2N6039

FIGURE 8 – DC CURRENT GAIN

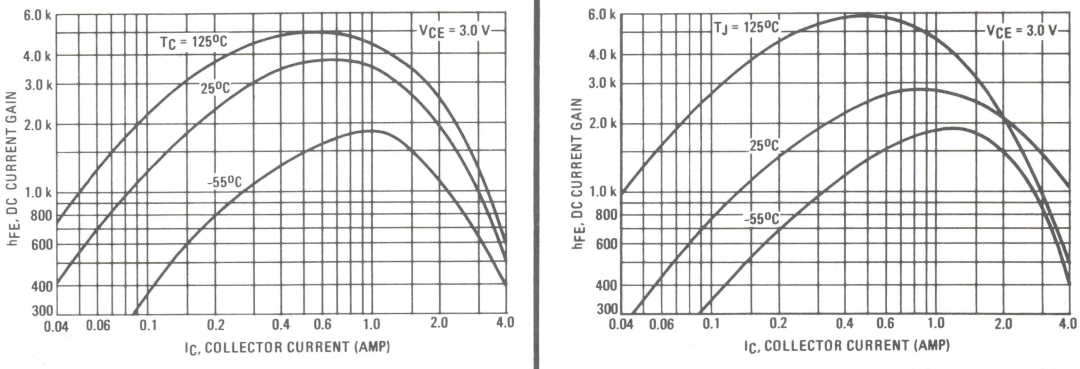

FIGURE 9 – COLLECTOR SATURATION REGION

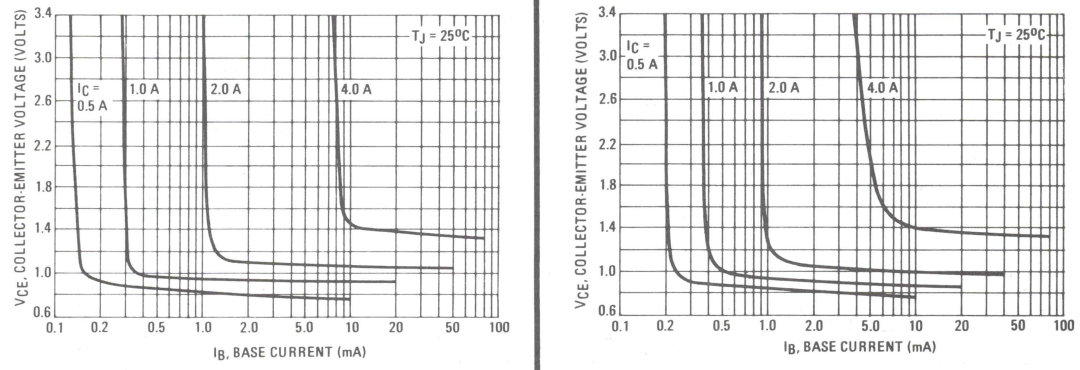

FIGURE 10 – "ON" VOLTAGES

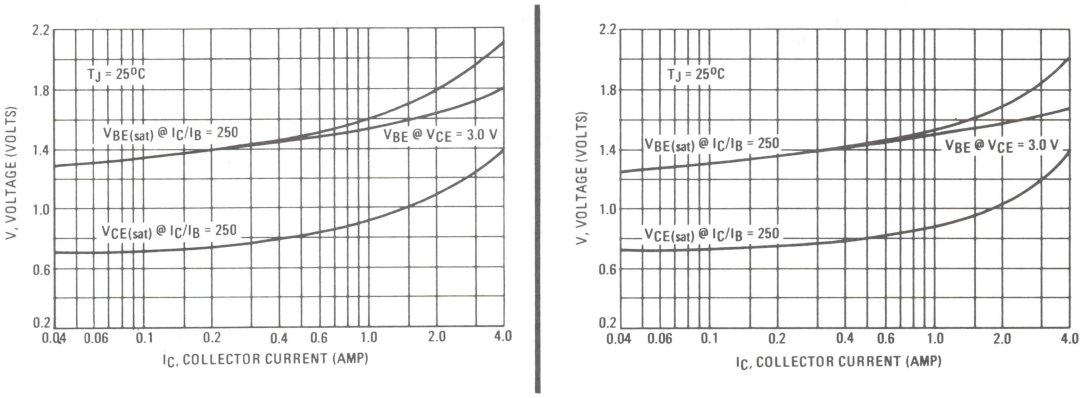

3

2N6040 thru 2N6042 PNP
2N6043 thru 2N6045 NPN
MJE6040 thru MJE6041 PNP
MJE6043 thru MJE6045 NPN

PLASTIC MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain –
  h_{FE} = 2500 (Typ) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage – @ 100 mAdc (1)
  $V_{CEO(sus)}$ = 60 Vdc (Min) – 2N6040, 2N6043
  = 80 Vdc (Min) – 2N6041, 2N6044
  = 100 Vdc (Min) – 2N6042, 2N6045
- Low Collector-Emitter Saturation Voltage – (1)
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 4.0 Adc – 2N6040,41,2N6043,44
  = 2.0 Vdc (Max) @ I_C = 3.0 Adc – 2N6042, 2N6045
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

(1) Applies to corresponding in-house part numbers also.

DARLINGTON 8 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60-80-100 VOLTS
75 WATTS

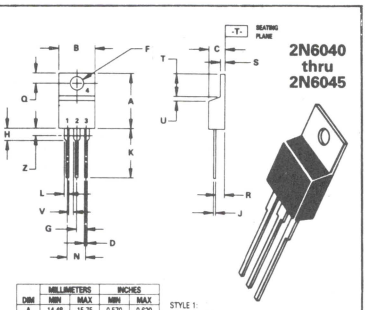

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

*MAXIMUM RATINGS

Rating	Symbol	2N6040 2N6043 MJE6040 MJE6043	2N6041 2N6044 MJE6041 MJE6044	2N6042 2N6045 MJE6045	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	◄ 5.0 ►			Vdc
Collector Current – Continuous	I_C	◄ 8.0 ►			Adc
Peak		◄ 16 ►			
Base Current	I_B	◄ 120 ►			mAdc
Total Power Dissipation @ T_C = 25°C	P_D	◄ 75 ►			Watts
Derate above 25°C		◄ 0.60 ►			W/°C
Total Power Dissipation @ T_A = 25°C	P_D	◄ 2.2 ►			Watts
Derate above 25°C		◄ 0.0175 ►			W/°C
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	◄ -65 to +150 ►			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.67	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	57	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

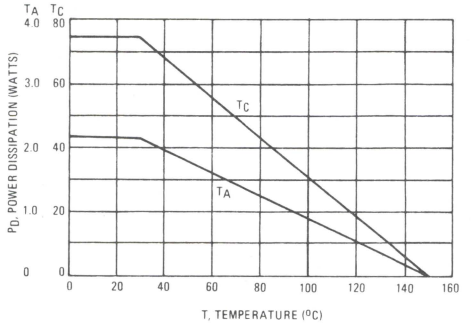

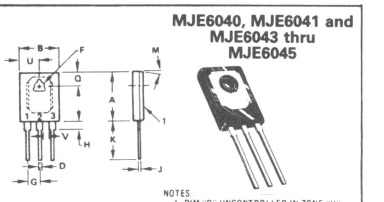

NOTES:
1. DIM "D" UNCONTROLLED IN ZONE "H"
2. DIM "F" DIA THRU
3. HEAT SINK CONTACT AREA (BOTTOM)
4. LEADS WITHIN 0.005" RAD OF TRUE POSITION (TP) AT MAXIMUM MATERIAL CONDITION.

STYLE 2
PIN 1. EMITTER
2. COLLECTOR
3. BASE

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	16.13	16.38	0.635	0.645
B	12.57	12.83	0.495	0.505
C	3.18	3.43	0.125	0.135
D	1.09	1.24	0.043	0.049
F	3.51	3.76	0.138	0.148
G	4.22 BSC		0.166 BSC	
H	2.67	2.92	0.105	0.115
J	0.813	0.864	0.032	0.034
K	15.11	16.38	0.595	0.645
M	90° TYP		90° TYP	
Q	4.70	4.95	0.185	0.195
R	1.91	2.16	0.075	0.085
U	6.22	6.48	0.245	0.255
V	2.03	—	0.080	—

CASE 90-05
TO-225AB

3

2N6040 thru 2N6042 PNP
2N6043 thru 2N6045 NPN
MJE6040 thru MJE6041 PNP
MJE6043 thru MJE6045 NPN

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0)	2N6040, 2N6043, MJE6040, MJE6043	$V_{CEO(sus)}$	60	–	Vdc
	2N6041, 2N6044, MJE6041, MJE6044		80	–	
	2N6042, 2N6045, MJE6045		100	–	
Collector Cutoff Current		I_{CEO}			μA
(V_{CE} = 60 Vdc, I_B = 0)	2N6040, 2N6043, MJE6040, MJE6043		–	20	
(V_{CE} = 80 Vdc, I_B = 0)	2N6041, 2N6044, MJE6041, MJE6044		–	20	
(V_{CE} = 100 Vdc, I_B = 0)	2N6042, 2N6045, MJE6045		–	20	
Collector Cutoff Current		I_{CEX}			μA
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6040, 2N6043, MJE6040, MJE6043		–	20	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6041, 2N6044, MJE6041, MJE6044		–	20	
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6042, 2N6045, MJE6045		–	20	
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6040, 2N6043, MJE6040, MJE6043		–	200	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6041, 2N6044, MJE6041, MJE6044		–	200	
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6042, 2N6045, MJE6045		–	200	
Collector Cutoff Current		I_{CBO}			μA
(V_{CB} = 60 Vdc, I_E = 0)	2N6040, 2N6043, MJE6040, MJE6043		–	20	
(V_{CB} = 80 Vdc, I_E = 0)	2N6041, 2N6044, MJE6041, MJE6044		–	20	
(V_{CB} = 100 Vdc, I_E = 0)	2N6042, 2N6045, MJE6045		–	20	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)	2N6040,41, 2N6043,44, MJE6040,41, MJE6043,44		1000	20,000	
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)	2N6042, 2N6045, MJE6045		1000	20,000	
(I_C = 8.0 Adc, V_{CE} = 4.0 Vdc)	All Types		100	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 4.0 Adc, I_B = 16 mAdc)	2N6040,41,2N6043,44,MJE6040,41,MJE6043,44		–	2.0	
(I_C = 3.0 Adc, I_B = 12 mAdc)	2N6042,2N6045,MJE6045		–	2.0	
(I_C = 8.0 Adc, I_B = 80 mAdc)	All Types		–	4.0	
Base-Emitter Saturation Voltage (I_C = 8.0 Adc, I_B = 80 mAdc)		$V_{BE(sat)}$	–	4.5	Vdc
Base-Emitter On Voltage (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	2.8	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	4.0	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N6040/2N6042, MJE6040		–	300	
	2N6043/2N6045, MJE6043/MJE6045		–	200	
Small-Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)		h_{fe}	300	–	–

*Indicates JEDEC Registered Data.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

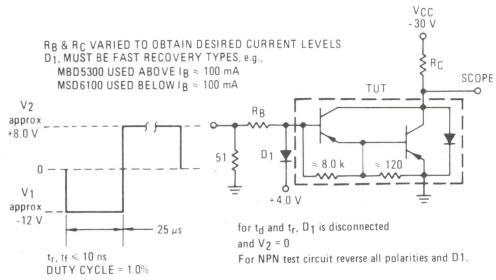

FIGURE 3 – SWITCHING TIMES

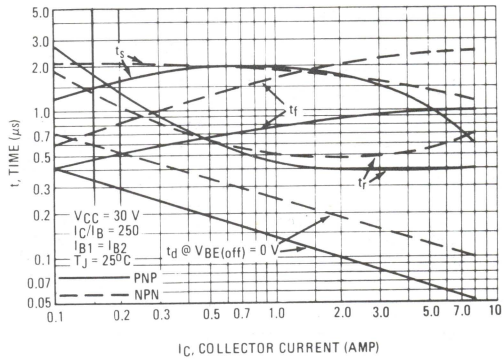

FIGURE 4 – THERMAL RESPONSE

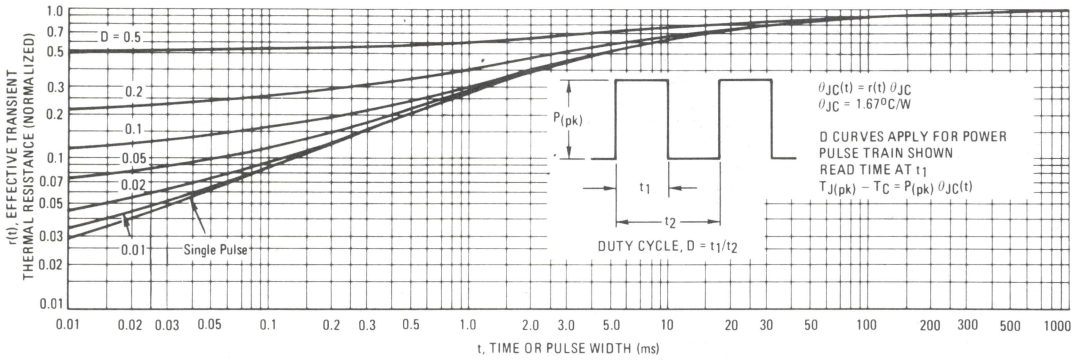

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

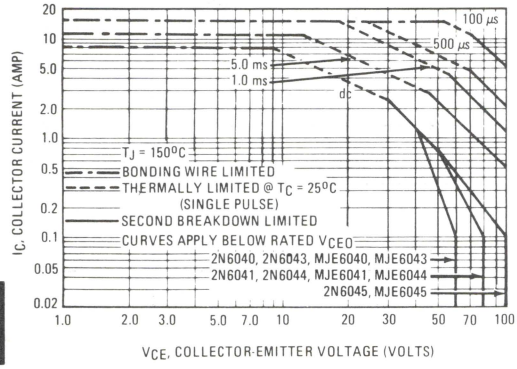

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

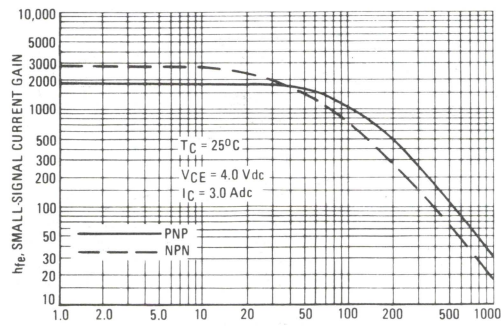

FIGURE 7 – CAPACITANCE

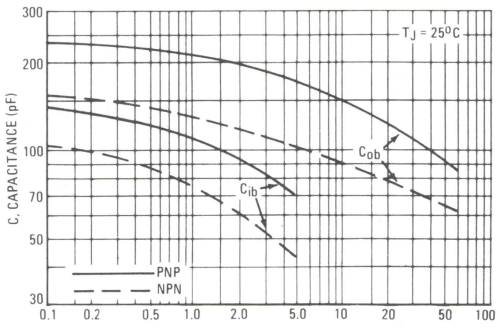

PNP
2N6040, 2N6041, 2N6042
MJE6040, MJE6041

NPN
2N6043, 2N6044, 2N6045
MJE6043, MJE6044, MJE6045

FIGURE 8 – DC CURRENT GAIN

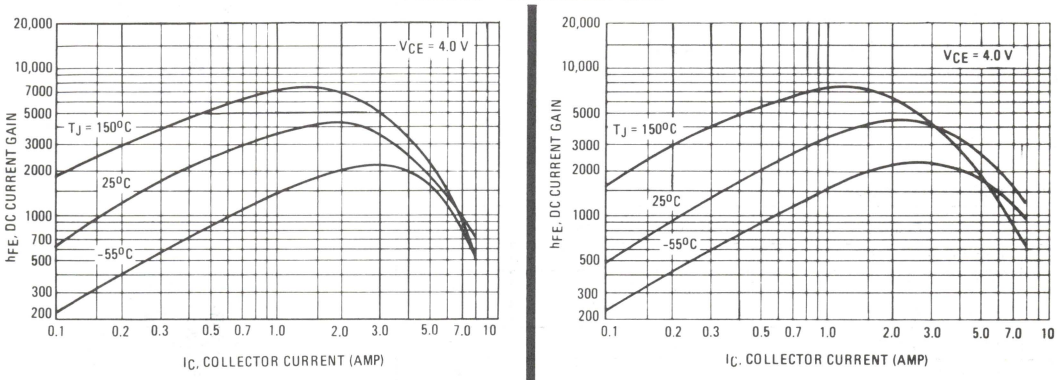

FIGURE 9 – COLLECTOR SATURATION REGION

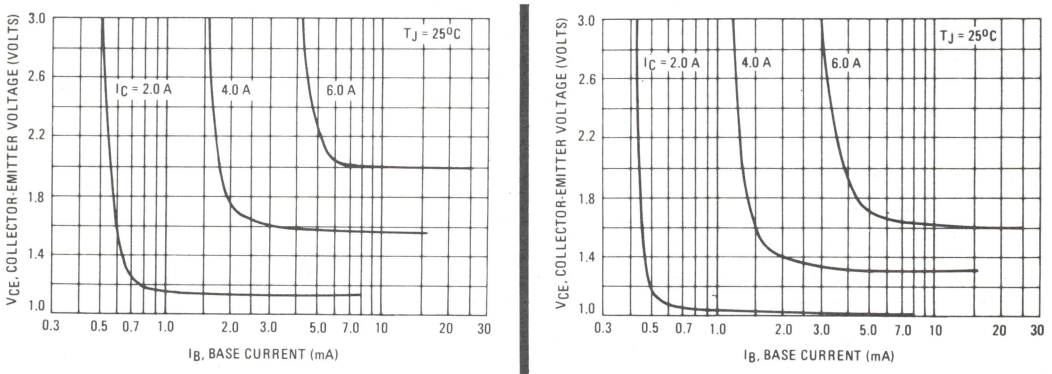

FIGURE 10 – "ON" VOLTAGES

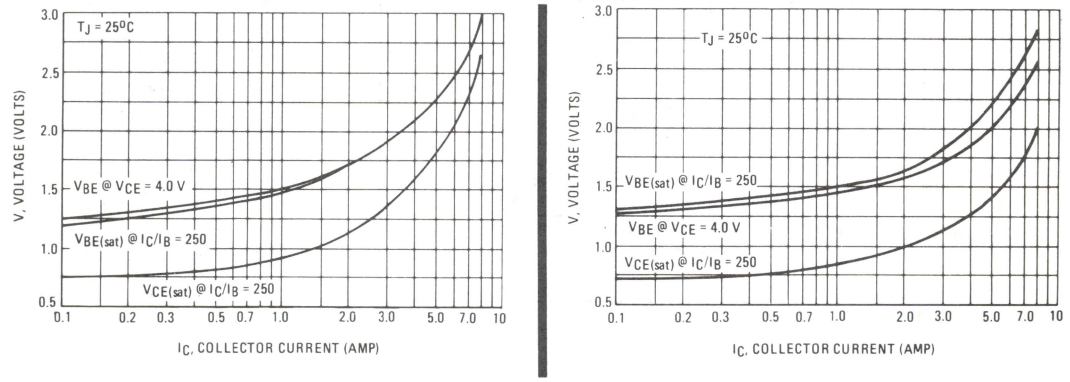

3

2N6049

MEDIUM-POWER PNP SILICON TRANSISTOR

. . . designed for general-purpose switching and amplifier applications

- Excellent Safe Operating Area
- DC Current Gain Specified to 4.0 Amperes
- Complement to NPN Type 2N3054A

4 AMPERE
POWER TRANSISTOR
PNP SILICON
55 VOLTS
75 WATTS



*MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	55	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	60	Vdc
Collector-Base Voltage	V_{CB}	90	Vdc
Emitter-Base Voltage	V_{EB}	7.0	Vdc
Collector Current — Continuous Peak	I_C	4.0 10	Adc
Base Current	I_B	2.0	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°	P_D	75 0.43	Watts W/°C
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	-65 to +200	°C

*Indicates JEDEC Registered Data

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	2.33	°C/W

FIGURE 1 — POWER-TEMPERATURE DERATING

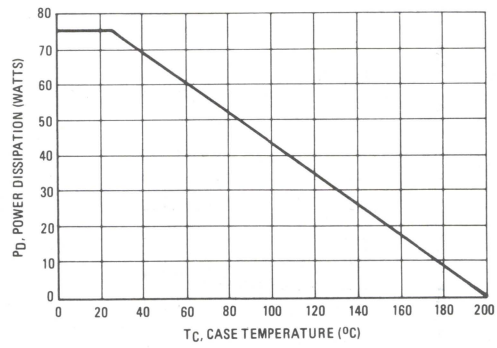

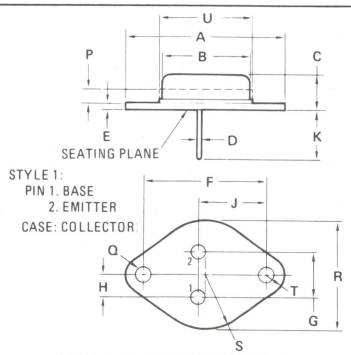

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	55	–	Vdc
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, R_{BE} = 100 Ω)	$V_{CER(sus)}$	60	–	Vdc
Collector Cuttoff Current (V_{CE} = 30 Vdc, I_B = 0)	I_{CEO}	–	500	μAdc
Collector Cutoff Current (V_{CE} = 90 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 90 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	– –	1.0 6.0	mAdc
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 500 mAdc, V_{CE} = 4.0 Vdc) (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)	h_{FE}	25 6.0	100	– –
Collector-Emitter Saturation Voltage (I_C = 500 mAdc, I_B = 50 mAdc) (I_C = 4.0 Adc, I_B = 800 mAdc)	$V_{CE(sat)}$	– –	0.5 2.0	Vdc
Base-Emitter On Voltage (I_C = 500 mAdc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	–	1.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (I_C = 200 mAdc, V_{CE} = 10 Vdc)	f_T	3.0	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	–	200	pF
Small-Signal Current Gain (I_C = 100 mAdc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)	h_{fe}	25	180	

*Indicates JEDEC Registered Data

(1) Pulse test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

3

FIGURE 2 – SWITCHING TIME EQUIVALENT TEST CIRCUIT

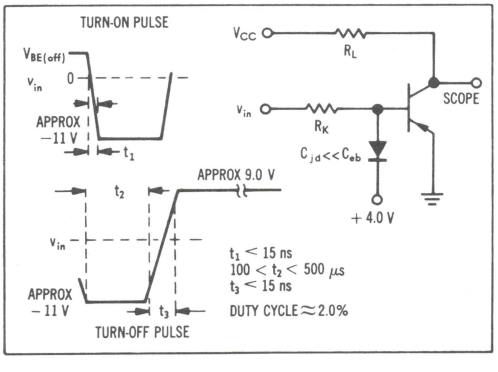

FIGURE 3 – TURN-ON TIME

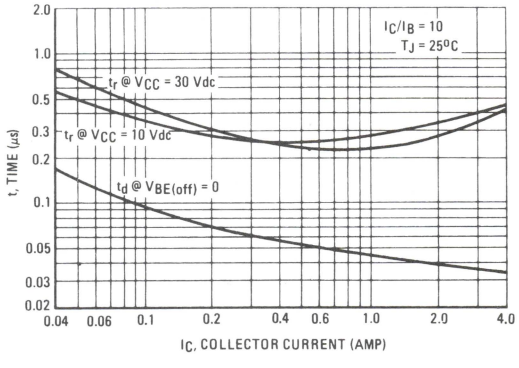

FIGURE 4 – THERMAL RESPONSE

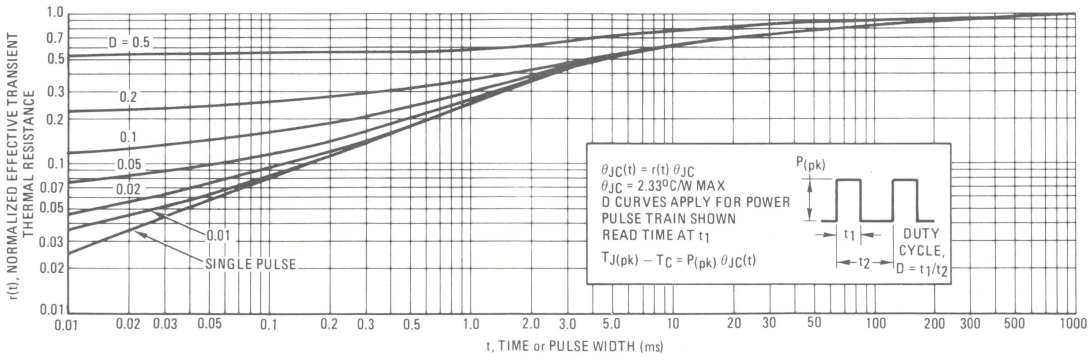

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

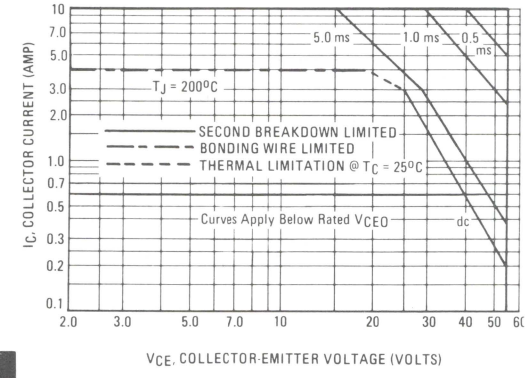

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

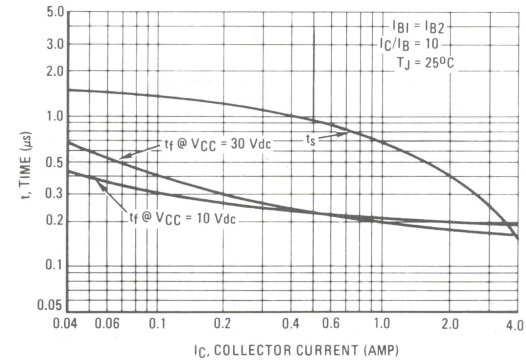

FIGURE 7 – CAPACITANCE

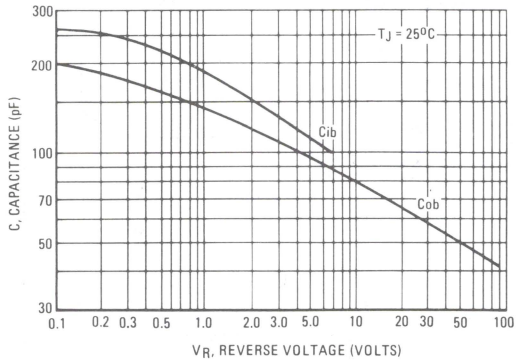

PNP
2N6050 thru 2N6052
NPN
2N6057 thru 2N6059

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low frequency switching applications.

- High DC Current Gain –
  h_{FE} = 3500 (Typ) @ I_C = 5.0 Adc
- Collector-Emitter Sustaining Voltage – @ 100 mA
  $V_{CEO(sus)}$ = 60 Vdc (Min) – 2N6050, 2N6057
  80 Vdc (Min) – 2N6051, 2N6058
  100 Vdc (Min) – 2N6052, 2N6059
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

DARLINGTON 12 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS 60-80-100 VOLTS 150 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6050 2N6057	2N6051 2N6058	2N6052 2N6059	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	← 5.0 →			Vdc
Collector Current – Continuous Peak	I_C	← 12 → ← 20 →			Adc
Base Current	I_B	← 0.2 →			Adc
Total Device Dissipation @T_C = 25°C Derate above 25°C	P_D	← 150 → ← 0.857 →			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +200°C →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Rating	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

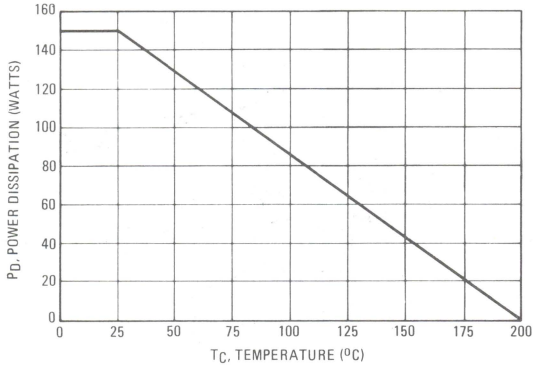



STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.151	0.165

CASE 1-04
TO-204AA

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0)	2N6050, 2N6057		60	–	
	2N6051, 2N6058		80	–	
	2N6052, 2N6059		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N6050, 2N6057		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N6051, 2N6058		–	1.0	
(V_{CE} = 50 Vdc, I_B = 0)	2N6052, 2N6059		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CEO}, $V_{BE(off)}$ = 1.5 Vdc)			–	0.5	
(V_{CE} = Rated V_{CEO}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)				5.0	
Emitter Cutoff Current		I_{EBO}	–	2.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 6.0 Adc, V_{CE} = 3.0 Vdc)			750	18,000	
(I_C = 12 Adc, V_{CE} = 3.0 Vdc)			100	–	
Collector-Emitter Saturation Volatage		$V_{CE(sat)}$			Vdc
(I_C = 6.0 Adc, I_B = 24 mAdc)			–	2.0	
(I_C = 12 Adc, I_B = 120 mAdc)			–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	–	4.0	Vdc
(I_C = 12 Adc, I_B = 120 mAdc)					
Base-Emitter On Voltage		$V_{BE(on)}$	–	2.8	Vdc
(I_C = 6.0 Adc, V_{CE} = 3.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short Circuit Forward Current Transfer Ratio		$\|h_{fe}\|$	4.0	–	MHz
(I_C = 5.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)					
Output Capacitance	2N6050/2N6052	C_{ob}	–	500	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N6057/2N6059		–	300	
Small-Signal Current Gain		h_{fe}	300	–	–
(I_C = 5.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)					

*Indicates JEDEC Registered Data

(1) Pulse test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

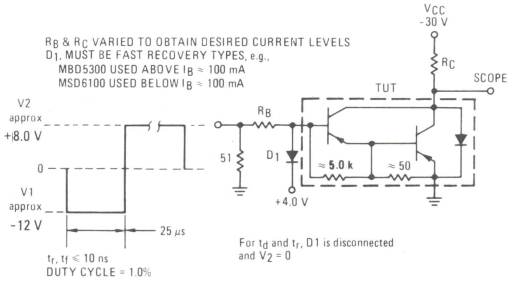

For NPN test circuit reverse diode and voltage polarities.

FIGURE 3 – SWITCHING TIMES

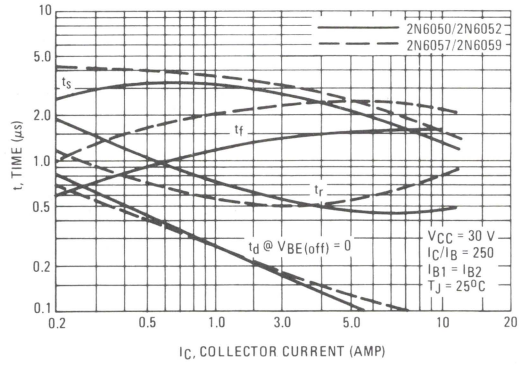

FIGURE 4 – THERMAL RESPONSE

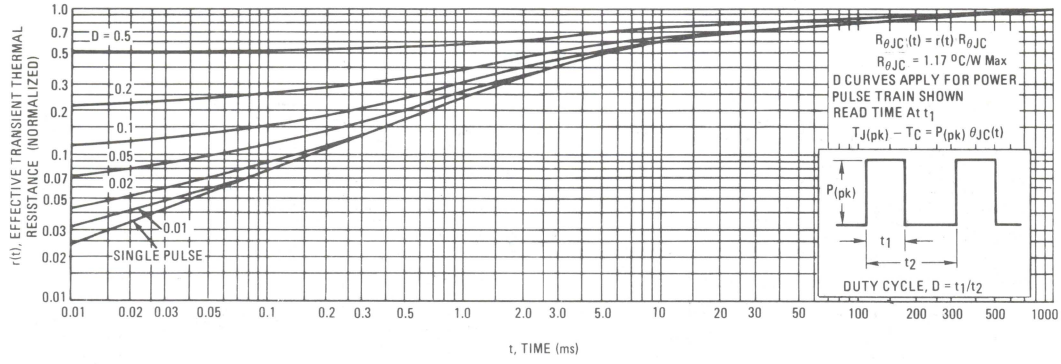

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 5 – 2N6050, 2N6057

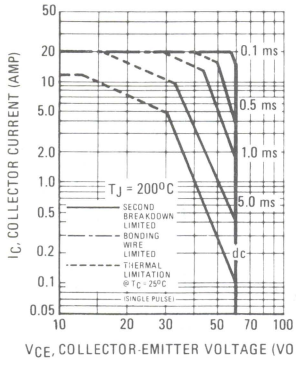

FIGURE 6 – 2N6051, 2N6058

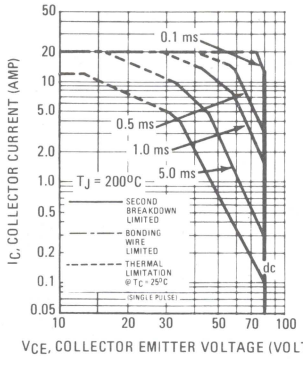

FIGURE 7 – 2N6052, 2N6059

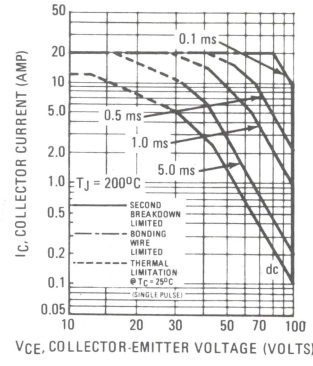

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 5, 6 and 7 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200°C$ $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 8 – SMALL-SIGNAL CURRENT GAIN

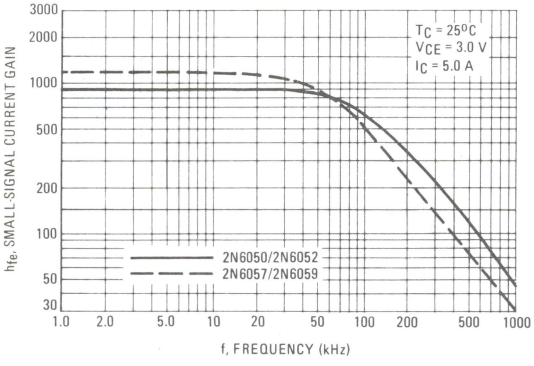

FIGURE 9 – CAPACITANCE

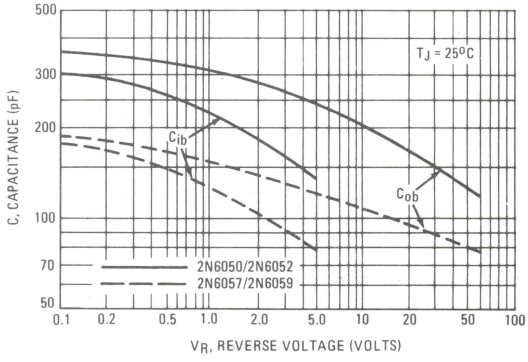

PNP
2N6050, 2N6051, 2N6052

NPN
2N6057, 2N6058, 2N6059

FIGURE 10 – DC CURRENT GAIN

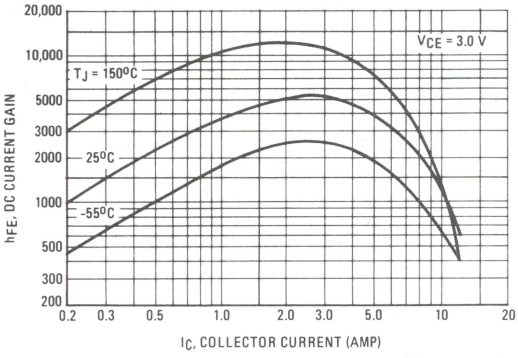

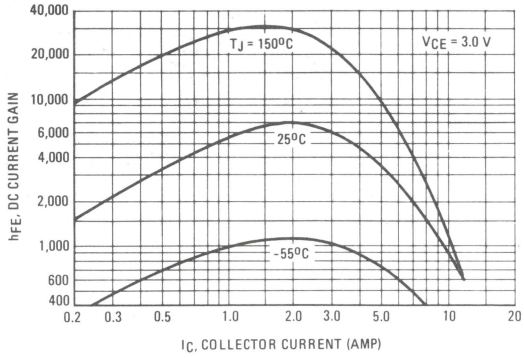

FIGURE 11 – COLLECTOR SATURATION REGION

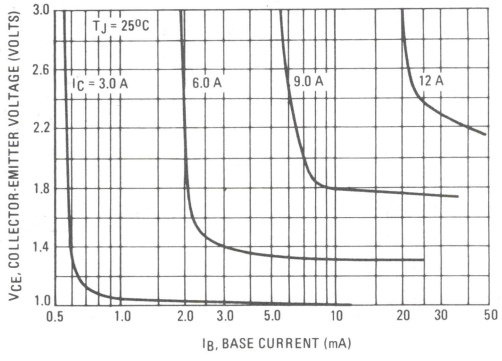

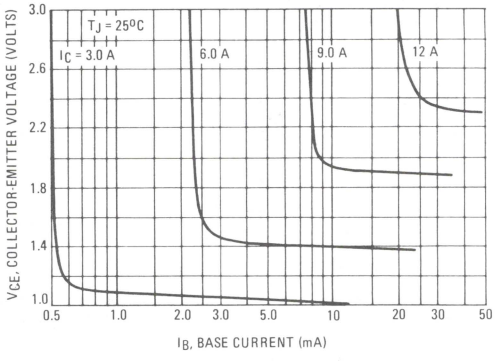

FIGURE 12 – "ON" VOLTAGES

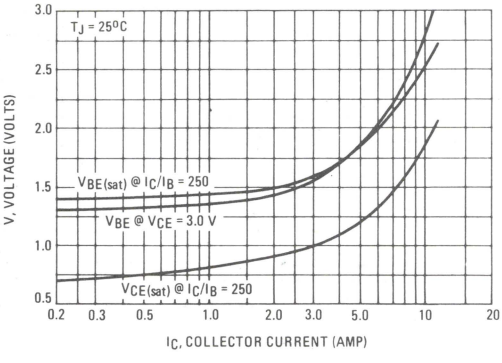

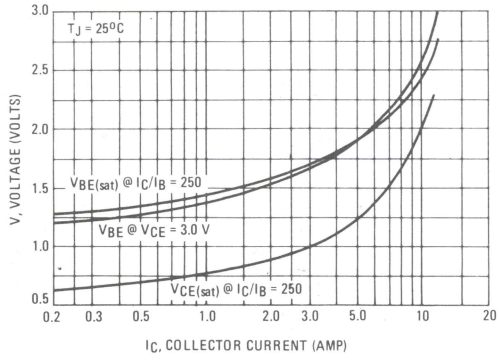

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6053, 2N6054
2N6298, 2N6299 PNP
2N6055, 2N6056
2N6300, 2N6301 NPN

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low frequency switching applications.

- High DC Current Gain –
  h_{FE} = 3000 (Typ) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage – @ 100 mA
  $V_{CEO(sus)}$ = 60 Vdc (Min) – 2N6053, 2N6055, 2N6298, 2N6300
  = 80 Vdc (Min) – 2N6054, 2N6056, 2N6299, 2N6301
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 4.0 Adc
  = 3.0 Vdc (Max) @ I_C = 8.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

DARLINGTON 8 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS 60-80 VOLTS 75,100 WATTS

*MAXIMUM RATINGS

Rating	Symbol	2N6053 2N6055 2N6298 2N6300	2N6054 2N6056 2N6299 2N6301	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous Peak	I_C	8.0 16		Adc
Base Current	I_B	120		mAdc
		2N6053 2N6054 2N6055 2N6056	2N6298 2N6299 2N6300 2N6301	
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	100 0.571	75 0.428	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	2N6053 2N6054 2N6055 2N6056	2N6298 2N6299 2N6300 2N6301	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	2.33	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

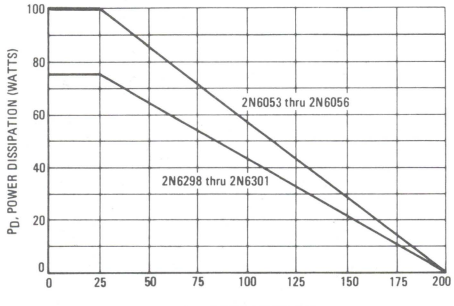

2N6053
2N6054
2N6055
2N6056



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR



NOTE:
1. DIM "Q" IS DIA.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B		21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E		3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

Collector connected to case.

CASE 11-01
TO-204AA

2N6298
2N6299
2N6300
2N6301



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	2N6053, 2N6055, 2N6298, 2N6300	$V_{CEO(sus)}$	60	–	Vdc
	2N6054, 2N6056, 2N6299, 2N6301		80	–	
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0)	2N6053, 2N6055, 2N6298, 2N6300	I_{CEO}	–	0.5	mAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N6054, 2N6056, 2N6299, 2N6301		–	0.5	
Collector Cutoff Current (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)		I_{CEX}	–	0.5	mAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)		h_{FE}	750	18000	–
(I_C = 8.0 Adc, V_{CE} = 3.0 Vdc)			100	–	
Collector-Emitter Saturation Voltage (I_C = 4.0 Adc, I_B = 16 mAdc)		$V_{CE(sat)}$	–	2.0	Vdc
(I_C = 8.0 Adc, I_B = 80 mAdc)			–	3.0	
Base-Emitter Saturation Voltage (I_C = 8.0 Adc, I_B = 80 mAdc)		$V_{BE(sat)}$	–	4.0	Vdc
Base-Emitter On Voltage (I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)		$V_{BE(on)}$	–	2.8	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short Circuit Current Transfer Ratio (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	4.0	–	–
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N6053, 2N6054, 2N6298, 2N6299	C_{ob}	–	300	pF
	2N6055, 2N6056, 2N6300, 2N6301		–	200	
Small-Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)		h_{fe}	300	–	–

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0 %.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

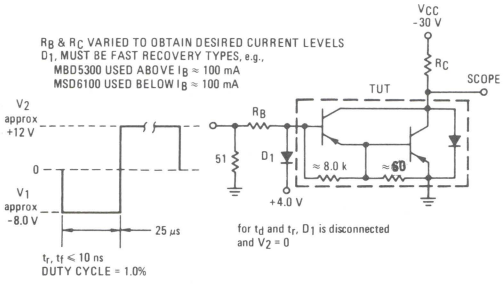

For NPN test circuit reverse diode, polarities and input pulses.

FIGURE 3 – SWITCHING TIMES

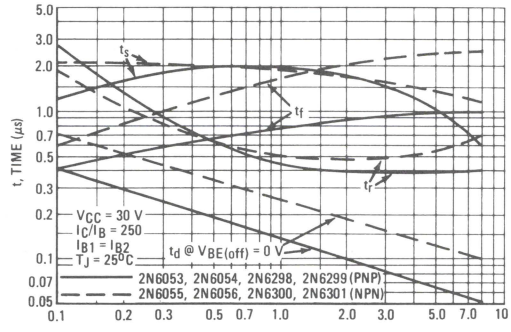

FIGURE 4 – THERMAL RESPONSE

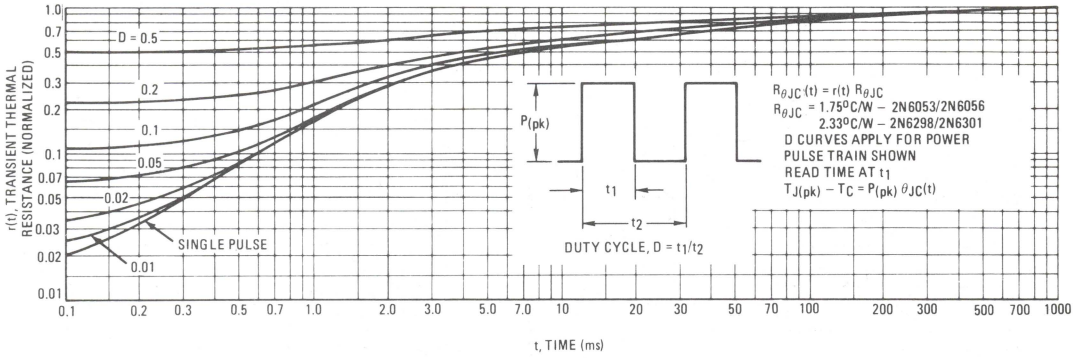

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 5 – 2N6053 thru 2N6056

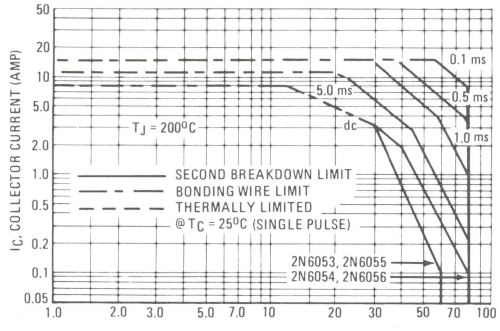

FIGURE 6 – 2N6298 thru 2N6301

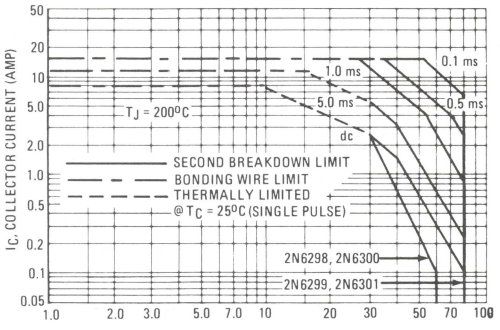

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate. The data of Figures 5 and 6 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 7 – SMALL-SIGNAL CURRENT GAIN

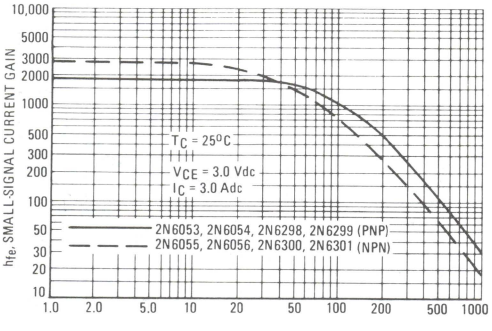

FIGURE 8 – CAPACITANCE

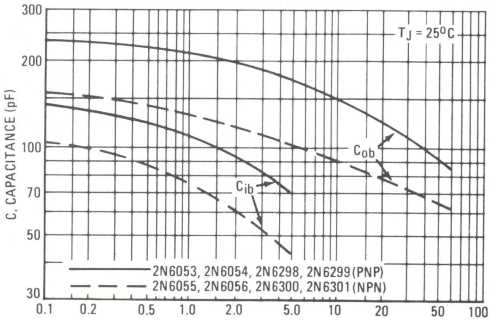

PNP

2N6053, 2N6054, 2N6298, 2N6299

NPN

2N6055, 2N6056, 2N6300, 2N6301

FIGURE 9 – DC CURRENT GAIN

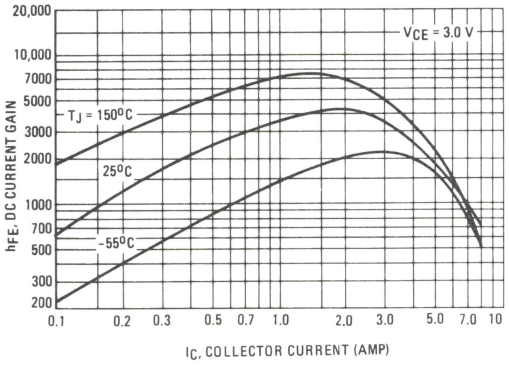

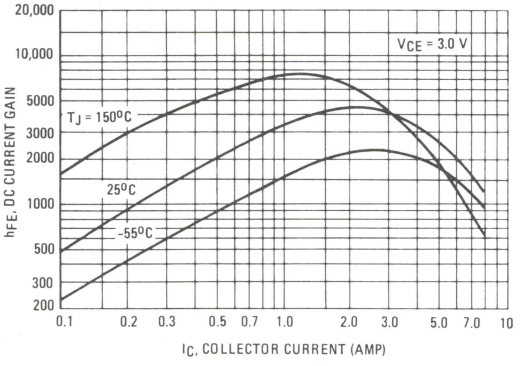

FIGURE 10 – COLLECTOR SATURATION REGION

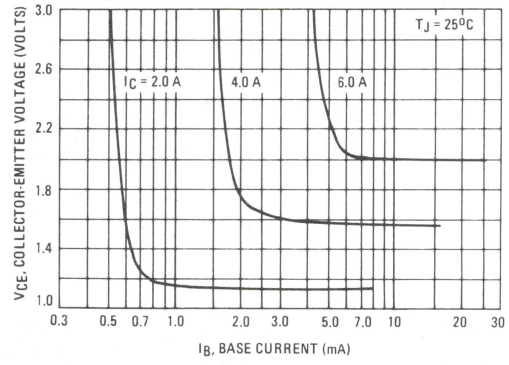

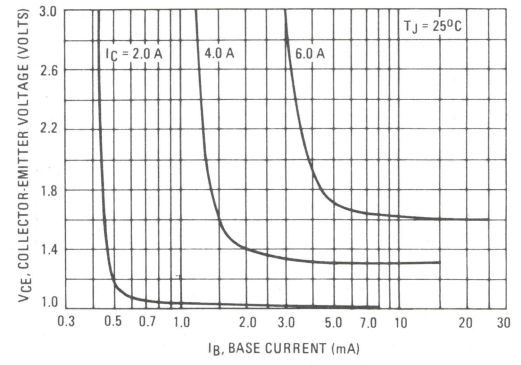

FIGURE 11 – "ON" VOLTAGES

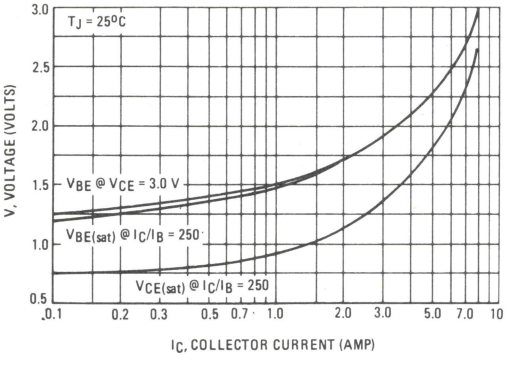

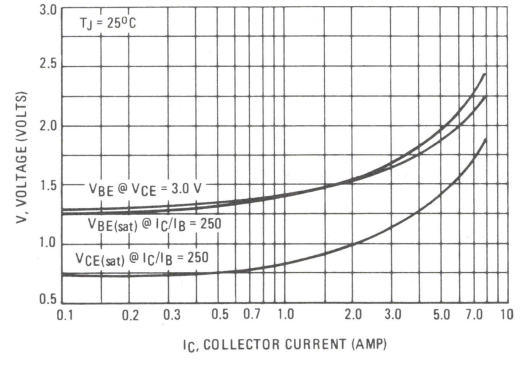

3

2N6057 thru 2N6059
See Page 3-153

PNP
2N6107, 2N6109
2N6111
NPN
2N6288, 2N6292

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general-purpose amplifier and switching applications.

- DC Current Gain Specified to 7.0 Amperes
  h_{FE} = 30–150 @ I_C = 3.0 Adc – 2N6111, 2N6288
  = 2.3 (Min) @ I_C = 7.0 Adc – All Devices
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 30 Vdc (Min) – 2N6111, 2N6288
  = 50 Vdc (Min) – 2N6109
  = 70 Vdc (Min) – 2N6107, 2N6292
- High Current Gain – Bandwidth Product
  f_T = 4.0 MHz (Min) @ I_C = 500 mAdc – 2N6288, 90, 92
  = 10 MHz (Min) @ I_C = 500 mAdc – 2N6107, 09, 11
- TO-220AB Compact Package
- TO-213AA Leadform Also Available

7 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON

30–50–70 VOLTS
40 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6111 2N6288	2N6109	2N6107 2N6292	Unit
Collector-Emitter Voltage	V_{CEO}	30	50	70	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current – Continuous Peak	I_C	7.0 10			Adc
Base Current	I_B	3.0			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 0.32			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.125	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

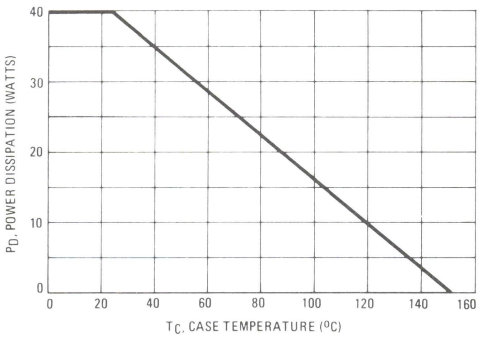

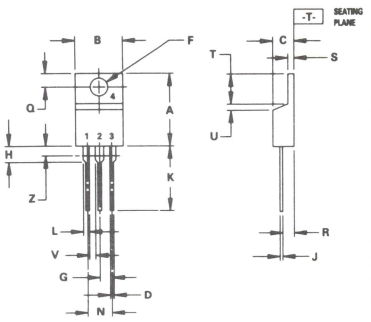

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF-CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0)	2N6111, 2N6288		30	–	
	2N6109		50	–	
	2N6107, 2N6292		70	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 20 Vdc, I_B = 0)	2N6111, 2N6288		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N6109		–	1.0	
(V_{CE} = 60 Vdc, I_B = 0)	2N6107, 2N6292		–	1.0	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6111, 2N6288		–	100	
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6109		–	100	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6107, 2N6292		–	100	
(V_{CE} = 30 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6111, 2N6288		–	2.0	mAdc
(V_{CE} = 50 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6109		–	2.0	
(V_{CE} = 70 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6107, 2N6292		–	2.0	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc)	2N6107, 2N6292		30	150	
(I_C = 2.5 Adc, V_{CE} = 4.0 Vdc)	2N6109		30	150	
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)	2N6111, 2N6288		30	150	
(I_C = 7.0 Adc, V_{CE} = 4.0 Vdc)	All Devices		2.3	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	–	3.5	Vdc
(I_C = 7.0 Adc, I_B = 3.0 Adc)					
Base-Emitter On Voltage		$V_{BE(on)}$	–	3.0	Vdc
(I_C = 7.0 Adc, V_{CE} = 4.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2)		f_T			MHz
(I_C = 500 mAdc, V_{CE} = 4.0 Vdc, f_{test} = 1.0 MHz)					
	2N6288, 92		4.0	–	
	2N6107, 09, 11		10	–	
Output Capacitance		C_{ob}	–	250	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)					
Small-Signal Current Gain		h_{fe}	20	–	–
(I_C = 0.5 Adc, V_{CE} = 4.0 Vdc, f = 50 kHz)					

*Indicates JEDEC Registered Data.

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2)$f_T = |h_{fe}| \bullet f_{test}$

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

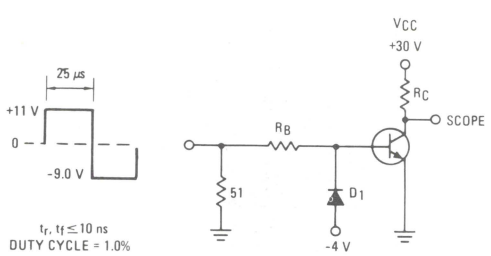

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

FIGURE 3 – TURN-ON TIME

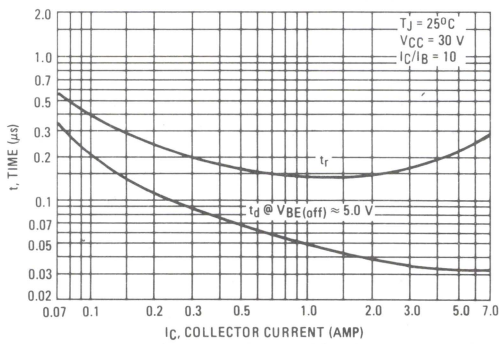

FIGURE 4 – THERMAL RESPONSE

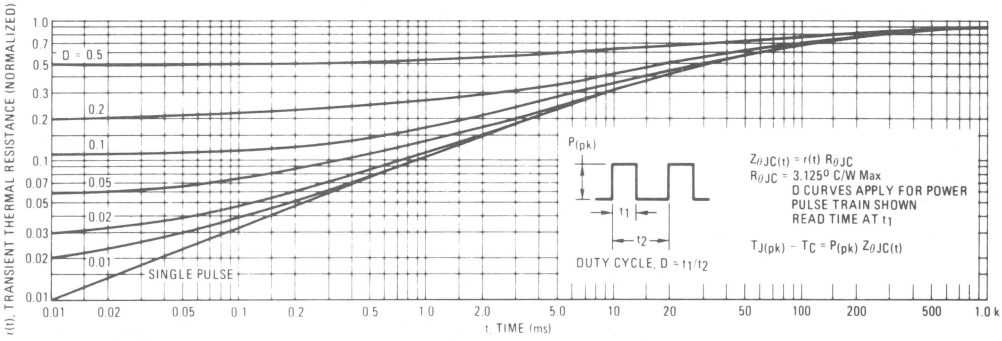

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

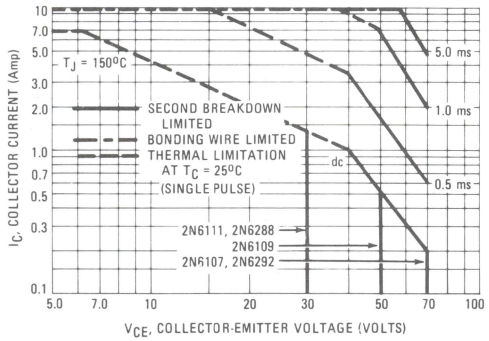

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^{\circ}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown

FIGURE 6 – TURN-OFF TIME

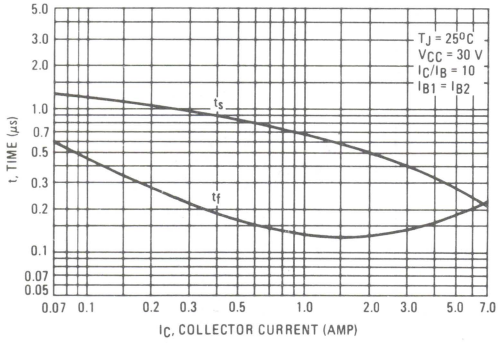

FIGURE 7 – CAPACITANCE

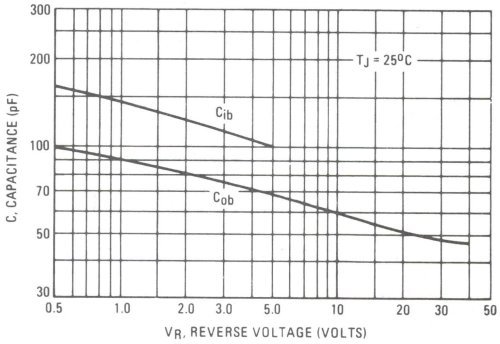

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
2N6121, 2N6122
2N6123
PNP
2N6124, 2N6125

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in power amplifier and switching circuits, — packaged in the compact TO-220AB outline. TO-66 leadform also available.

4 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
45-80 VOLTS
40 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N6121 2N6124	2N6122 2N6125	2N6123	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current	I_C	4.0			Adc
Base Current	I_B	1.0			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 320			Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	3.12	°C/W

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 0.1 Adc, I_B = 0)	2N6121, 2N6124 2N6122, 2N6125 2N6123	$V_{CEO(sus)}$	45 60 80	– – –	Vdc
Collector Cutoff Current (V_{CE} = 45 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0) (V_{CE} = 80 Vdc, I_B = 0)	 2N6121, 2N6124 2N6122, 2N6125 2N6123	I_{CEO}	 – – –	 1.0 1.0 1.0	mAdc
Collector Cutoff Current (V_{CE} = 45 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 45 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C) (V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C) (V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	 2N6121, 2N6124 2N6122, 2N6125 2N6123 2N6121, 2N6124 2N6122, 2N6125 2N6123, 2N6126	I_{CEX}	 – – – – – –	 0.1 0.1 0.1 2.0 2.0 2.0	mAdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	 2N6121, 2N6124 2N6122, 2N6125 2N6123	I_{CBO}	 – – –	 0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (1) (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc) (I_C = 4.0 Adc, V_{CE} = 2.0 Vdc)	 2N6126, 2N6124 2N6122, 2N6125 2N6123 2N6121, 2N6124 2N6122, 2N6125 2N6123	h_{FE}	 25 25 20 10 10 7.0	 100 100 80 – – –	–
Collector-Emitter Saturation Voltage (1) (I_C = 1.5 Adc, I_B = 0.15 Adc) (I_C = 4.0 Adc, I_B = 1.0 Adc)		$V_{CE(sat)}$	 – –	 0.6 1.4	Vdc
Base-Emitter On Voltage (1) (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	–	1.2	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 0.1 Adc, V_{CE} = 2.0 Vdc, f = 1.0 kHz)		h_{fe}	25	–	–
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 MHz)		f_T	2.5	–	MHz

(1)Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2.0%.
*Indicates JEDEC Registered Data.



NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	–	0.045	–
Z	–	2.04	–	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 – DC CURRENT GAIN

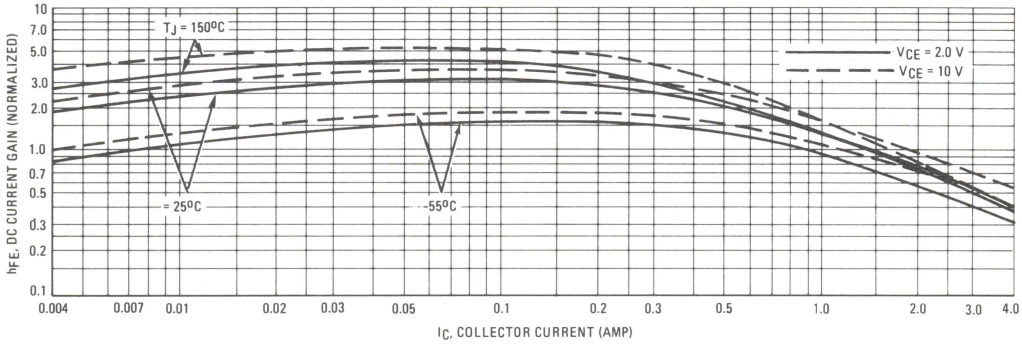

FIGURE 2 – COLLECTOR SATURATION REGION

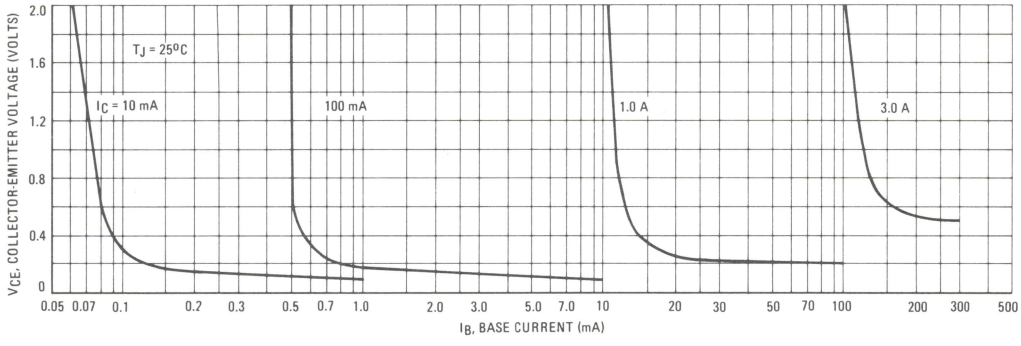

FIGURE 3 – "ON" VOLTAGES

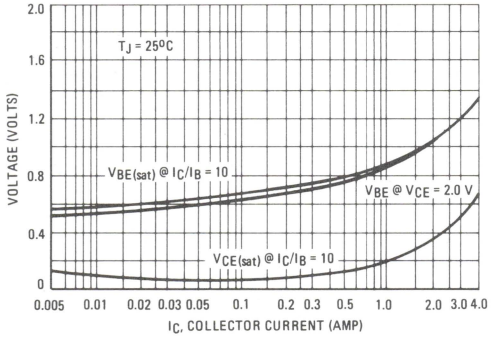

FIGURE 4 – TEMPERATURE COEFFICIENTS

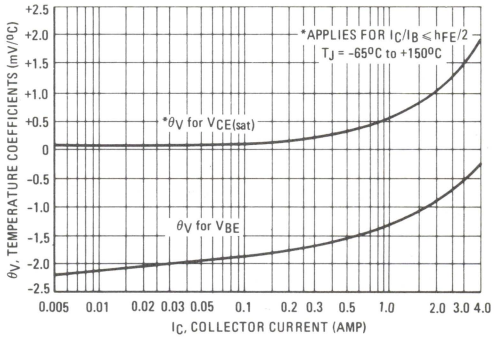

3

FIGURE 5 – COLLECTOR CUT-OFF REGION

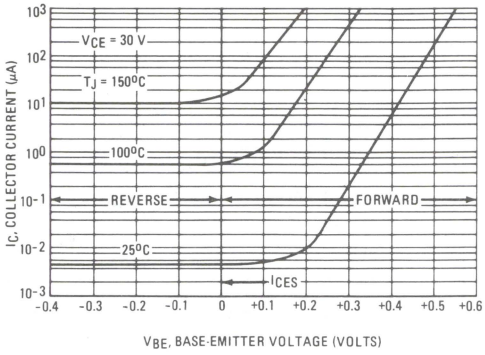

FIGURE 6 – EFFECTS OF BASE-EMITTER RESISTANCE

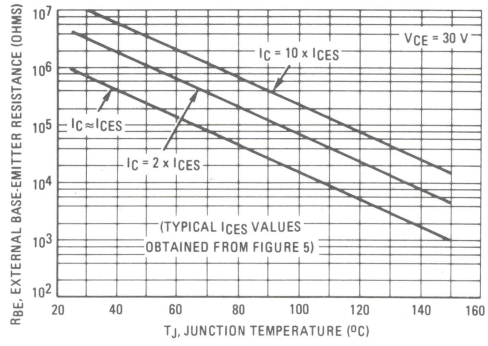

FIGURE 7 – SWITCHING TIME EQUIVALENT CIRCUIT

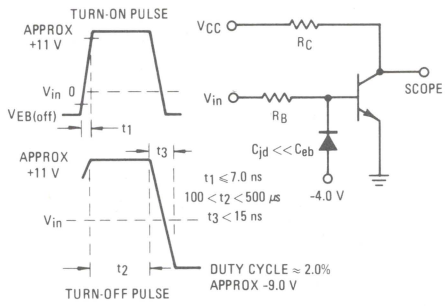

R_B AND R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

Reverse all polarities and diode for PNP transistors.

FIGURE 8 – CAPACITANCE

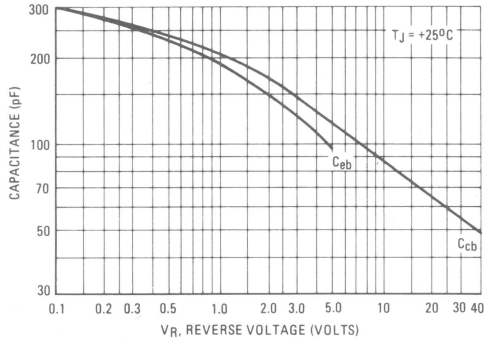

FIGURE 9 – TURN-ON TIME

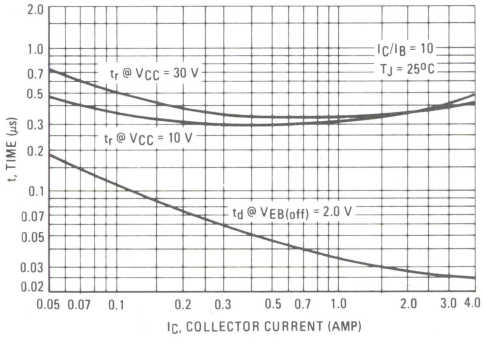

FIGURE 10 – TURN-OFF TIME

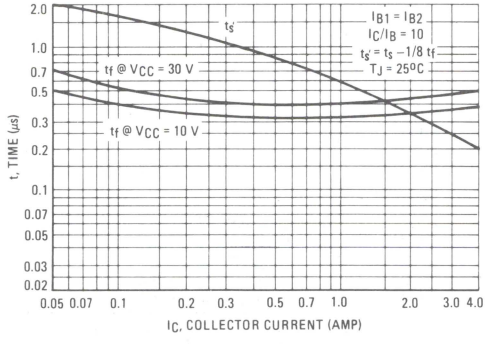

RATING AND THERMAL DATA

FIGURE 11 – ACTIVE REGION SAFE OPERATING AREA

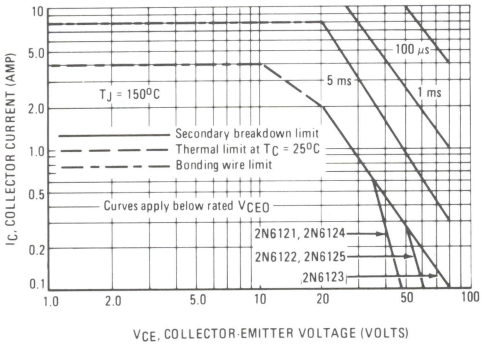

There are two limitations on the power handling ability of a transistor: peak junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 12. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 12 – THERMAL RESPONSE

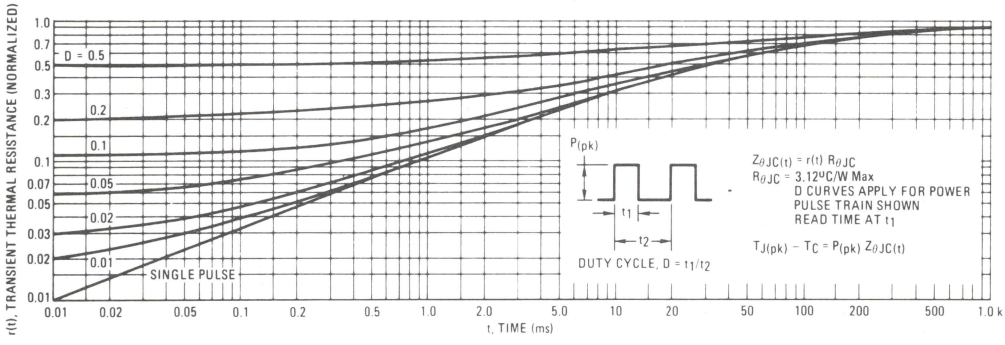

3

DESIGN NOTE: USE OF TRANSIENT THERMAL RESISTANCE DATA

FIGURE A

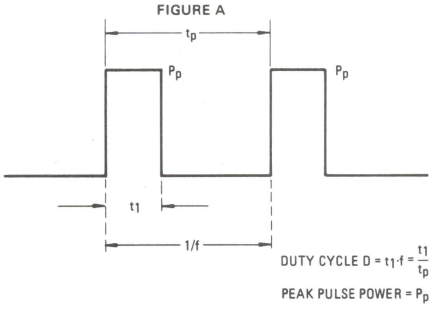

A train of periodical power pulses can be represented by the model shown in Figure A. Using the model and the device thermal response, the normalized effective transient thermal resistance of Figure 12 was calculated for various duty cycles.

To find $\theta_{JC}(t)$, multiply the value obtained from Figure 12 by the steady state value θ_{JC}.

Example:

The 2N6121 is dissipating 50 watts under the following conditions: t_1 = 0.1 ms, t_p = 0.5 ms. (D = 0.2).

Using Figure 12, at a pulse width of 0.1 ms and D = 0.2, the reading of $r(t_1, D)$ is 0.27.

The peak rise in junction temperature is therefore:

$$\triangle T = r(t) \times P_P \times \theta_{JC} = 0.27 \times 50 \times 3.12 = 42.2^oC$$

2N6190
2N6191
2N6193

MEDIUM-POWER PNP SILICON TRANSISTORS

. . . designed for switching and wide band amplifier applications.

- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 1.2 Vdc (Max) @ I_C = 5.0 Amp
- DC Current Gain Specified to 5 Amperes
- Excellent Safe Operating Area
- Packaged in the Compact TO-205AD Case for Critical Space Limited Applications
- Complement to NPN 2N5336 thru 2N5339

5 AMPERE

POWER TRANSISTORS
PNP SILICON

80-100 VOLTS
10 WATTS

*MAXIMUM RATINGS

Rating	Symbol	2N6190 2N6191	2N6193	Unit
Collector-Emitter Voltage	V_{CEO}	80	100	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous	I_C	5.0		Adc
Base Current	I_B	1.0		Adc
Total Device Dissipation @ T_C = 25°C	P_D	10		Watts
Derate above 25°C		57.1		mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	17.5	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 — POWER-TEMPERATURE DERATING

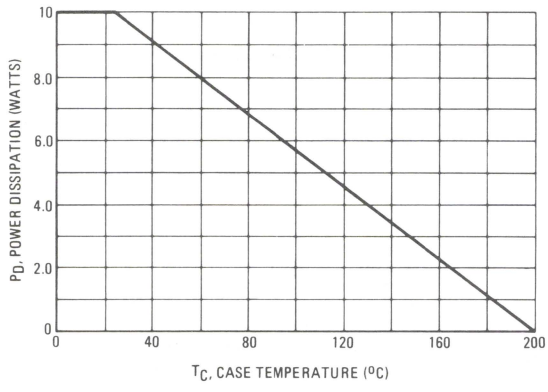

Safe Area Curves are indicated by Figure 5. All limits are applicable and must be observed.



STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	8.89	9.40	0.350	0.370
B	8.00	8.51	0.315	0.335
C	6.10	6.60	0.240	0.260
D	0.406	0.533	0.016	0.021
E	0.229	3.18	0.009	0.125
F	0.406	0.483	0.016	0.019
G	4.83	5.33	0.190	0.210
H	0.711	0.864	0.028	0.034
J	0.737	1.02	0.029	0.040
K	12.70	–	0.500	–
L	6.35	–	0.250	–
M	45° NOM		45° NOM	
P	–	1.27	–	0.050
Q	90° NOM		90° NOM	
R	2.54	–	0.100	–

All JEDEC dimensions and notes apply.

CASE 79-02
TO-205AD

3

* ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			V_{dc}
(I_C = 50 mAdc, I_B = 0)	2N6190, 2N6191		80	–	
	2N6193		100	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 75 Vdc, I_B = 0)	2N6190, 2N6191		–	100	
(V_{CE} = 90 Vdc, I_B = 0)	2N6193		–	100	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 75 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6190, 2N6191		–	10	
(V_{CE} = 90 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6193		–	10	
(V_{CE} = 75 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6190, 2N6191		–	1.0	mAdc
(V_{CE} = 90 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6193		–	1.0	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 80 Vdc, I_E = 0)	2N6190, 2N6191		–	10	
(V_{CB} = 100 Vdc, I_E = 0)	2N6193		–	10	
Emitter Cutoff Current		I_{EBO}			μAdc
(V_{BE} = 6.0 Vdc, I_C = 0)			–	100	
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 500 mAdc, V_{CE} = 2.0 Vdc)	2N6190		30	–	
	2N6191, 2N6193		60	–	
(I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)	2N6190		30	120	
	2N6191, 2N6193		60	240	
(I_C = 5.0 Adc, V_{CE} = 2.0 Vdc)	2N6190		20	–	
	2N6191, 2N6193		40	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)			–	0.7	
(I_C = 5.0 Adc, I_B = 0.5 Adc)			–	1.2	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)			–	1.2	
(I_C = 5.0 Adc, I_B = 0.5 Adc)			–	1.8	
DYNAMIC CHARACTERISTICS					
Current-Gain-Bandwidth Product (2)		f_T			MHz
(I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{Test} = 10 MHz)			30	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)			–	300	
Input Capacitance		C_{ib}			pF
(V_{BE} = 2.0 Vdc, I_C = 0, f = 100 kHz)			–	1250	
SWITCHING CHARACTERISTICS					
Delay Time	(V_{CC} = 40 Vdc, $V_{BE(off)}$ = 3.0 Vdc,	t_d	–	100	ns
Rise Time	I_C = 2.0 Adc, I_{B1} = 0.2 Adc)	t_r	–	100	ns
Storage Time	(V_{CC} = 40 Vdc, I_C = 2.0 Adc,	t_s	–	2.0	μs
Fall Time	I_{B1} = I_{B2} = 0.2 Adc)	t_f	–	200	ns

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%
(2) $f_T = |h_{fe}| \cdot f_{Test}$

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

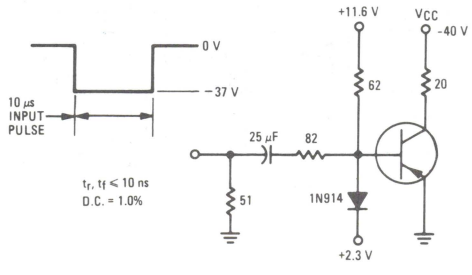

FIGURE 3 – TURN ON TIME

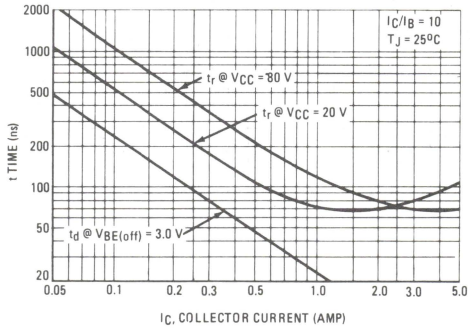

3

FIGURE 4 – THERMAL RESPONSE

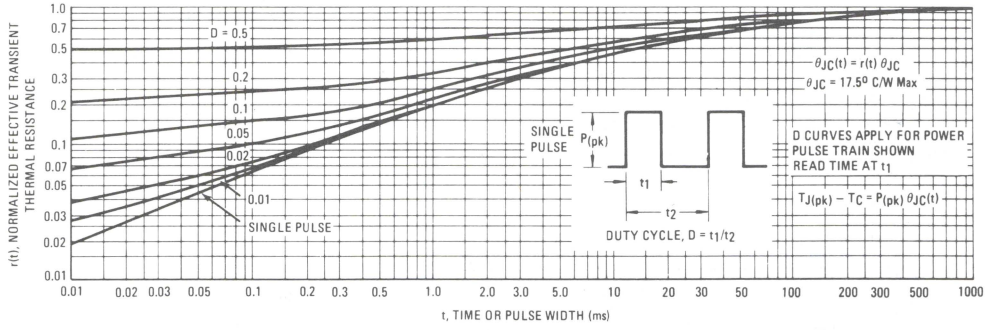

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

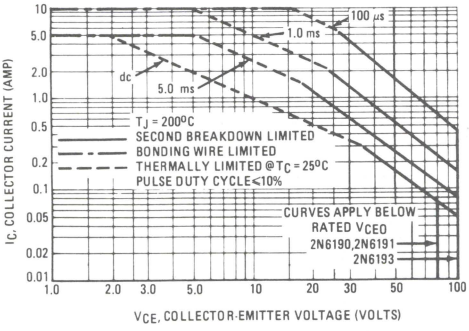

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitaitons imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

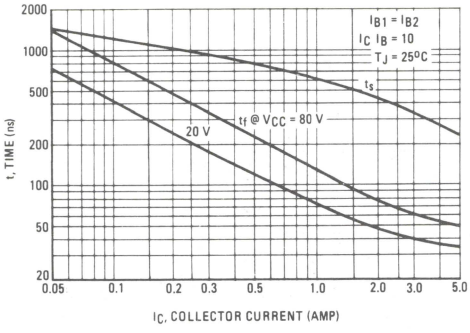

FIGURE 7 – CAPACITANCE versus VOLTAGE

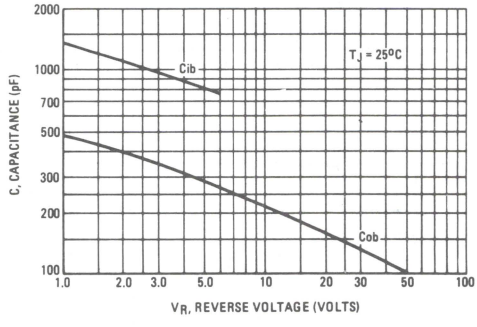

2N6211
2N6212
2N6213

MEDIUM-POWER HIGH-VOLTAGE PNP POWER TRANSISTORS

. . . designed for high-speed switching and linear amplifier applications for high-voltage operational amplifiers, switching regulators, converters, inverters, deflection stages and high fidelity amplifiers.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 225 to 350 Vdc @ I_C = 200 mAdc
- Second Breakdown Collector Current –
  $I_{s/b}$ = 875 mAdc @ V_{CE} = 40 Vdc
- t_f = 0.6 μs Resistive Fall Time
- Usable DC Current Gain to 2.0 Adc

2 AMPERE
POWER TRANSISTORS
PNP SILICON
225–350 VOLTS
35 WATTS

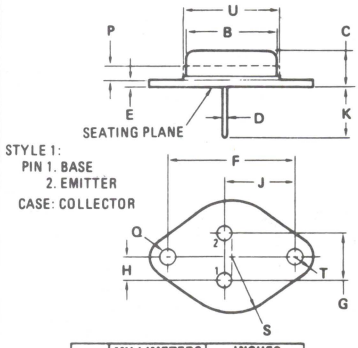

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

*MAXIMUM RATINGS

Rating	Symbol	2N6211	2N6212	2N6213	Unit
Collector-Emitter Voltage	V_{CEO}	225	300	350	Vdc
Collector-Base Voltage	V_{CB}	275	350	400	Vdc
Emitter-Base Voltage	V_{EB}	6			Vdc
Collector Current – Continuous Peak	I_C	2 5			Adc
Base Current	I_B	1			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	35 0.2			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	5.0	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – FORWARD BIAS SAFE OPERATING AREA

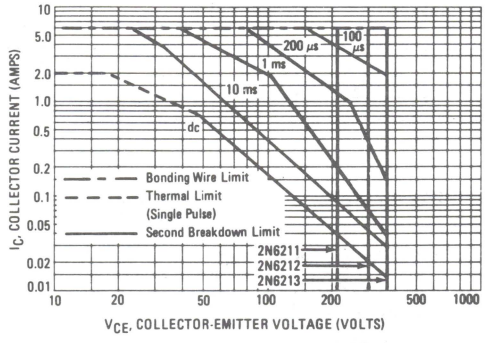

There are two limitations on the powerhandling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 200; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See Figure 8).

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
*Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N6211		225	–	
	2N6212		300	–	
	2N6213		350	–	
*Collector-Emitter Sustaining Voltage		$V_{CEX(sus)}$			Vdc
(I_C = 200 mA, V_{BE} = −1.5 V, L = 10 mH)	2N6211		275	–	
	2N6212		350	–	
	2N6213		400	–	
*Collector-Emitter Sustaining Voltage (1)		$V_{CER(sus)}$			Vdc
(I_C = 200 mA, I_B = 0, R_{BE} = 50 Ω)	2N6211		250	–	
	2N6212		325	–	
	2N6213		375	–	
*Emitter-Base Breakdown Voltage (1)		V_{EBO}			Vdc
(I_E = 0.5 mAdc, I_C = 0)	2N6212/13		6.0	–	
(I_E = 1.0 mAdc, I_C = 0)	2N6211		6.0	–	
*Collector Cutoff Current		I_{CEV}			mAdc
(V_{CE} = 250 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 25°C)			–	0.5	
(T_C = 100°C)			–	5.0	
(V_{CE} = 315 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 25°C)			–	0.5	
(T_C = 100°C)			–	5.0	
(V_{CE} = 360 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 25°C)			–	0.5	
(T_C = 100°C)			–	5.0	
Collector Cutoff Current (V_{CE} = 150 Vdc, I_B = 0)	All Types	I_{CEO}	–	5.0	mAdc
*Emitter Cutoff Current		I_{EBO}			mAdc
(V_{EB} = 6.0 Vdc, I_C = 0)	2N6211		–	1.0	
	2N6212		–	0.5	
	2N6213		–	0.5	
***ON CHARACTERISTICS (1)**					
DC Current Gain		h_{FE}			–
(I_C = 1.0 Adc, V_{CE} = 2.8 Vdc)	2N6211		10	100	
(I_C = 1.0 Adc, V_{CE} = 3.2 Vdc)	2N6212		10	100	
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)	2N6213		10	100	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 125 mAdc)	2N6211		–	1.4	
	2N6212		–	1.6	
	2N6213		–	2.0	
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 125 mAdc)	All Types	$V_{BE(sat)}$	–	1.4	Vdc
DYNAMIC CHARACTERISTICS					
*Current Gain—Bandwidth Product (2) (I_C = 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 5.0 MHz)		f_T	20	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)		C_{ob}	–	220	pF
***SECOND BREAKDOWN**					
*Second Breakdown Collector Current with Base Forward Biased t = 1.0 s (non-repetitive) (V_{CE} = 40 Vdc)		$I_{S/b}$	0.875	–	Adc
***SWITCHING CHARACTERISTICS**					
Rise Time	(V_{CC} = 200 Vdc, I_C = 1.0 Adc, I_{B1} = I_{B2} = 0.125 Adc)	t_r	–	0.6	μs
Storage Time		t_s	–	2.5	μs
Fall Time		t_f	–	0.6	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

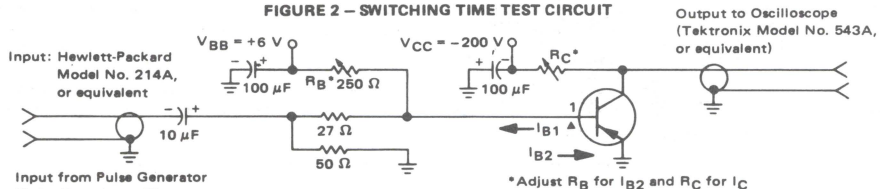

FIGURE 3 – DC CURRENT GAIN

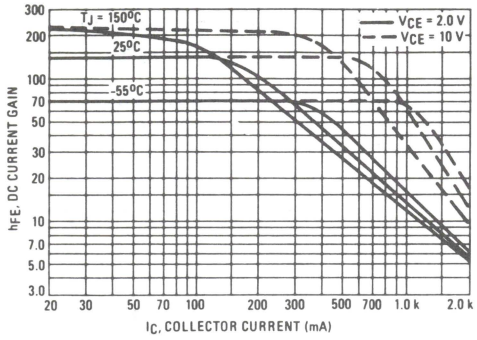

FIGURE 4 – COLLECTOR SATURATION REGION

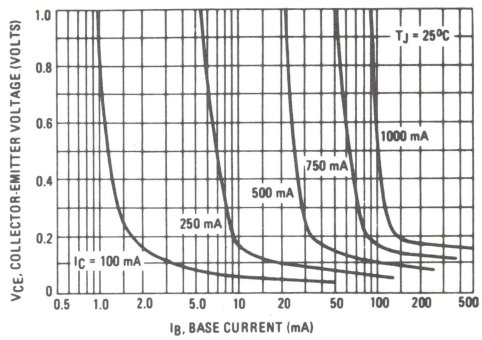

FIGURE 5 – COLLECTOR CUTOFF REGION

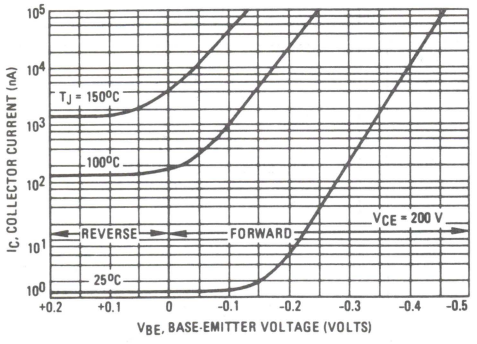

FIGURE 6 – TEMPERATURE COEFFICIENTS

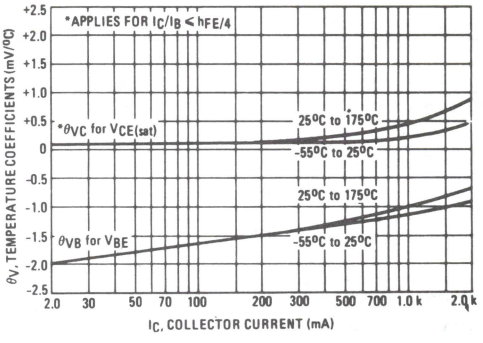

FIGURE 7 – BASE CUTOFF REGION

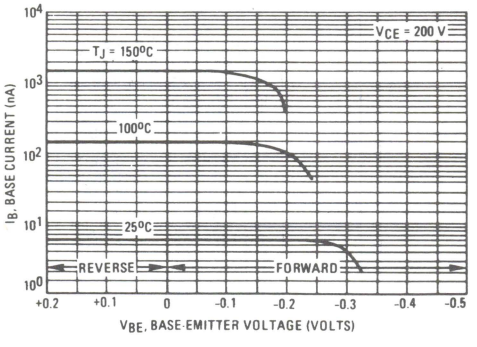

FIGURE 8 – POWER DERATING

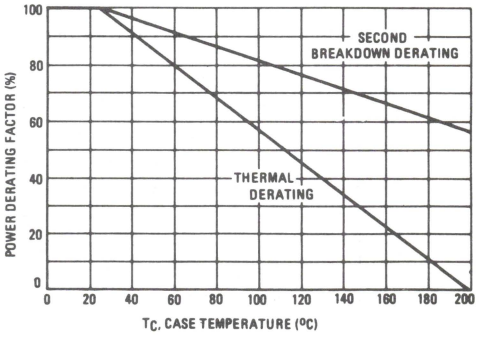

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6233
2N6235

HIGH VOLTAGE NPN SILICON TRANSISTORS

. . . useful for high-voltage medium power applications such as switching regulators.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 225 Vdc – 2N6233
  325 Vdc – 2N6235
- DC Current Gain – h_{FE} = 25 to 125 – I_C = 1.0 Adc
- Low Collector-Emitter Saturation Voltage
  $V_{CE(sat)}$ = 0.5 Vdc (Max) @ I_C = 1.0 Adc
- High Frequency Response – f_T = 20 MHz (Min)
- Fast Switching Times @ 1.0 Adc –
  t_r = 0.5 μs (Max)
  t_s = 3.5 μs (Max)
  t_f = 0.5 μs (Max)

5 AMPERE

POWER TRANSISTORS
NPN SILICON

225,275,325 VOLTS
50 WATTS

***MAXIMUM RATINGS**

Rating	Symbol	2N6233	2N6235	Unit
Collector-Emitter Voltage	V_{CEO}	225	325	Vdc
Collector-Base Voltage	V_{CB}	250	350	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous Peak	I_C	5.0 10		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	50 0.286		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.5	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER TEMPERATURE DERATING

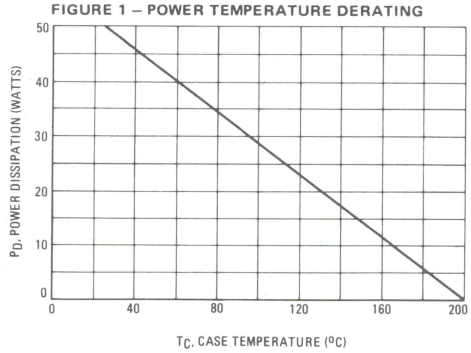

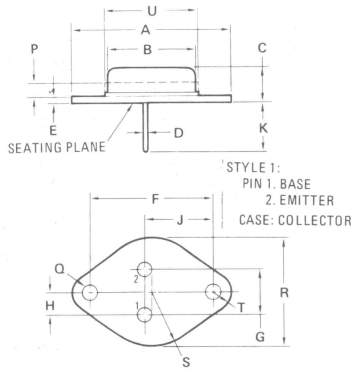

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 20 mAdc, I_B = 0)	2N6233		225	—	
	2N6235		325	—	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 225, I_B = 0)	2N6233		—	1.0	
(V_{CE} = 325, I_B = 0)	2N6235		—	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 250 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6233		—	1.0	
(V_{CE} = 350 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6235		—	1.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 250 Vdc, I_E = 0)	2N6233		—	0.1	
(V_{CB} = 350 Vdc, I_E = 0)	2N6235		—	0.1	
Emitter Cutoff Current (V_{BE} = 6.0 Vdc, I_C = 0)		I_{EBO}	—	0.1	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 0.1 Adc, V_{CE} = 5.0 Vdc)			25	—	
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)			25	125	
(I_C = 3.0 Adc, V_{CE} = 5.0 Vdc)			10	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)			—	0.5	
(I_C = 5.0 Adc, I_B = 1.0 Adc)			—	2.5	
Base Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)			—	1.0	
(I_C = 5.0 Adc, I_B = 1.0 Adc)			—	2.0	
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	—	1.0	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain Bandwidth Product (2) (I_C = 0.25 Adc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)		f_T	20	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	—	250	pF
SWITCHING CHARACTERISTICS					
Rise Time (V_{CC} = 200 Vdc, I_C = 1.0 Adc, I_B = 0.1 Adc)		t_r	—	0.5	μs
Storage Time (V_{CC} = 200 Vdc, I_C = 1.0 Adc, I_{B1} = I_{B2} = 0.1 Adc)		t_s	—	3.5	μs
Fall Time (V_{CC} = 200 Vdc, I_C = 1.0 Adc, I_{B1} = I_{B2} = 0.1 Adc)		t_f	—	0.5	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = |h_{fe}| * f_{test}$

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

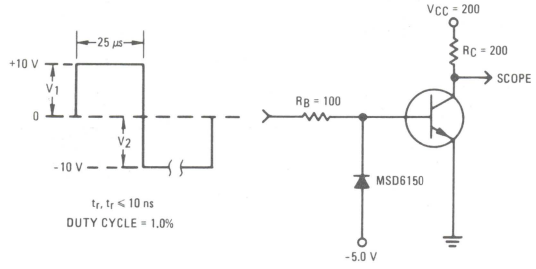

FOR INFORMATION ON FIGURES 3 and 6 R_B AND R_C ARE VARIED TO OBTAIN DESIRED CURRENT LEVELS; D_1 DISCONNECTED AND V_2 REDUCED TO 5 VOLTS FOR t_d MEASUREMENT.

FIGURE 3 – TURN-ON TIME

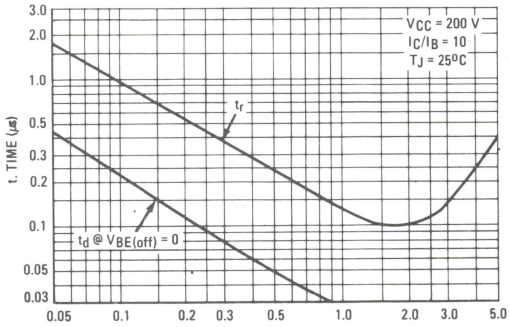

3

FIGURE 4 – THERMAL RESPONSE

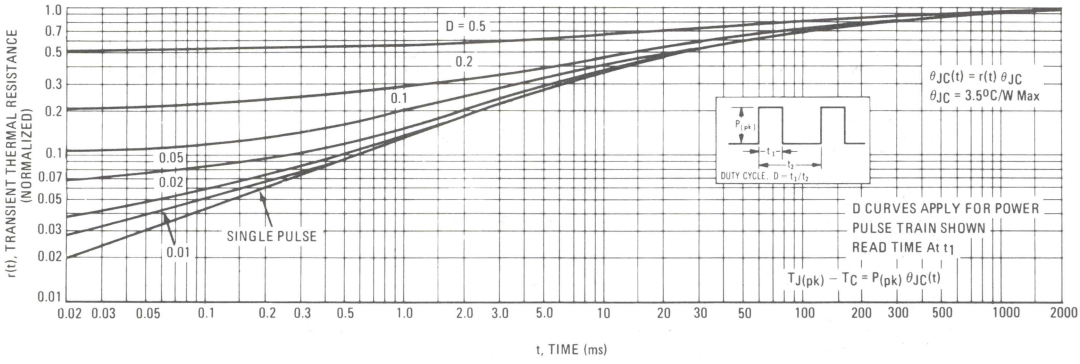

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

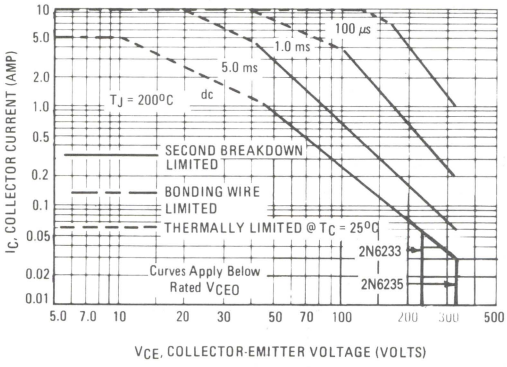

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

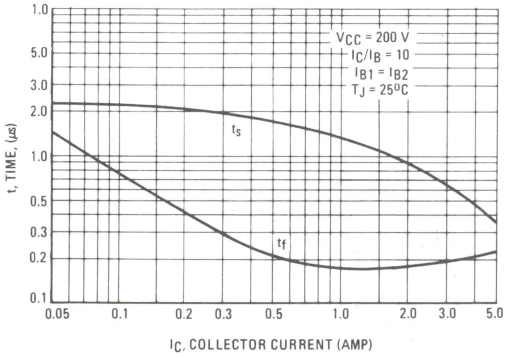

FIGURE 7 – CAPACITANCES

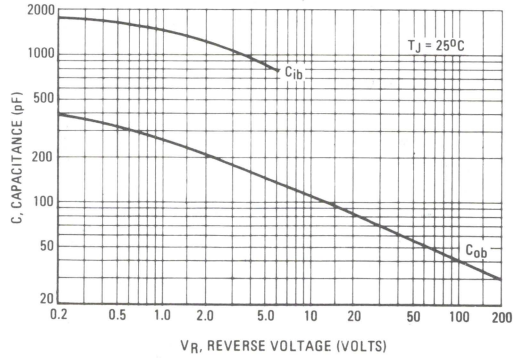

2N6249
2N6250
2N6251

HIGH VOLTAGE NPN SILICON POWER TRANSISTORS

. . . designed for high voltage inverters, switching regulators and line operated amplifier applications. Especially well suited for switching power supply applications.

- High Voltage Breakdown Rating
- Low Saturation Voltages
- Fast Switching Capability
- High $E_{S/b}$ Energy Handling Capability

15 AMPERE

POWER TRANSISTORS NPN SILICON

200, 275, 350 VOLTS
175 WATTS



MAXIMUM RATINGS

Rating	Symbol	2N6249	2N6250	2N6251	Unit
*Collector-Emitter Voltage	$V_{CEO(sus)}$	200	275	350	Vdc
*Collector-Emitter Voltage	$V_{CER(sus)}$	225	300	375	Vdc
*Collector-Base Voltage	V_{CB}	300	375	450	Vdc
Emitter-Base Voltage	V_{EB}	6.0			Vdc
Collector Current — Continuous**	I_C	15			Adc
— Peak	I_{CM}	30			
Base Current — Continuous*	I_B	10			Adc
— Peak	I_{BM}	20			
Emitter Current — Continuous	I_E	25			Adc
— Peak	I_{EM}	50			
Total Power Dissipation @ $T_C = 25^oC$	P_D	175			Watts
@ $T_C = 100^oC$		100			
Derate above 25^oC*		1.0			$W/^oC$
*Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200			^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	$^oC/W$
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	^oC

*Indicates JEDEC Registered Data.

**JEDEC Registered Value is 10 A, Motorola Guaranteed Value is 15 A.

FIGURE 1 — POWER DERATING

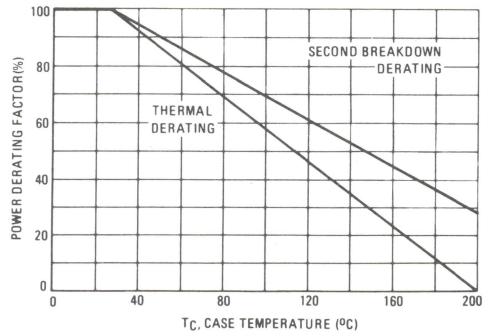

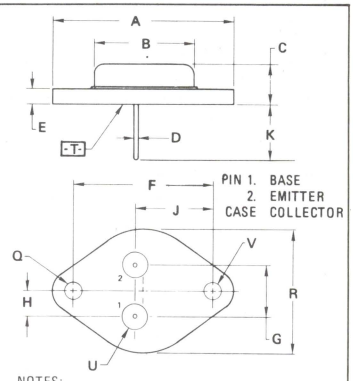

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀0.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ ⌀0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mA, I_B = 0)	2N6249		200	–	
	2N6250		275	–	
	2N6251		350	–	
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CER(sus)}$			Vdc
(I_C = 200 mA)	2N6249		225	–	
	2N6250		300	–	
	2N6251		375	–	
Collector Cutoff Current		I_{CEV}			mAdc
(V_{CE} = Rated V_{CER}, $V_{BE(off)}$ = 1.5 Vdc)			–	5.0	
(V_{CE} = Rated V_{CER}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)			–	10	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 150 Vdc, I_B = 0)	2N6249		–	5.0	
(V_{CE} = 225 Vdc, I_B = 0)	2N6250		–	5.0	
(V_{CE} = 300 Vdc, I_B = 0)	2N6251		–	5.0	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{EB} = 6.0 Vdc, I_C = 0)					
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward	(V_{CE} = 30 V)	$I_{S/b}$	5.8	–	Vdc
biased t = 1.0 s (non-repetitive)	(V_{CE} = 100 V)		0.3	–	
Second Breakdown Energy with base reverse biased (Table 1)		$E_{S/b}$	2.5	–	mJ
(I_C = 10 A, $V_{BE(off)}$ = 4.0 Vdc, L = 50 μH)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)	2N6249		10	50	
	2N6250		8.0	50	
	2N6251		6.0	50	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)	2N6249		–	1.5	
(I_C = 10 Adc, I_B = 1.25 Adc)	2N6250		–	1.5	
(I_C = 10 Adc, I_B = 1.67 Adc)	2N6251		–	1.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)	2N6249		–	2.5	
(I_C = 10 Adc, I_B = 1.25 Adc)	2N6250		–	2.5	
(I_C = 10 Adc, I_B = 1.67 Adc)	2N6251		–	2.5	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T	2.5	–	MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)					
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Rise Time	(V_{CC} = 200 Vdc, I_C = 10 A, Duty Cycle ≤ 2.0%, t_p = 100 μs)	t_r	–	2.0	μs
Storage Time	(I_{B1} = I_{B2} = 1.0 Adc) 2N6249 (I_{B1} = I_{B2} = 1.25 Adc) 2N6250 (I_{B1} = I_{B2} = 1.67 Adc) 2N6251	t_s	–	3.5	μs
Fall Time		t_f	–	1.0	μs

* Indicates JEDEC Registered Data.

(1) Measured on a curve tracer (60 Hz full-wave rectified sine wave).

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	$V_{CER(sus)}$	$E_{S/b}$	RESISTIVE SWITCHING
INPUT CONDITIONS	+6.0 V, 0, 39, 1, 2	+6.0 V, 0, 39, 51, 1, 2	I_{B1} = 2.0 A, +10 V, 0, 5.0, 50, 4 V, 1, 2	+15 V, 50 μF, 2N4231, 51, 51, 4.7, 0.02 μF, 1, 2; I_C = 10 A, PW ≈ 100 μs, t_r < 5 ns, t_f < 50 ns, Duty Cycle < 2%
CIRCUIT VALUES	L_{coil} = 42 mH, R_{coil} = 0.7 Ω, f_o = 60 Hz, V_{CC} = 0 to 50 V	L_{coil} = 14 mH, R_{coil} = 0.05 Ω, V_{CC} = 0 to 50 V, f_o = 60 Hz	L_{coil} = 50 μH, R_{coil} = 0.2 Ω, V_{CC} = 11.5 V	V_{CC} = 200 V, R_L = 20 Ω
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937, R_{Coil}, L_{Coil}, V_{CL}, V_{CC}, R_S 0.1	OUTPUT WAVEFORMS: I_C, $I_{C(pk)}$, t_1, t_f, V_{CE}, t; t_1 Adjusted to Obtain I_C; $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$		RESISTIVE TEST CIRCUIT: +200 V, 20, DC Current Probe, TUT, 3, 25, -6.0 V

NOTE: Set $I_{C(pk)}$ to Obtain I_C = 200 mA at $V_{CEO(sus)}$ Equal to Rated Value.
Adjust V_{Clamp} Voltage for $V_{CEO(sus)}$ Rated Value.

FIGURE 2 – THERMAL RESPONSE

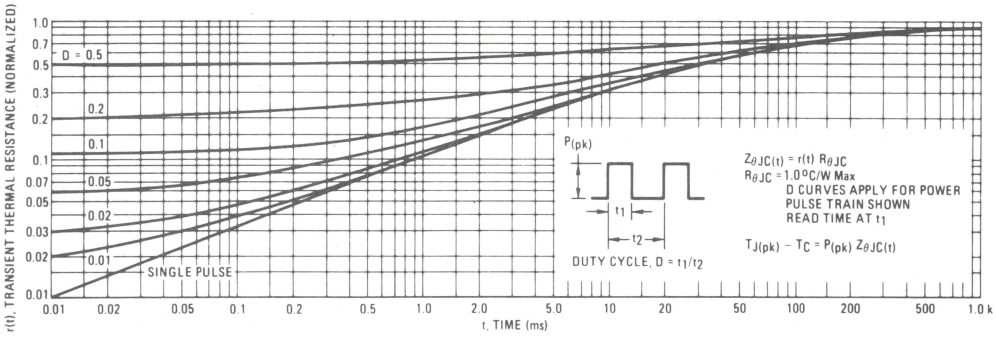

FIGURE 3 – ACTIVE-REGION SAFE OPERATING AREA

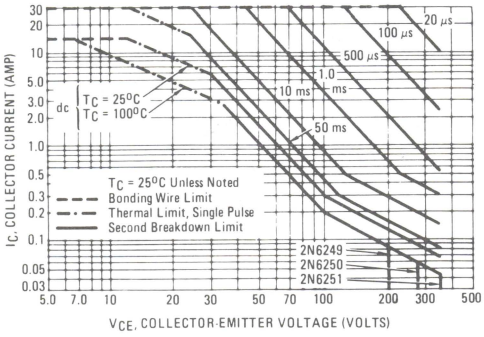

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on T_C = 25°C, $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 3 may be found at any case temperature by using the appropriate curve on Figure 1.

$T_{J(pk)}$ may be calculated from the data in Figure 2. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

DC CHARACTERISTICS

FIGURE 4 – DC CURRENT GAIN

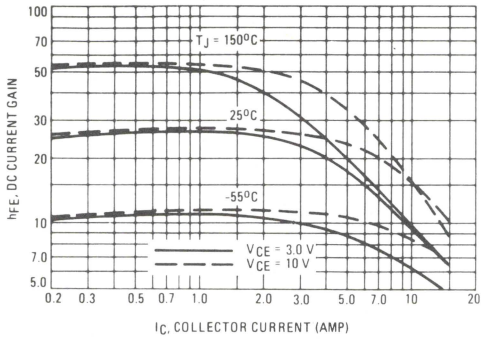

FIGURE 5 – COLLECTOR SATURATION REGION

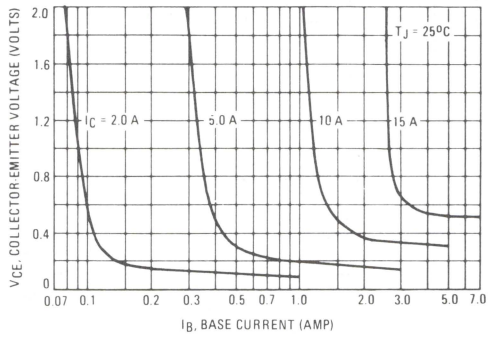

FIGURE 6 – "ON" VOLTAGE

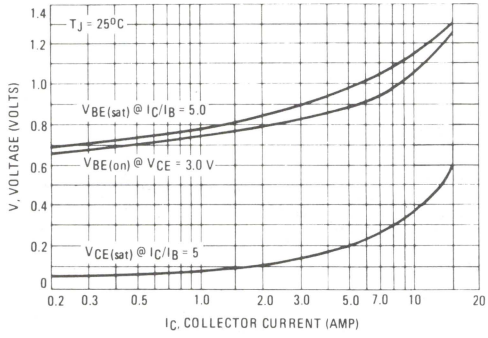

FIGURE 7 – TEMPERATURE COEFFICIENTS

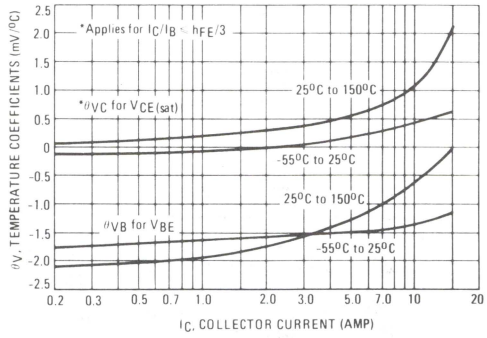

3

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

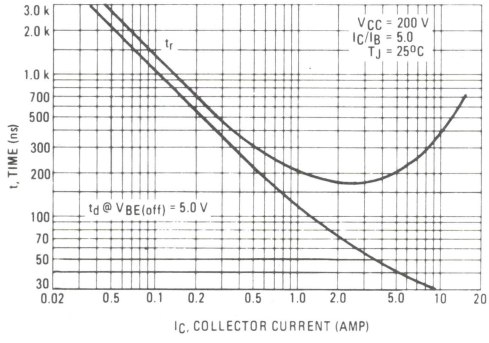

FIGURE 9 – TURN-OFF TIME

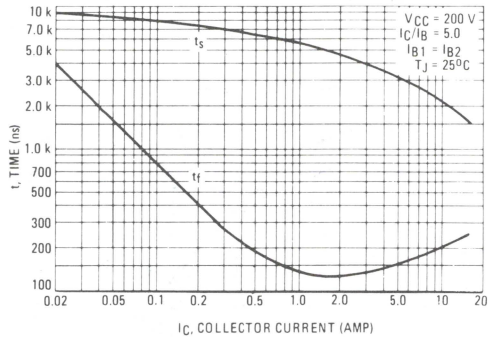

2N6274
2N6275
2N6277

HIGH-POWER NPN SILICON TRANSISTORS

. . . designed for use in industrial-military power amplifer and switching circuit applications.

- High Collector Emitter Sustaining Voltage —
  $V_{CEO(sus)}$ = 100 Vdc (Min) — 2N6274
  = 120 Vdc (Min) — 2N6275
  = 150 Vdc (Min) — 2N6277
- High DC Current Gain —
  h_{FE} = 30-120 @ I_C = 20 Adc
  = 10 (Min) @ I_C = 50 Adc
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 20 Adc
- Fast Switching Times @ I_C = 20 Adc
  t_r = 0.35 μs (Max)
  t_s = 0.8 μs (Max
  t_f = 0.25 μs (Max)
- Complement to 2N6377-79

50 AMPERE
POWER TRANSISTORS
NPN SILICON

100, 120, 140, 150 VOLTS
250 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N6274	2N6275	2N6277	Unit
Collector-Base Voltage	V_{CB}	120	140	180	Vdc
Collector-Emitter Voltage	V_{CEO}	100	120	150	Vdc
Emitter-Base Voltage	V_{EB}	6.0			Vdc
Collector Current — Continuous Peak	I_C	50 100			Adc
Base Current	I_B	20			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	250 1.43			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 — POWER DERATING

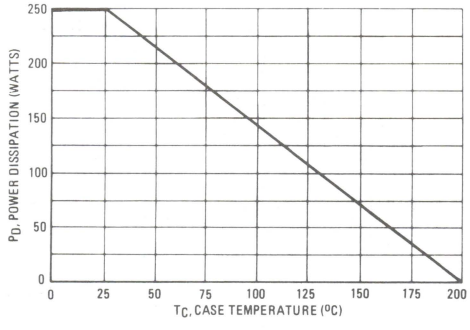



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
TO-204AE

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 50 mAdc, I_B = 0)	2N6274		100	–	
	2N6275		120	–	
	2N6277		150	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 50 Vdc, I_B = 0)	2N6274		–	50	
(V_{CE} = 60 Vdc, I_B = 0)	2N6275		–	50	
(V_{CE} = 75 Vdc, I_B = 0)	2N6277		–	50	
Collector Cutoff Current		I_{CEX}			
(V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc)			–	10	μAdc
(V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)			–	1.0	mAdc
Emitter Cutoff Current		I_{EBO}	–	100	μAdc
(V_{BE} = 6.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)			50	–	
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)			30	120	
(I_C = 50 Adc, V_{CE} = 4.0 Vdc)			10	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 20 Adc, I_B = 2.0 Adc)			–	1.0	
(I_C = 50 Adc, I_B = 10 Adc)			–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 20 Adc, I_B = 2.0 Adc)			–	1.8	
(I_C = 50 Adc, I_B = 10 Adc)			–	3.5	
Base-Emitter On Voltage		$V_{BE(on)}$	–	1.8	Vdc
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (2)		f_T	30	–	MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)					
Output Capacitance		C_{ob}	–	600	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)					
SWITCHING CHARACTERISTICS					
Rise Time		t_r	–	0.35	μs
(V_{CC} = 80 Vdc, I_C = 20 Adc, I_{B1} = 2.0 Adc, $V_{BE(off)}$ = 5.0 Vdc)					
Storage Time		t_s	–	0.80	μs
(V_{CC} = 80 Vdc, I_C = 20 Adc, I_{B1} = I_{B2} = 2.0 Adc)					
Fall Time		t_f	–	0.25	μs
(V_{CC} = 80 Vdc, I_C = 20 Adc, I_{B1} = I_{B2} = 2.0 Adc)					

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

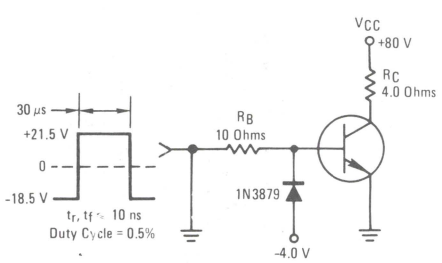

Note: For information on Figures 3 and 6, R_B and R_C were varied to obtain desired test conditions.

FIGURE 3 – TURN-ON TIME

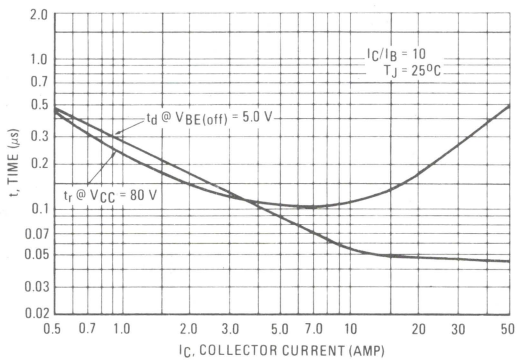

FIGURE 4 – THERMAL RESPONSE

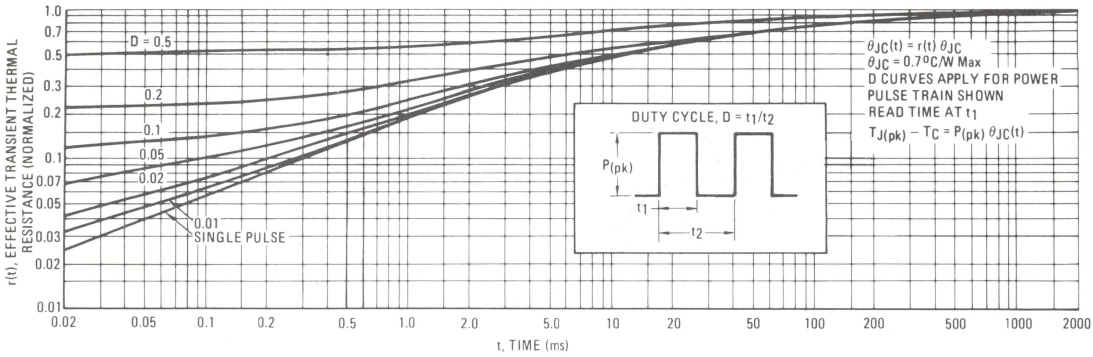

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

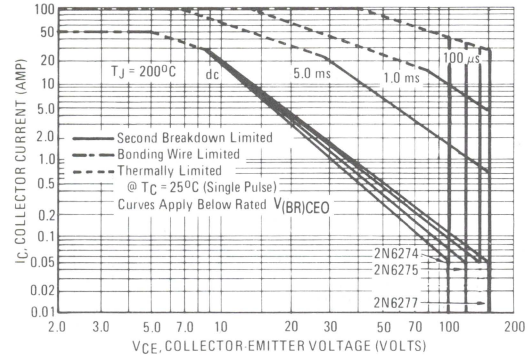

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

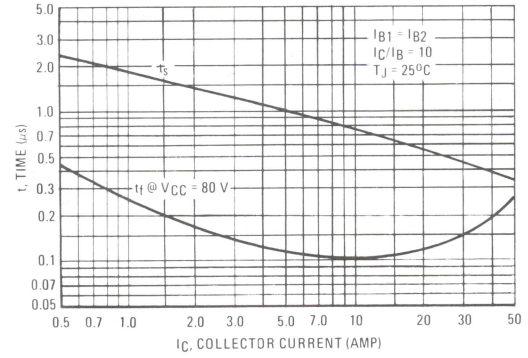

FIGURE 7 – CAPACITANCE

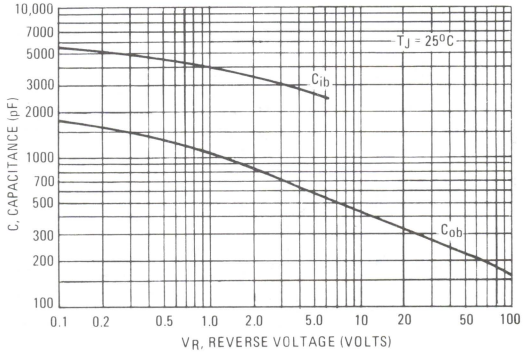

3

FIGURE 8 – DC CURRENT GAIN

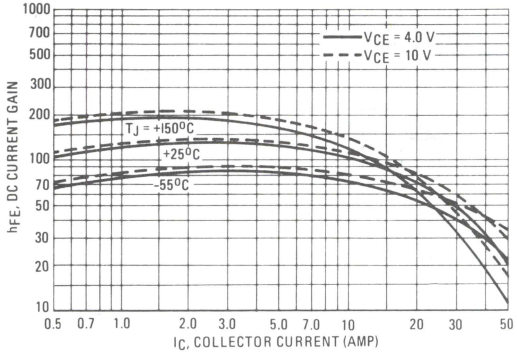

FIGURE 9 – COLLECTOR SATURATION REGION

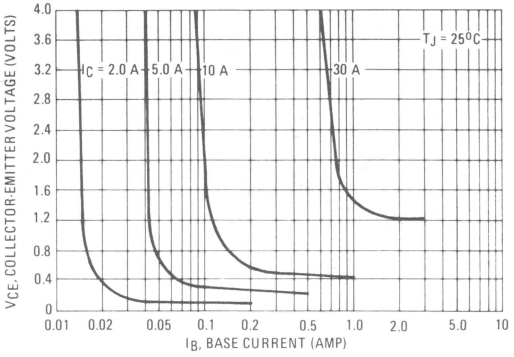

FIGURE 10 – "ON" VOLTAGES

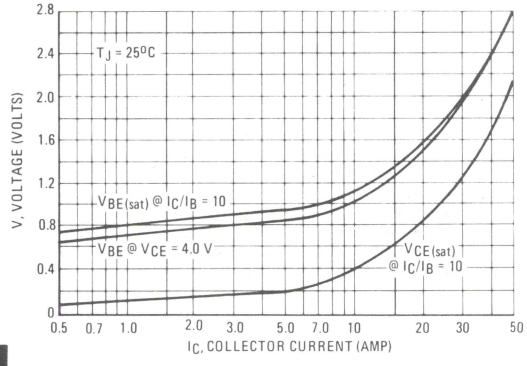

FIGURE 11 – TEMPERATURE COEFFICIENTS

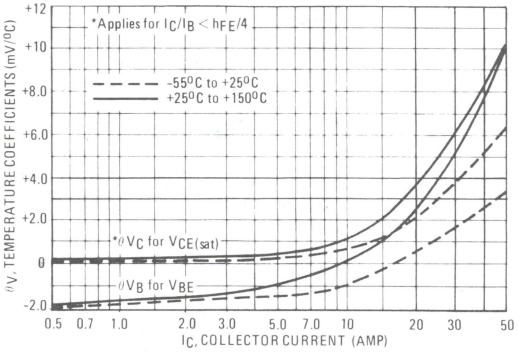

FIGURE 12 – COLLECTOR CUT-OFF REGION

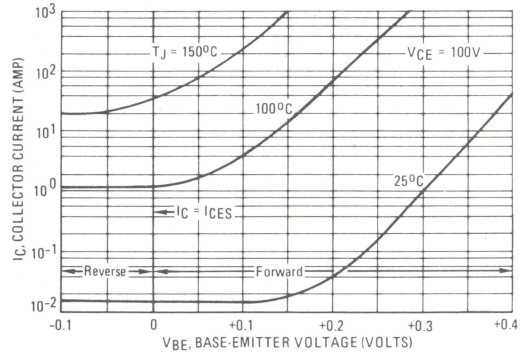

FIGURE 13 – BASE CUT-OFF REGION

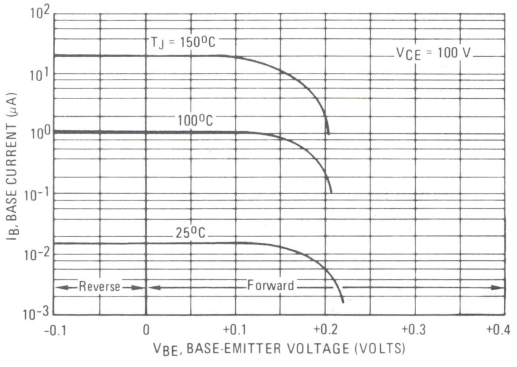

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
2N6282 thru 2N6284
PNP
2N6285 thru 2N6287

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low-frequency switching applications.

- High DC Current Gain @ I_C = 10 Adc –
  h_{FE} = 2400 (Typ) – 2N6282, 2N6283, 2N6284
  = 4000 (Typ) – 2N6285, 2N6286, 2N6287
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 60 Vdc (Min) – 2N6282, 2N6285
  = 80 Vdc (Min) – 2N6283, 2N6286
  = 100 Vdc (Min) – 2N6284, 2N6287
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

DARLINGTON 20 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60, 80, 100 VOLTS
160 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6282 2N6285	2N6283 2N6286	2N6284 2N6287	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current – Continuous Peak	I_C	20 40			Adc
Base Current	I_B	0.5			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	160 0.915			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200			°C

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.09	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

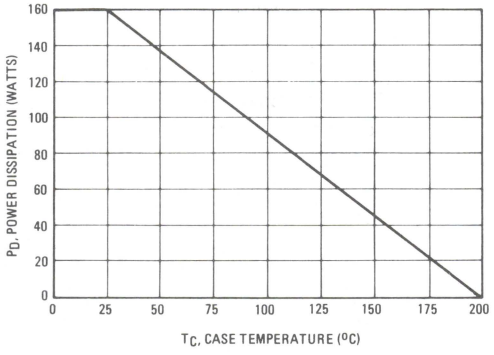



STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

CASE 1-04
TO-204AA

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage		$V_{CEO(sus)}$			Vdc
(I_C = 0.1 Adc, I_B = 0)	2N6282, 2N6285		60	–	
	2N6283, 2N6286		80	–	
	2N6284, 2N6287		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N6282, 2N6285		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N6283, 2N6286		–	1.0	
(V_{CE} = 50 Vdc, I_B = 0)	2N6284, 2N6287		–	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)			–	0.5	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	5.0	
Emitter Cutoff Current		I_{EBO}	–	2.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)			750	18,000	
(I_C = 20 Adc, V_{CE} = 3.0 Vdc)			100	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 40 mAdc)			–	2.0	
(I_C = 20 Adc, I_B = 200 mAdc)			–	3.0	
Base-Emitter On Voltage		$V_{BE(on)}$	–	2.8	Vdc
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)					
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	–	4.0	Vdc
(I_C = 20 Adc, I_B = 200 mAdc)					
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio		$\lvert h_{fe} \rvert$	4.0	–	MHz
(I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)					
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N6282, 83, 84		–	400	
	2N6285, 86, 87		–	600	
Small-Signal Current Gain		h_{fe}	300	–	–
(I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)					

*Indicates JEDEC Registered Data.

(1) Pulse test: Pulse Width = 300 μs, Duty Cycle = 2%

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

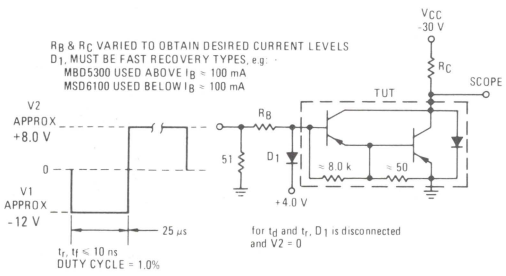

For NPN test circuit reverse diode and voltage polarities.

FIGURE 3 – SWITCHING TIMES

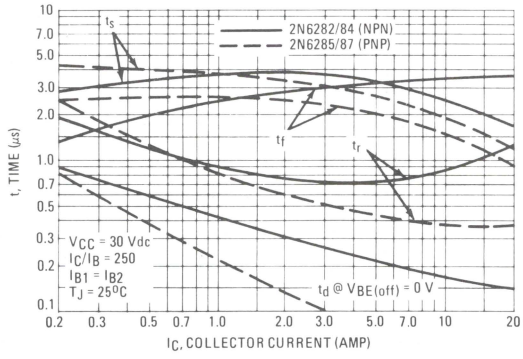

FIGURE 4 – THERMAL RESPONSE

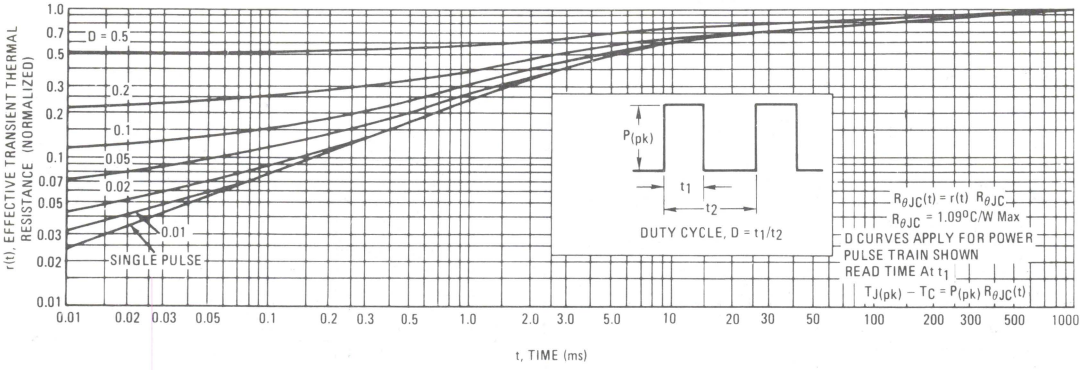

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 5 – 2N6282, 2N6285

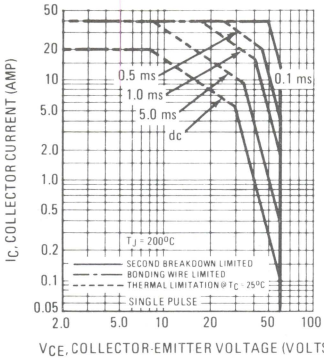

FIGURE 6 – 2N6283, 2N6286

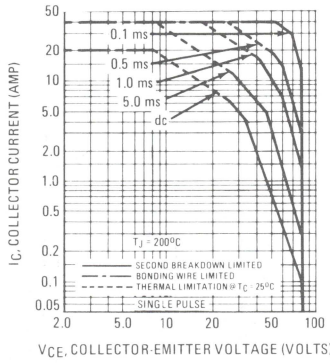

FIGURE 7 – 2N6284, 2N6287

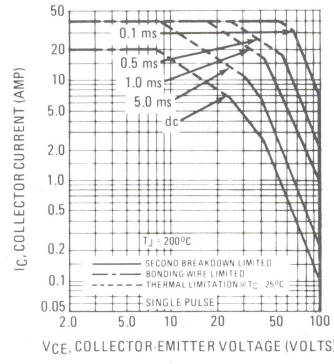

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e. the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 5, 6 and 7 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 8 – SMALL-SIGNAL CURRENT GAIN

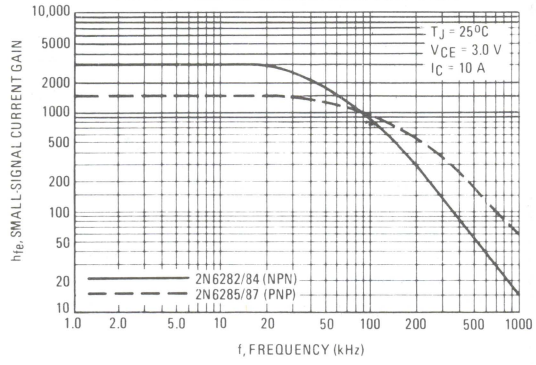

FIGURE 9 – CAPACITANCE

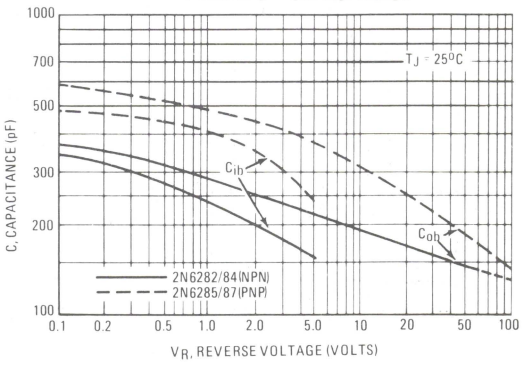

NPN
2N6282, 2N6283, 2N6284

PNP
2N6285, 2N6286, 2N6287

FIGURE 10 – DC CURRENT GAIN

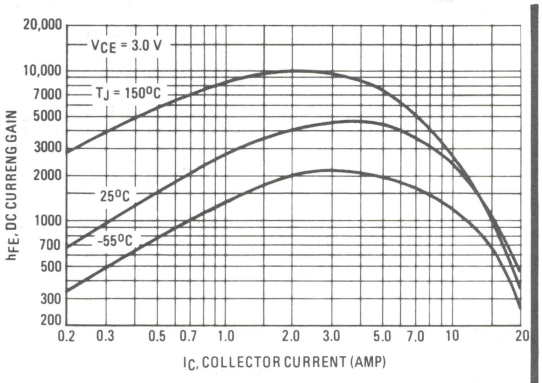

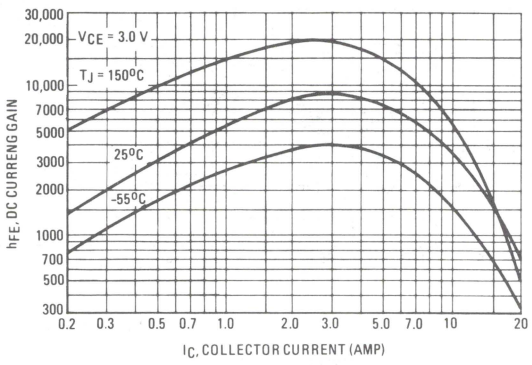

FIGURE 11 – COLLECTOR SATURATION REGION

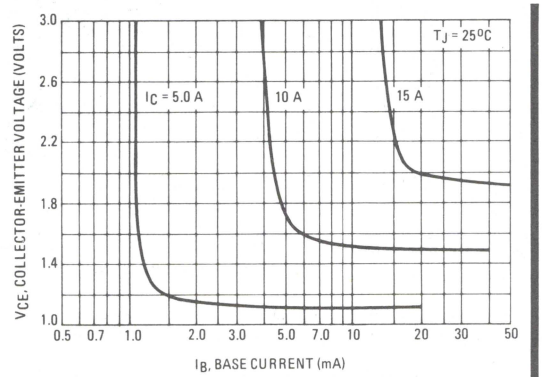

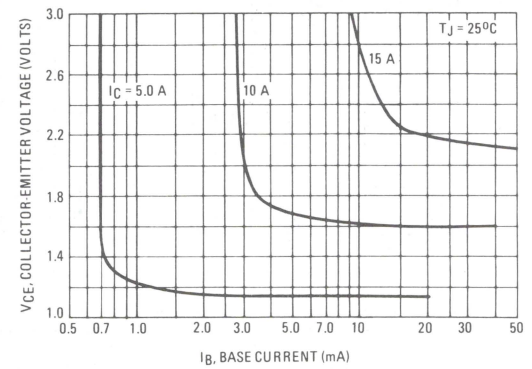

FIGURE 12 – "ON" VOLTAGES

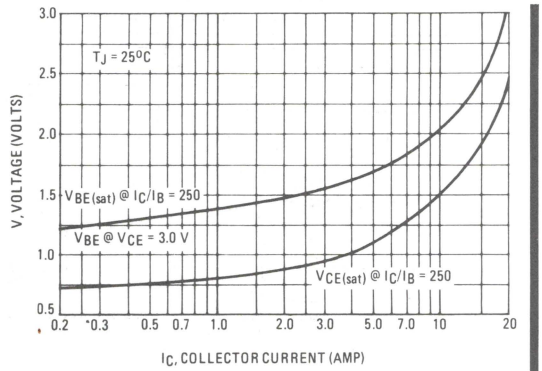

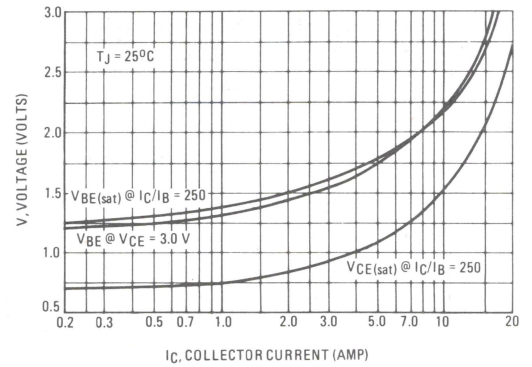

3

NPN
2N6282, 2N6283, 2N6284

PNP
2N6285, 2N6286, 2N6287

FIGURE 13 – TEMPERATURE COEFFICIENTS

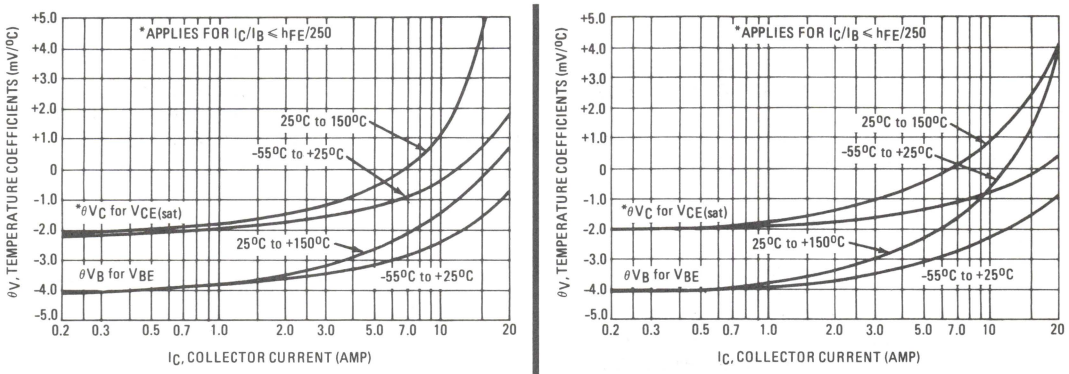

FIGURE 14 – COLLECTOR CUTOFF REGION

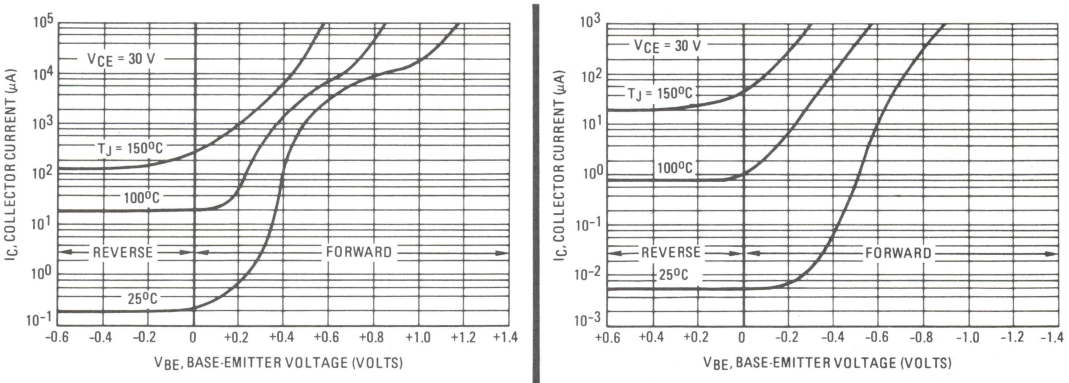

FIGURE 15 – DARLINGTON SCHEMATIC

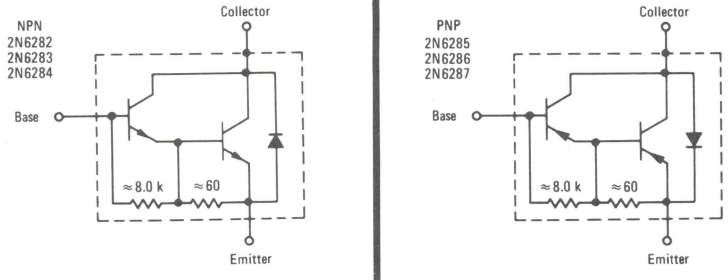

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
2N6294, 2N6295
PNP
2N6296, 2N6297

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier, low-frequency switching and hammer driver applications.

- High DC Current Gain — h_{FE} = 3000 (Typ) @ I_C = 2.0 Adc
- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 2.0 Adc
- Collector-Emitter Sustaining Voltage
  $V_{CEO(sus)}$ = 60 Vdc (Min) — 2N6294, 2N6296
  = 80 Vdc (Min) — 2N6295, 2N6297
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

4 AMPERES
DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS
60, 80 VOLTS
50 WATTS



* MAXIMUM RATINGS

Rating	Symbol	2N6294 2N6296	2N6295 2N6297	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous Peak	I_C	4.0 8.0		Adc
Base Current	I_B	80		mAdc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	50 0.286		Watts W/°C
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.5	°C/W

*Indicates JEDEC Registered Data

3

FIGURE 1 — POWER DERATING

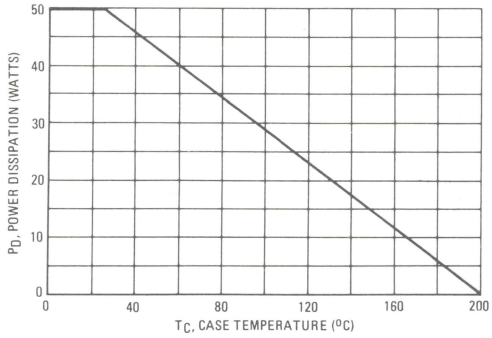

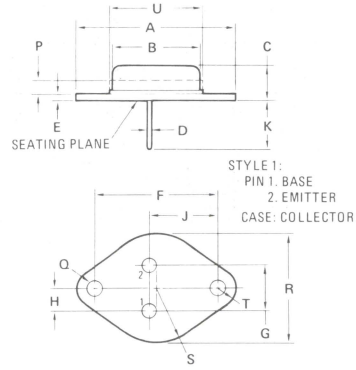

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	2N6294, 2N6296	$V_{CEO(sus)}$	60	–	Vdc
	2N6295, 2N6297		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N6294, 2N6296		–	0.5	
(V_{CE} = 40 Vdc, I_B = 0)	2N6295, 2N6297		–	0.5	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc)	2N6294, 2N6295		–	0.5	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)	2N6296, 2N6297		–	0.5	
(V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6294, 2N6295		–	5.0	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6296, 2N6297		–	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)			750	18000	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			100	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 8.0 mAdc)			–	2.0	
(I_C = 4.0 Adc, I_B = 40 mAdc)			–	3.0	
Base-Emitter Saturation Voltage (I_C = 4.0 Adc, I_B = 40 mAdc)		$V_{BE(sat)}$	–	4.0	Vdc
Base-Emitter On Voltage (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)		$V_{BE(on)}$	–	2.8	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	4.0	–	–
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	2N6294, 2N6295		–	120	
	2N6296, 2N6297		–	200	
Small-Signal Current Gain (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)		h_{fe}	300	–	–

*Indicates JEDEC Registered Data

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

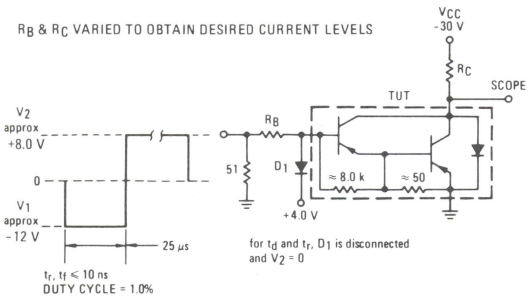

For NPN test circuit, reverse all polarities.

FIGURE 3 – SWITCHING TIMES

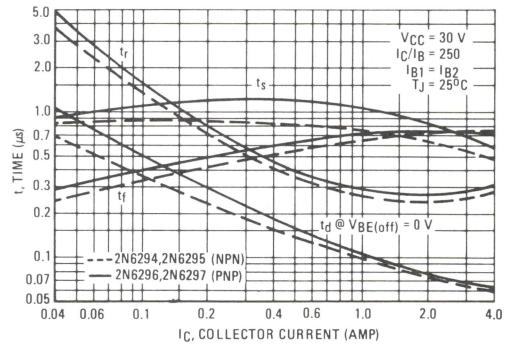

3

FIGURE 4 – THERMAL RESPONSE

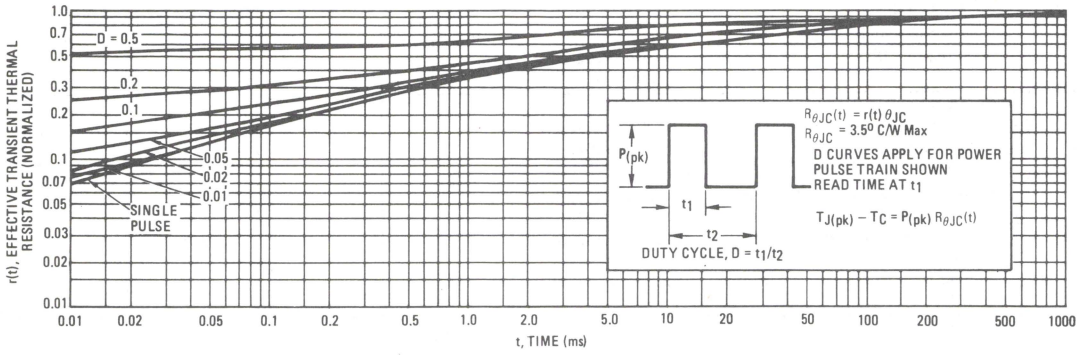

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

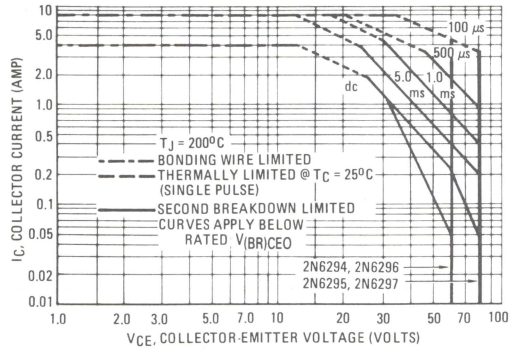

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

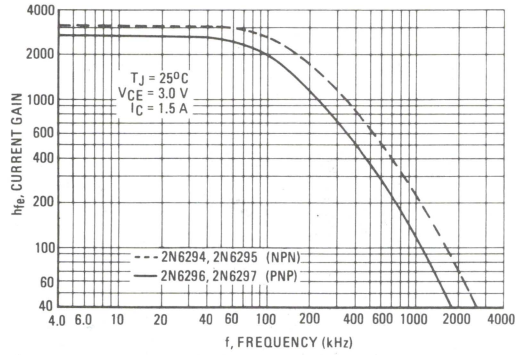

FIGURE 7 – CAPACITANCE

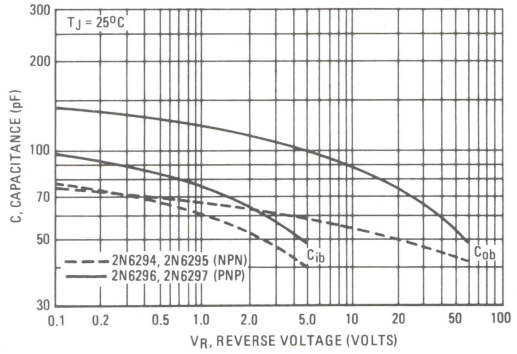

NPN
2N6294, 2N6295

PNP
2N6296, 2N6297

FIGURE 8 – DC CURRENT GAIN

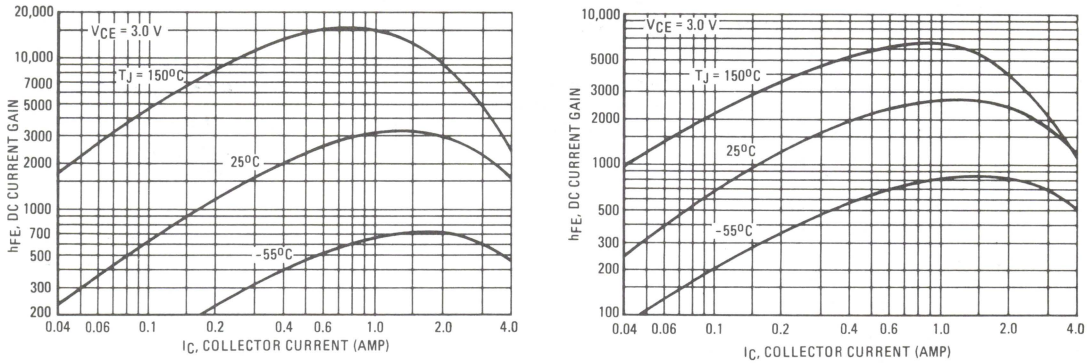

FIGURE 9 – COLLECTOR SATURATION REGION

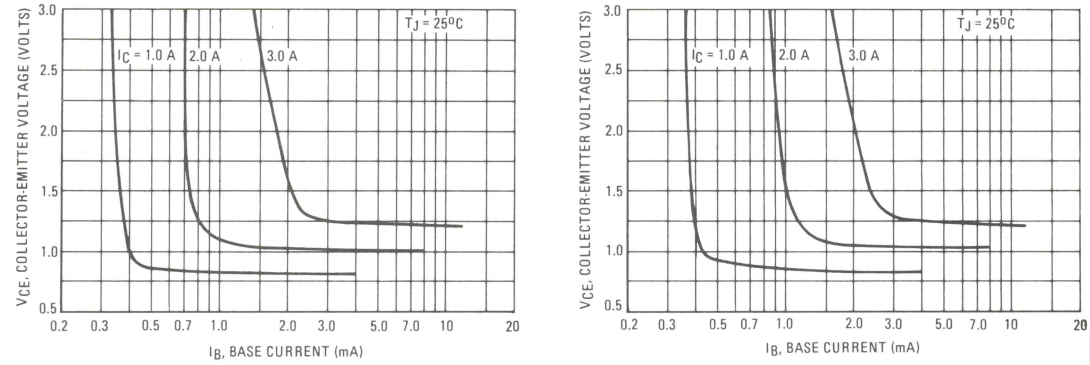

FIGURE 10 – "ON" VOLTAGES

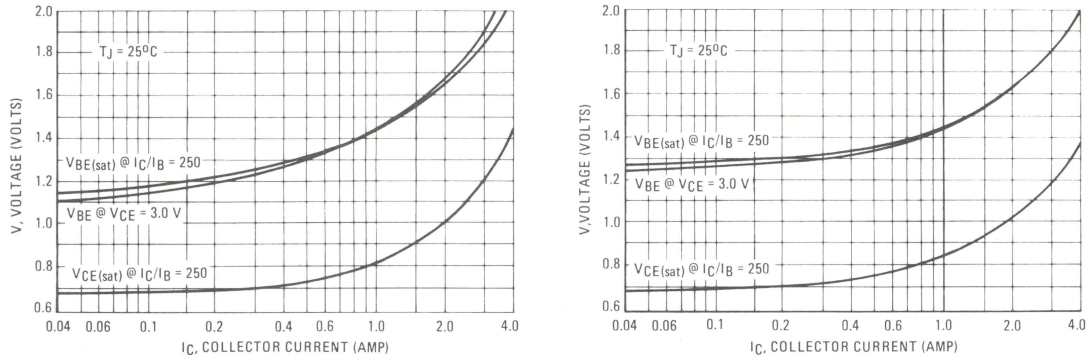

2N6298 thru 2N6301
See Page 3-157
2N6303 — See Page 3-32

2N6306
2N6307, 2N6308

HIGH VOLTAGE NPN SILICON POWER TRANSISTORS

. . . designed for high voltage inverters, switching regulators and line-operated amplifier applications. Especially well suited for switching power supply applications in associated consumer products.

- High Collector-Base Voltage —
  V_{CB} = 500 Vdc — 2N6306
  = 600 Vdc — 2N6307
  = 700 Vdc — 2N6308
- Excellent DC Current Gain @ I_C = 3.0 Adc
  h_{FE} = 15 - 75 — 2N6306, 2N6307
  = 12 - 60 — 2N6308
- Low Collector-Emitter Saturation Voltage @ I_C = 3.0 Adc
  $V_{CE(sat)}$ = 0.8 Vdc (Max) — 2N6306
  = 1.0 Vdc (Max) — 2N6307
  = 1.5 Vdc (Max) — 2N6308
- Current Gain Bandwidth Product —
  f_T = 5.0 MHz (Min) @ I_C = 0.3 Adc

8 AMPERE POWER TRANSISTORS NPN SILICON

250-300-350 VOLTS
125 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6306	2N6307	2N6308	Unit
Collector-Base Voltage	V_{CB}	500	600	700	Vdc
Collector-Emitter Voltage	V_{CEO}	250	300	350	Vdc
Emitter-Base Voltage	V_{EB}	8.0			Vdc
Collector Current — Continuous Peak	I_C	8.0 16			Adc
Base Current	I_B	4.0			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	125 0.714			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200			°C

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.4	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 — POWER DERATING

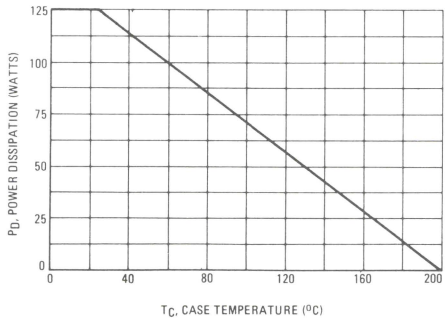

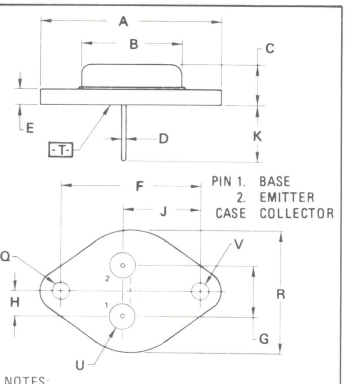

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | Ø0.13 (0.005) Ⓜ | T | V Ⓜ
   FOR LEADS:
   ⌖ | Ø0.13 (0.005) Ⓜ T | V Ⓜ | Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0)	2N6306		250	–	
	2N6307		300	–	
	2N6308		350	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = Rated V_{CEO}, I_B = 0)			–	0.5	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 500 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6306		–	0.5	
(V_{CE} = 600 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6307		–	0.5	
(V_{CE} = 700 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6308		–	0.5	
(V_{CE} = 450 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6306		–	2.5	
(V_{CE} = 550 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6307		–	2.5	
(V_{CE} = 650 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6308		–	2.5	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 8.0 Vdc, I_C = 0)			–	1.0	
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 5.0 Vdc)	2N6306, 2N6307		15	75	
	2N6308		12	60	
(I_C = 8.0 Adc, V_{CE} = 5.0 Vdc)	2N6306, 2N6307		4.0	–	
	2N6308		3.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 0.6 Adc)	2N6306		–	0.8	
	2N6307		–	1.0	
	2N6308		–	1.5	
(I_C = 8.0 Adc, I_B = 2.0 Adc)	2N6306, 2N6307		–	5.0	
(I_C = 8.0 Adc, I_B = 2.67 Adc)	2N6308		–	5.0	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$			Vdc
(I_C = 8.0 Adc, I_B = 2.0 Adc)	2N6306, 2N6307		–	2.3	
(I_C = 8.0 Adc, I_B = 2.67 Adc)	2N6308		–	2.5	
Base-Emitter On Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 3.0 Adc, V_{CE} = 5.0 Vdc)	2N6306, 2N6307		–	1.3	
	2N6308		–	1.5	
Second Breakdown Energy (Figure 2)		$E_{s/b}$			mJ
($I_{C(PK)}$ = 3.0 Adc, L = 40 mH, R_{BE} = 3 kΩ, V_{BB2} = 1.5 Vdc)			–	180	
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2)		f_T			MHz
(I_C = 0.3 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)			5.0	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)			–	250	
SWITCHING CHARACTERISTICS					
Rise Time		t_r			μs
(V_{CC} = 125 Vdc, I_C = 3.0 Adc, I_B = 0.6 Adc)			–	0.6	
Storage Time (3)		t_s			μs
(V_{CC} = 125 Vdc, I_C = 3.0 Adc, I_{B1} = 0.6 Adc, I_{B2} = 1.5 Adc)					
Pulse Width = 25 μs			–	1.6	
Pulse Width = 5.0 μs			–	0.8	
Fall Time		t_f			μs
(V_{CC} = 125 Vdc, I_C = 3.0 Adc, I_{B1} = 0.6 Adc, I_{B2} = 1.5 Adc)			–	0.4	

(1) Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle = 2.0%

(2) $f_T = |h_{fe}| \cdot f_{test}$

(3) "On" time is 25 μs. t_s decreases with shorter pulse widths, being approximately 50% of the values shown at a 5.0 μs pulse width.

*Indicates JEDEC Registered Data.

FIGURE 2 – SECOND BREAKDOWN ENERGY TEST CIRCUIT AND WAVEFORMS

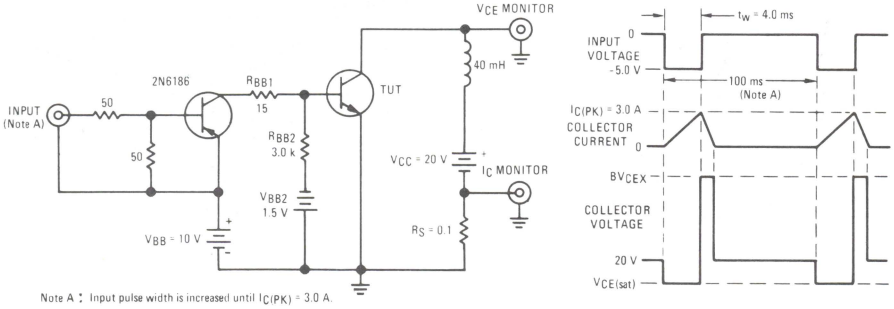

Note A: Input pulse width is increased until $I_{C(PK)}$ = 3.0 A.

FIGURE 3 – THERMAL RESPONSE

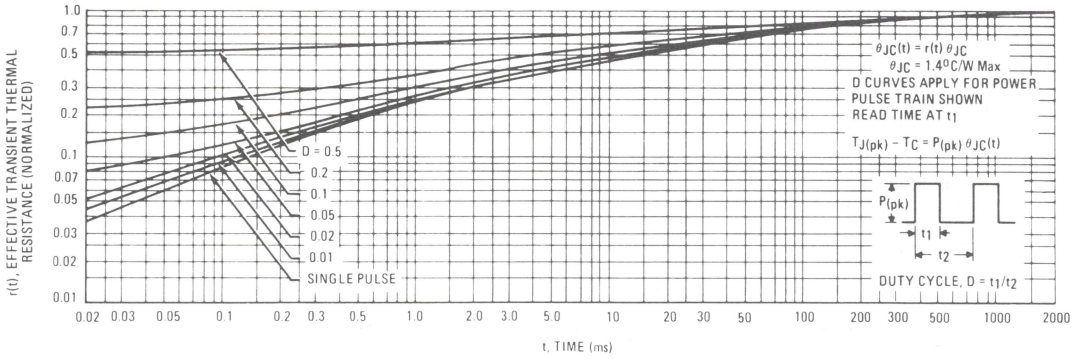

FIGURE 4 – ACTIVE-REGION SAFE OPERATING AREA

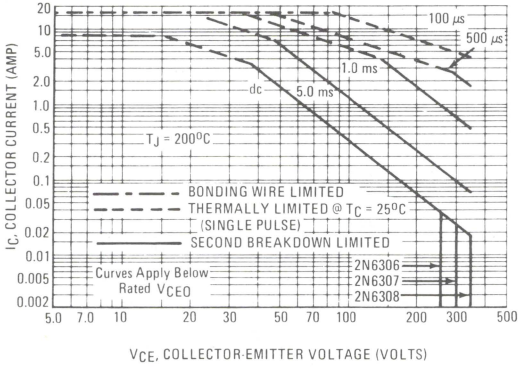

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 4 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 3. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 5 – SWITCHING TIMES TEST CIRCUIT

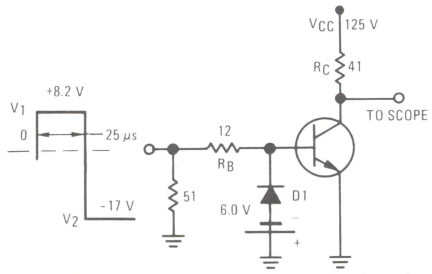

DUTY CYCLE 1%
t_r, $t_f \leqslant 10$ ns
D_1 – 1N3879
COLLECTOR-BASE JUNCTION

FOR DATA IN FIGURE 6, R_B & R_C ARE VARIED TO OBTAIN DESIRED TEST CONDITIONS. D_1 OMITTED AND V_2 REDUCED TO 5.0 V FOR t_d and t_r MEASUREMENTS

FIGURE 6 – TURN-ON AND TURN-OFF TIMES

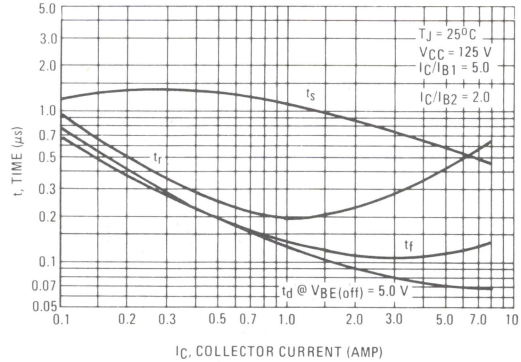

FIGURE 7 – DC CURRENT GAIN

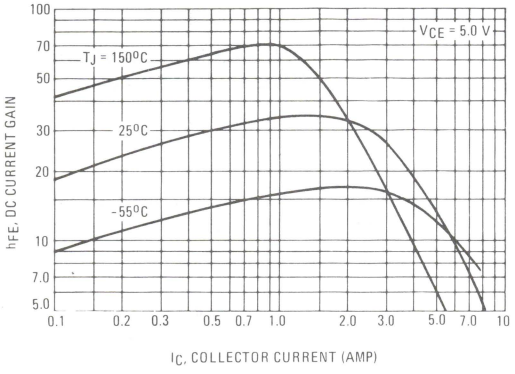

FIGURE 8 – COLLECTOR SATURATION REGION

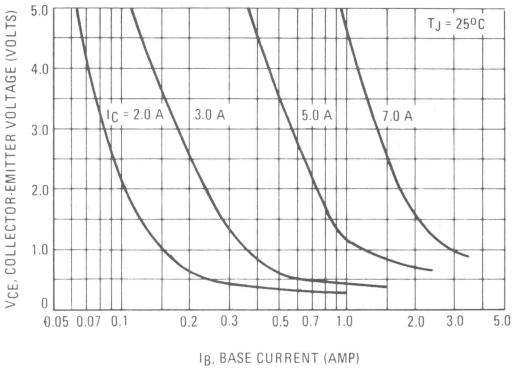

FIGURE 9 – "ON" VOLTAGES

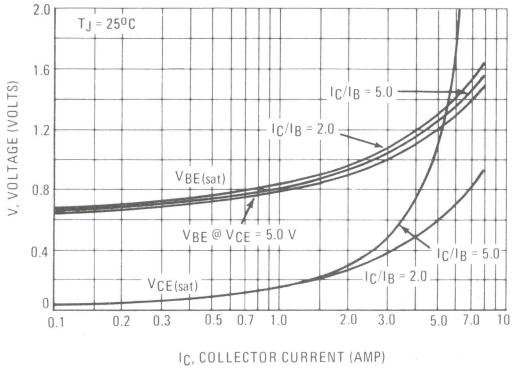

FIGURE 10 – TEMPERATURE COEFFICIENTS

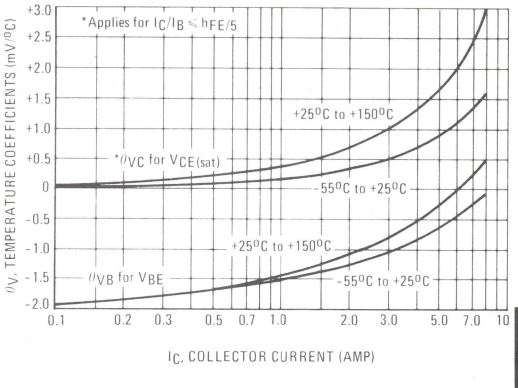

FIGURE 11 – COLLECTOR-CUTOFF REGION

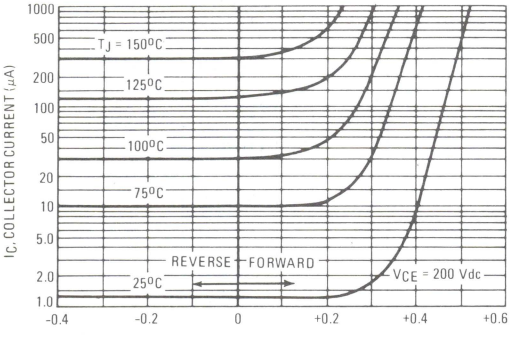

FIGURE 12 – CAPACITANCE

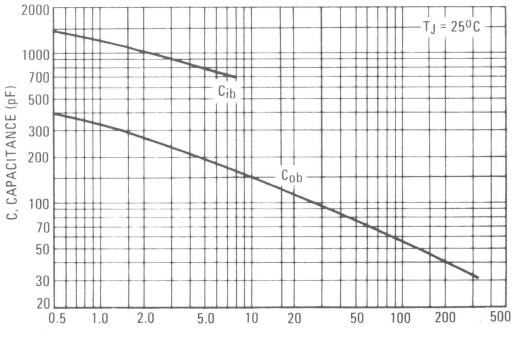

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
2N6315, 2N6316
PNP
2N6317, 2N6318

COMPLEMENTARY SILICON MEDIUM-POWER TRANSISTORS

. . . designed for general-purpose power amplifier and switching applications.

- Low Collector-Emitter Saturation Voltage – $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 4.0 Adc
- Low Leakage Current – I_{CEX} = 0.25 mAdc (Max)
- Excellent DC Current Gain – h_{FE} = 20 (Min) @ I_C = 2.5 Adc
- High Current Gain – Bandwidth Product – f_T = 4.0 MHz @ I_C = 0.25 Adc

7.0 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

60-80 VOLTS
90 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N6315 2N6317	2N6316 2N6318	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous Peak	I_C	7.0 15		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation – T_C = 25°C Derate above 25°C	P_D	90 0.515		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.94	°C/W

*Indicates JEDEC registered data. Limits and conditions differ on some parameters and re-registration reflecting these changes has been requested. All above values meet or exceed present JEDEC registered data.

FIGURE 1 – POWER DERATING

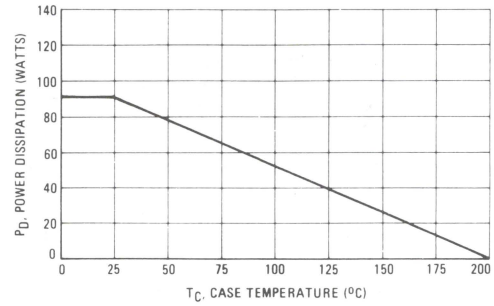

Safe Area Limits are indicated by Figure 13.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	–	0.360	–
P	–	1.27	–	0.050
Q	3.61	3.86	0.142	0.152
S	–	8.89	–	0.350
T	–	3.68	–	0.145
U	–	15.75	–	0.620

All JEDEC Dimensions and and Notes Apply.

CASE 80-02
TO-213AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	2N6315,2N6317 2N6316,2N6318	$V_{CEO(sus)}$	 60 80	 – –	Vdc
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	2N6315,2N6317		–	0.5	
(V_{CE} = 40 Vdc, I_B = 0)	2N6316,2N6318		–	0.5	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6315,2N6317		–	0.25	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6316,2N6318		–	0.25	
(V_{CE} = 60 Vdc $V_{BE(off)}$ =1.5 Vdc,T_C =150°C)	2N6315,2N6317		–	2.0	
(V_{CE} = 80 Vdc,$V_{BE(off)}$ =1.5 Vdc,T_C =150°C)	2N6316,2N6318		–	2.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	2N6315,2N6317		–	0.25	
(V_{CB} = 80 Vdc, I_E = 0)	2N6316,2N6318		–	0.25	
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 0.5 Adc, V_{CE} = 4.0 Vdc)			35	–	
(I_C = 2.5 Adc, V_{CE} = 4.0 Vdc)			20	100	
(I_C = 7.0 Adc, V_{CE} = 4.0 Vdc)			4.0	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 4.0 Adc, I_B = 0.4 Adc)			–	1.0	
(I_C = 7.0 Adc, I_B = 1.75 Adc)			–	2.0	
Base-Emitter Saturation Voltage (1) (I_C = 7.0 Adc, I_B = 1.75 Adc)		$V_{BE(sat)}$	–	2.5	Vdc
Base-Emitter On Voltage (1) (I_C = 2.5 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	1.5	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (2) (I_C = 0.25 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)		f_T	4.0	–	MHz
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	2N6317,2N6318		–	300	
	2N6315,2N6316		–	200	
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)		h_{fe}	20	–	–
SWITCHING CHARACTERISTICS					
Rise Time	(V_{CC} = 30 Vdc, I_C = 2.5 Adc, I_{B1} = I_{B2} = 0.25 Adc)	t_r	–	0.7	μs
Storage Time		t_s	–	1.0	μs
Fall Time		t_f	–	0.8	μs

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
(2) $f_T = |h_{fe}| \bullet f_{test}$

NPN
2N6315 and 2N6316

PNP
2N6317 and 2N6318

FIGURE 2 – DC CURRENT GAIN

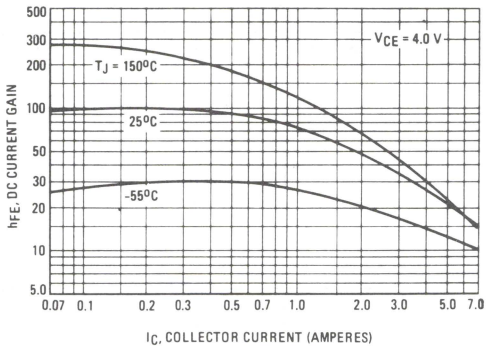

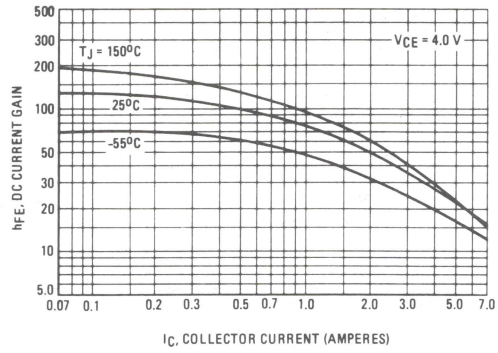

FIGURE 3 – COLLECTOR SATURATION REGION

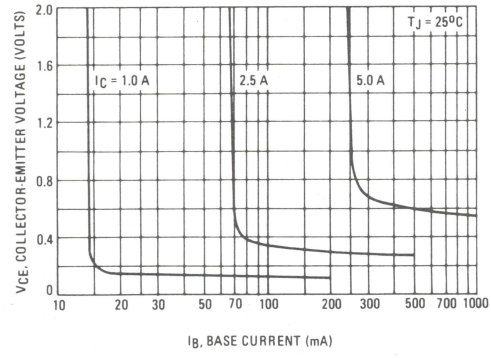

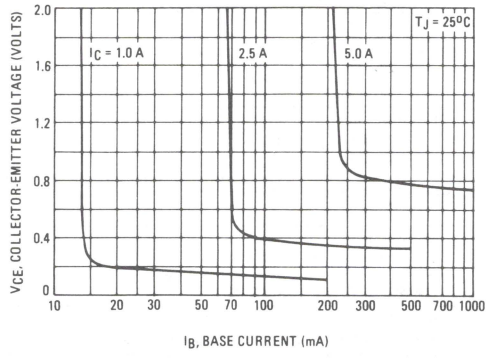

FIGURE 4 – "ON" VOLTAGES

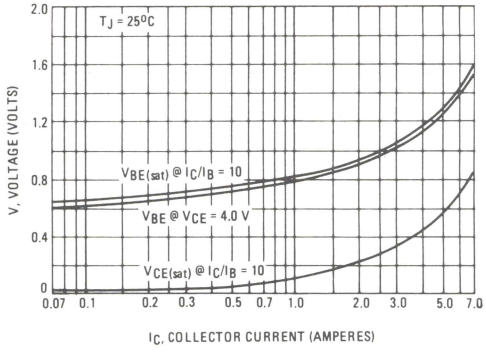

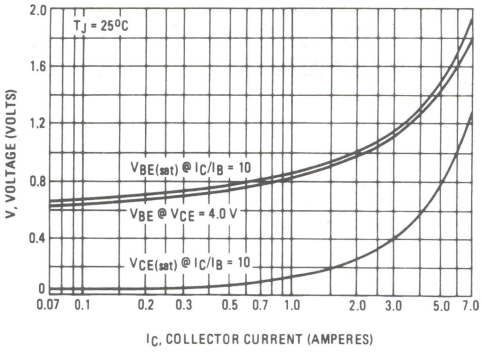

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

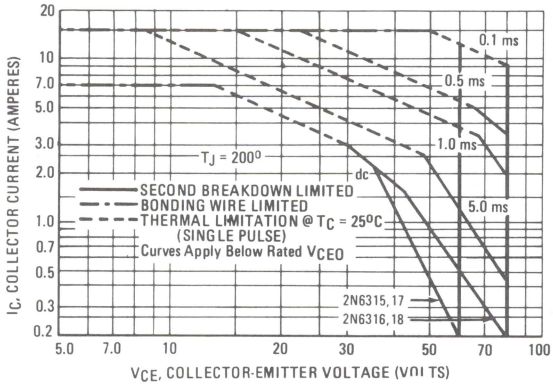

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure 6. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – THERMAL RESPONSE

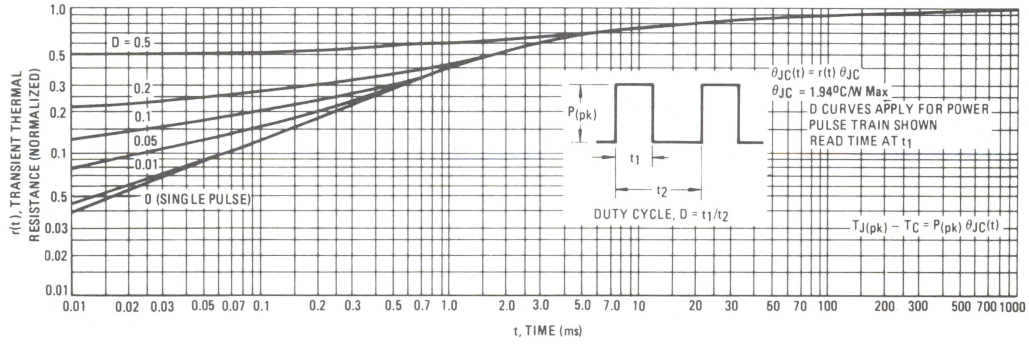

2N6338 thru 2N6341

HIGH-POWER NPN SILICON TRANSISTORS

. . . designed for use in industrial-military power amplifier and switching circuit applications.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 100 Vdc (Min) – 2N6338
  = 120 Vdc (Min) – 2N6339
  = 140 Vdc (Min) – 2N6340
  = 150 Vdc (Min) – 2N6341
- High DC Current Gain –
  h_{FE} = 30-120 @ I_C = 10 Adc
  = 12 (Min) @ I_C = 25 Adc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 10 Adc
- Fast Switching Times @ I_C = 10 Adc
  t_r = 0.3 μs (Max)
  t_s = 1.0 μs (Max)
  t_f = 0.25 μs (Max)
- Complement to 2N6436–38

25 AMPERE
POWER TRANSISTORS
NPN SILICON
100, 120, 140, 150 VOLTS
200 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6338	2N6339	2N6340	2N6341	Unit
Collector-Base Voltage	V_{CB}	120	140	160	180	Vdc
Collector-Emitter Voltage	V_{CEO}	100	120	140	150	Vdc
Emitter-Base Voltage	V_{EB}	6.0				Vdc
Collector Current – Continuous	I_C	25				Adc
Peak		50				
Base Current	I_B	10				Adc
Total Device Dissipation @ T_C = 25°C	P_D	200				Watts
Derate above 25°C		1.14				W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

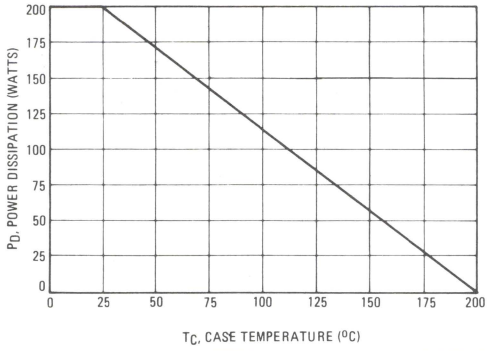



STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120

CASE 1–04

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

3

*ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 50 mAdc, I_B = 0)	2N6338		100	–	
	2N6339		120	–	
	2N6340		140	–	
	2N6341		150	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 50 Vdc, I_B = 0)	2N6338		–	50	
(V_{CE} = 60 Vdc, I_B = 0)	2N6339		–	50	
(V_{CE} = 70 Vdc, I_B = 0)	2N6340		–	50	
(V_{CE} = 75 Vdc, I_B = 0)	2N6341		–	50	
Collector Cutoff Current		I_{CEX}			
(V_{CE} = Rated V_{CEO}, $V_{EB(off)}$ = 1.5 Vdc)			–	10	μAdc
(V_{CE} = Rated V_{CEO}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)			–	1.0	mAdc
Collector Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)		I_{CBO}	–	10	μAdc
Emitter Cutoff Current (V_{BE} = 6.0 Vdc, I_C = 0)		I_{EBO}	–	100	μAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)			50	–	
(I_C = 10 Adc, V_{CE} = 2.0 Vdc)			30	120	
(I_C = 25 Adc, V_{CE} = 2.0 Vdc)			12	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)			–	1.0	
(I_C = 25 Adc, I_B = 2.5 Adc)			–	1.8	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)			–	1.8	
(I_C = 25 Adc, I_B = 2.5 Adc)			–	2.5	
Base-Emitter On Voltage (I_C = 10 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	–	1.8	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (2) (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)		f_T	40	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	–	300	pF
SWITCHING CHARACTERISTICS					
Rise Time (V_{CC} ≈ 80 Vdc, I_C = 10 Adc, I_{B1} = 1.0 Adc, $V_{BE(off)}$ = 6.0 Vdc)		t_r	–	0.3	μs
Storage Time (V_{CC} ≈ 80 Vdc, I_C = 10 Adc, I_{B1} = I_{B2} = 1.0 Adc)		t_s	–	1.0	μs
Fall Time (V_{CC} ≈ 80 Vdc, I_C = 10 Adc, I_{B1} = I_{B2} = 1.0 Adc)		t_f	–	0.25	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = |h_{fe}| \cdot f_{test}$

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

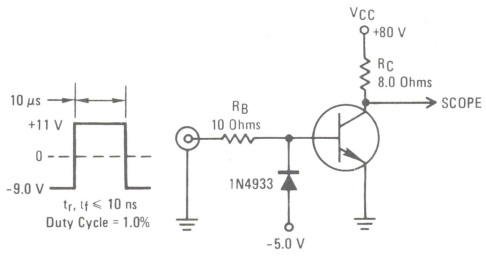

Note: For information on Figures 3 and 6, R_B and R_C were varied to obtain desired test conditions.

FIGURE 3 – TURN-ON TIME

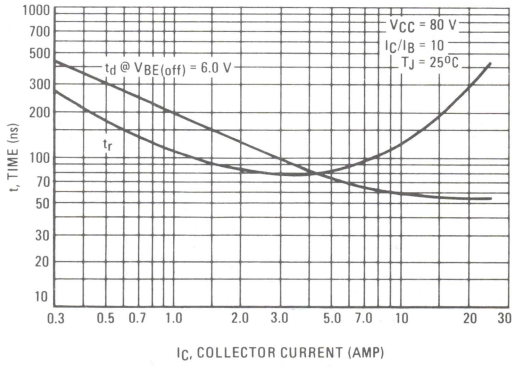

FIGURE 4 – THERMAL RESPONSE

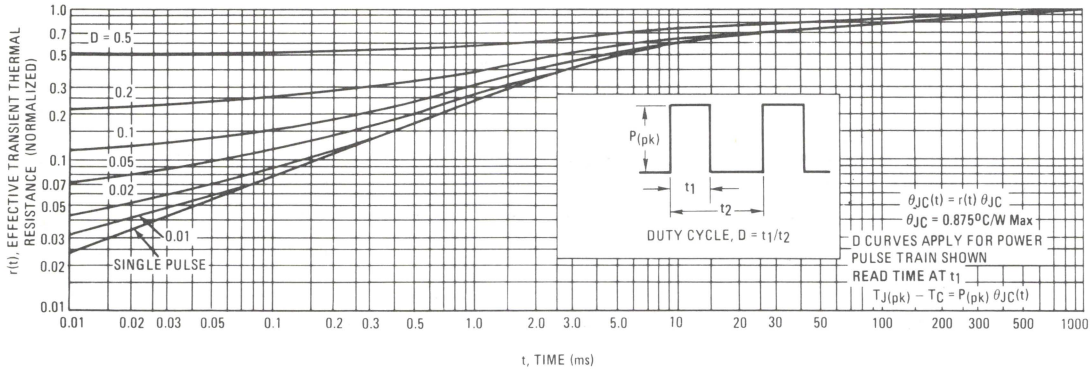

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

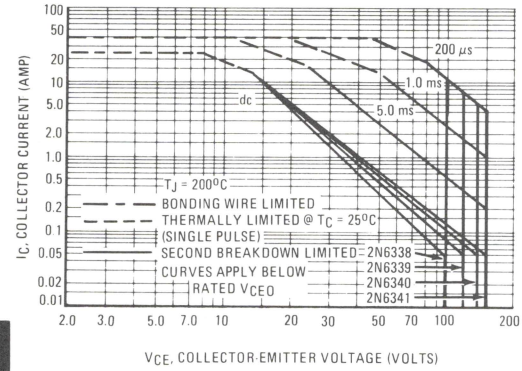

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

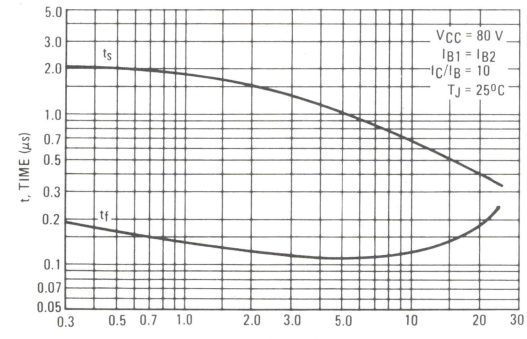

FIGURE 7 – CAPACITANCE

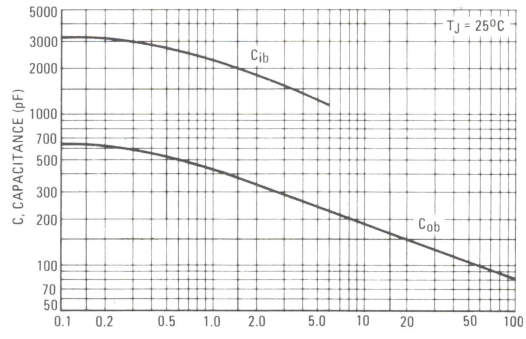

2N6377 thru 2N6379

HIGH-POWER PNP SILICON TRANSISTORS

. . . designed for use in industrial-military power amplifier and switching circuit applications.

- High Collector Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 80 Vdc (Min) – 2N6377
  = 100 Vdc (Min) – 2N6378
  = 120 Vdc (Min) – 2N6379
- High DC Current Gain –
  h_{FE} = 30-120 @ I_C = 20 Adc
  = 10 (Min) @ I_C = 50 Adc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 20 Adc
- Fast Switching Times @ I_C = 20 Adc
  t_r = 0.35 μs (Max)
  t_s = 0.8 μs (Max)
  t_f = 0.25 μs (Max)
- Complement to 2N6274–77

50 AMPERE
POWER TRANSISTORS
PNP SILICON
80, 100, 120 VOLTS
250 WATTS



* MAXIMUM RATINGS

Rating	Symbol	2N6377	2N6378	2N6379	Unit
Collector-Base Voltage	V_{CB}	100	120	140	Vdc
Collector-Emitter Voltage	V_{CEO}	80	100	120	Vdc
Emitter-Base Voltage	V_{EB}	← 6.0 →			Vdc
Collector Current – Continuous	I_C	← 50 →			Adc
Peak		← 100 →			
Base Current	I_B	← 20 →			Adc
Total Device Dissipation @ T_C = 25°C	P_D	← 250 →			Watts
Derate above 25°C		← 1.43 →			W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	← -65 to +200 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

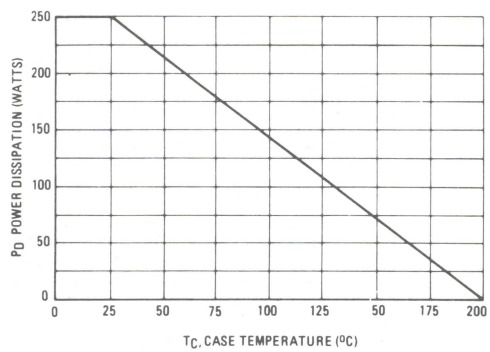

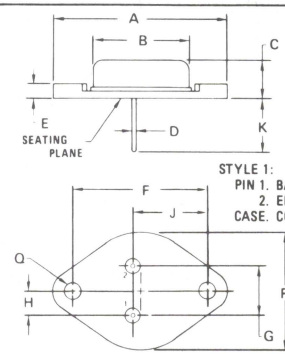

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
***OFF CHARACTERISTICS**					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 50 mAdc, I_B = 0)	2N6377		80	–	
	2N6378		100	–	
	2N6379		120	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 50 Vdc, I_B = 0)	2N6377		–	50	
(V_{CE} = 60 Vdc, I_B = 0)	2N6378		–	50	
(V_{CE} = 70 Vdc, I_B = 0)	2N6379		–	50	
Collector Cutoff Current		I_{CEX}			
(V_{CE} = 90% Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)			–	10	μAdc
(V_{CE} = 90% Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	1.0	mAdc
Emitter Cutoff Current		I_{EBO}	–	100	μAdc
(V_{EB} = 6.0 Vdc, I_C = 0)					
***ON CHARACTERISTICS** (1)					
DC Current Gain		h_{FE}			–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)			50	–	
(I_C = 20 Adc, V_{CE} = 4.0 Vdc)			30	120	
(I_C = 50 Adc, V_{CE} = 4.0 Vdc)			10	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	–		Vdc
(I_C = 20 Adc, I_B = 2.0 Adc)			–	1.2	
(I_C = 50 Adc, I_B = 10 Adc)			–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 20 Adc, I_B = 2.0 Adc)			–	1.8	
(I_C = 50 Adc, I_B = 10 Adc)			–	3.5	
DYNAMIC CHARACTERISTICS					
*Current-Gain – Bandwidth Product (2)		f_T	30	–	MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)					
*Output Capacitance		C_{ob}	–	1500	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)					
***SWITCHING CHARACTERISTICS** (Figure 2)					
Rise Time	(V_{CC} = 80 Vdc, I_C = 20 Adc, I_{B1} = I_{B2} = 2.0 Adc)	t_r	–	0.35	μs
Storage Time		t_s	–	0.80	μs
Fall Time		t_f	–	0.25	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

(2) $f_T = |h_{fe}| \bullet f_{test}$

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

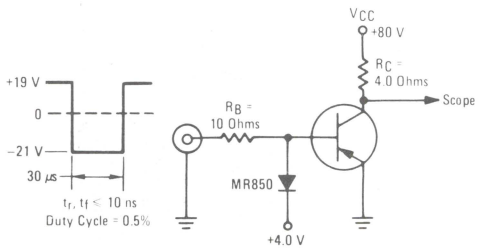

Note: For information on Figures 3 & 6, R_B and R_C were varied to obtain desired test conditions.

FIGURE 3 – TURN ON TIME

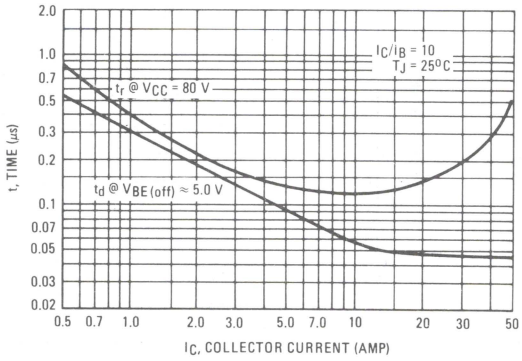

FIGURE 4 – THERMAL RESPONSE

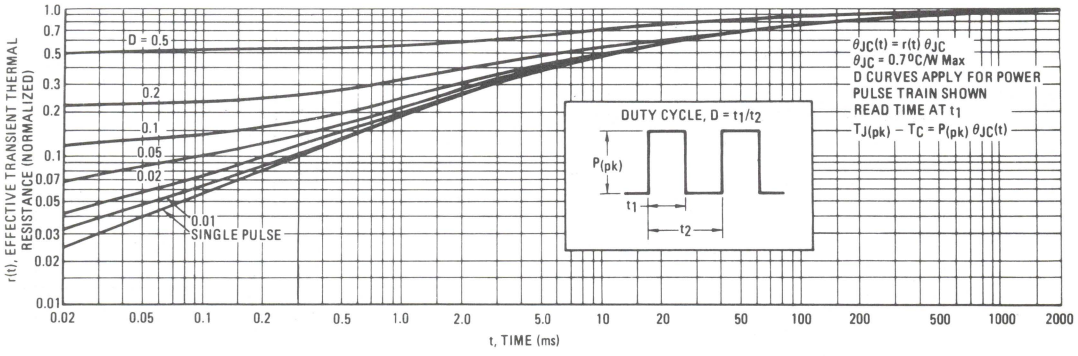

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

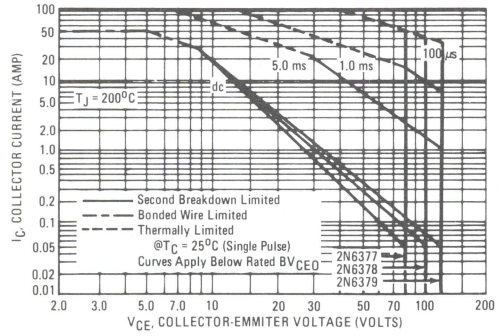

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

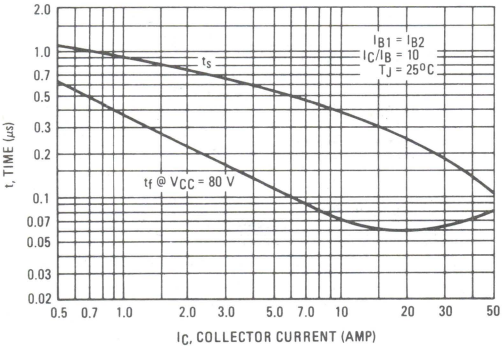

FIGURE 7 – CAPACITANCE

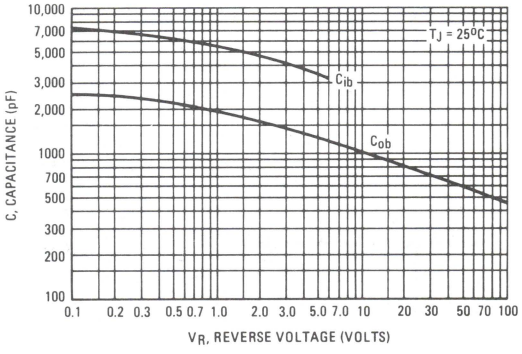

FIGURE 8 – DC CURRENT GAIN

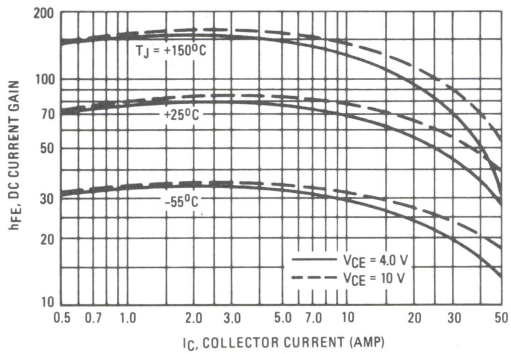

FIGURE 9 – COLLECTOR SATURATION REGION

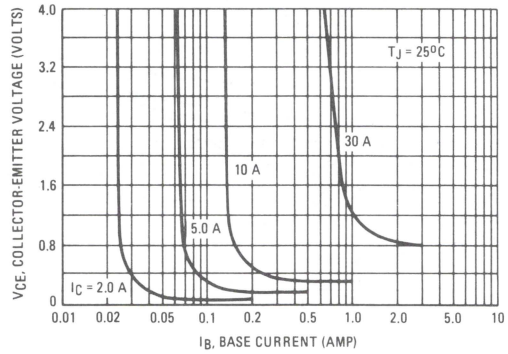

FIGURE 10 – "ON" VOLTAGES

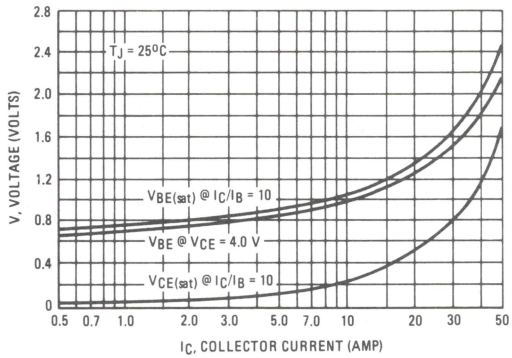

FIGURE 11 – TEMPERATURE COEFFICIENTS

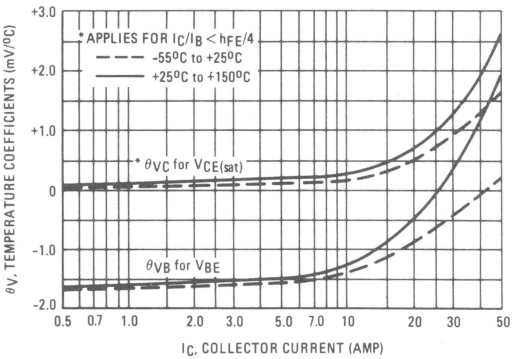

FIGURE 12 – COLLECTOR CUT-OFF REGION

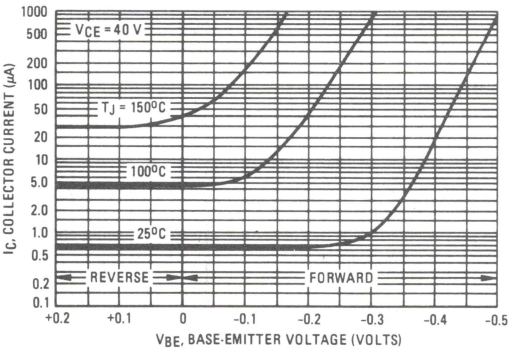

FIGURE 13 – BASE CUTOFF REGION

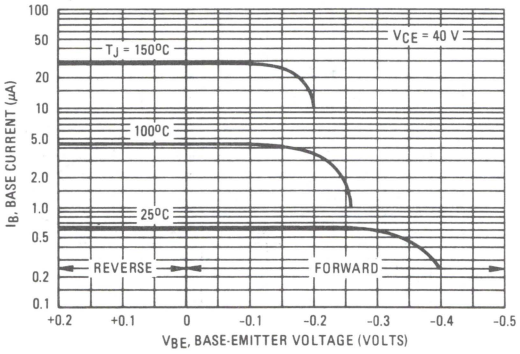

3

NPN
2N6383, 2N6384
2N6385
PNP
2N6648

COMPLEMENTARY SILICON POWER DARLINGTON TRANSISTORS

. . . monolithic complementary silicon Darlington transistors designed for low and medium frequency power applications such as power switching, audio amplifiers, hammer drivers, and shunt and series regulators.

- High Gain Darlington Performance
- True Complementary Specifications

15 AMPERE PEAK

COMPLEMENTARY SILICON POWER DARLINGTON TRANSISTORS

40–60–80 VOLTS
100 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6383 2N6648	2N6384	2N6385	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	40	60	80	Vdc
Collector-Emitter Voltage	V_{CEX}	40	60	80	Vdc
Collector-Emitter Voltage	V_{CBO}	40	60	80	Vdc
Emitter Base Voltage	V_{EBO}	5.0			Vdc
Collector Current — Continuous	I_C	10			Adc
Peak (1)**	I_{CM}	15			
Base Current — Continuous	I_B	0.25			Adc
Total Power Dissipation @ $T_C = 25^oC$ (2)	P_D	100			Watts
Derate above 25^oC		0.571			$W/^oC$
Operating and Storage Junction Temperature Range (2)	T_J, T_{stg}	-65 to +200			^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	$^oC/W$
Maximum Lead Temperature for Soldering Purposes: 1/32" from Case for 5 Seconds	T_L	235	^oC

*Indicates JEDEC Registered Data.
**Not JEDEC Registered.
(1) Pulse Width = 50 ms, Duty Cycle ≤ 10%.
(2) Exceeds JEDEC Registration for 2N6648.
JEDEC Registration gives P_D = 70 W, T_J = 150^oC.

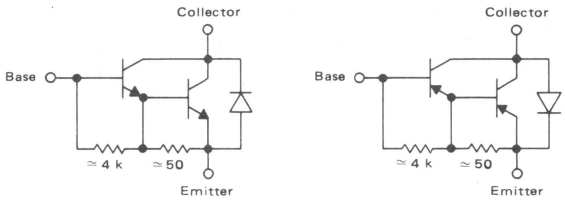



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

Collector connected to case.
CASE 11-01
(TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
*Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	2N6383, 2N6648	$V_{CEO(sus)}$	40	–	Vdc
	2N6384		60	–	
	2N6385		80	–	
Collector Cutoff Current (V_{CE} = Rated Value)		I_{CEO}	–	1.0	mAdc
*Collector Cutoff Current (V_{CE} = Rated $V_{CEO(sus)}$ Value, $V_{BE(off)}$ = 1.5 Vdc)		I_{CEV}	–	0.3	mAdc
(V_{CE} = Rated $V_{CEO(sus)}$ Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	3.0	
*Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	10	mAdc
Collector-Emitter Sustaining Voltage (1) (R_{BE} = 100 Ω, I_C = 200 mA)	2N6383, 2N6648	$V_{CER(sus)}$	40	–	Vdc
	2N6384		60	–	
	2N6385		80	–	
Collector-Emitter Sustaining Voltage (1) ($V_{BE(off)}$ = 1.5 V, I_C = 200 mA)	2N6383, 2N6648	$V_{CEV(sus)}$	40	–	Vdc
	2N6384		60	–	
	2N6385		80	–	
ON CHARACTERISTICS (1)					
*DC Current Gain (I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)		h_{FE}	1000	20,000	–
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)			100	–	
*Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.01 Adc)		$V_{CE(sat)}$	–	2.0	Vdc
(I_C = 10 Adc, I_B = 0.1 Adc)			–	3.0	
*Base-Emitter On Voltage (I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)		$V_{BE(on)}$	–	2.8	Vdc
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)			–	4.5	
Diode Forward Voltage (I_F = 10 Adc)		V_F	–	4.0	Vdc
***DYNAMIC CHARACTERISTICS**					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 MHz)		C_{ob}	–	200	pF
*Magnitude of Common-Emitter Small-Signal Short-Circuit Current Transfer Ratio (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	20	–	–
Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc, f = 1.0 kHz)		h_{fe}	1000	–	–
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base-Forward Biased		$I_{S/B}$	See Figures 8 and 9		
Second Breakdown Energy with Base Reverse-Biased (L = 12 mH, R_{BE} = 100 Ω, $V_{BE(off)}$ = 1.5 Vdc, I_C = 4.5 Adc)		$E_{s/b}$	120	–	mJ

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

* Indicates JEDEC Registered Data.

FIGURE 1 – DC CURRENT GAIN

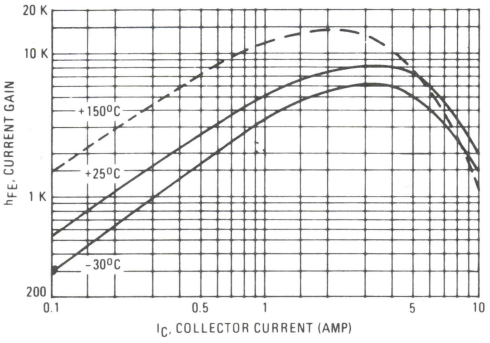

FIGURE 2 – COLLECTOR SATURATION REGION

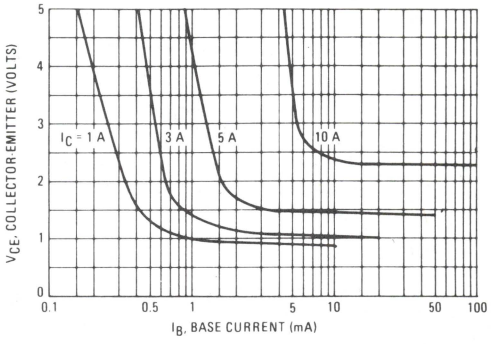

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

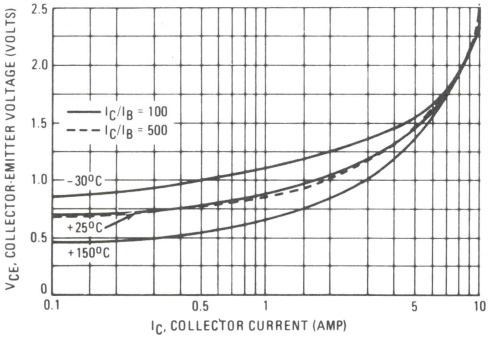

FIGURE 4 – BASE-EMITTER VOLTAGE

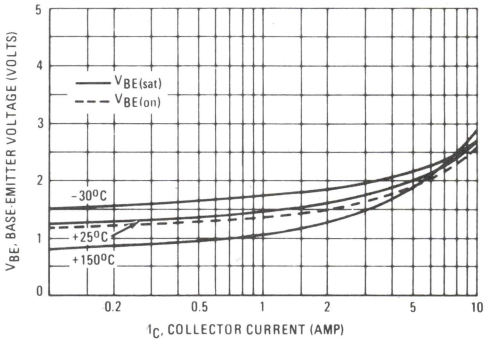

FIGURE 5 – SWITCHING TIME TEST CIRCUIT
(Shown for NPN)

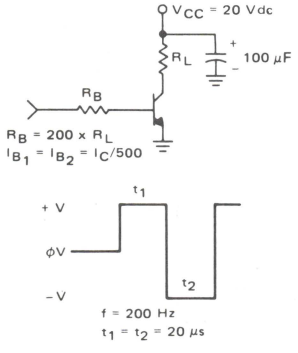

FIGURE 6 – SWITCHING TIMES

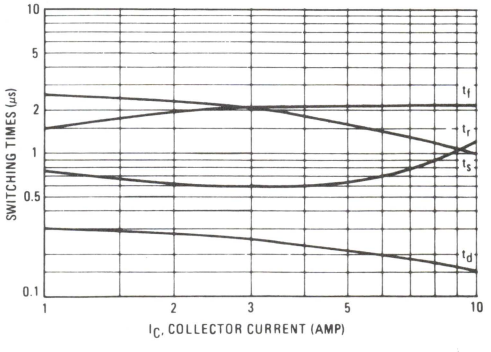

3

FIGURE 7 – THERMAL RESPONSE

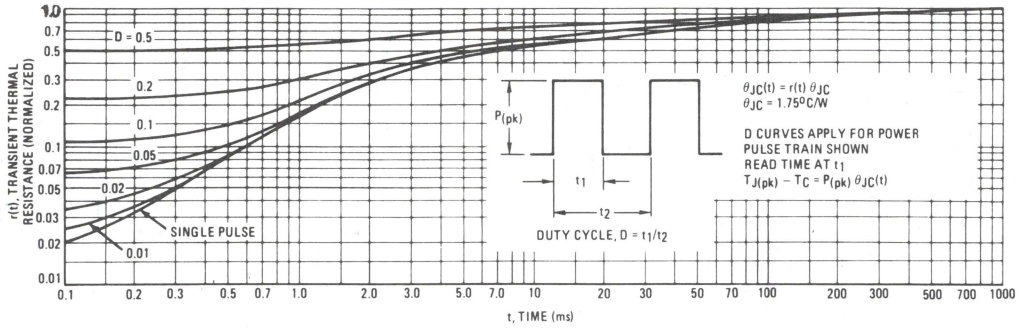

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 8 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature.

$T_{J(pk)}$ may be calculated from the data in Figure 7. At high case temperatures, see Figure 9, thermal limitations will reduce the current that can be handled to values less than the limitations imposed by second breakdown. Second breakdown limitations do derate the same as thermal limitations. Allowable current at the voltages shown on Figure 8 may be found at any case temperature by derating linearly to 200^oC.

FORWARD BIASED SAFE OPERATING AREA

FIGURE 8 – $T_C = 25^oC$

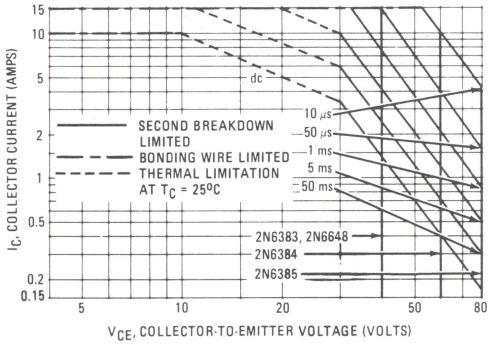

FIGURE 9 – $T_C = 100^oC$

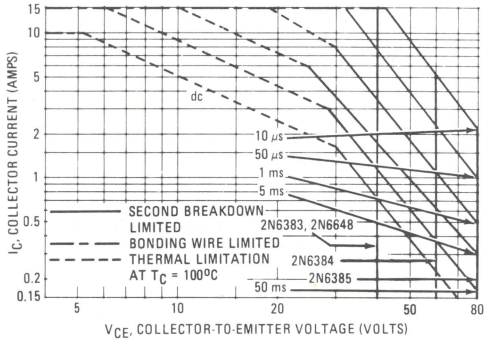

FIGURE 10 – CE DIODE CHARACTERISTICS

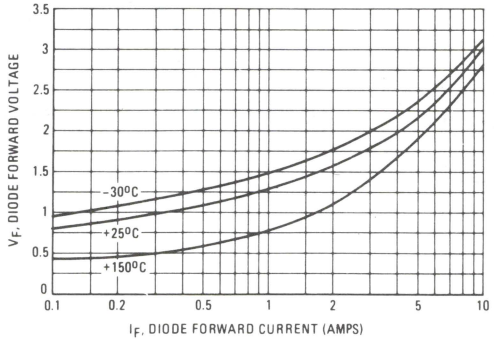

2N6386
2N6387
2N6388

PLASTIC MEDIUM-POWER SILICON TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain –
  h_{FE} = 2500 (Typ) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage – @ 100 mAdc
  $V_{CEO(sus)}$ = 40 Vdc (Min) – 2N6386
  = 60 Vdc (Min) – 2N6387
  = 80 Vdc (Min) – 2N6388
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 3.0 Adc – 2N6386
  = 2.0 Vdc (Max) @ I_C = 5.0 Adc – 2N6387, 2N6388
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors
- TO-220AB Compact Package
- TO-66 Leadform Also Available

DARLINGTON
8 AND 10 AMPERE

NPN SILICON POWER TRANSISTORS

40-60-80 VOLTS
65 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N6386	2N6387	2N6388	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	← 5.0 →			Vdc
Collector Current – Continuous Peak	I_C	8.0 15	10 15	10 15	Adc
Base Current	I_B	← 250 →			mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	← 65 → ← 0.52 →			Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	← 2.0 → ← 0.016 →			Watts W/°C
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	← -65 to +150 →			°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.92	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

FIGURE 1 – POWER DERATING

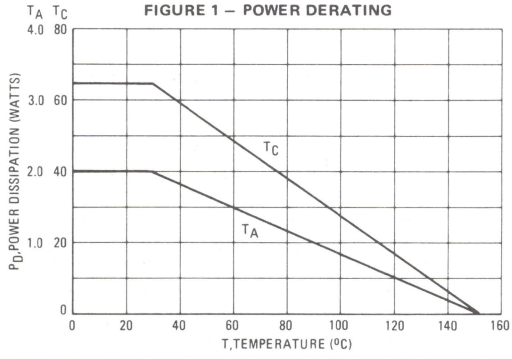

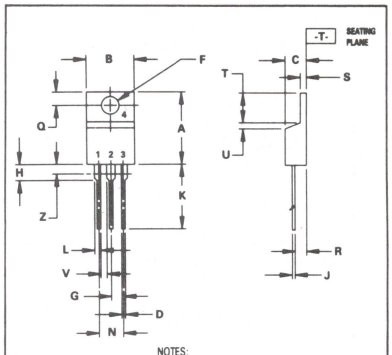

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N6386		40	–	
	2N6387		60	–	
	2N6388		80	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N6386		–	1.0	
(V_{CE} = 60 Vdc, I_B = 0)	2N6387		–	1.0	
(V_{CE} = 80 Vdc, I_B = 0)	2N6388		–	1.0	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6386		–	300	
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6387		–	300	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6388		–	300	
(V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	2N6386		–	3.0	mAdc
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	2N6387		–	3.0	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	2N6388		–	3.0	
Emitter Cutoff Current		I_{EBO}	–	5.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)	2N6386		1000	20000	
(I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)	2N6387, 2N6388		1000	20000	
(I_C = 8.0 Adc, V_{CE} = 3.0 Vdc)	2N6386		100	–	
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)	2N6387, 2N6388		100	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 0.006 Adc)	2N6386		–	2.0	
(I_C = 5.0 Adc, I_B = 0.01 Adc)	2N6387, 2N6388		–	2.0	
(I_C = 8.0 Adc, I_B = 0.08 Adc)	2N6386		–	3.0	
(I_C = 10 Adc, I_B = 0.1 Adc)	2N6387, 2N6388		–	3.0	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)	2N6386		–	2.8	
(I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)	2N6387, 2N6388		–	2.8	
(I_C = 8.0 Adc, V_{CE} = 3.0 Vdc)	2N6386		–	4.5	
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)	2N6387, 2N6388		–	4.5	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain		$\|h_{fe}\|$	20	–	
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)					
Output Capacitance		C_{ob}	–	200	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)					
Small-Signal Current Gain		h_{fe}	1000	–	–
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc, f = 1.0 kHz)					

* Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

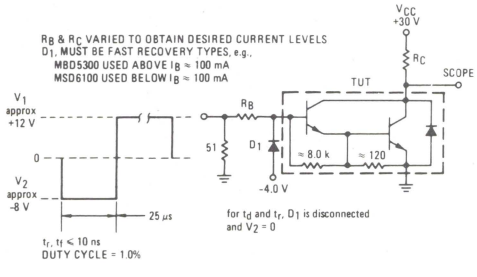

FIGURE 3 – SWITCHING TIMES

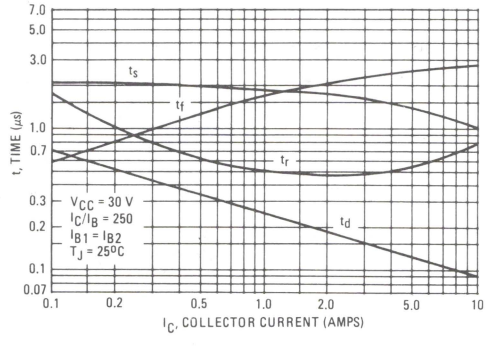

FIGURE 4 – THERMAL RESPONSE

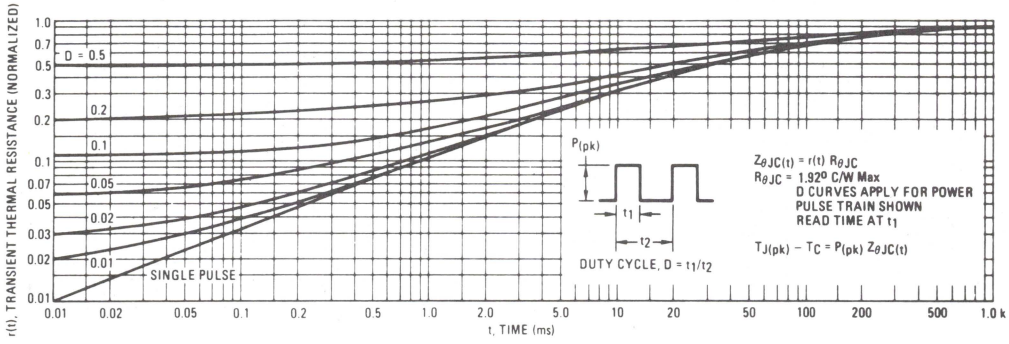

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

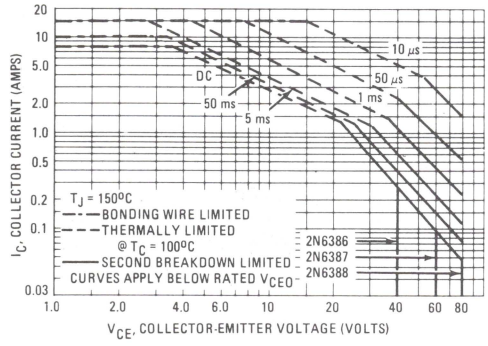

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown

3

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

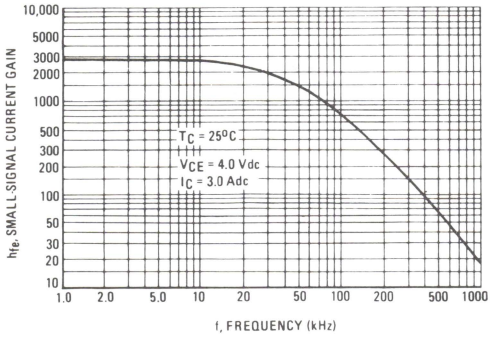

FIGURE 7 – CAPACITANCE

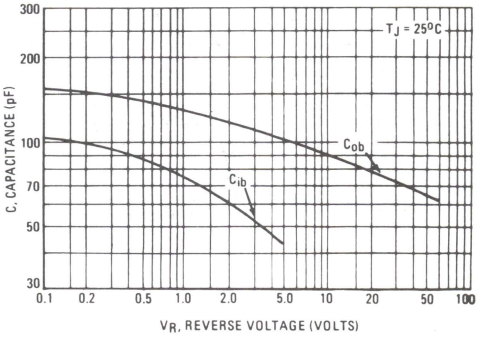

FIGURE 8 – DC CURRENT GAIN

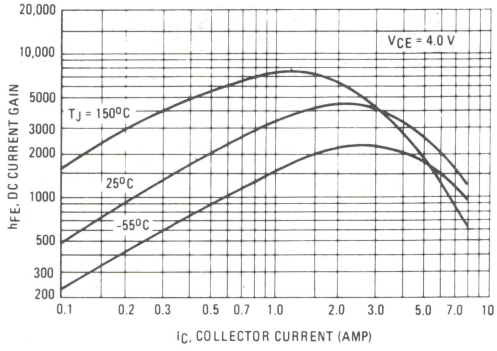

FIGURE 9 – COLLECTOR SATURATION REGION

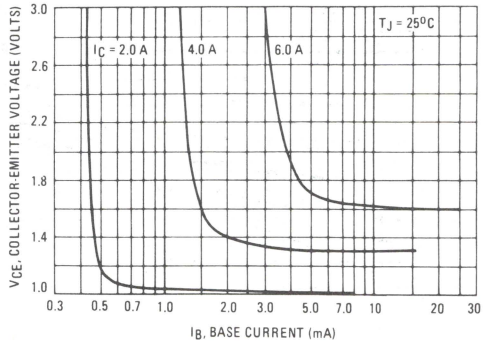

FIGURE 10 – "ON" VOLTAGES

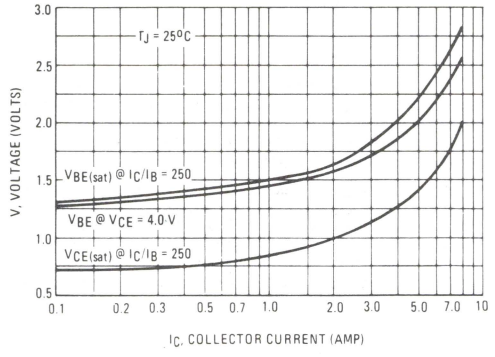

FIGURE 11 – TEMPERATURE COEFFICIENTS

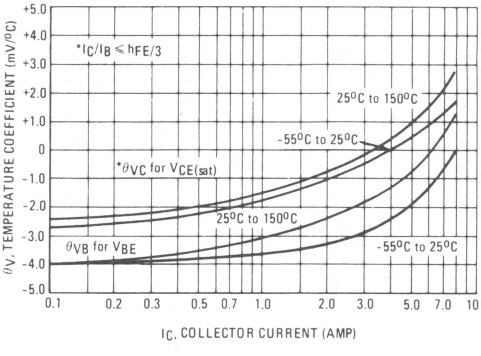

3

FIGURE 12 – COLLECTOR CUT-OFF REGION

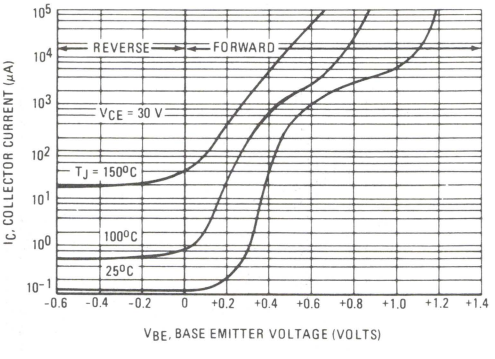

FIGURE 13 – DARLINGTON SCHEMATIC



MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6420 thru 2N6422
See Page 3-20

2N6436
2N6437, 2N6438

HIGH-POWER PNP SILICON TRANSISTORS

. . . designed for use in industrial-military power amplifier and switching circuit applications.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 80 Vdc (Min) – 2N6436
  = 100 Vdc (Min) – 2N6437
  = 120 Vdc (Min) – 2N6438
- High DC Current Gain –
  h_{FE} = 20-80 @ I_C = 10 Adc
  = 12 (Min) @ I_C = 25 Adc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) @ I_C = 10 Adc
- Fast Switching Times @ I_C = 10 Adc
  t_r = 0.3 μs (Max)
  t_s = 1.0 μs (Max)
  t_f = 0.25 μs (Max)
- Complement to NPN 2N6338 thru 2N6341

25 AMPERE
POWER TRANSISTORS
PNP SILICON
80, 100, 120 VOLTS
200 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6436	2N6437	2N6438	Unit
Collector-Base Voltage	V_{CB}	100	120	140	Vdc
Collector-Emitter Voltage	V_{CEO}	80	100	120	Vdc
Emitter-Base Voltage	V_{EB}	← 6.0 →			Vdc
Collector Current – Continuous Peak	I_C	← 25 → ← 50 →			Adc
Base Current	I_B	← 10 →			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	← 200 → ← 1.14 →			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +200 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.875	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 – POWER DERATING

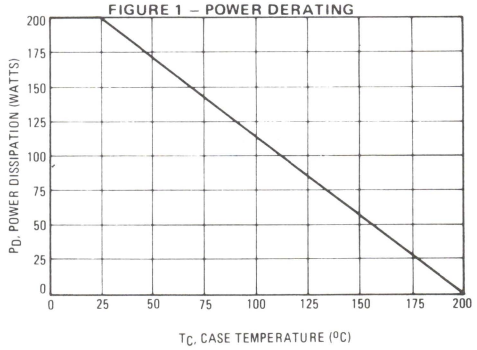

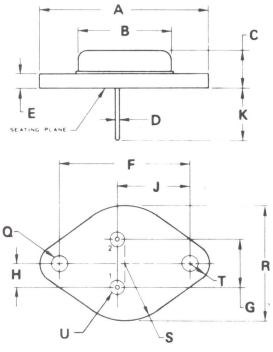

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120

CASE 1–04

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 50 mAdc, I_B = 0)	2N6436		80	–	
	2N6437		100	–	
	2N6438		120	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 40 Vdc, I_B = 0)	2N6436		–	50	
(V_{CE} = 50 Vdc, I_B = 0)	2N6437		–	50	
(V_{CE} = 60 Vdc, I_B = 0)	2N6438		–	50	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 90 Vdc, $V_{BE(off)}$ = −1.5 Vdc)	2N6436		–	10	
(V_{CE} = 110 Vdc, $V_{BE(off)}$ = −1.5 Vdc)	2N6437		–	10	
(V_{CE} = 130 Vdc, $V_{BE(off)}$ = −1.5 Vdc)	2N6438		–	10	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = −1.5 Vdc, T_C = 150°C)	2N6436		–	1.0	mAdc
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = −1.5 Vdc, T_C = 150°C)	2N6437		–	1.0	
(V_{CE} = 120 Vdc, $V_{BE(off)}$ = −1.5 Vdc, T_C = 150°C)	2N6438		–	1.0	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 100 Vdc, I_E = 0)	2N6436		–	10	
(V_{CB} = 120 Vdc, I_E = 0)	2N6437		–	10	
(V_{CB} = 140 Vdc, I_E = 0)	2N6438		–	10	
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	–	100	μAdc
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)			30	–	
(I_C = 10 Adc, V_{CE} = 2.0 Vdc)			20	120	
(I_C = 25 Adc, V_{CE} = 2.0 Vdc)			12	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)			–	1.0	
(I_C = 25 Adc, I_B = 2.5 Adc)			–	1.8	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 1.0 Adc)			–	1.8	
(I_C = 25 Adc, I_B = 2.5 Adc)			–	2.5	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)		f_T	40	–	MHz
Output Capacitance (V_{CE} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	700	pF
SWITCHING CHARACTERISTICS					
Rise Time (V_{CC} = 80 Vdc, I_C = 10 A, $V_{BE(off)}$ = 6.0 Vdc, I_{B1} = 1.0 Adc)		t_r	–	0.3	μs
Storage (V_{CC} = 80 Vdc, I_C = 10 A, $V_{BE(off)}$ = 6.0 Vdc, I_{B1} = I_{B2} = 1.0 Adc)		t_s	–	1.0	μs
Fall Time (V_{CC} = 80 Vdc, I_C = 10 A, $V_{BE(off)}$ = 6.0 Vdc, I_{B1} = I_{B2} = 1.0 Adc)		t_f	–	0.25	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

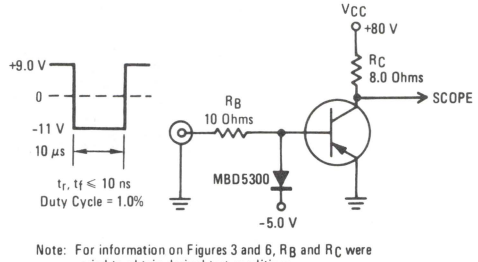

Note: For information on Figures 3 and 6, R_B and R_C were varied to obtain desired test conditions.

FIGURE 3 – TURN-ON TIME

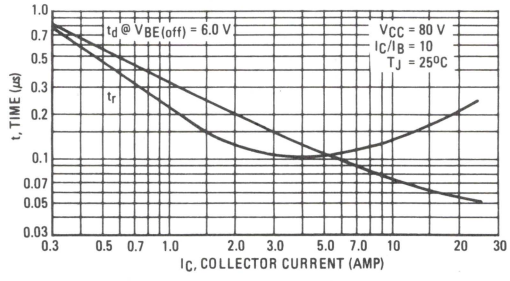

FIGURE 4 – THERMAL RESPONSE

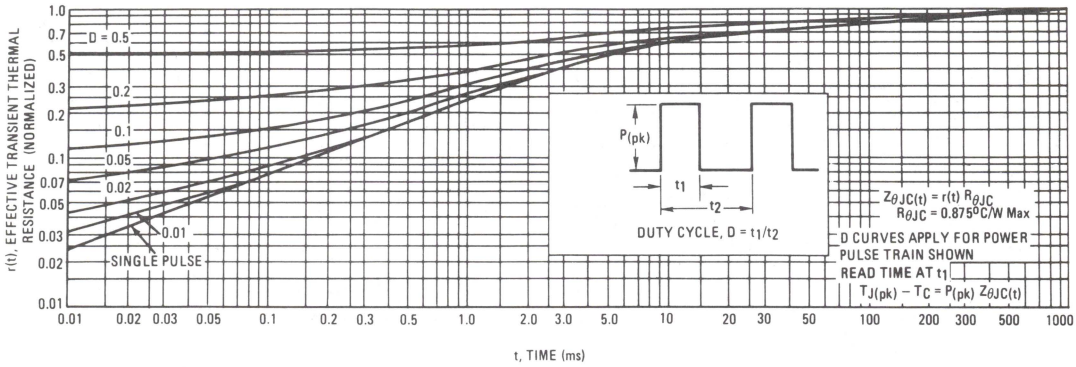

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

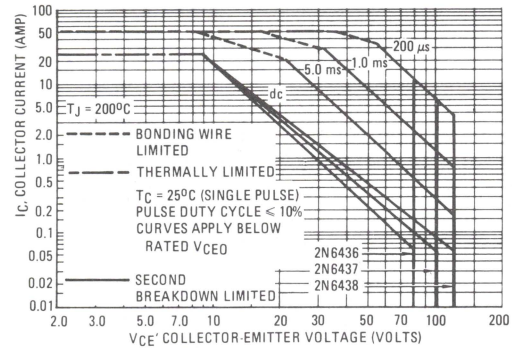

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

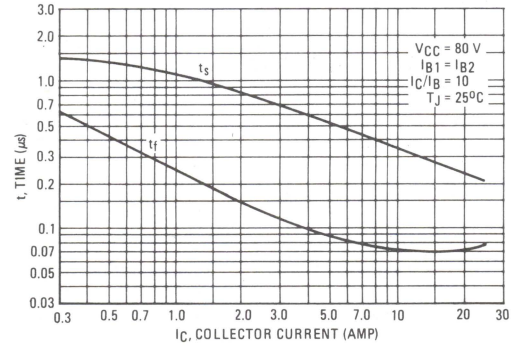

FIGURE 7 – CAPACITANCE

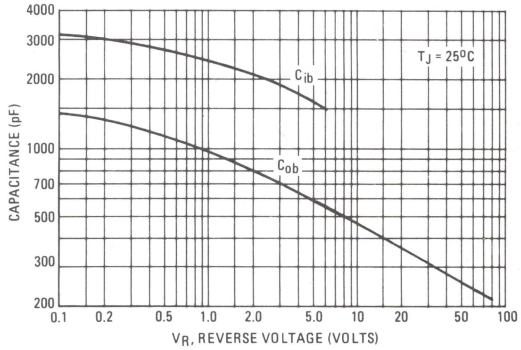

3

FIGURE 8 – DC CURRENT GAIN

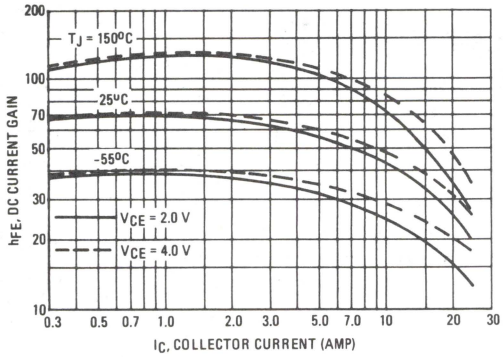

FIGURE 9 – COLLECTOR SATURATION REGION

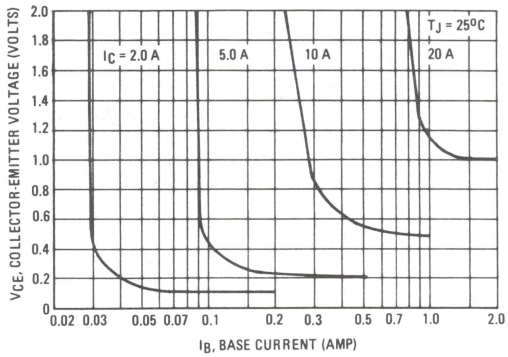

FIGURE 10 – "ON" VOLTAGE

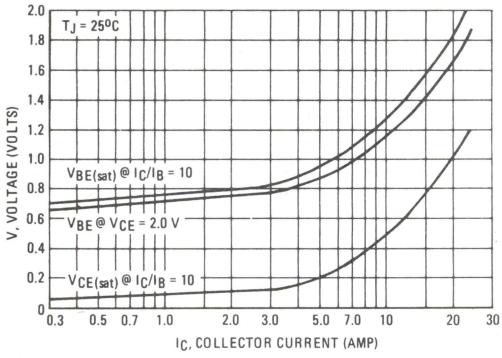

FIGURE 11 – TEMPERATURE COEFFICIENTS

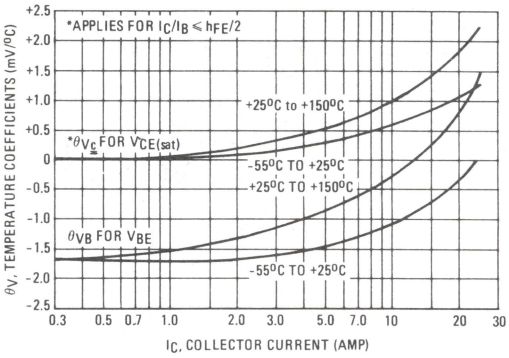

3

FIGURE 12 – COLLECTOR CUT-OFF REGION

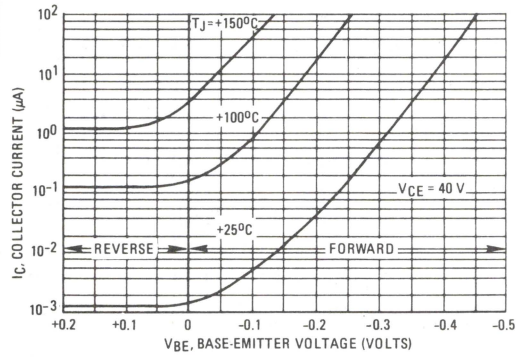

FIGURE 13 – BASE CUT-OFF REGION

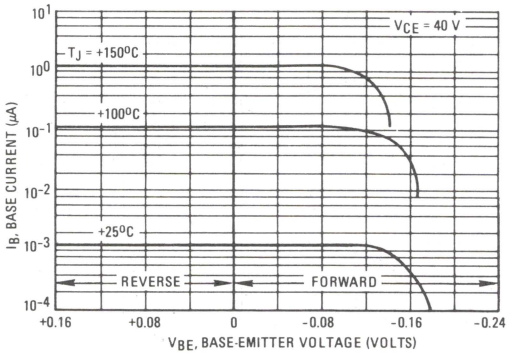

NPN 2N6486 2N6487 2N6488
PNP 2N6489 2N6490 2N6491

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general-purpose amplifier and switching applications.

- DC Current Gain Specified to 15 Amperes
  h_{FE} = 20–150 @ I_C = 5.0 Adc
  = 5.0 (Min) @ I_C = 15 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO\ (sus)}$ = 40 Vdc (Min) – 2N6486, 2N6489
  = 60 Vdc (Min) – 2N6487, 2N6490
  = 80 Vdc (Min) – 2N6488, 2N6491
- High Current Gain – Bandwidth Product
  f_T = 5.0 MHz (Min) @ I_C = 1.0 Adc
- TO-220AB Compact Package
- TO-66 Leadform Also Available

15 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

40-60-80 VOLTS
75 WATTS



***MAXIMUM RATINGS**

Rating	Symbol	2N6486 2N6489	2N6487 2N6490	2N6488 2N6491	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Collector-Base Voltage	V_{CB}	50	70	90	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current – Continuous	I_C	15			Adc
Base Current	I_B	5.0			Adc
Total Power Dissipation @ T_C = 25°C	P_D	75			Watts
Derate above 25°C		0.6			W/°C
Total Power Dissipation @ T_A = 25°C	P_D	1.8			Watts
Derate above 25°C		0.014			W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.67	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	70	°C/W

*Indicates JEDEC Registered Data

FIGURE 1 – POWER DERATING

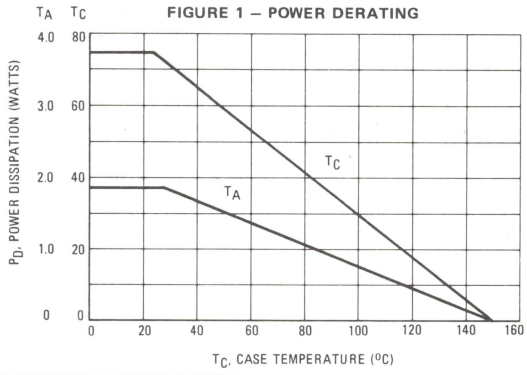

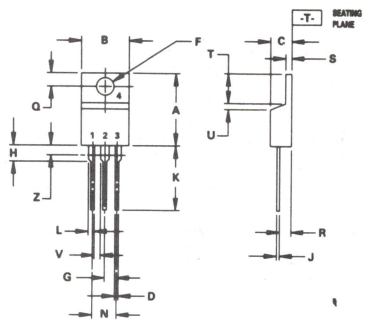

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	2N6486, 2N6489		40	–	
	2N6487, 2N6490		60	–	
	2N6488, 2N6491		80	–	
Collector-Emitter Sustaining Voltage (1)		V_{CEX}			Vdc
(I_C = 200 mAdc, V_{BE} = 1.5 Vdc)	2N6486, 2N6489		50	–	
	2N6487, 2N6490		70	–	
	2N6488, 2N6491		90	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 20 Vdc, I_B = 0)	2N6486, 2N6489		–	1.0	
(V_{CE} = 30 Vdc, I_B = 0)	2N6487, 2N6490		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	2N6488, 2N6491		–	1.0	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 45 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6486, 2N6489		–	500	
(V_{CE} = 65 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6487, 2N6490		–	500	
(V_{CE} = 85 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	2N6488, 2N6491		–	500	
(V_{CE} = 40 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6486, 2N6489		–	5.0	mAdc
(V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6487, 2N6490		–	5.0	
(V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	2N6488, 2N6491		–	5.0	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)			20	150	
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 5.0 Adc, I_B = 0.5 Adc)			–	1.3	
(I_C = 15 Adc, I_B = 5.0 Adc)			–	3.5	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)			–	1.3	
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)			–	3.5	
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2)		f_T	5.0	–	MHz
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f_{test} = 1.0 MHz)					
Small-Signal Current Gain		h_{fe}	25	–	–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 kHz)					

*Indicates JEDEC Registered Data.

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2)$f_T = |h_{fe}| \bullet f_{test}$.

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

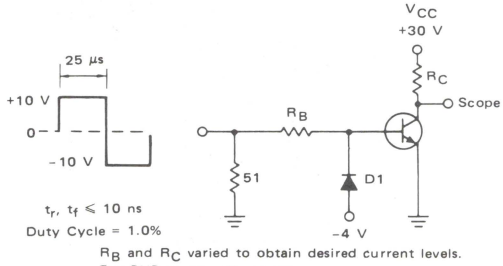

t_r, t_f ≤ 10 ns
Duty Cycle = 1.0%

R_B and R_C varied to obtain desired current levels.
For PNP reverse all polarities.

D1 must be fast recovery type, e.g.:
MBD5300 used above $I_B \approx 100$ mA
MSD6100 used below $I_B \approx 100$ mA

FIGURE 3 – TURN-ON TIME

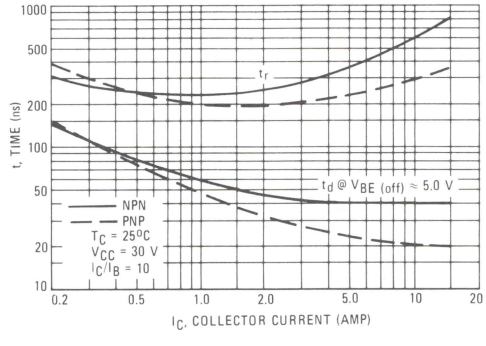

FIGURE 4 – THERMAL RESPONSE

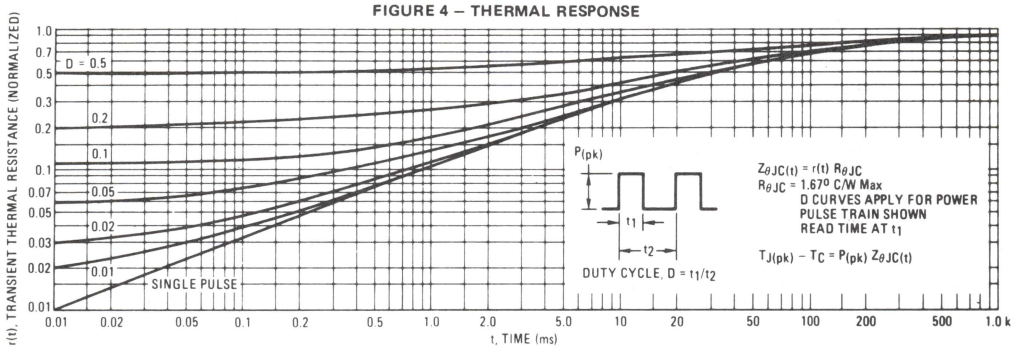

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

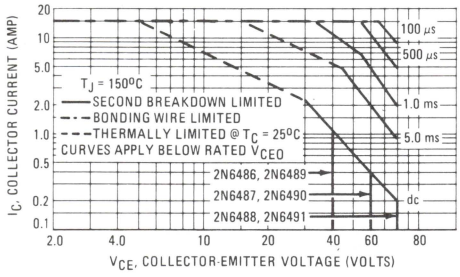

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^{\circ}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown

FIGURE 6 – TURN-OFF TIME

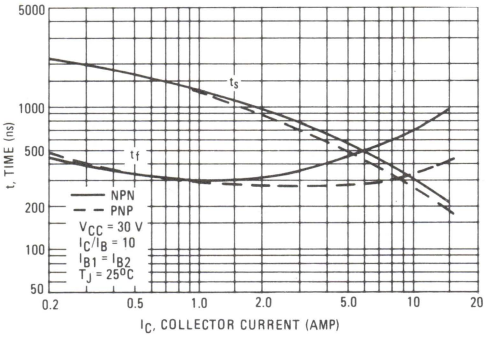

FIGURE 7 – CAPACITANCES

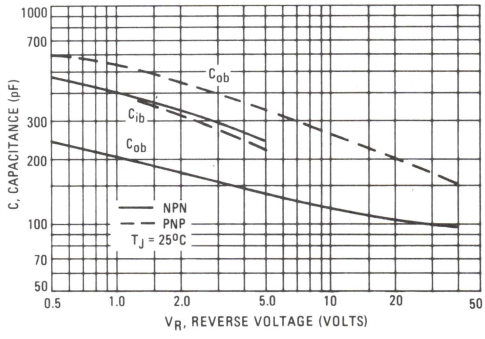

3

NPN
2N6486, 2N6487, 2N6488

PNP
2N6489, 2N6490, 2N6491

FIGURE 8 – DC CURRENT GAIN

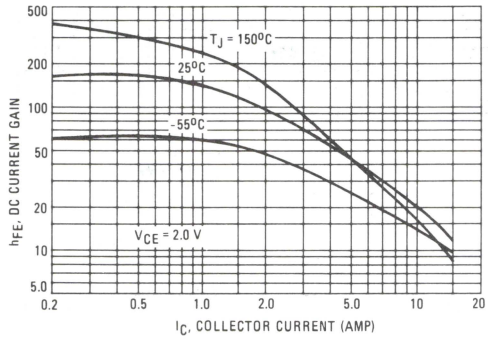

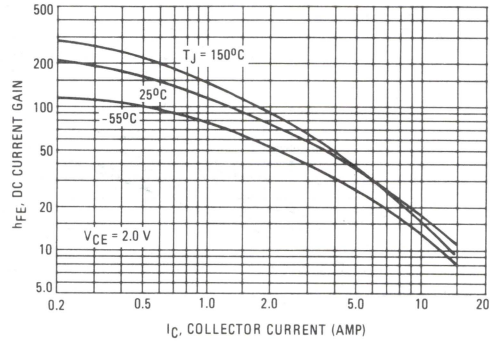

FIGURE 9 – COLLECTOR SATURATION REGION

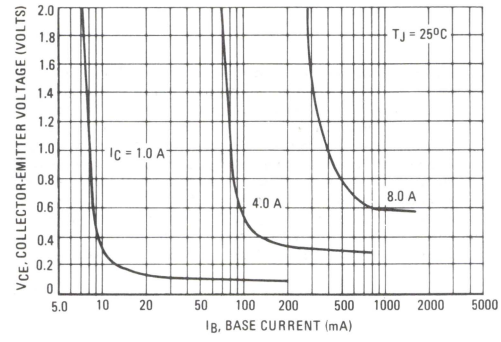

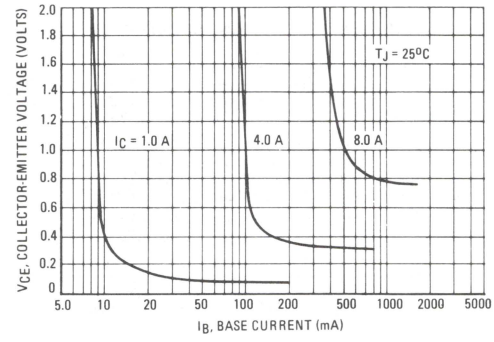

3

FIGURE 10 – "ON" VOLTAGES

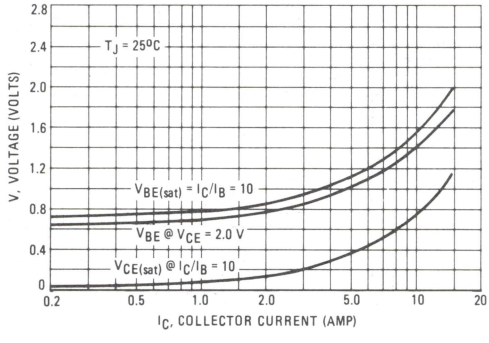

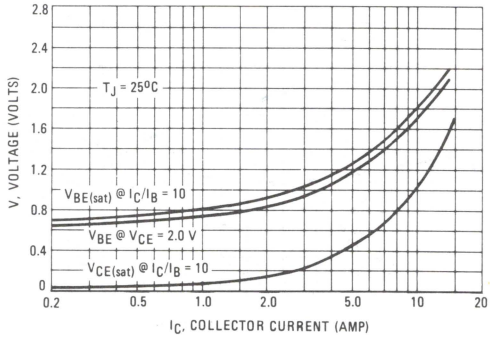

2N6497
2N6498

HIGH VOLTAGE NPN SILICON POWER TRANSISTORS

· · · designed for high voltage inverters, switching regulators and line-operated amplifier applications. Especially well suited for switching power supply applications.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 250 Vdc (Min) – 2N6497
  = 300 Vdc (Min) – 2N6498
- Excellent DC Current Gain –
  h_{FE} = 10 – 75 @ I_C = 2.5 Adc
- Low Collector-Emitter Saturation Voltage @ I_C = 2.5 Adc –
  $V_{CE(sat)}$ = 1.0 Vdc (Max) – 2N6497
  = 1.25 Vdc (Max) – 2N6498

5 AMPERE
POWER TRANSISTORS
NPN SILICON

250 & 300 VOLTS
80 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6497	2N6498	Unit
Collector-Emitter Voltage	V_{CEO}	250	300	Vdc
Collector-Base Voltage	V_{CB}	350	400	Vdc
Emitter-Base Voltage	V_{EB}	← 6.0 →		Vdc
Collector Current – Continuous – Peak	I_C	← 5.0 → ← 10 →		Adc
Base Current	I_B	← 2.0 →		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	← 80 → ← 0.64 →		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +150 →		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W

*Indicates JEDEC Registered Data.

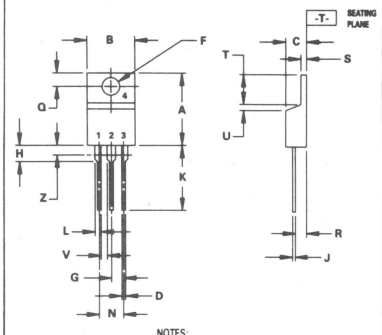

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$				Vdc
(I_C = 25 mAdc, I_B = 0)	2N6497		250	–	–	
	2N6498		300	–	–	
Collector Cutoff Current		I_{CEX}				mAdc
(V_{CE} = 350 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6497		–	–	1.0	
(V_{CE} = 400 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	2N6498		–	–	1.0	
(V_{CE} = 175 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	2N6497		–	–	10	
(V_{CE} = 200 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	2N6498		–	–	10	
Emitter Cutoff Current		I_{EBO}	–	–	1.0	mAdc
(V_{BE} = 6.0 Vdc, I_C = 0)						
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				–
(I_C = 2.5 Adc, V_{CE} = 10 Vdc)			10	–	75	
(I_C = 5.0 Adc, V_{CE} = 10 Vdc)			3.0	–	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 500 mAdc)	2N6497		–	–	1.0	
	2N6498		–	–	1.25	
(I_C = 5.0 Adc, I_B = 2.0 Adc)	All Devices		–	–	5.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 500 mAdc)			–	–	1.5	
(I_C = 5.0 Adc, I_B = 2.0 Adc)			–	–	2.5	
DYNAMIC CHARACTERISTICS						
Current-Gain—Bandwidth Product		f_T	5.0	–	–	MHz
(I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)						
Output Capacitance		C_{ob}	–	–	150	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)						
SWITCHING CHARACTERISTICS						
Rise Time		t_r	–	0.4	1.0	μs
(V_{CC} = 125 Vdc, I_C = 2.5 Adc, I_{B1} = 0.5 Adc)						
Storage Time		t_s	–	1.4	2.5	μs
(V_{CC} = 125 Vdc, I_C = 2.5 Adc, V_{BE} = 5.0 Vdc, I_{B1} = I_{B2} = 0.5 Adc)						
Fall Time		t_f	–	0.45	1.0	μs
(V_{CC} = 125 Vdc, I_C = 2.5 Adc, I_{B1} = I_{B2} = 0.5 Adc)						

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – SWITCHING TIME TEST CIRCUIT

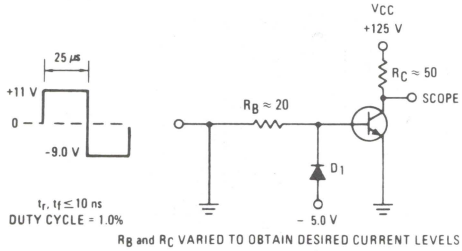

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈ 100 mA
MSD6100 USED BELOW I_B ≈ 100 mA

FIGURE 2 – TURN-ON TIME

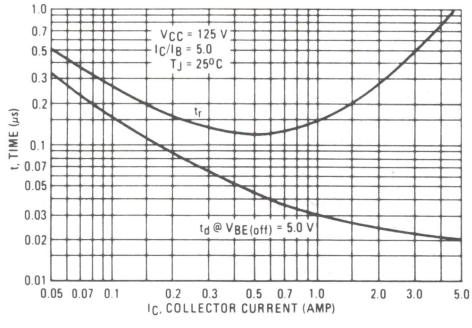

FIGURE 3 – THERMAL RESPONSE

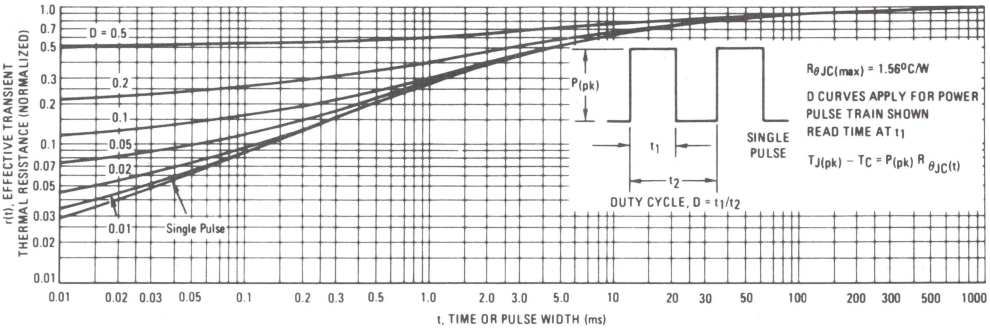

FIGURE 4 – ACTIVE-REGION SAFE OPERATING AREA

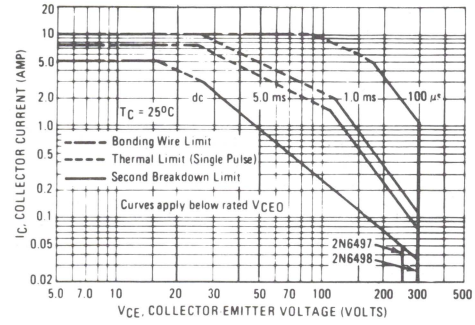

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 4 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 3. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 4 may be found at any case temperature by using the appropriate curve on Figure 6.

FIGURE 5 – TURN-OFF TIME

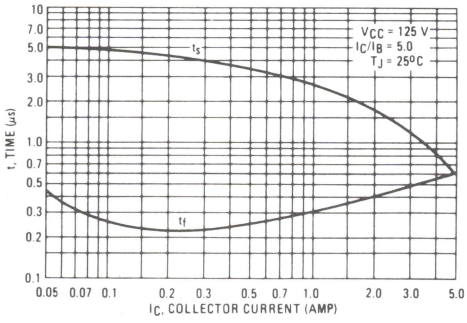

FIGURE 6 – POWER DERATING

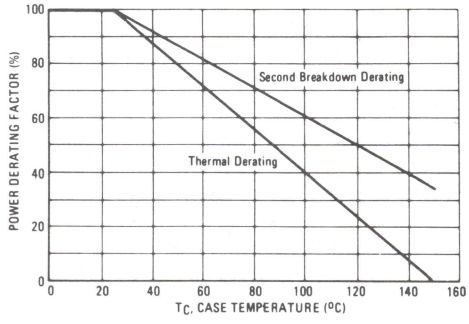

3

FIGURE 7 – DC CURRENT GAIN

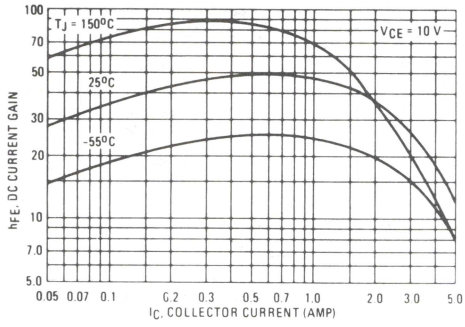

FIGURE 8 – COLLECTOR SATURATION REGION

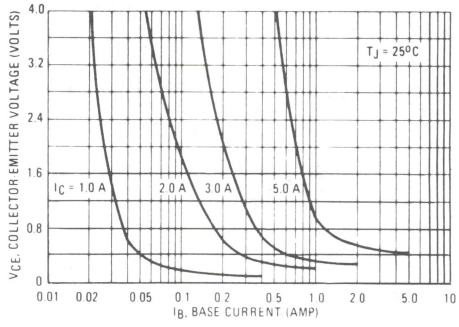

FIGURE 9 – "ON" VOLTAGES

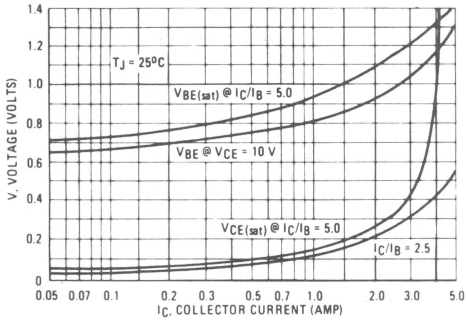

FIGURE 10 – TEMPERATURE COEFFICIENTS

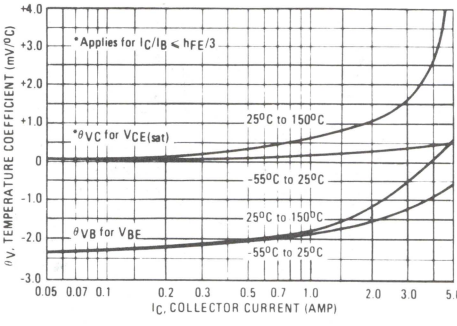

3

FIGURE 11 – COLLECTOR CUTOFF REGION

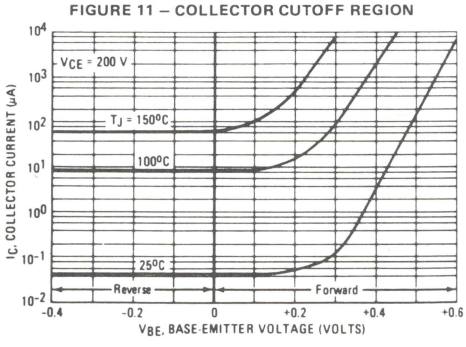

FIGURE 12 – CAPACITANCE

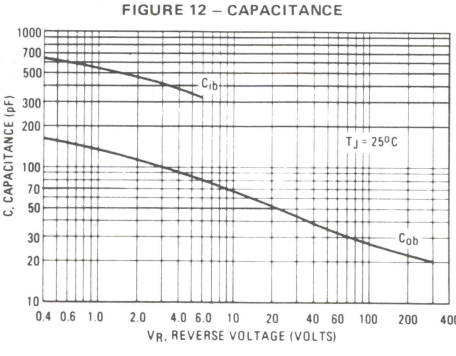

2N6543

Designers Data Sheet

5 AMPERE
NPN SILICON
POWER TRANSISTOR
400 VOLTS
100 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

This device is designed for high-voltage, high-speed, power switching inductive circuits where fall time is critical. It is particularly suited for 115 and 200 volt line operated SWITCHMODE applications such as:

- Switching Regulators
- PWM Inverters and Motor Controls
- Solenoid and Relay Drivers
- Deflection Circuits

Specification Features –

High Temperature Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

***MAXIMUM RATINGS**

Rating	Symbol	2N6543	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	Vdc
Collector-Emitter Voltage	$V_{CEX(sus)}$	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	8.0	Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	5.0 10	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	5.0 10	Adc
Emitter Current – Continuous – Peak (1)	I_E I_{EM}	10 20	Adc
Total Power Dissipation @ $T_C = 25^oC$ @ $T_C = 100^oC$ Derate above 25^oC	P_D	100 57.2 0.57	Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	$^oC/W$
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	^oC

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

2N6543

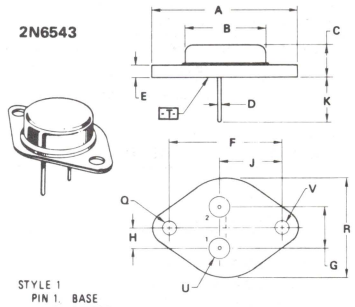

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀0.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS (1)				
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	400	–	Vdc
Collector-Emitter Sustaining Voltage (Table 2, Figure 12) (I_C = 2.6 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C) (I_C = 5.0 Adc, V_{clamp} = Rated V_{CEO} -100 V, T_C = 100°C)	$V_{CEX(sus)}$	450 300	– – – –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	0.5 3.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	–	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 8.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased t = 1.0 s (non-repetitive) (V_{CE} = 100 Vdc)	$I_{S/b}$	0.2 (See Figure 11)	–	Adc
Clamped Inductive SOA with base reverse biased	RBSOA	(See Figure 12)		
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc) (I_C = 3.0 Adc, V_{CE} = 2.0 Vdc)	h_{FE}	12 7.0	60 35	–
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) (I_C = 5.0 Adc, I_B = 1.0 Adc) (I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)	$V_{CE(sat)}$	– – –	1.0 5.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) (I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)	$V_{BE(sat)}$	– –	1.4 1.4	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain – Bandwidth Product (I_C = 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)	f_T	6.0	28	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 MHz)	C_{ob}	50	200	pF
SWITCHING CHARACTERISTICS				
Resistive Load (Table 2)				
Delay Time	(V_{CC} = 250 Vdc, I_C = 3.0 A, I_{B1} = I_{B2} = 0.6 A, t_p = 100 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.05	μs
Rise Time		t_r	–	0.7	μs
Storage Time		t_s	–	4.0	μs
Fall Time		t_f	–	0.8	μs
Inductive Load, Clamped (Table 2)		**Symbol**	**Typ**	**Max**	**Unit**
Storage Time	(I_C = 3.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 0.6 A, $V_{BE(off)}$ = 5.0 Vdc, T_C = 100°C)	t_{sv}	–	4.0	μs
Crossover Time		t_c	0.6	–	μs
Fall Time		t_{fi}	–	0.8	μs
Storage Time	(I_C = 3.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 0.6 A, $V_{BE(off)}$ = 5.0 Vdc, T_C = 25°C)	t_{sv}	0.8	–	μs
Crossover Time		t_c	0.3	–	μs
Fall Time		t_{fi}	0.2	–	μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

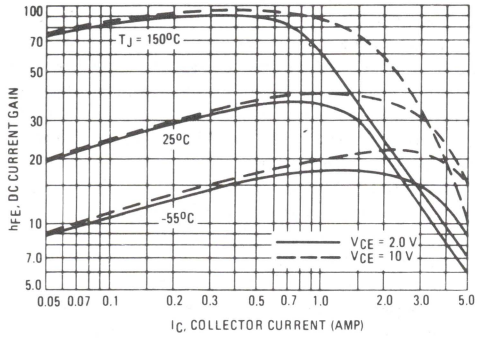

FIGURE 2 – COLLECTOR SATURATION REGION

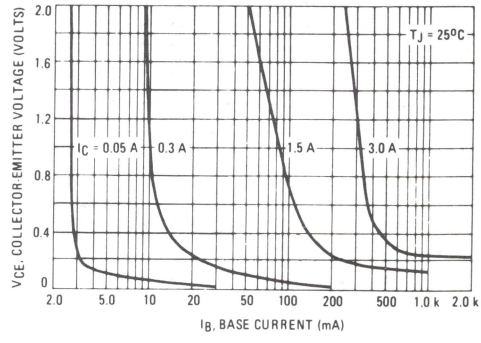

FIGURE 3 – "ON" VOLTAGE

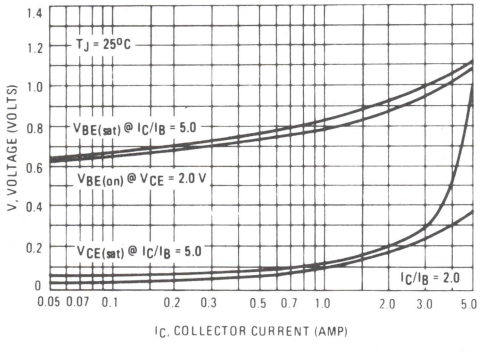

FIGURE 4 – TEMPERATURE COEFFICIENTS

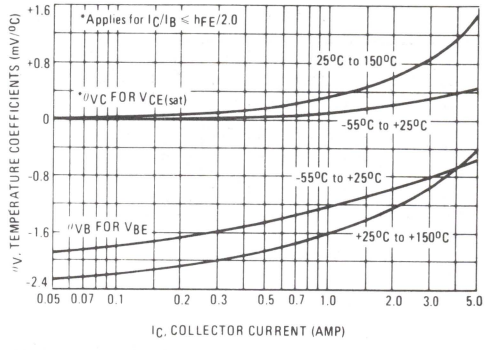

FIGURE 5 – COLLECTOR CUTOFF REGION

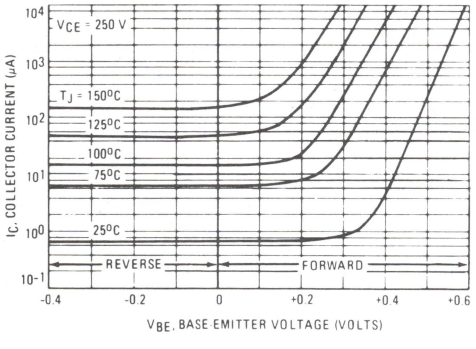

FIGURE 6 – CAPACITANCE

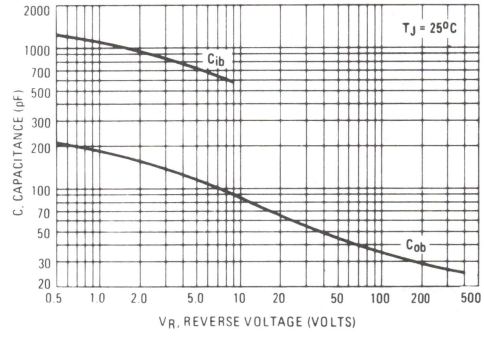

3

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

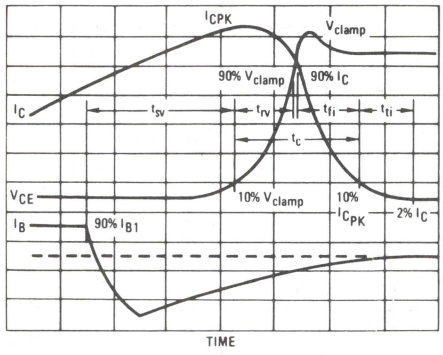

TABLE 1 – INDUCTIVE SWITCHING PERFORMANCE

I_C (A)	T_C °C	t_{sv} μs	t_{rv} μs	t_{fi} μs	t_{ti} μs	t_c μs
1.0	25	0.70	0.22	0.21	0.23	0.66
	100	1.20	0.37	0.19	0.39	0.95
3.0	25	1.10	0.09	0.12	0.08	0.29
	100	1.60	0.42	0.19	0.40	1.01
5.0	25	1.10	0.16	0.19	0.11	0.46
	100	1.70	0.45	0.37	0.26	1.08

Note: All Data Recorded in the Inductive Switching Circuit Shown in Table 2.

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

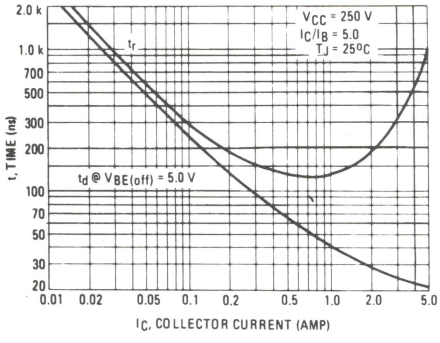

FIGURE 9 – TURN-OFF TIME

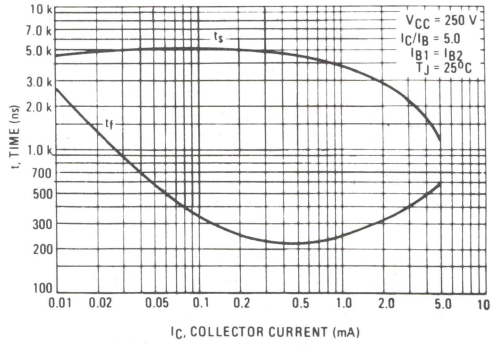

TABLE 2 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	$V_{CEX(sus)}$ AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20 Ω, 0, 1, 2 PW Varied to Attain I_C = 100 mA	Drive Circuit: +4 V, PW, -4 V, 1 k, 0.01 μF, 0.5 μF, 20, 100, 0.1 μF, Q1, Q2, Q3, Q4, +V_{in}, -5 V Set +V_{in} to Obtain a Forced h_{FE} = 5 and Adjust PW to Attain Specified Peak I_C. Duty Cycle < 3% f = 1 kHz Q1 2N6408 Q3 2N5875 Q2 2N6406 Q4 2N5877 Diodes 1N4933	≈ +13 V, 0, ≈ -11 V, 1, 2 I_C = 3A PW ≈ 100 μs t_r < 5 ns t_f < 50 ns Duty Cycle < 2%
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} (Unclamped)	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = Rated V_{CEX} Value	V_{CC} = 250 V R_L = 83 Ω D1 = 1N5820 or Equiv. R_B = 20 Ω
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω See Above For Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t V_{CE}, V_{CE} or V_{clamp}, Time, t_2, t t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope-Tektronics 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, R_B, TUT, 2, R_L, V_{CC}, D1, -5 V

3

FIGURE 10 – THERMAL RESPONSE

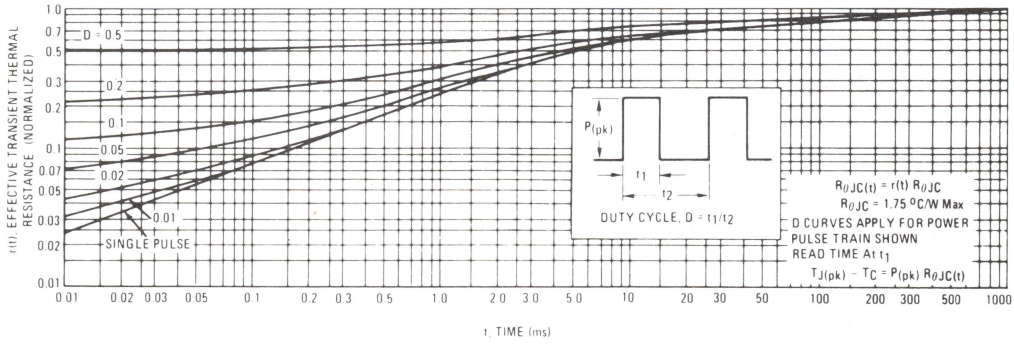

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATING AREA

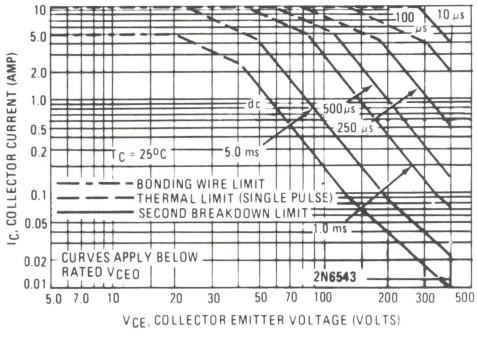

FIGURE 12 – REVERSE BIAS SAFE OPERATING AREA

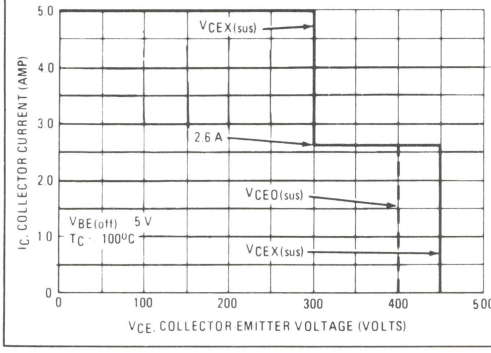

FIGURE 13 – POWER DERATING

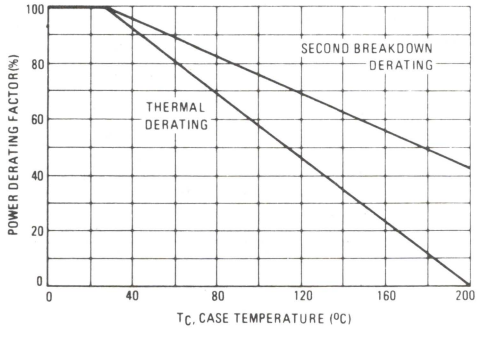

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete RBSOA characteristics.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6545

Designers Data Sheet

8 AMPERE
NPN SILICON
POWER TRANSISTOR

400 VOLTS
125 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTOR

The 2N6545 transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for 115 and 220 volt line operated switch-mode applications such as:

- Switching Regulators
- PWM Inverters and Motor Controls
- Solenoid and Relay Drivers
- Deflection Circuits

Specification Features –

High Temperature Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

*MAXIMUM RATINGS

Rating	Symbol	2N6545	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	Vdc
Collector-Emitter Voltage	$V_{CEX(sus)}$	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	9.0	Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	8.0 16	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	8.0 16	Adc
Emitter Current – Continuous – Peak (1)	I_E I_{EM}	16 32	Adc
Total Power Dissipation @ $T_C = 25^oC$ @ $T_C = 100^oC$ Derate above 25^oC	P_D	125 71.5 0.714	Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	$^oC/W$
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	^oC

*Indicates JEDEC Registered Data

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

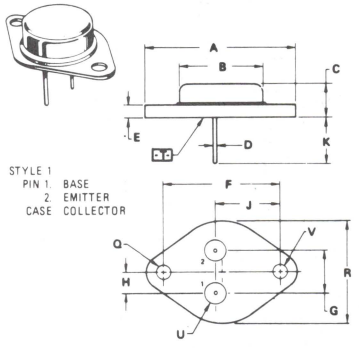

STYLE 1
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
⌖ ⌀.13 (0.005) M T V M
FOR LEADS:
⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS (1)				
Collector-Emitter Sustaining Voltage (I_C = 100 mA, I_B = 0) 2N6545	$V_{CEO(sus)}$	400	–	Vdc
Collector-Emitter Sustaining Voltage (I_C = 4.5 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C)	$V_{CEX(sus)}$	450	–	Vdc
(I_C = 8.0 A, V_{clamp} = Rated V_{CEO} -100 V, T_C = 100°C)		300	–	
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)	I_{CEV}	–	0.5	mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		–	2.5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	–	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 9.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased t = 1.0 s (non-repetitive) (V_{CE} = 100 Vdc)	$I_{S/b}$	0.2	–	Adc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 2.5 Adc, V_{CE} = 3.0 Vdc)	h_{FE}	12	60	–
(I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)		7.0	35	
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc)	$V_{CE(sat)}$	–	1.5	Vdc
(I_C = 8.0 Adc, I_B = 2.0 Adc)		–	5.0	
(I_C = 5.0 Adc, I_B = 1.0 Adc, T_C = 100°C)		–	2.5	
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc)	$V_{BE(sat)}$	–	1.6	Vdc
(I_C = 5.0 Adc, I_B = 1.0 Adc, T_C = 100°C)		–	1.6	
DYNAMIC CHARACTERISTICS				
Current-Gain – Bandwidth Product (I_C = 300 mAdc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)	f_T	6.0	28	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 MHz)	C_{ob}	75	300	pF
SWITCHING CHARACTERISTICS				
Resistive Load				
Delay Time (V_{CC} = 250 Vdc, I_C = 5.0 A, I_{B1} = I_{B2} = 1.0 A, t_p = 100 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.05	μs
Rise Time	t_r	–	1.0	μs
Storage Time	t_s	–	4.0	μs
Fall Time	t_f	–	1.0	μs
Inductive Load, Clamped				
Storage Time (I_C = 5.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5.0 Vdc, T_C = 100°C)	t_s	–	4.0	μs
Fall Time	t_f	–	0.9	μs
		Typical		
Storage Time (I_C = 5.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5.0 Vdc, T_C = 25°C)	t_s	1.2		μs
Fall Time	t_f	0.18		μs

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

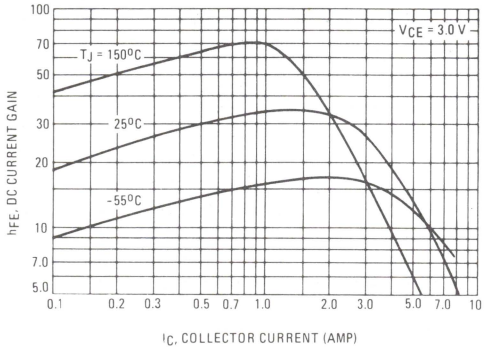

FIGURE 2 – COLLECTOR SATURATION REGION

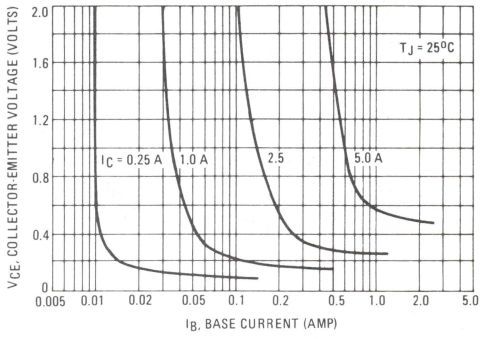

FIGURE 3 – "ON" VOLTAGE

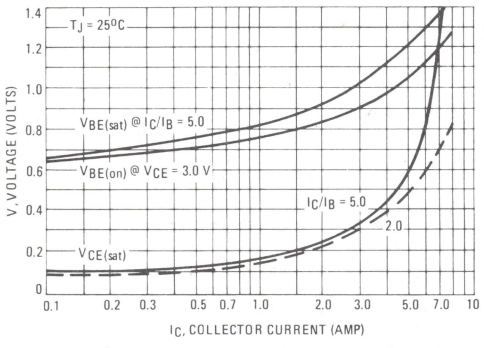

FIGURE 4 – TEMPERATURE COEFFICIENTS

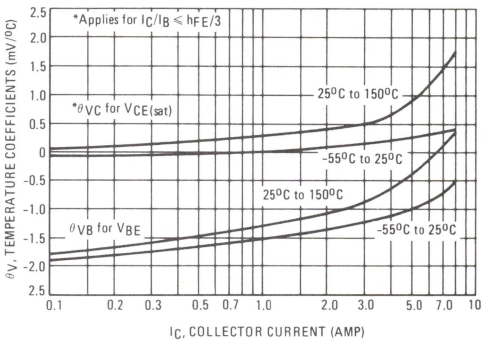

FIGURE 5 – TURN-ON TIME

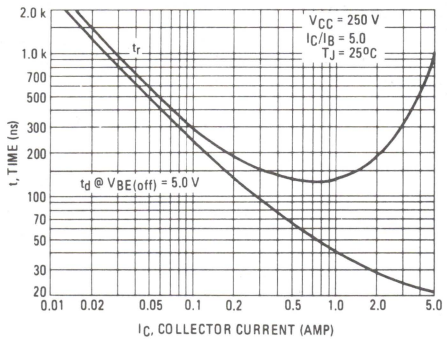

FIGURE 6 – TURN-OFF TIME

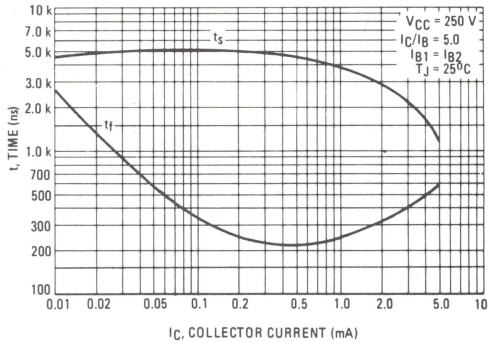

3

FIGURE 7 – FORWARD BIAS SAFE OPERATING AREA

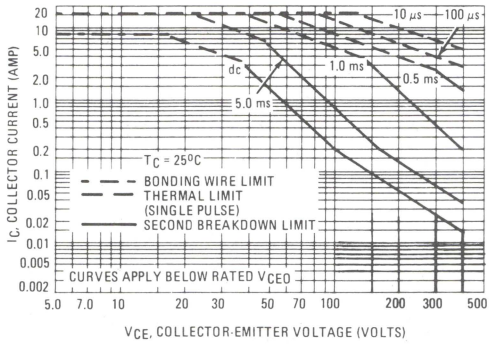

FIGURE 8 – REVERSE BIAS SAFE OPERATING AREA

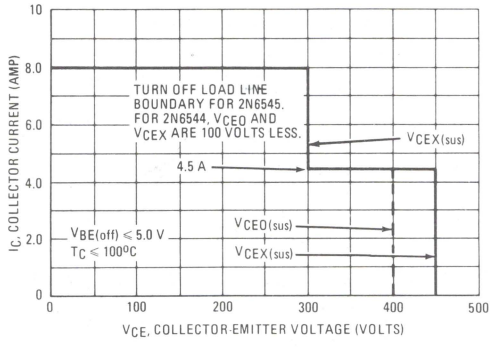

FIGURE 9 – POWER DERATING

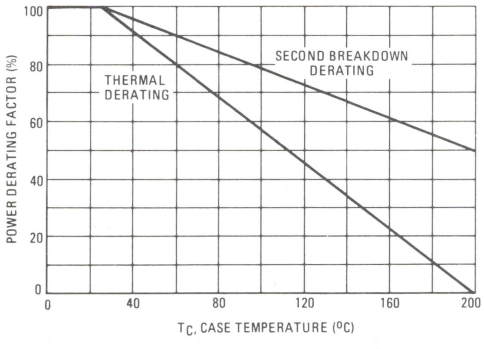

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 7 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 7 may be found at any case temperature by using the appropriate curve on Figure 9.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. The reverse biased safe operating area (Figure 8) is the boundary the load line may traverse during turn-off.

FIGURE 10 – THERMAL RESPONSE

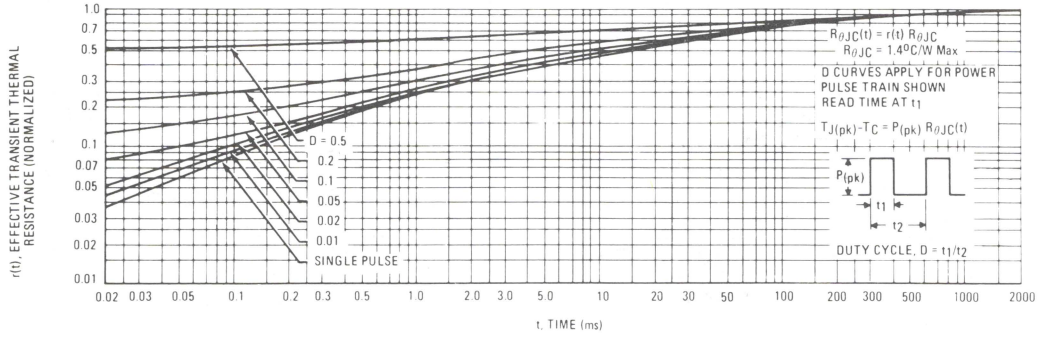

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6546
2N6547

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The 2N6546 and 2N6547 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for 115 and 220 volt line operated switch-mode applications such as:

- Switching Regulators
- PWM Inverters and Motor Controls
- Solenoid and Relay Drivers
- Deflection Circuits

Specification Features –

High Temperature Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents



15 AMPERE
NPN SILICON
POWER TRANSISTORS
300 and 400 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

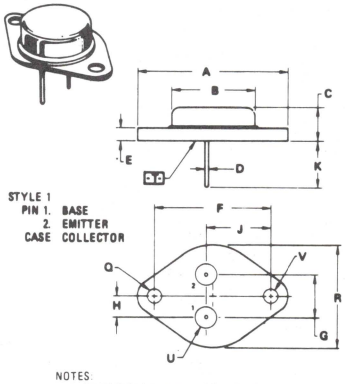

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

*MAXIMUM RATINGS

Rating	Symbol	2N6546	2N6547	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	400	Vdc
Collector-Emitter Voltage	$V_{CEX(sus)}$	350	450	Vdc
Collector-Emitter Voltage	V_{CEV}	650	850	Vdc
Emitter Base Voltage	V_{EB}	9.0		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	15 30		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	10 20		Adc
Emitter Current – Continuous – Peak (1)	I_E I_{EM}	25 50		Adc
Total Power Dissipation @ $T_C = 25^oC$ @ $T_C = 100^oC$ Derate above 25^oC	P_D	175 100 1.0		Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	$^oC/W$
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	^oC

*Indicates JEDEC Registered Data
(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage		$V_{CEO(sus)}$			Vdc
(I_C = 100 mA, I_B = 0)	2N6546		300	–	
	2N6547		400	–	
Collector-Emitter Sustaining Voltage		$V_{CEX(sus)}$			Vdc
(I_C = 8.0 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C)	2N6546		350	–	
	2N6547		450	–	
(I_C = 15 A, V_{clamp} = Rated V_{CEO} – 100 V,	2N6546		200	–	
T_C = 100°C)	2N6547		300	–	
Collector Cutoff Current		I_{CEV}			mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	1.0	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			–	4.0	
Collector Cutoff Current		I_{CER}	–	5.0	mAdc
(V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)					
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{EB} = 9.0 Vdc, I_C = 0)					
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	0.2	–	Adc
t = 1.0 s (non-repetitive) (V_{CE} = 100 Vdc)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 5.0 Adc, V_{CE} = 2.0 Vdc)			12	60	
(I_C = 10 Adc, V_{CE} = 2.0 Vdc)			6.0	30	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 2.0 Adc)			–	1.5	
(I_C = 15 Adc, I_B = 3.0 Adc)			–	5.0	
(I_C = 10 Adc, I_B = 2.0 Adc, T_C = 100°C)			–	2.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 2.0 Adc)			–	1.6	
(I_C = 10 Adc, I_B = 2.0 Adc, T_C = 100°C			–	1.6	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T	6.0	28	MHz
(I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)					
Output Capacitance		C_{ob}	125	500	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 MHz)					
SWITCHING CHARACTERISTICS					
Resistive Load					
Delay Time	(V_{CC} = 250 V, I_C = 10 A, I_{B1} = I_{B2} = 2.0 A, t_p = 100 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.05	μs
Rise Time		t_r	–	1.0	μs
Storage Time		t_s	–	4.0	μs
Fall Time		t_f	–	0.7	μs
Inductive Load, Clamped					
Storage Time	(I_C = 10 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5.0 Vdc, T_C = 100°C)	t_s	–	5.0	μs
Fall Time		t_f	–	1.5	μs
			Typical		
Storage Time	(I_C = 10 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5.0 Vdc, T_C = 25°C)	t_s	2.0		μs
Fall Time		t_f	0.09		μs

*Indicates JEDEC Registered Data.

(1) Puse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

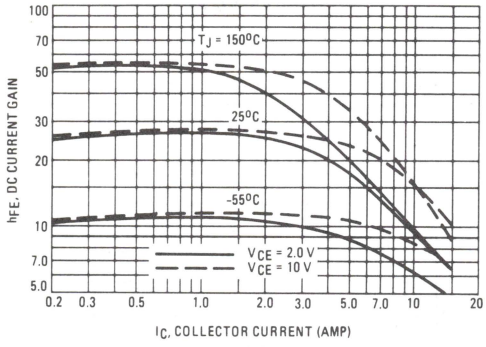

FIGURE 2 – COLLECTOR SATURATION REGION

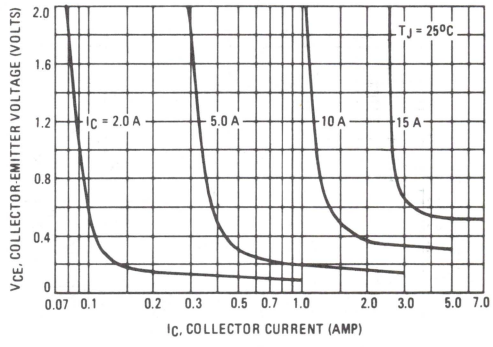

FIGURE 3 – "ON" VOLTAGE

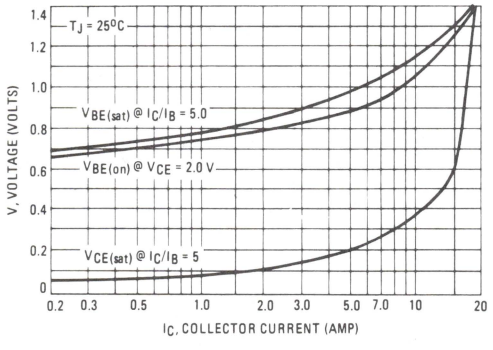

FIGURE 4 – TEMPERATURE COEFFICIENTS

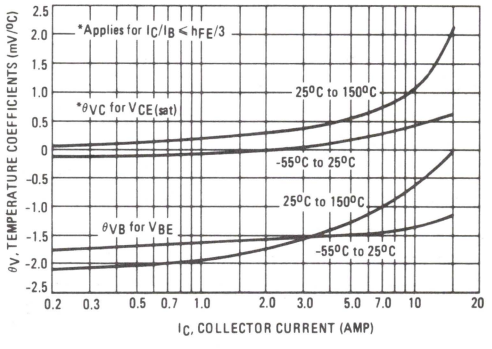

FIGURE 5 – TURN-ON TIME

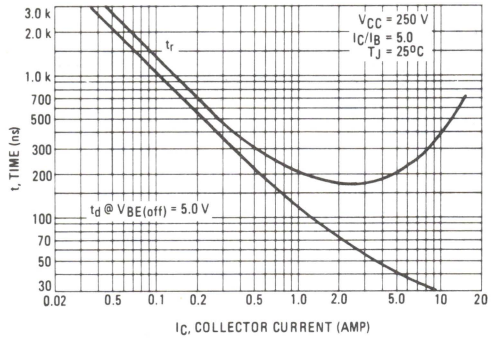

FIGURE 6 – TURN-OFF TIME

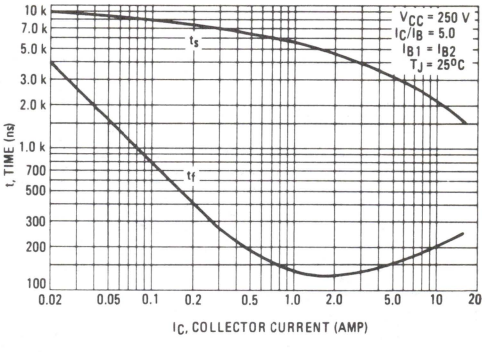

3

MAXIMUM RATED SAFE OPERATING AREAS

FIGURE 7 – FORWARD BIAS SAFE OPERATING AREA

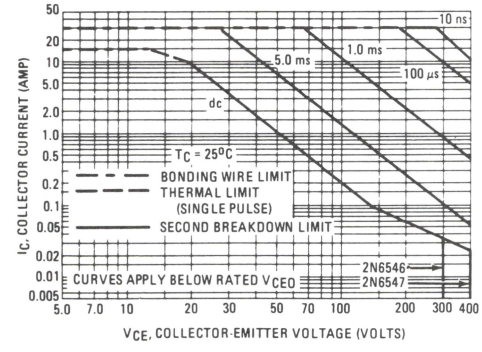

FIGURE 8 – REVERSE BIAS SAFE OPERATING AREA

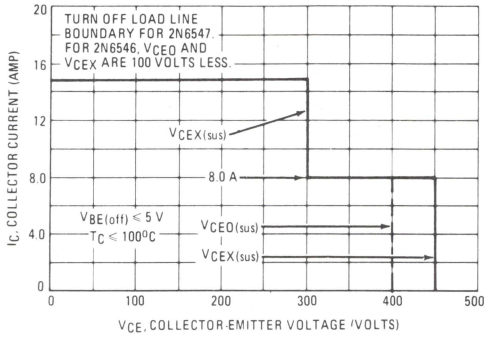

FIGURE 9 – POWER DERATING

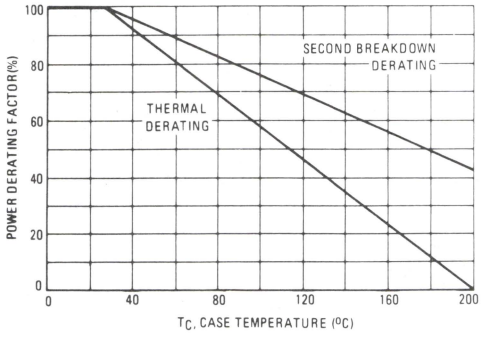

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 7 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 7 may be found at any case temperature by using the appropriate curve on Figure 9.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 10 – THERMAL RESPONSE

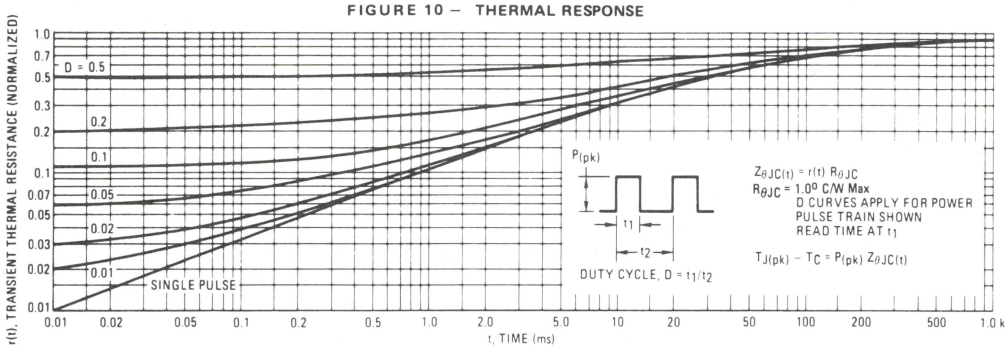

2N6576
2N6577
2N6578

NPN SILICON POWER DARLINGTON TRANSISTORS

General-purpose EpiBase power Darlington transistors, suitable for linear and switching applications.

- Replacement for 2N3055 and Driver
- High Gain Darlington Performance
- Built-In Diode Protection for Reverse Polarity Protection
- Can Be Driven from Low-Level Logic
- Popular Voltage Range
- Operating Range – –65 to +200°C

15 AMPERE
POWER TRANSISTORS
NPN SILICON
DARLINGTON
60, 90, 120 VOLTS
120 WATTS



*MAXIMUM RATINGS

Rating	Symbol	2N6576	2N6577	2N6578	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	60	90	120	Vdc
Collector-Base Voltage	V_{CB}	60	90	120	Vdc
Emitter-Base Voltage	V_{EB}	← 7.0 →			Vdc
Collector Current – Continuous – Peak	I_C	← 15 → ← 30 →			Adc
Base Current – Continuous – Peak	I_B	← 0.25 → ← 0.50 →			Adc
Emitter Current – Continuous – Peak	I_E	← 15.25 → ← 30.5 →			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	← 120 → ← 0.685 →			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← –65 to +200 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.46	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/16" from Case for 10s.	T_L	265	°C

*Indicates JEDEC Registered Data



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	22.23	–	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

CASE 11-03
TO-3

DARLINGTON SCHEMATIC



3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage(1) (I_C = 200 mAdc, I_B = 0)	2N6576	$V_{CEO(sus)}$	60	–	Vdc
	2N6577		90	–	
	2N6578		120	–	
Collector Cutoff Current (V_{CE} = Rated Value)		I_{CEO}	–	1.0	mAdc
Collector Cutoff Current (V_{CER} = Rated $V_{CEO(sus)}$ Value, R_{BE} = 10 kΩ, T_C = 150°C)		I_{CER}	–	5.0	mAdc
Collector Cutoff Current V_{CEX} = Rated $V_{CEO(sus)}$ Value, $V_{BE(off)}$ = 1.5 Vdc)		I_{CEV}	–	5.0	mAdc
Collector Cutoff Current (V_{CB} = Rated Value)		I_{CBO}	–	0.5	mAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)			100	–	
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)			500	5,000	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			2000	20,000	
(I_C = 0.4 Adc, V_{CE} = 3.0 Vdc)			200	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 15 Adc, I_B = 0.15 Adc)			–	4.0	
(I_C = 10 Adc, I_B = 0.1 Adc)			–	2.8	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 15 Adc, I_B = 0.15 Adc)			–	4.5	
(I_C = 10 Adc, I_B = 0.1 Adc)			–	3.5	
Collector-Emitter Diode Voltage Drop (I_{EC} = 15 Adc)		V_F	–	4.5	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common-Emitter Small-Signal Short-Circuit Current Transfer Ratio (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		$\lvert h_{fe} \rvert$	10	200	–
SWITCHING CHARACTERISTICS **RESISTIVE LOAD (Figure 2)**					
Delay Time	(V_{CC} = 30 Vdc, I_C = 10 Adc, I_{B1} = 0.1 Adc, t_p = 300 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.15	μs
Rise Time		t_r	–	1.0	μs
Storage Time	(V_{CC} = 30 Vdc, I_C = 10 Adc, I_{B1} = I_{B2} = 0.1 Adc, t_p = 300 μs, Duty Cycle ≤ 2.0%)	t_s	–	2.0	μs
Fall Time		t_f	–	7.0	μs

*Indicates JEDEC Registered Data

(1) Pulse test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – RATED FORWARD BIASED SAFE-OPERATING AREA

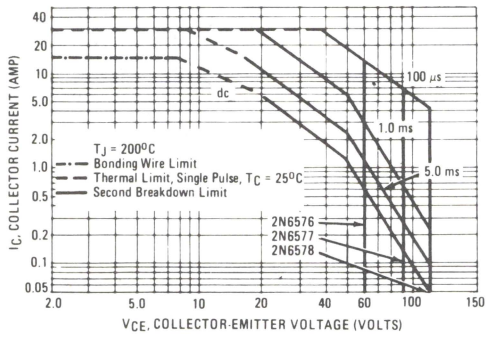

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10%.

$T_{J(pk)}$ may be calculated from the data in Figure 6. At high case temperatures thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 2 – DC CURRENT GAIN

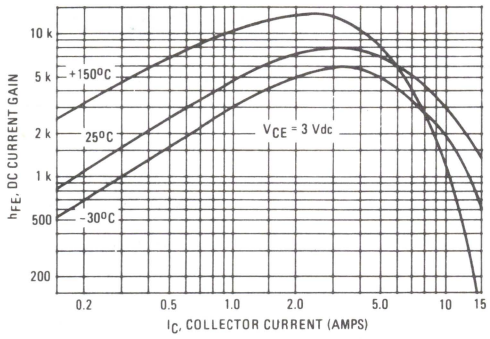

FIGURE 3 – COLLECTOR-SATURATION REGION

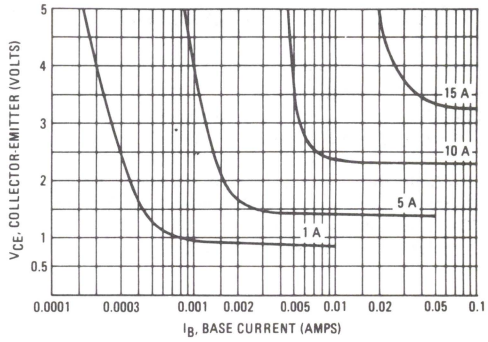

FIGURE 4 – COLLECTOR SATURATION VOLTAGE

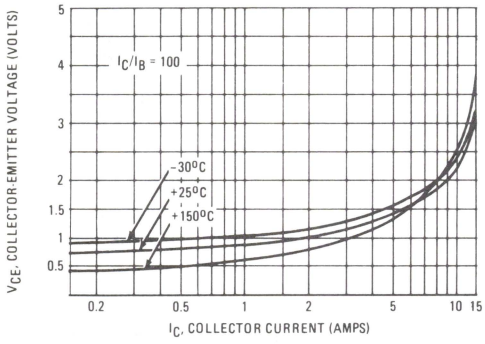

FIGURE 5 – BASE-EMITTER VOLTAGE

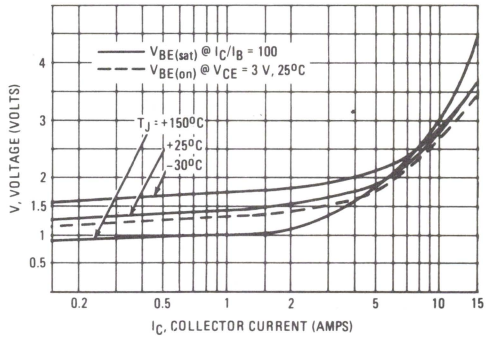

FIGURE 6 – THERMAL RESPONSE

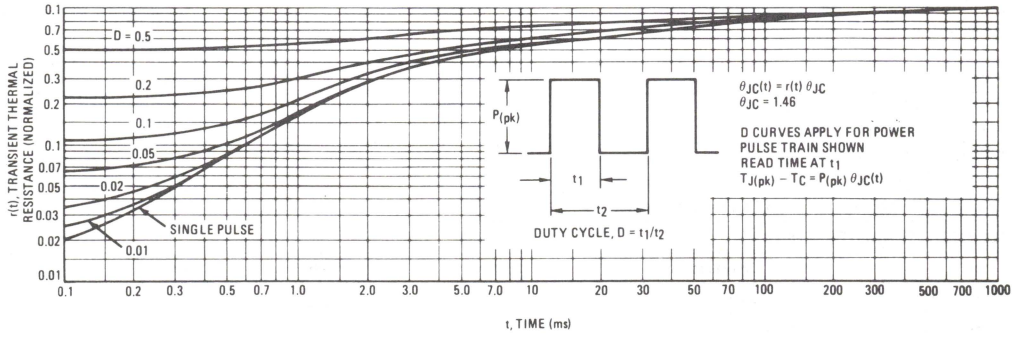

3

2N6609
See Page
3-52

Darlington Silicon Power Transistors

2N6667
2N6668

. . . designed for general-purpose amplifier and low speed switching applications.

- High DC Current Gain — h_{FE} = 3500 (Typ) @ I_C = 4 Adc
- Collector-Emitter Sustaining Voltage — @ 200 mAdc
  $V_{CEO(sus)}$ = 60 Vdc (Min) — 2N6667
  = 80 Vdc (Min) — 2N6668
- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 2 Vdc (Max) @ I_C = 5 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors
- TO-220AB Compact Package
- Complementary to 2N6387, 2N6388

PNP SILICON

DARLINGTON POWER TRANSISTORS

10 AMPERES
60–80 VOLTS
65 WATTS



Figure 1. Darlington Schematic



CASE 221A-04
TO-220AB

***MAXIMUM RATINGS**

Rating	Symbol	2N6667	2N6668	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5		Vdc
Collector Current — Continuous — Peak	I_C	10 15		Adc
Base Current	I_B	250		mAdc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	65 0.52		watts W/°C
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	2 0.016		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.92	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

* Indicates JEDEC Registered Data

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	2N6667 2N6668	$V_{CEO(sus)}$	60 80	— —	Vdc
Collector Cutoff Current (V_{CE} = 60 Vdc, I_B = 0) (V_{CE} = 80 Vdc, I_B = 0)	2N6667 2N6668	I_{CEO}	— —	1 1	mAdc
Collector Cutoff Current (V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 60 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C) (V_{CE} = 80 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	 2N6667 2N6668 2N6667 2N6668	I_{CEX}	 — — — —	 300 300 3 3	 μAdc mAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)		I_{EBO}	—	5	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 5 Adc, V_{CE} = 3 Vdc) (I_C = 10 Adc, V_{CE} = 3 Vdc)		h_{FE}	1000 100	20000 —	—
Collector-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 0.01 Adc) (I_C = 10 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	— —	2 3	Vdc
Base-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 0.01 Adc) (I_C = 10 Adc, I_B = 0.1 Adc)		$V_{BE(sat)}$	— —	2.8 4.5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1 Adc, V_{CE} = 5 Vdc, f_{test} = 1 MHz)		$\|h_{fe}\|$	20	—	—
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1 MHz)		C_{ob}	—	200	pF
Small-Signal Current Gain (I_C = 1 Adc, V_{CE} = 5 Vdc, f = 1 kHz)		h_{fe}	1000	—	—

* Indicates JEDEC Registered Data
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

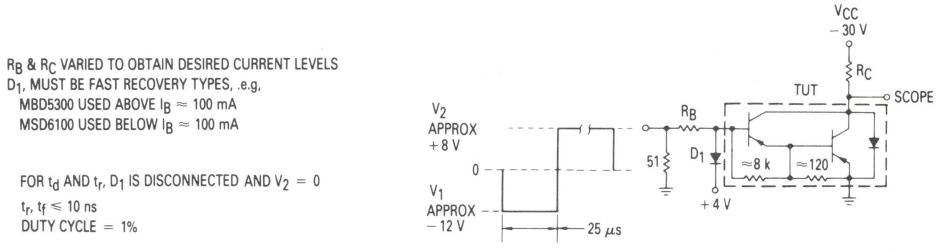

Figure 2. Switching Times Test Circuit

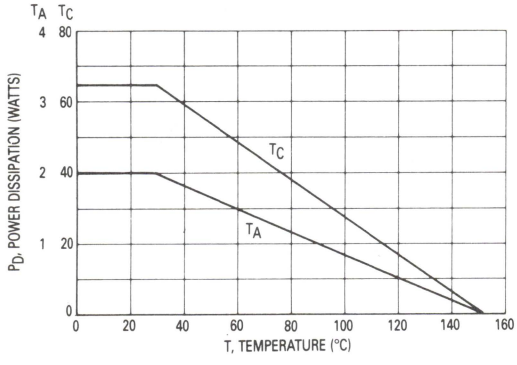

Figure 3. Power Derating

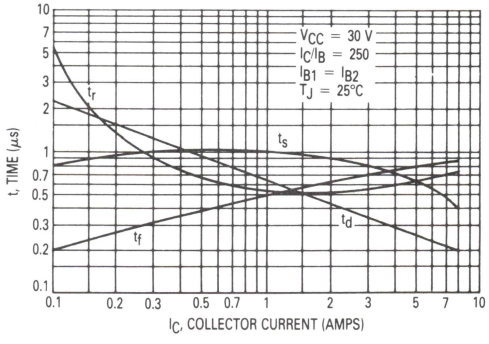

Figure 4. Typical Switching Times

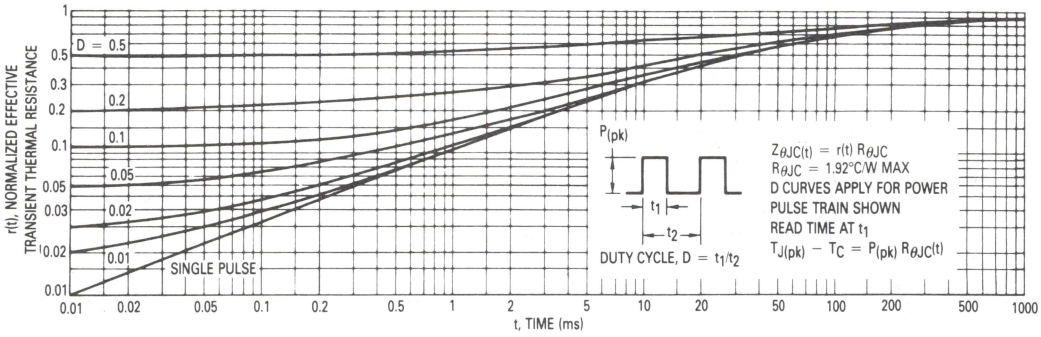

Figure 5. Thermal Response

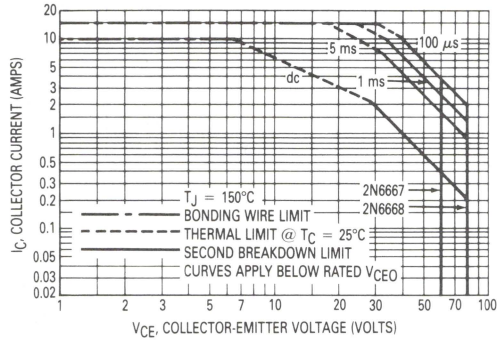

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Figure 6. Maximum Safe Operating Area

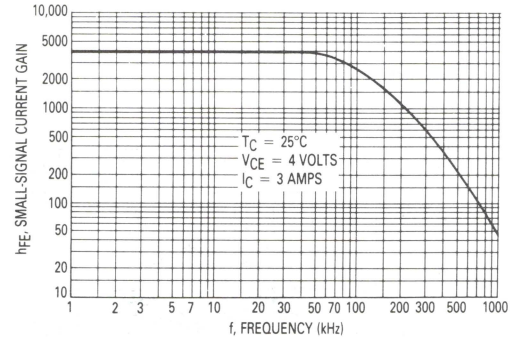

Figure 7. Typical Small-Signal Current Gain

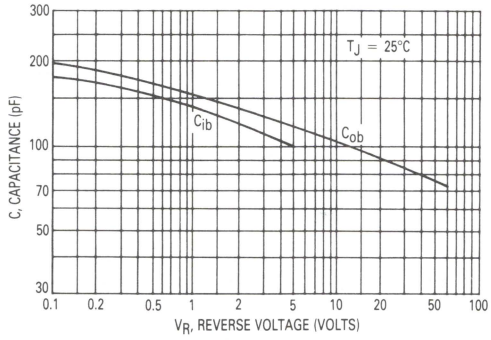

Figure 8. Typical Capacitance

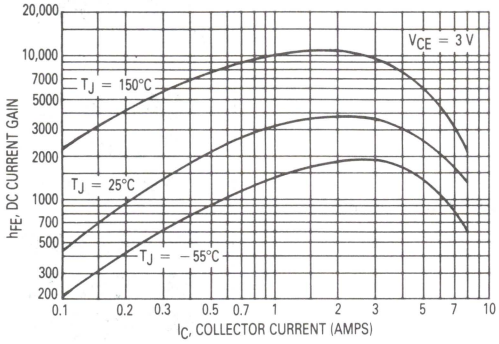

Figure 9. Typical DC Current Gain

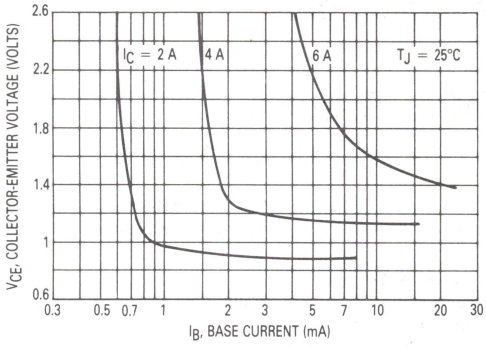

Figure 10. Typical Collector Saturation Region

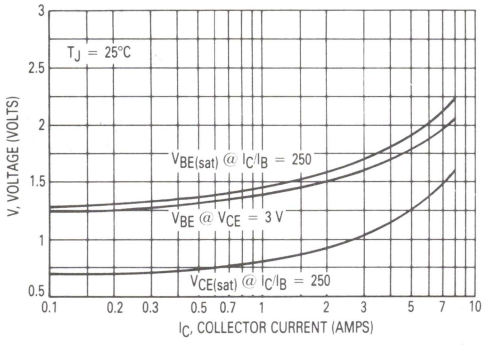

Figure 11. Typical "On" Voltages

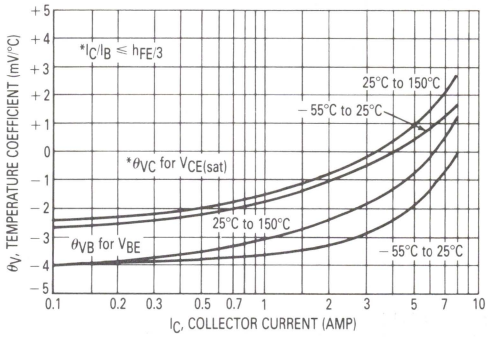

Figure 12. Typical Temperature Coefficients

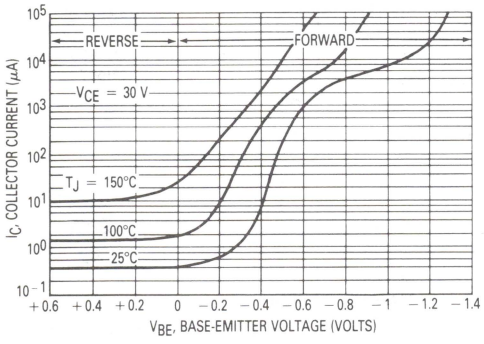

Figure 13. Typical Collector Cut-Off Region

OUTLINE DIMENSIONS



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.36	0.55	0.014	0.022
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

3

2N6648
See Page
3-209

NPN Silicon Power Transistors

2N6676
2N6677
2N6678

MJH6676
MJH6677
MJH6678

NPN SILICON

POWER TRANSISTORS

15 AMPERES
300, 350, 400 VOLTS
125 and 175 WATTS

The 2N6676, 2N6677, 2N6678, MJH6676, MJH6677, and MJH6678 transistors are designed for high voltage switching applications such as:

- Off-Line Supplies
- Converter Circuits
- Pulse Width Modulated Regulators

Specification Features —
- High Voltage Capability
- Fast Switching Speeds
- Low Saturation Voltages
- High SOA Ratings

CASE 1-05
TO-204AA
2N6676
2N6677
2N6678



CASE 340-01
TO-218AC
MJH6676
MJH6677
MJH6678

MAXIMUM RATINGS

Rating	Symbol	2N6676 MJH6676	2N6677 MJH6677	2N6678 MJH6678	Unit
Collector-Emitter Voltage	V_{CEV}	450	550	650	Vdc
Collector-Emitter Voltage	V_{CEX}	350	400	450	Vdc
Collector-Emitter Voltage	V_{CEO}	300	350	400	Vdc
Emitter-Base Voltage	V_{EBO}	8			Vdc
Collector Current — Continuous — Peak	I_C I_{CM}	15 20			Adc
Base Current — Continuous	I_B	5			Adc
Maximum Lead Temperature At Distance > 1/16 in. (1.58 mm) from seating plane for 10 s max		235			°C

MAXIMUM THERMAL RATINGS

Rating	Symbol	2N6676 2N6677 2N6678	MJH6676 MJH6677 MJH6678	Unit
Thermal Resistance Junction to Case	$R_{\theta JC}$	1		°C/W
Power Dissipation T_C = 25°C Derate above 25°C	P_T	175 1	125 1	Watts W/°C
Operating and Storage Junction	T_J, T_{stg}	−65 to +200	−65 to +150	°C

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = Rated V_{CEV}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		I_{CEV}	— —	0.1 1	mA
Emitter Cutoff Current (V_{EB} = 8 Vdc, I_C = 0)		I_{EBO}	—	2	mA
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0)	2N6676, MJH6676 2N6677, MJH6677 2N6678, MJH6678	$V_{CEO(sus)}$	300 350 400	— — —	Vdc
Collector-Emitter Sustaining Voltage (I_C = 15 A, $V_{CE(pk)}$ = V_{clamp} = Rated V_{CEX})	2N6676, MJH6676 2N6677, MJH6677 2N6678, MJH6678	$V_{CEX(sus)}$	350 400 450	— — —	Vdc
SECOND BREAKDOWN					
Second Breakdown Collector with Base Forward Biased		$I_{S/b}$	See Figure 1		
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 2		
ON CHARACTERISTICS					
DC Current Gain (I_C = 15 A, V_{CE} = 3 V)		h_{FE}	8	—	—
Base-Emitter Saturation Voltage (I_C = 15 A, I_B = 3 A)		$V_{BE(sat)}$	—	1.5	Vdc
Collector-Emitter, Saturation Voltage (I_C = 15 A, I_B = 3 A) (I_C = 15 A, I_B = 3 A, T_C = 100°C)		$V_{CE(sat)}$	— —	1.5 2	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain (I_C = 1 A, V_{CE} = 10 Vdc, f = 5 MHz)		$\|h_{fe}\|$	3	10	—
Output Capacitance (I_C = 1 A, V_{CB} = 10 Vdc, f = 0.1 MHz)		C_{ob}	150	500	pF
SWITCHING CHARACTERISTICS					
Resistive Load					
Delay Time	V_{CC} = 200 V, I_C = 15 A, I_{B1} = I_{B2} = 3 A, t_p = 20 μs, Duty Cycle ≤ 2 %, V_{B2} ≃ 6 V, R_L ≃ 13.5 Ω (See Figure 3)	T_C = 25°C	t_d	—	0.1	μs
Rise Time			t_r	—	0.6	
Storage Time			t_s	—	2.5	
Fall Time			t_f	—	0.5	
Delay Time		T_C = 100°C	t_d	—	0.4	
Rise Time			t_r	—	1	
Storage Time			t_s	—	4	
Fall Time			t_f	—	1	
Inductive Load						
Cross Over Time	L = 50 μH, $V_{CE(pk)}$ = V_{clamp} = Rated V_{CEX} (See Figure 3)	T_C = 25°C	t_c	—	0.5	μs
		T_C = 100°C		—	0.8	

3

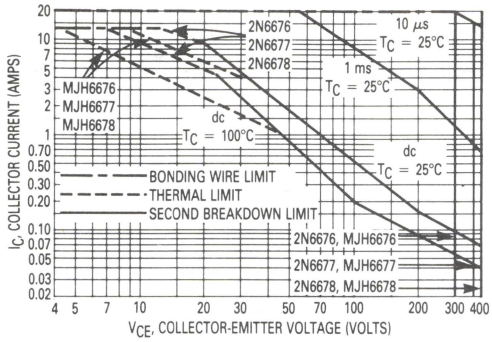

Figure 1. Maximum Rated Forward Biased Safe Operating Area

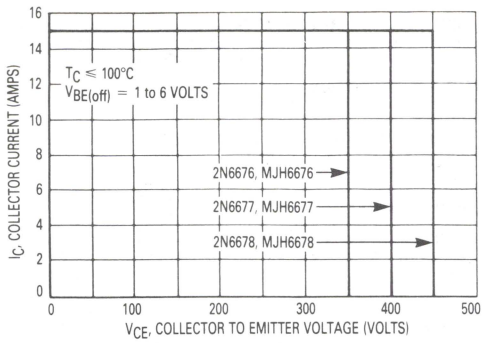

Figure 2. Maximum Rated Reverse Biased Safe Operating Area

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on T_C = 25°C and T_C = 100°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when T_C > 25°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 2 gives the RBSOA characteristics.

OUTLINE DIMENSIONS



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.130	0.210
V	3.81	4.19	0.151	0.165

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ 0.13 (0.005) Ⓜ T V Ⓜ
   FOR LEADS:
   ⌖ 0.13 (0.005) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5. 1973.

CASE 1-05
TO-204AA
(Formerly TO-3)
2N6676 thru 2N6678



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 340-01
TO-218AC
MJH6676 thru MJH6678

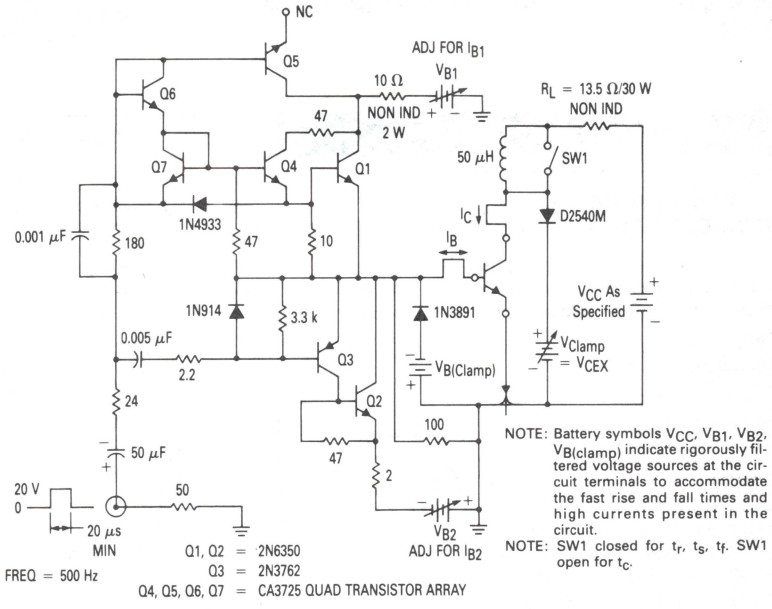

Figure 3. Switching Times Test Circuit

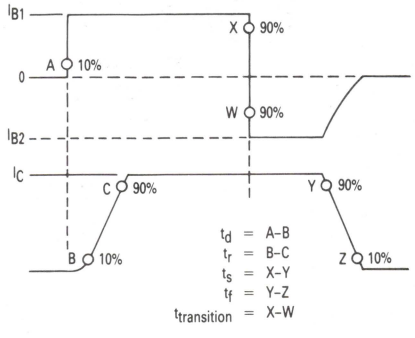

Figure 4. Switching Time Measurements

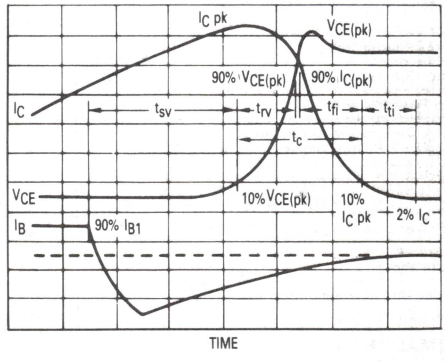

Figure 5. Inductive Switching Measurements

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6833
2N6834

Designer's Data Sheet

SWITCHMODE III SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  - 50 ns Inductive Fall Time — 75°C (Typ)
  - 70 ns Inductive Crossover Time — 75°C (Typ)
  - 500 ns Inductive Storage Time — 75°C (Typ)
- Operating Temperature Range -65 to +150°C
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents



5.0 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
80 and 125 WATTS

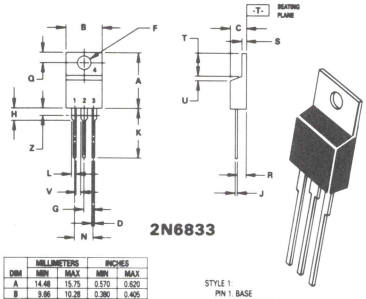

2N6833

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

2N6834



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA (Formerly TO-3)

MAXIMUM RATINGS

Rating	Symbol	2N6833	2N6834	Unit
Collector-Emitter Voltage*	$V_{CEO(sus)}$	450		Vdc
Collector-Emitter Voltage*	V_{CEV}	850		Vdc
Emitter Base Voltage*	V_{EB}	6.0		Vdc
Collector Current — Continuous* — Peak (1)	I_C I_{CM}	5.0 10		Adc
Base Current — Continuous* — Peak (1)	I_B I_{BM}	4.0 8.0		Adc
Total Power Dissipation @ T_C = 25°C* @ T_C = 100°C* Derate above 25°C*	P_D	80 32 0.64	125 71.5 0.714	Watts W/°C
Operating and Storage Junction Temperature Range*	T_J, T_{stg}	-65 to +150	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	2N6833	2N6834	Unit
Thermal Resistance, Junction to Case*	$R_{\theta JC}$	1.56	1.40	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds*	T_L	275		°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.
*Indicate JEDEC Registered Data

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450*	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.25* 1.5*	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0*	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figures 15* and 16*			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 17			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 0.15 Adc) (I_C = 3.0 Adc, I_B = 0.4 Adc) (I_C = 3.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 1.0 2.5* 2.5*	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.4 Adc) (I_C = 3.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — —	 — —	 1.5* 1.5	Vdc
DC Current Gain (I_C = 3.0 Adc, V_{CE} = 5.0 Vdc) (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	 7.5* 5.0	 — —	 30* —	—
DYNAMIC CHARACTERISTICS (2)					
Current Gain - Bandwidth Product (V_{CE} = 10 Vdc, I_C = 0.25 Adc, f_{test} = 10 MHz)	f_T	15*	—	75*	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	20*	—	200*	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)							
Delay Time	(I_C = 3.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.4 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 0.8 Adc, R_{B2} = 8.0 Ω)	t_d	—	30	100*	ns
Rise Time			t_r	—	100	300*	
Storage Time			t_s	—	1000	3000*	
Fall Time			t_f	—	60	300*	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	400	—	
Fall Time			t_f	—	130	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 3.0 Adc, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_C = 100°C)	t_{sv}	—	500	1600*	ns
Fall Time			t_{fi}	—	100	200*	
Crossover Time			t_c	—	120	250*	
Storage Time		(T_C = 150°C)	t_{sv}	—	600	—	
Fall Time			t_{fi}	—	120	—	
Crossover Time			t_c	—	160	—	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤2%.
(2) $f_T = |h_{fe}| f_{test}$
*Indicates JEDEC Registered Limit

3

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

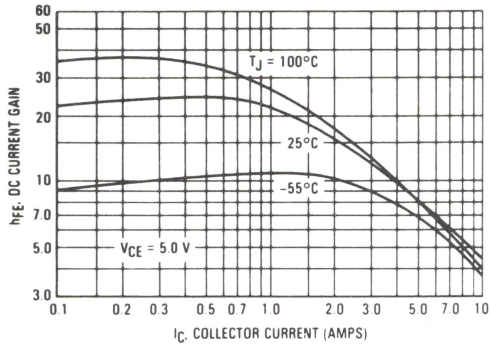

FIGURE 2 — COLLECTOR SATURATION REGION

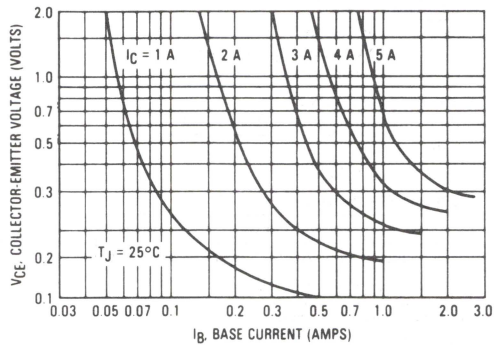

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

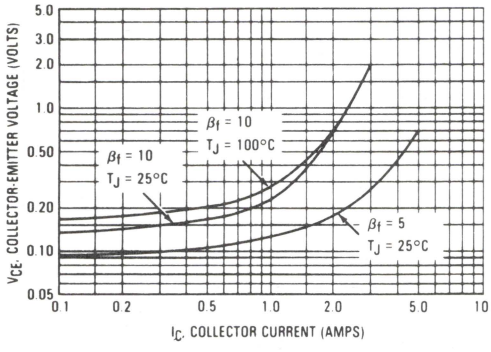

FIGURE 4 — BASE-EMITTER VOLTAGE

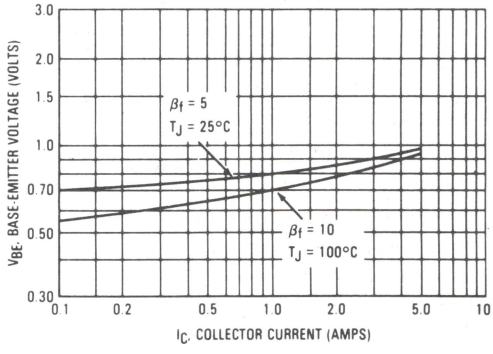

FIGURE 5 — COLLECTOR CUTOFF REGION

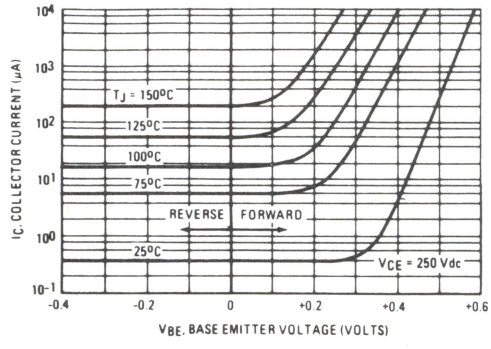

FIGURE 6 — CAPACITANCE

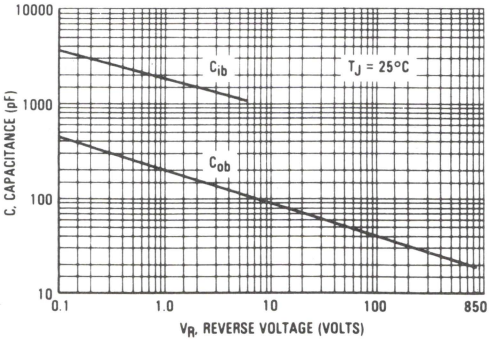

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

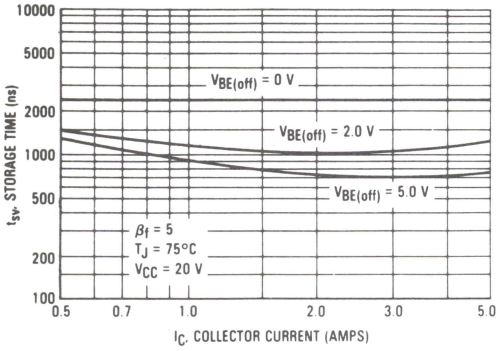

FIGURE 8 — STORAGE TIME

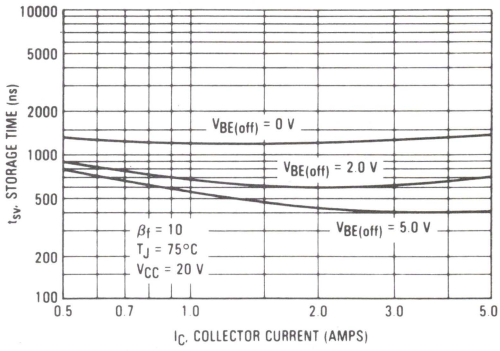

FIGURE 9 — COLLECTOR CURRENT FALL TIME

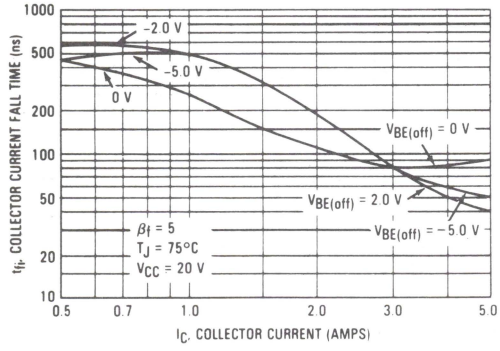

FIGURE 10 — COLLECTOR CURRENT FALL TIME

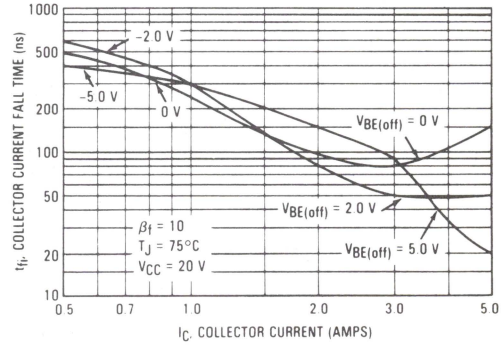

FIGURE 11 — CROSSOVER TIME

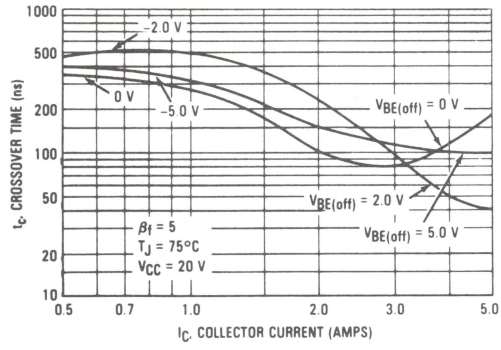

FIGURE 12 — CROSSOVER TIME

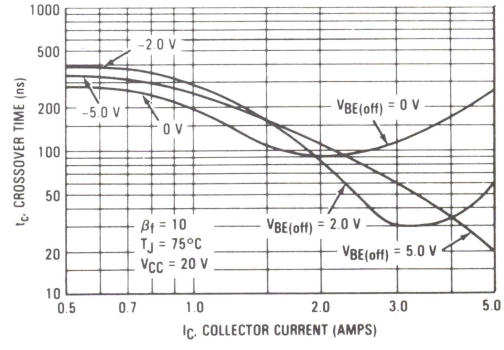

3

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

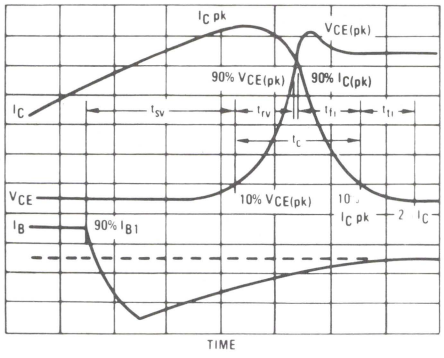

FIGURE 14 — PEAK REVERSE BASE CURRENT

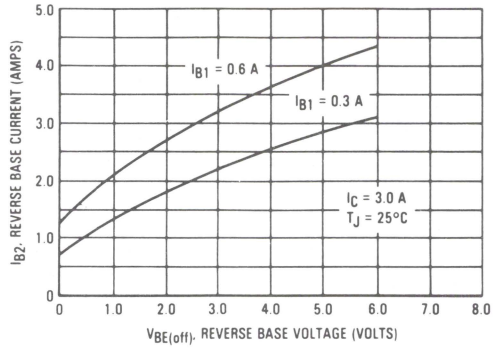

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA (2N6833)

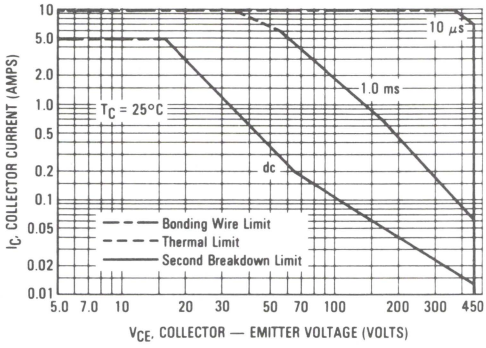

FIGURE 16 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA (2N6834)

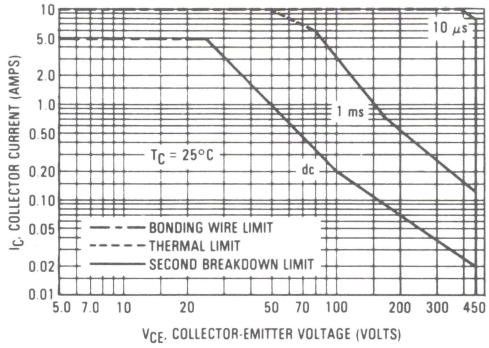

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 15 and 16 are based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 15 and 16 may be found at any case temperature by using the appropriate curve on Figures 18 or 19.

$T_{J(pk)}$ may be calculated from the data in Figures 20 or 21. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable putting reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 17 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

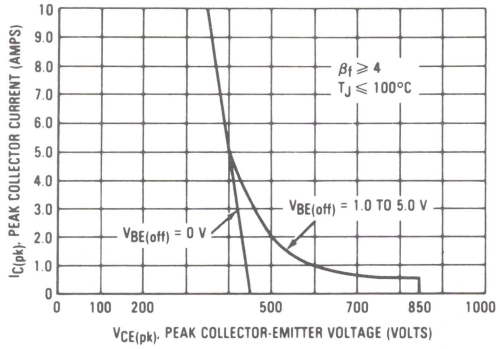

FIGURE 18 — POWER DERATING (2N6833)

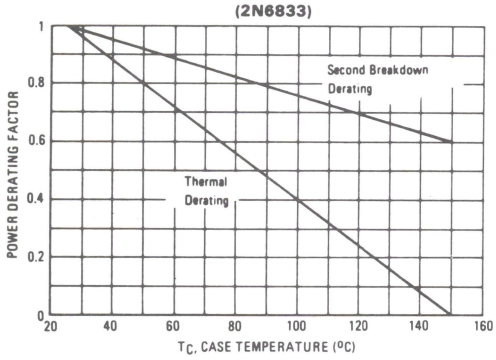

FIGURE 19 — POWER DERATING (2N6834)

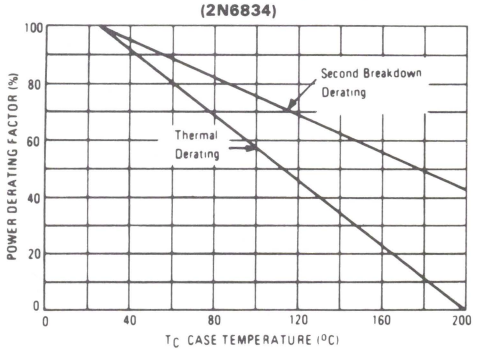

TABLE 1 — RESISTIVE LOAD SWITCHING

t_d and t_r

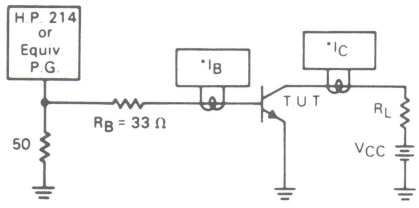

V_{CC} = 250 Vdc
R_L = 83 Ω
I_C = 3.0 Adc
I_B = 0.4 Adc



*Tektronix P-6042 or Equivalent

t_s and t_f

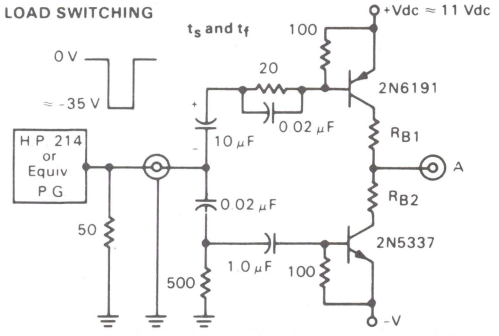

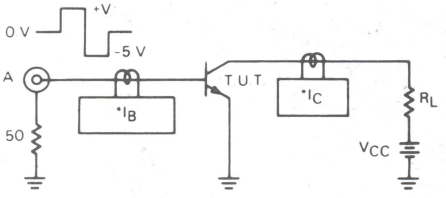

V_{CC} = 250
R_L = 83 Ω
I_C = 3.0 Adc

I_{B1} = 0.4 Adc
I_{B2} = 0.8 Adc
For $V_{BE(off)}$ = 5.0 V

R_{B1} = 33 Ω
R_{B2} = 8.0 Ω
R_{B2} = 0 Ω

*Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

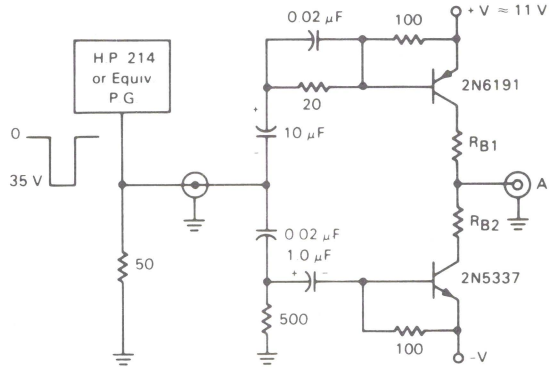



$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
$R_{B2} = \infty$
V_{CC} = 20 Volts

*Tektronix P-6042 or Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope - Tektronix 7403 or Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

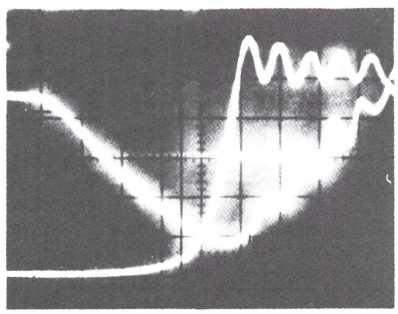

$I_{C(pk)}$ = 3.0 Amps
I_{B1} = 0.4 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base = 20 ns/cm

$I_{C(pk)}$ = 3.0 Amps
I_{B1} = 0.4 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base = 20 ns/cm

t_{fi}, t_c

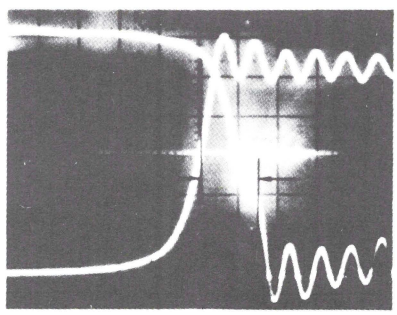

THERMAL RESPONSE

FIGURE 20 — 2N6833

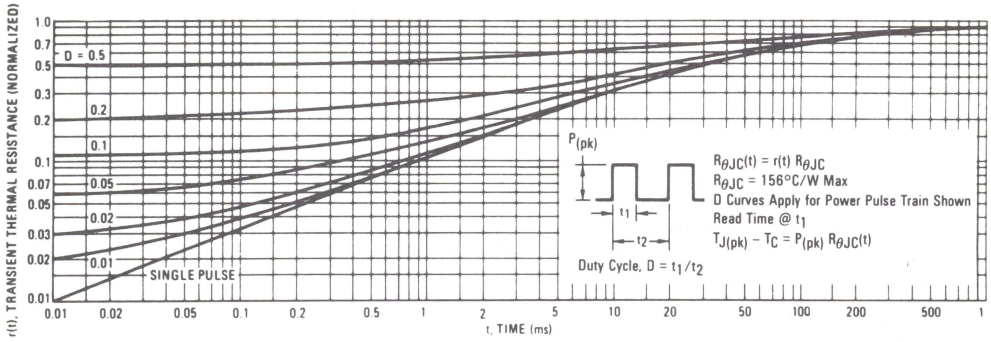

FIGURE 21 — 2N6834

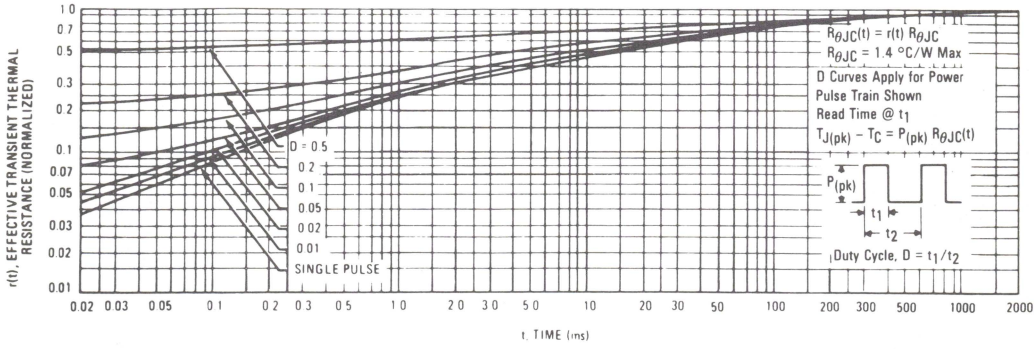

3

2N6835

Designer's Data Sheet

8 AMPERE

NPN SILICON
POWER TRANSISTORS

450 VOLTS
150 WATTS

SWITCHMODE III SERIES
ULTRA-FAST NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

- Switching Regulators
- Inverters
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  90 ns Inductive Fall Time — 75°C (Typ)
  90 ns Inductive Crossover Time — 75°C (Typ)
  450 ns Inductive Storage Time — 75°C (Typ)
- Operating Temperature Range -65 to +200°C
- 100°C Performance Specified for:
  Reverse-Biased SOA with Inductive Loads
  Switching Times with Inductive Loads
  Saturation Voltages
  Leakage Currents



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.





NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
⌖ ∅.13 (0.005) M T V M
FOR LEADS.
⌖ ∅.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA Type
(TO-3 Type)

***MAXIMUM RATINGS**

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	6.0	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	8.0 16	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	6.0 12	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 85.5 0.86	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

***THERMAL CHARACTERISTICS**

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5.0 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

*Indicate JEDEC Registered Data

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450*	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.25* 1.5*	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, $R_{BE(off)}$ = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0*	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15*			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.40 Adc) (I_C = 5.0 Adc, I_B = 0.66 Adc) (I_C = 5.0 Adc, I_B = 0.66 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 1.2 2.5* 3.0*	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.66 Adc) (I_C = 5.0 Adc, I_B = 0.66 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — —	 — —	 1.5* 1.5	Vdc
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc) (I_C = 8.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	 7.5* 4.0*	 — —	 30* —	—
DYNAMIC CHARACTERISTICS (2)					
Current Gain - Bandwidth Product (V_{CE} = 10 Vdc, I_C = 0.25 Adc, f_{test} = 10 MHz)	f_T	10*	—	75*	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	50*	—	350*	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)							
Delay Time	(I_C = 5.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.66 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 1.3 Adc, R_{B2} = 4.0 Ω)	t_d	—	20	50*	ns
Rise Time			t_r	—	85	250*	
Storage Time			t_s	—	1000	2500*	
Fall Time			t_f	—	70	250*	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	500	—	
Fall Time			t_f	—	100	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 5.0 Adc, I_{B1} = 0.66 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_C = 100°C)	t_{sv}	—	700	1800*	ns
Fall Time			t_{fi}	—	80	200*	
Crossover Time			t_c	—	150	250*	
Storage Time		(T_C = 150°C)	t_{sv}	—	800	—	
Fall Time			t_{fi}	—	80	—	
Crossover Time			t_c	—	200	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.
(2) $f_T = |h_{fe}| f_{test}$
*Indicates JEDEC Registered Limit

3

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

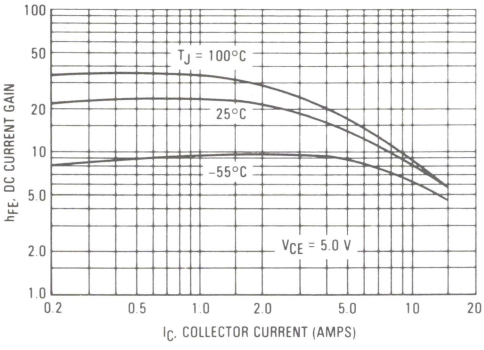

FIGURE 2 — COLLECTOR SATURATION REGION

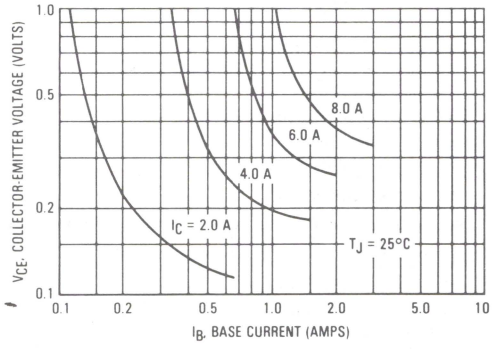

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

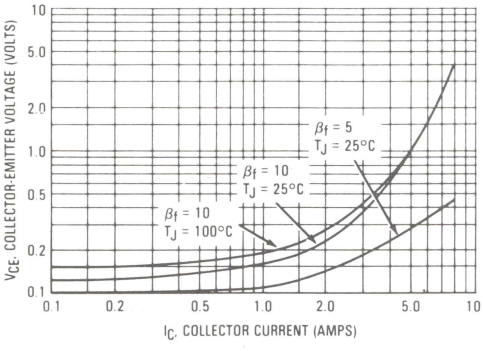

FIGURE 4 — BASE-EMITTER VOLTAGE

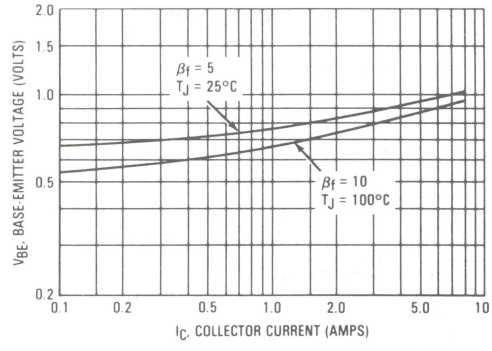

FIGURE 5 — COLLECTOR CUTOFF REGION

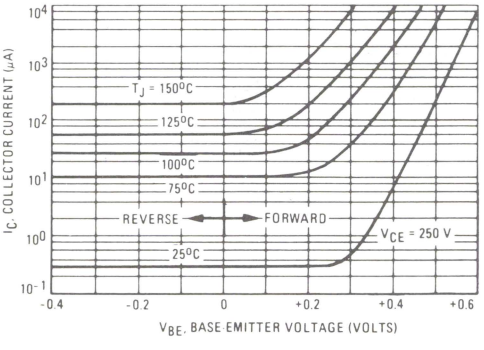

FIGURE 6 — CAPACITANCE

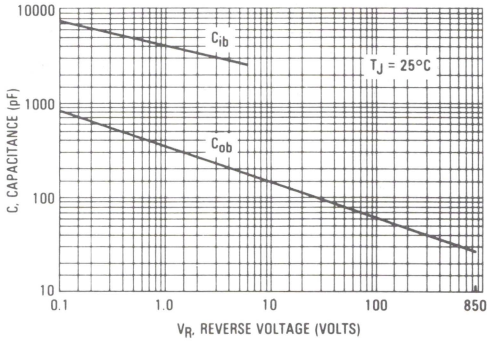

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

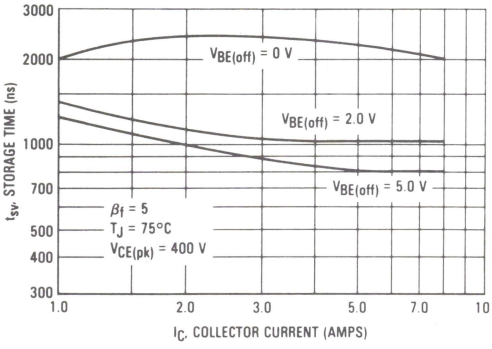

FIGURE 8 — STORAGE TIME

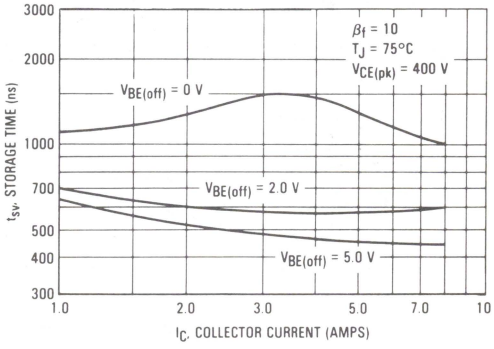

FIGURE 9 — COLLECTOR CURRENT FALL TIME

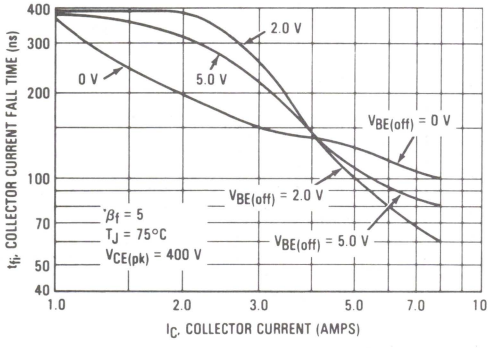

FIGURE 10 — COLLECTOR CURRENT FALL TIME

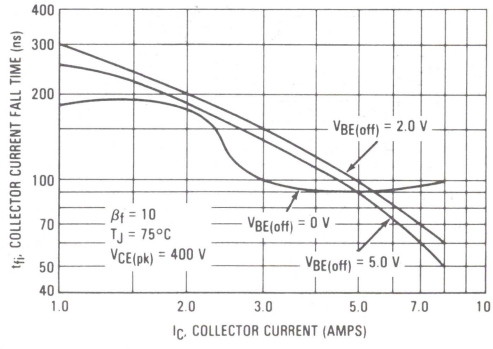

FIGURE 11 — CROSSOVER TIME

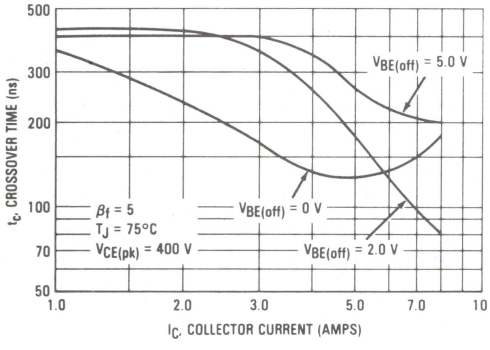

FIGURE 12 — CROSSOVER TIME

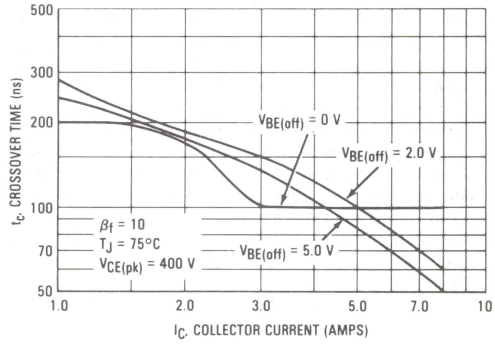

3

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

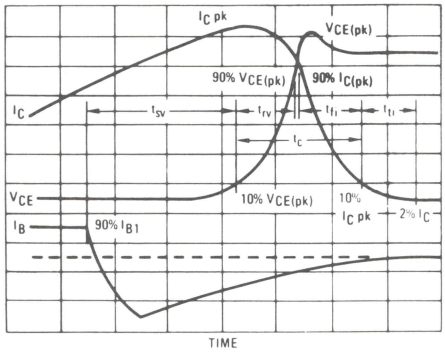

FIGURE 14 — PEAK REVERSE BASE CURRENT

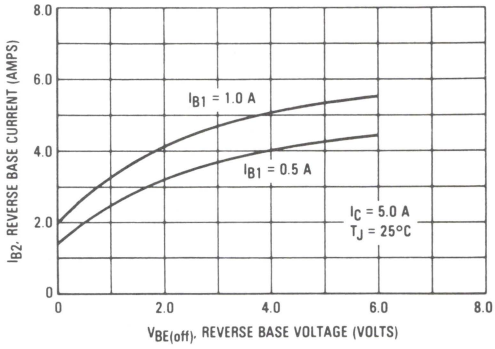

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

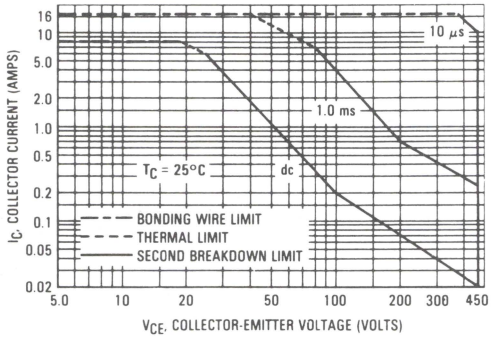

FIGURE 16 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

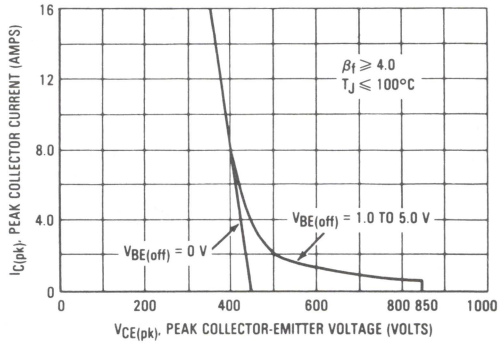

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 17. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

FIGURE 17 — THERMAL RESPONSE

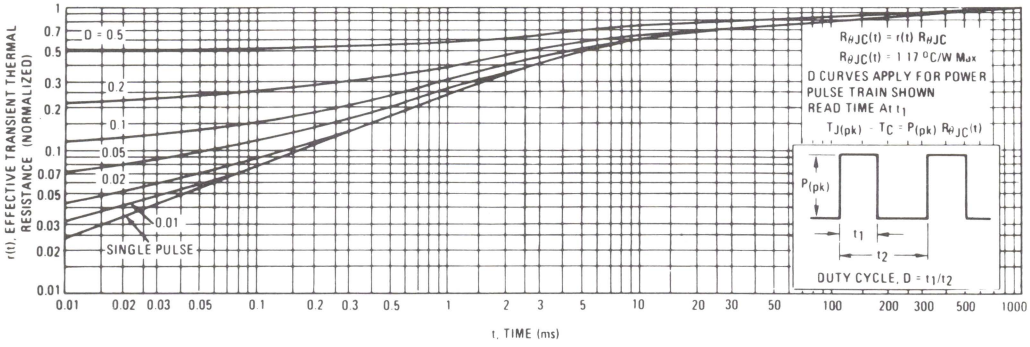

FIGURE 18 — POWER DERATING

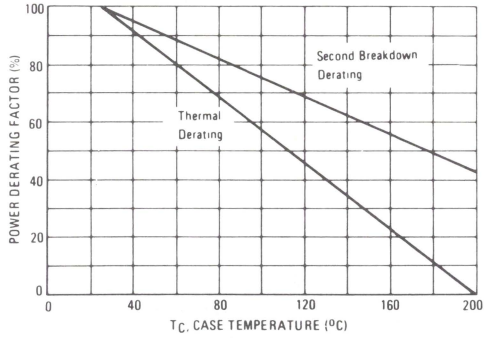

TABLE 1 — RESISTIVE LOAD SWITCHING

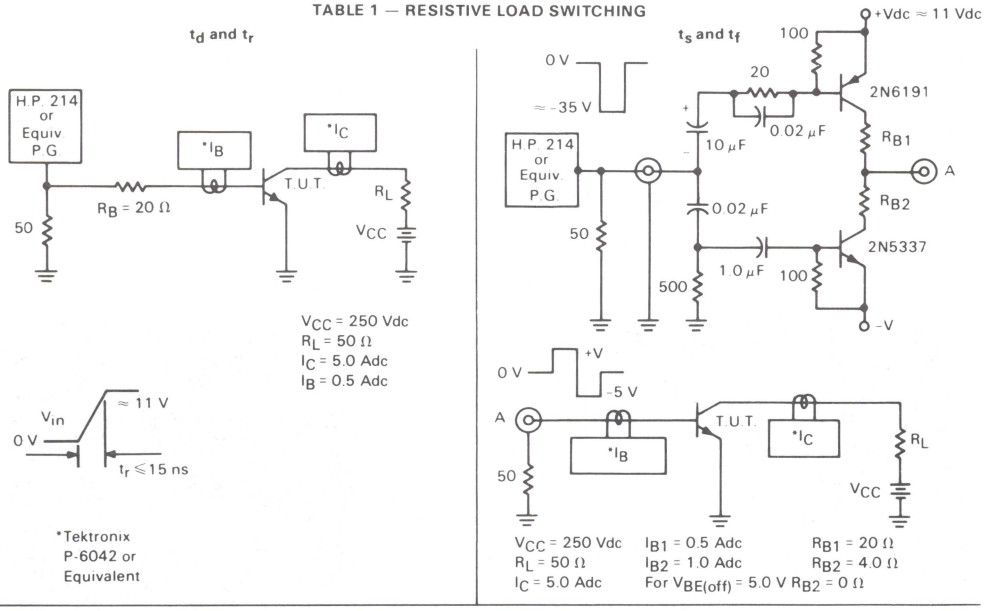

*Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

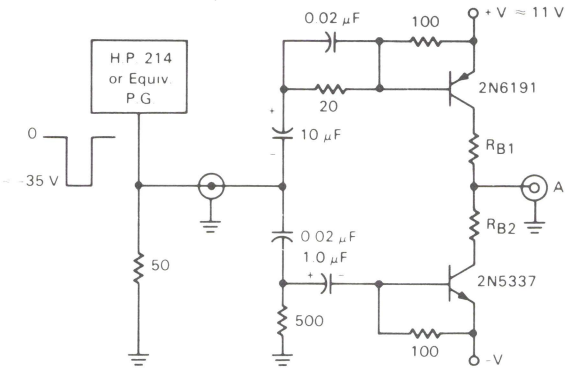

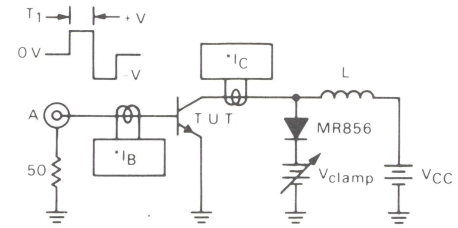



$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
$R_{B2} = \infty$
V_{CC} = 20 Volts

*Tektronix
P-6042 or
Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope - Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

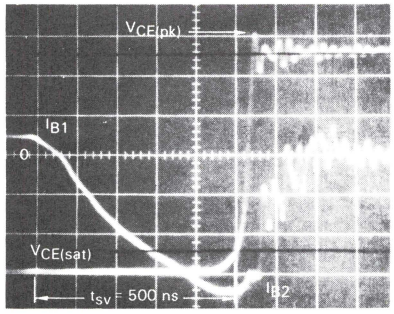

$I_{C(pk)}$ = 5.0 Amps
I_{B1} = 0.5 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base =
100 ns/cm

t_{fi}, t_c

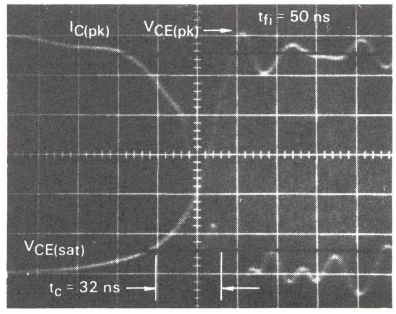

$I_{C(pk)}$ = 5.0 Amps
I_{B1} = 0.5 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base =
20 ns/cm

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

2N6836

Designer's Data Sheet

15 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
175 WATTS

SWITCHMODE III SERIES
ULTRA-FAST NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.



- Switching Regulators
- Inverters
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  - 30 ns Inductive Fall Time — 75°C (Typ)
  - 50 ns Inductive Crossover Time — 75°C (Typ)
  - 600 ns Inductive Storage Time — 75°C (Typ)
- Operating Temperature Range -65 to +200°C
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

*MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	6.0	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	15 20	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	10 15	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1.0	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5.0 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

*Indicate JEDEC Registered Data



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
   ⌖ ⌀.13 (0.005) M T V M
   FOR LEADS:
   ⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA Type
(TO-3 Type)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450*	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.25* 1.5*	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0*	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15*			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.7 Adc) (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 10 Adc, I_B = 1.0 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 1.2 2.5* 3.0*	Vdc
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 10 Adc, I_B = 1.0 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — —	 — —	 1.5* 1.5	Vdc
DC Current Gain (I_C = 10 Adc, V_{CE} = 5.0 Vdc) (I_C = 15 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	 8.0* 5.0	 — —	 30* —	—
DYNAMIC CHARACTERISTICS (2)					
Current Gain - Bandwidth Product (V_{CE} = 10 Vdc, I_C = 0.25 Adc, f_{test} = 10 MHz)	f_T	10*	—	75*	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	50*	—	400*	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 10 Adc, V_{CC} = 250 Vdc, I_{B1} = 1.0 Adc, PW = 30 μs, Duty Cycle ≤ 2.0%)	(I_{B2} = 2.6 Adc, R_{B2} = 1.6 Ω)	t_d	—	20	100*	ns
Rise Time			t_r	—	200	500*	
Storage Time			t_s	—	1200	3000*	
Fall Time			t_f	—	200	250*	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	650	—	
Fall Time			t_f	—	80	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 10 Adc, I_{B1} = 1.0 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_C = 100°C)	t_{sv}	—	800	1500*	ns
Fall Time			t_{fi}	—	50	150*	
Crossover Time			t_c	—	90	200*	
Storage Time		(T_C = 150°C)	t_{sv}	—	1050	—	
Fall Time			t_{fi}	—	70	—	
Crossover Time			t_c	—	120	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.
(2) $f_T = |h_{fe}| f_{test}$
*Indicates JEDEC Registered Limit

3

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

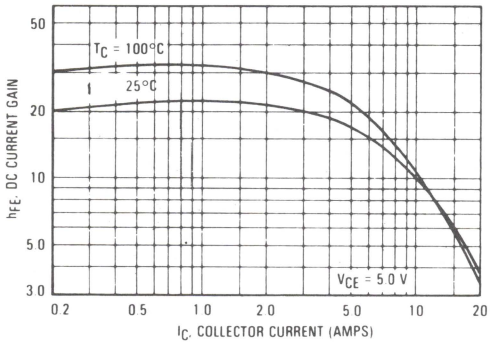

FIGURE 2 — COLLECTOR SATURATION REGION

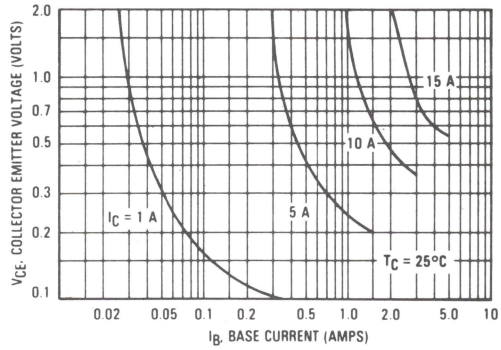

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

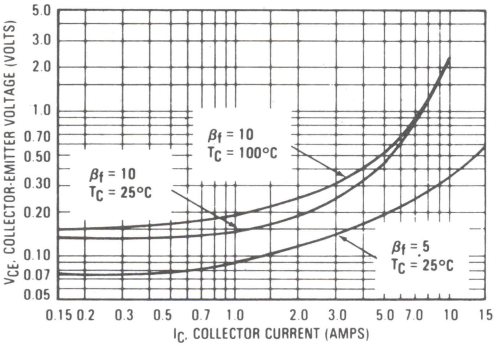

FIGURE 4 — BASE-EMITTER VOLTAGE

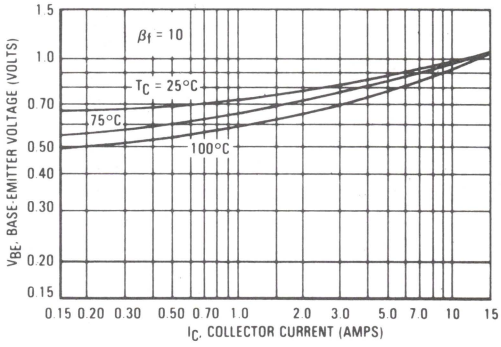

FIGURE 5 — COLLECTOR CUTOFF REGION

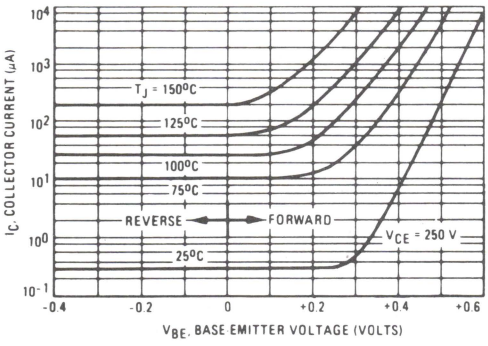

FIGURE 6 — CAPACITANCE

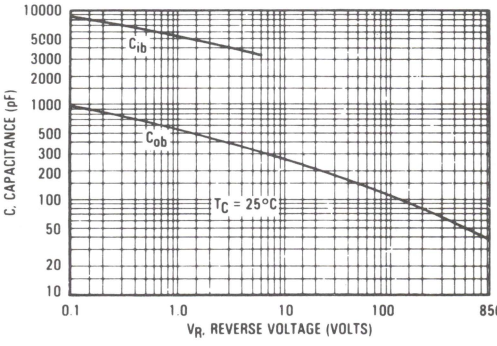

3

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

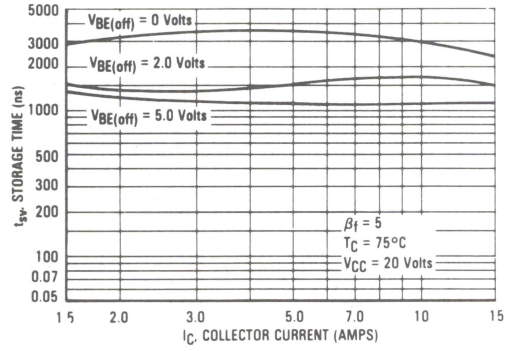

FIGURE 8 — STORAGE TIME

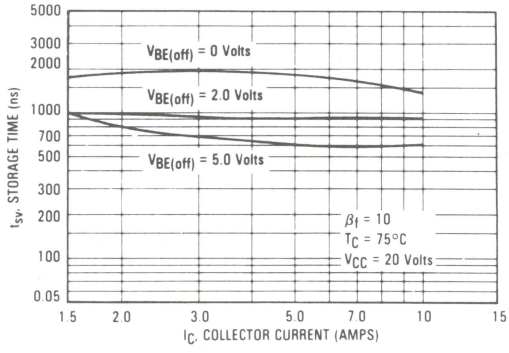

FIGURE 9 — COLLECTOR CURRENT FALL TIME

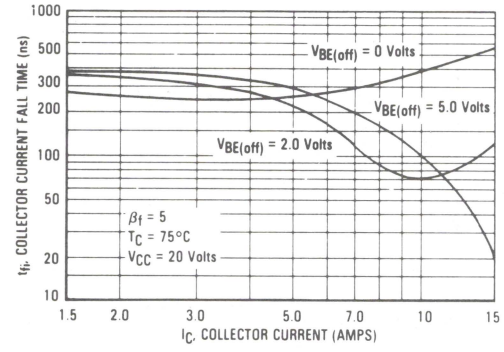

FIGURE 10 — COLLECTOR CURRENT FALL TIME

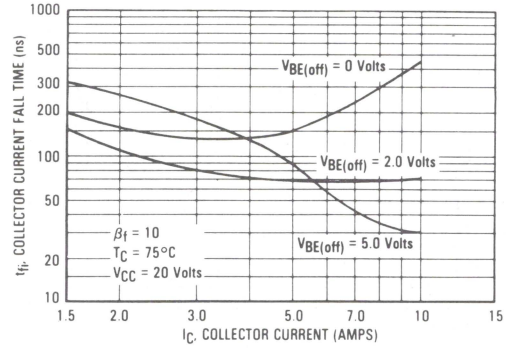

FIGURE 11 — CROSSOVER TIME

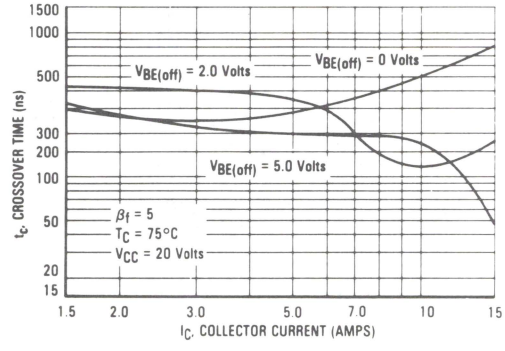

FIGURE 12 — CROSSOVER TIME

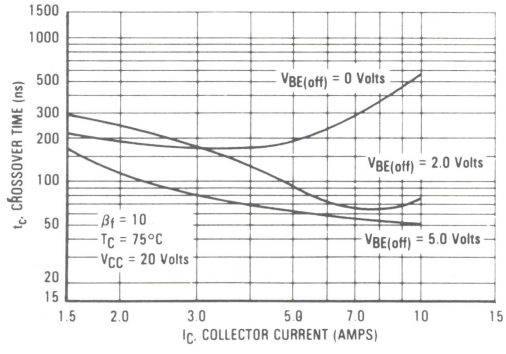

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

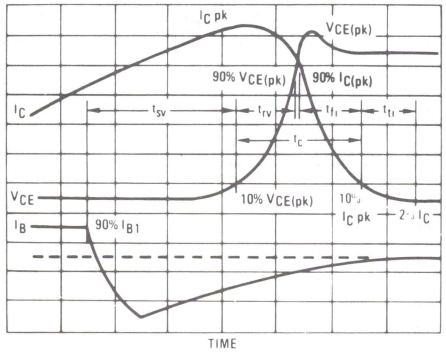

FIGURE 14 — PEAK REVERSE BASE CURRENT

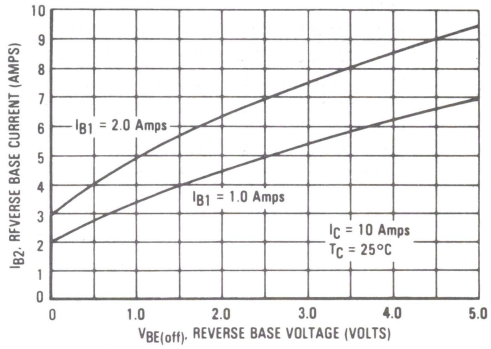

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

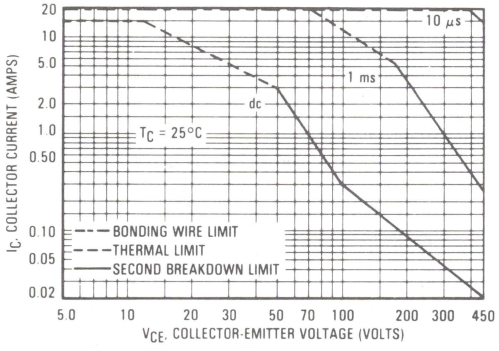

FIGURE 16 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

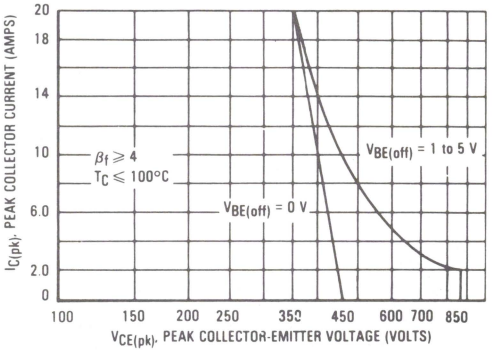

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 17. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

FIGURE 17 — THERMAL RESPONSE

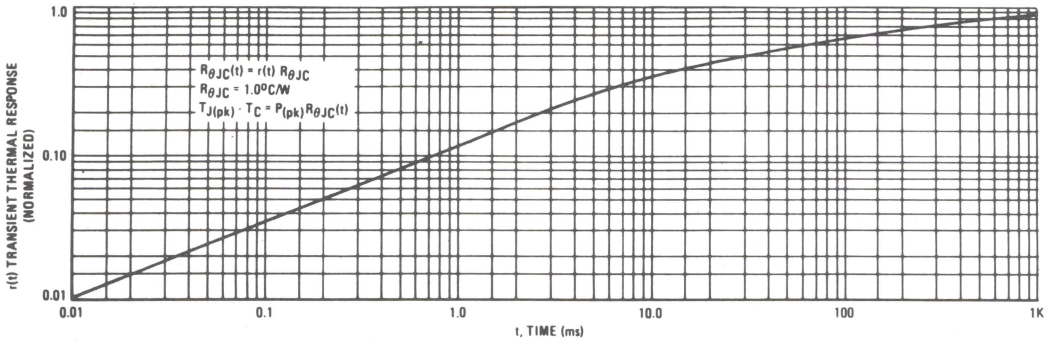

FIGURE 18 — POWER DERATING

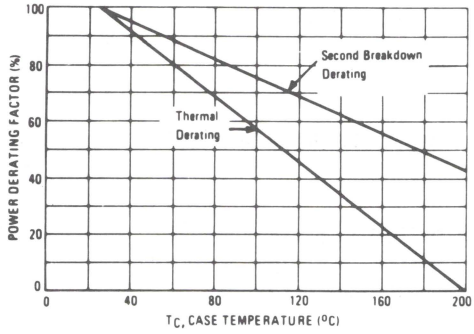

TABLE 1 — RESISTIVE LOAD SWITCHING

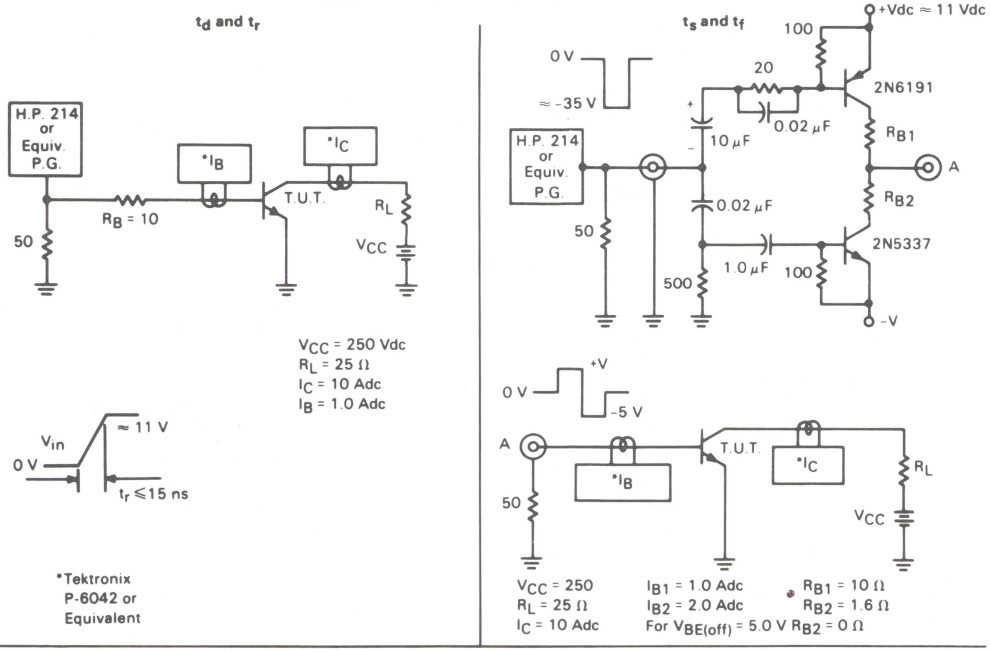

*Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

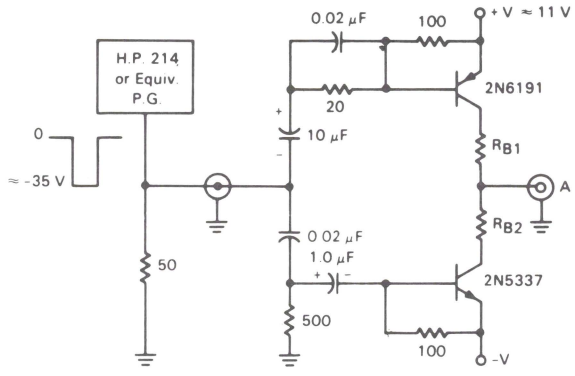

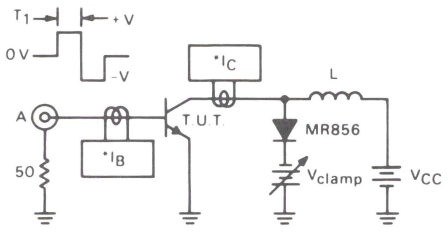



$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

*Tektronix
P-6042 or
Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope - Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

3

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

$I_{C(pk)}$ = 10 Amps
I_{B1} = 1.0 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base =
100 ns/cm



t_{fi}, t_c

$I_{C(pk)}$ = 10 Amps
I_{B1} = 1.0 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base =
20 ns/cm



2N6837

Designer's Data Sheet

20 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
250 WATTS

SWITCHMODE III SERIES
ULTRA-FAST NPN SILICON POWER TRANSISTORS

This transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:

- Switching Regulators
- Inverters
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  30 ns Inductive Fall Time — 75°C (Typ)
  40 ns Inductive Crossover Time — 75°C (Typ)
  800 ns Inductive Storage Time — 75°C (Typ)
- Operating Temperature Range −65 to +200°C
- 100°C Performance Specified for:
  Reverse-Biased SOA with Inductive Loads
  Switching Times with Inductive Loads
  Saturation Voltages
  Leakage Currents



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



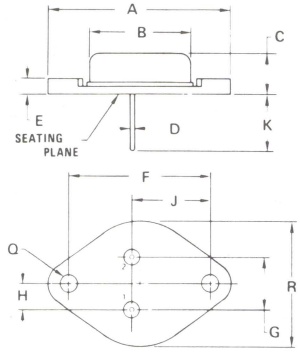

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
TO-204AE (Type) Modified TO-3

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Collector-Emitter Voltage*	$V_{CEO(sus)}$	450	Vdc
Collector-Emitter Voltage*	V_{CEV}	850	Vdc
Emitter Base Voltage*	V_{EB}	6.0	Vdc
Collector Current — Continuous* — Peak (1)	I_C I_{CM}	20 30	Adc
Base Current — Continuous* — Peak (1)	I_B I_{BM}	15 20	Adc
Total Power Dissipation @ T_C = 25°C* @ T_C = 100°C Derate above 25°C	P_D	250 143 1.43	Watts W/°C
Operating and Storage Junction* Temperature Range	T_J, T_{stg}	−65 to +200	°C

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case*	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering* Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.
*Indicate JEDEC Registered Data

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)			$V_{CEO(sus)}$	450*	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			I_{CEV}	— —	— —	0.25* 1.5*	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)			I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)			I_{EBO}	—	—	1.0*	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with Base Forward Biased			$I_{S/b}$	See Figure 15*			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figure 16			
ON CHARACTERISTICS (1)							
Collector-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.2 Adc) (I_C = 15 Adc, I_B = 2.0 Adc) (I_C = 15 Adc, I_B = 2.0 Adc, T_C = 100°C)			$V_{CE(sat)}$	— — —	— — —	1.5 3.0* 3.0*	Vdc
Base-Emitter Saturation Voltage (I_C = 15 Adc, I_B = 2.0 Adc) (I_C = 15 Adc, I_B = 2.0 Adc, T_C = 100°C)			$V_{BE(sat)}$	— —	— —	1.5* 1.5	Vdc
DC Current Gain (I_C = 15 Adc, V_{CE} = 5.0 Vdc) (I_C = 20 Adc, V_{CE} = 5.0 Vdc)			h_{FE}	7.5* 5.0	— —	30* —	—
DYNAMIC CHARACTERISTICS (2)							
Current Gain — Bandwidth Product (V_{CE} = 10 Vdc, I_C = 0.25 Adc, f_{test} = 10 MHz)			f_T	10*	—	75*	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)			C_{ob}	100*	—	500*	pF
SWITCHING CHARACTERISTICS							
Resistive Load (Table 1)							
Delay Time	(I_C = 15 Adc, V_{CC} = 250 Vdc, I_{B1} = 2.0 Adc, PW = 30 μs, Duty Cycle ≤ 2.0%)	(I_{B2} = 4.0 Adc, R_{B2} = 1.6 Ω)	t_d	—	20	100*	ns
Rise Time			t_r	—	200	500*	
Storage Time			t_s	—	1200	2700*	
Fall Time			t_f	—	200	350*	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	650	—	
Fall Time			t_f	—	80	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 15 Adc, I_{B1} = 2.0 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_C = 100°C)	t_{sv}	—	800	2700*	ns
Fall Time			t_{fi}	—	50	200*	
Crossover Time			t_c	—	90	250*	
Storage Time		(T_C = 150°C)	t_{sv}	—	1050	—	
Fall Time			t_{fi}	—	70	—	
Crossover Time			t_c	—	120	—	

(1) Pulse Test: PW — 300 μs, Duty Cycle ≤ 2.0%.
(2) $f_T = |h_{fE}| f_{test}$
*Indicates JEDEC Registered Limit

3

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

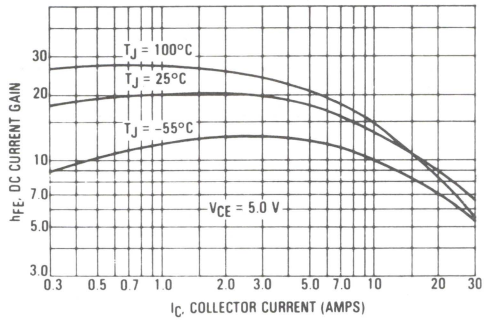

FIGURE 2 — COLLECTOR SATURATION REGION

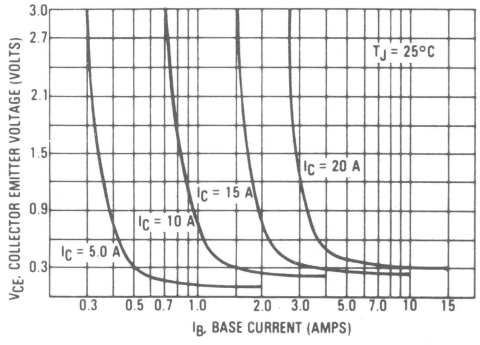

FIGURE 3 — COLLECTOR-EMITTER SATURATION REGION

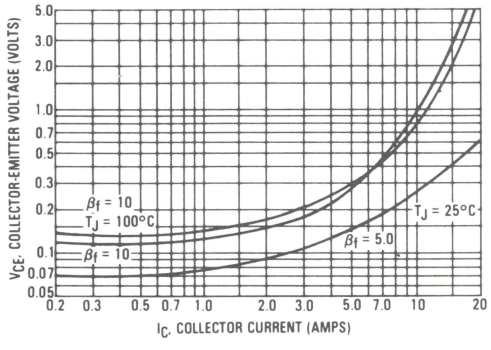

FIGURE 4 — BASE-EMITTER VOLTAGE

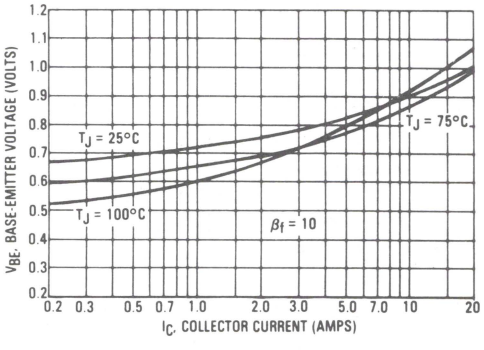

FIGURE 5 — COLLECTOR CUTOFF REGION

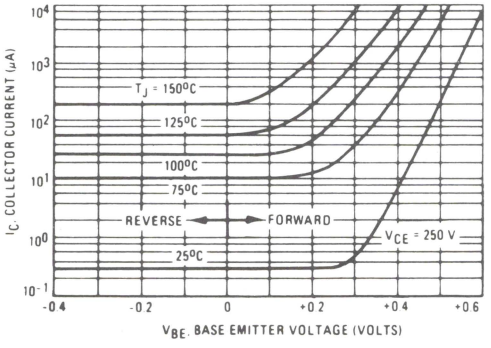

FIGURE 6 — CAPACITANCE

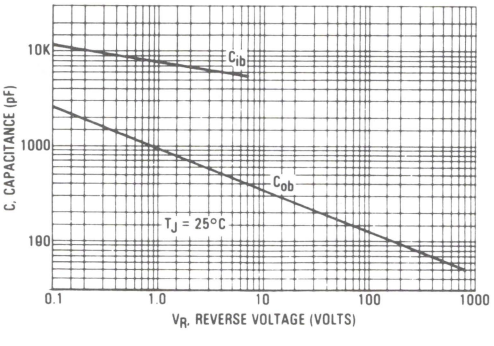

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

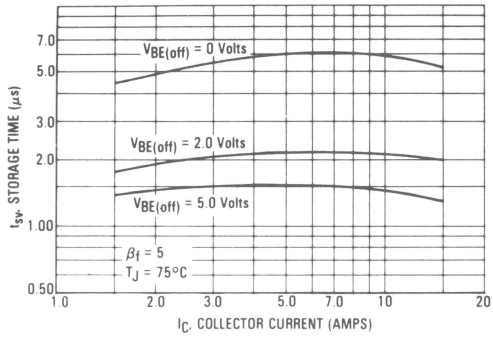

FIGURE 8 — STORAGE TIME

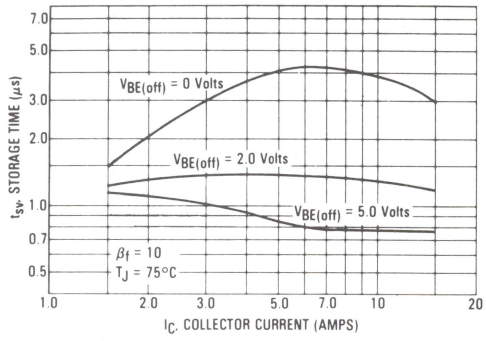

FIGURE 9 — COLLECTOR CURRENT FALL TIME

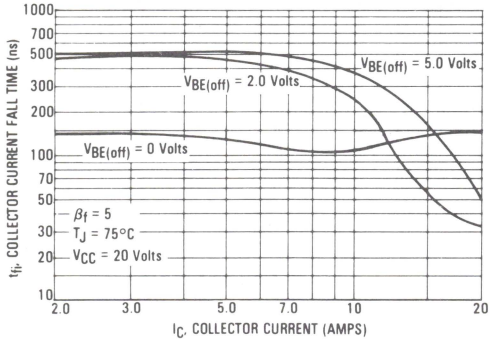

FIGURE 10 — COLLECTOR CURRENT FALL TIME

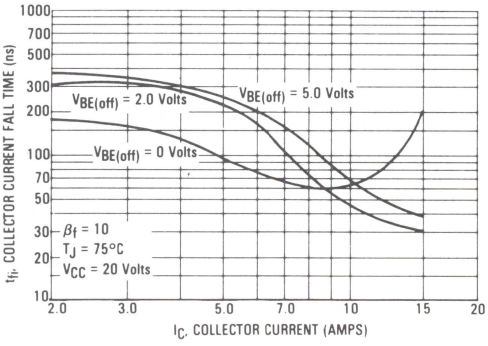

FIGURE 11 — CROSSOVER TIME

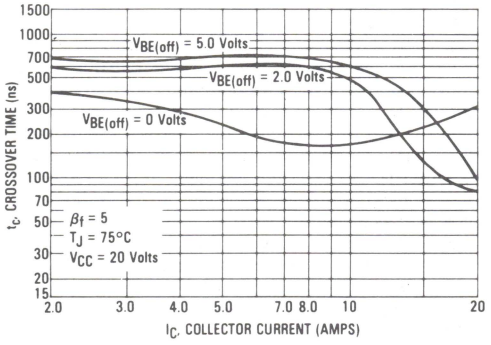

FIGURE 12 — CROSSOVER TIME

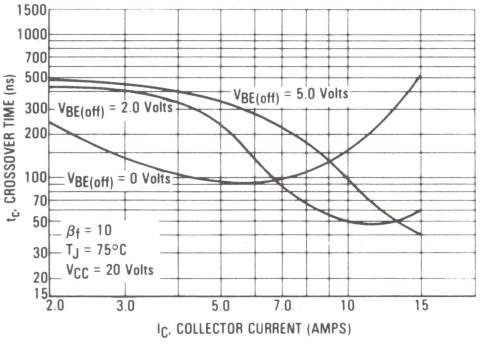

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

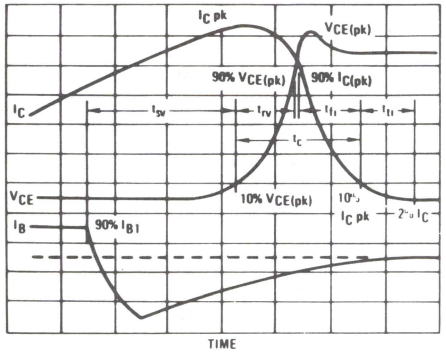

FIGURE 14 — REVERSE BASE CURRENT

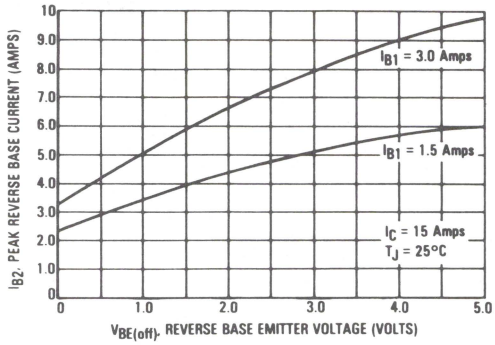

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

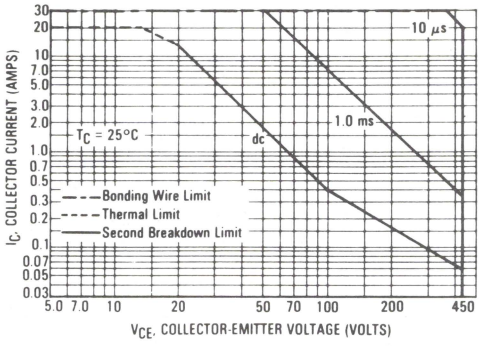

FIGURE 16 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

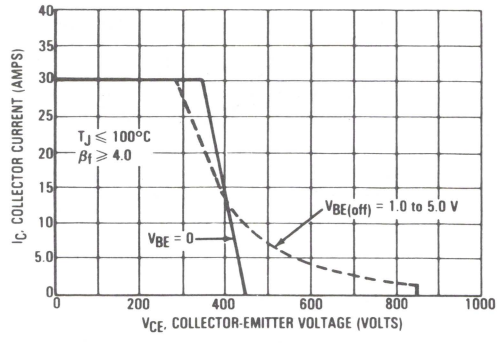

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 17. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

FIGURE 17 — THERMAL RESPONSE

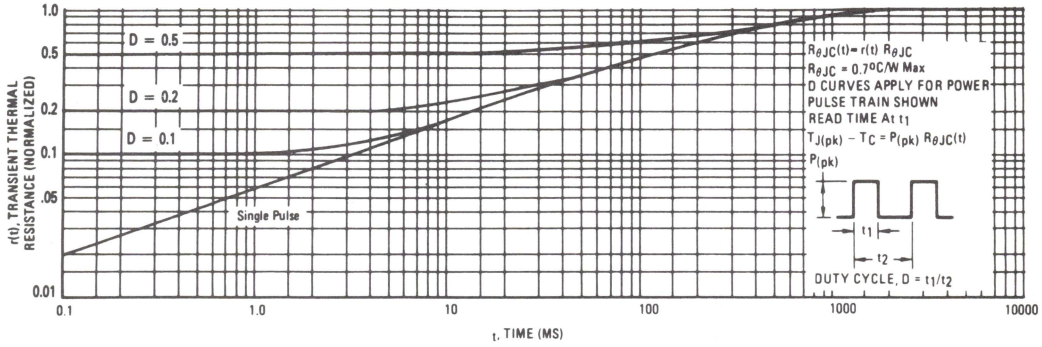

FIGURE 18 — POWER DERATING

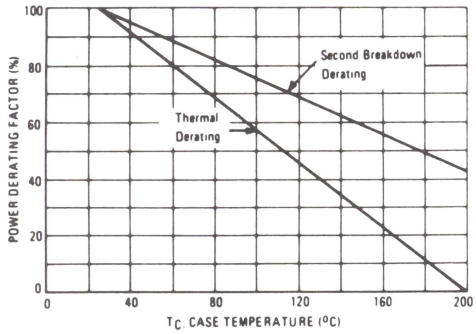

TABLE 1 — RESISTIVE LOAD SWITCHING

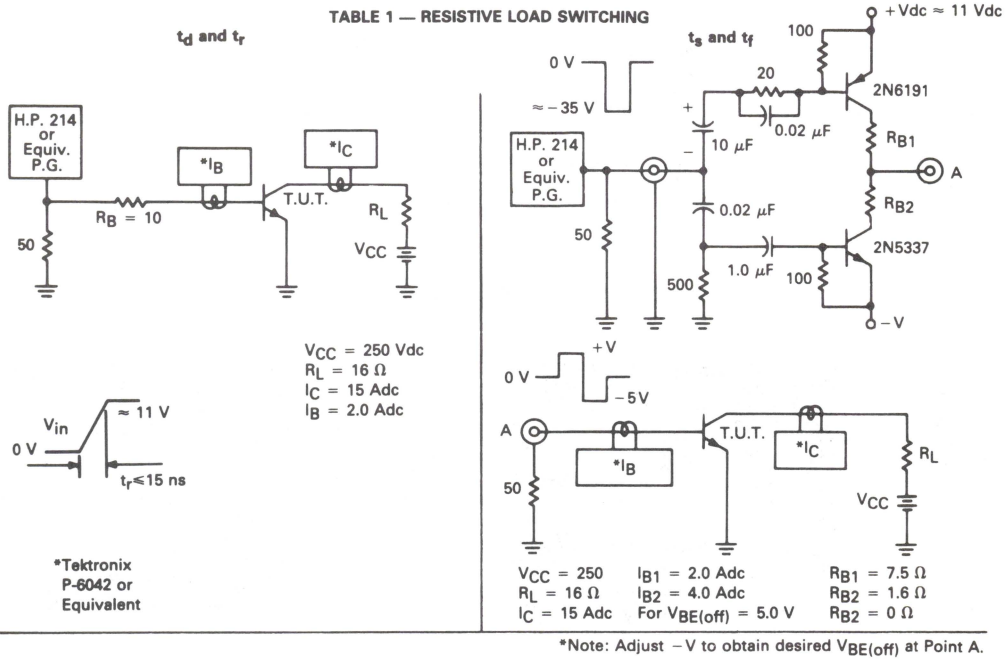

*Note: Adjust −V to obtain desired $V_{BE(off)}$ at Point A.

3

TABLE 2 — INDUCTIVE LOAD SWITCHING

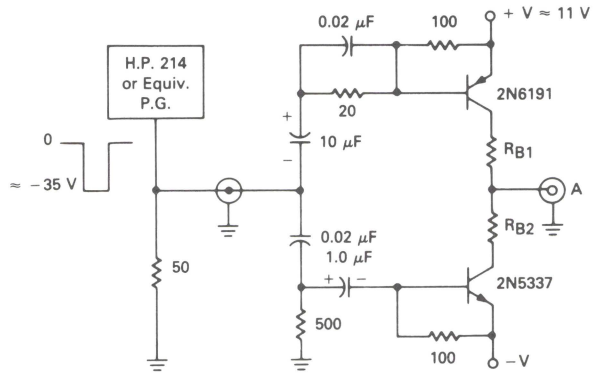

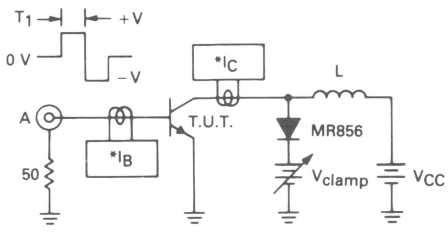



$T_1 \approx \frac{L_{coil}\,(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

*Tektronix
P-6042 or
Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope — Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust — V to obtain desired $V_{BE(off)}$ at Point A.

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

$I_{C(pk)}$ = 15 A
I_{B1} = 2.0 A
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base = 200 ns/cm



t_{fi}, t_c

$I_{C(pk)}$ = 15 A
I_{B1} = 2.0 A
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base = 200 ns/cm



MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD135,-6,-10,-16
BD137,-6,-10,-16
BD139,-6,-10,-16

PLASTIC MEDIUM POWER
SILICON NPN TRANSISTOR

. . . designed for use as audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- Available in H_{FE} groups -6, -10, -16
- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 135, 137, 139 are complementary with BD 136, 138, 140

1.5 AMPERE
POWER TRANSISTOR

NPN SILICON

45, 60, 80 VOLTS
10 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 135 BD 137 BD 139	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 135 BD 137 BD 139	45 60 100	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		1.5	Adc
Base Current	I_B		0.5	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.25 10	Watts mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		12.5 100	Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	10	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	100	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.03 Adc, I_B = 0)	BV_{CEO}*	BD 135 BD 137 BD 139	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0) (V_{CB} = 30 Vdc, I_E = 0, T_C = 125° C)	I_{CBO}		— — —	0.1 10	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	10	μAdc
DC Current Gain (I_C = 0.005A, V_{CE} = 2 V) (I_C = 0.15A, V_{CE} = 2 V) (I_C = 0.5A V_{CE} = 2 V)	h_{FE}*		25 40 25	— 250 —	—
Collector-Emitter Saturation Voltage* (I_C = 0.5 Adc, I_B = 0.05 Adc)	$V_{CE(sat)}$*		—	0.5	Vdc
Base-Emitter On Voltage* (I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1	Vdc

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

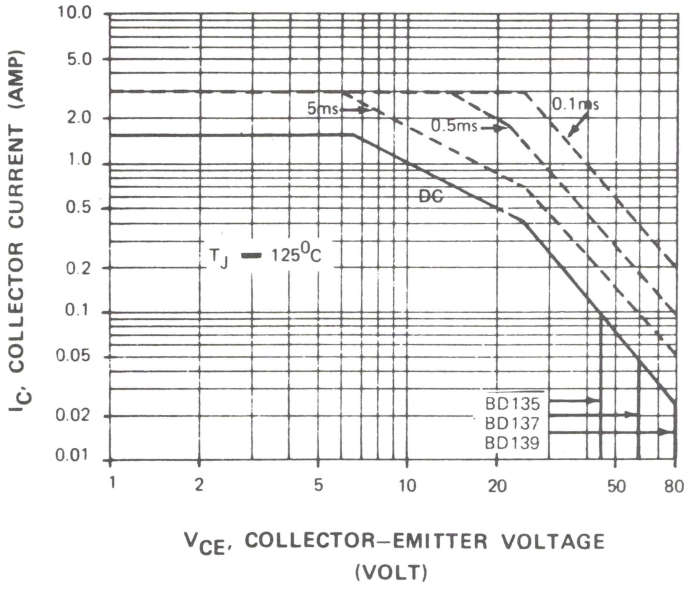

3

		Min.	Max.
Available in H_{FE} groups			
(At I_C = 0.15 A, V_{CE} = 2 V) H_{FE} group:	-6	40	100
	-10	63	160
	-16	100	250

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD136,-6,-10,-16
BD138,-6,-10,-16
BD140,-6,-10,-16

PLASTIC MEDIUM POWER
SILICON PNP TRANSISTOR

. . . designed for use as audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- Available in H_{FE} groups -6, -10, -16
- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 136, 138, 140 are complementary with BD 135, 137, 139

1.5 AMPERE
POWER TRANSISTOR

PNP SILICON

45, 60, 80 VOLTS
10 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 136 BD 138 BD 140	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 136 BD 138 BD 140	45 60 100	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		1.5	Adc
Base Current	I_B		0.5	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.25 10	Watts mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		12.5 100	Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	10	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	100	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.03 Adc, I_B = 0)	BV_{CEO}*	BD 136 BD 138 BD 140	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0) (V_{CB} = 30 Vdc, I_E = 0, T_C = 125° C)	I_{CBO}		— — —	0.1 10	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	10	μAdc
DC Current Gain (I_C = 0.005A, V_{CE} = 2 V) (I_C = 0.15A, V_{CE} = 2 V) (I_C = 0.5A, V_{CE} = 2 V)	h_{FE}*		25 40 25	– 250 –	–
Collector-Emitter Saturation Voltage* (I_C = 0.5 Adc, I_B = 0.05 Adc)	$V_{CE(sat)}$*		—	0.5	Vdc
Base-Emitter On Voltage* (I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1	Vdc

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL
2. LEADS: TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

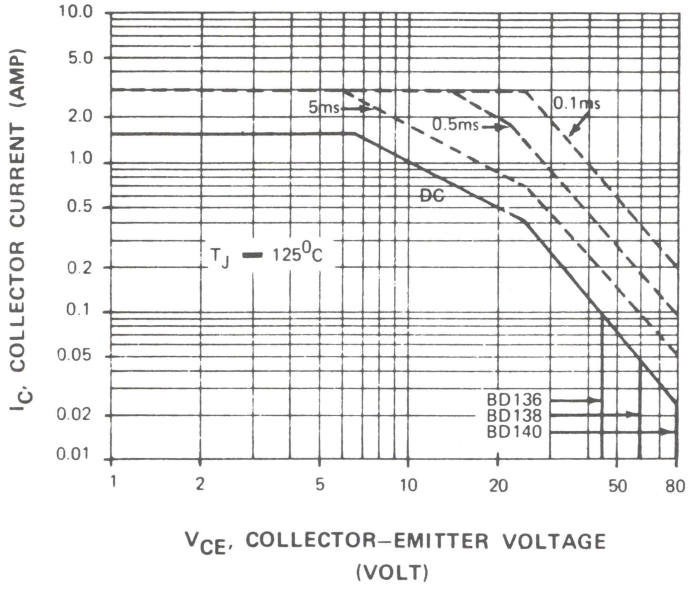

3

Available in H_{FE} groups (at I_C = 0.15 A, V_{CE} 2 V) H_{FE} group:		Min.	Max.
	-6	40	100
	-10	63	160
	-16	100	250

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD157
BD158
BD159

PLASTIC MEDIUM POWER NPN
SILICON TRANSISTOR

. . . designed for power output stages for television, radio, phonograph and other consumer product applications.

- Suitable for Transformerless, Line-Operated Equipment
- Thermopad† Construction Provides High Power Dissipation Rating for High Reliability

0.5 AMPERE
POWER TRANSISTOR

NPN SILICON

250-300-350 VOLTS
20 WATTS



*MAXIMUM RATINGS

Rating	Symbol	BD 157	BD 158	BD 159	Unit
Collector-Emitter Voltage	V_{CEO}	250	300	350	Vdc
Collector-Base Voltage	V_{CB}	275	325	375	Vdc
Emitter-Base Voltage	V_{EB}	← 5.0 →			Vdc
Collector Current — Continuous Peak	I_C	← 0.5 → ← 1.0 →			Adc
Base Current	I_B	← 0.25 →			Adc
Total Device Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	← 20 0.16 →			Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +150 →			^oC

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	$^oC/W$

ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 1.0 mAdc, I_B = 0)	BV_{CEO}	BD 157 BD 158 BD 159	250 300 350	–	Vdc
Collector Cutoff Current (At rated voltage)	I_{CBO}		–	100	μAdc
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)	I_{EBO}		–	100	μAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 50 mAdc, V_{CE} = 10 Vdc)	h_{FE}		30	240	–



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	–	0.040	–

CASE 77-05
TO-126

3

FIGURE 1 – POWER TEMPERATURE DERATING CURVE

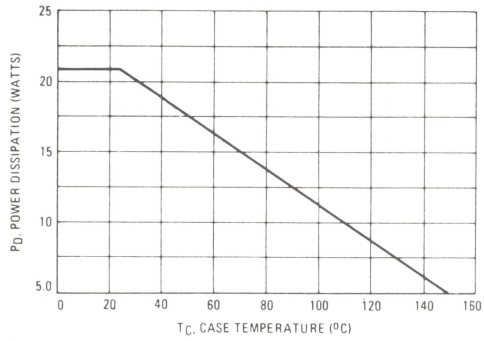

FIGURE 2 – "ON" VOLTAGES

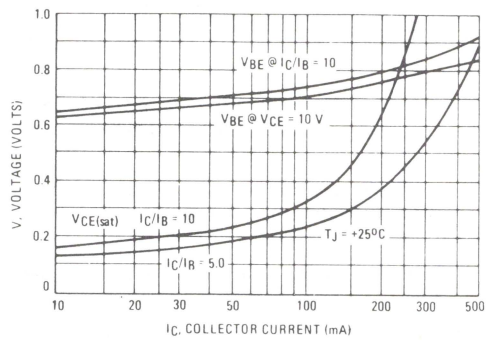

FIGURE 3 – DC SAFE OPERATING AREA

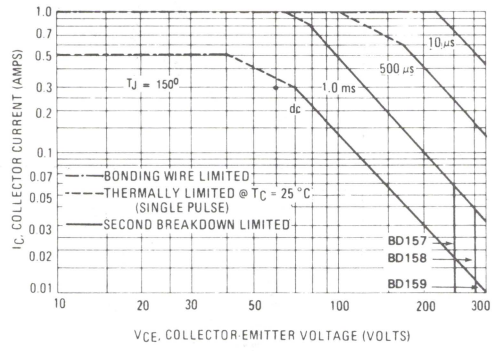

The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 4 – CURRENT GAIN

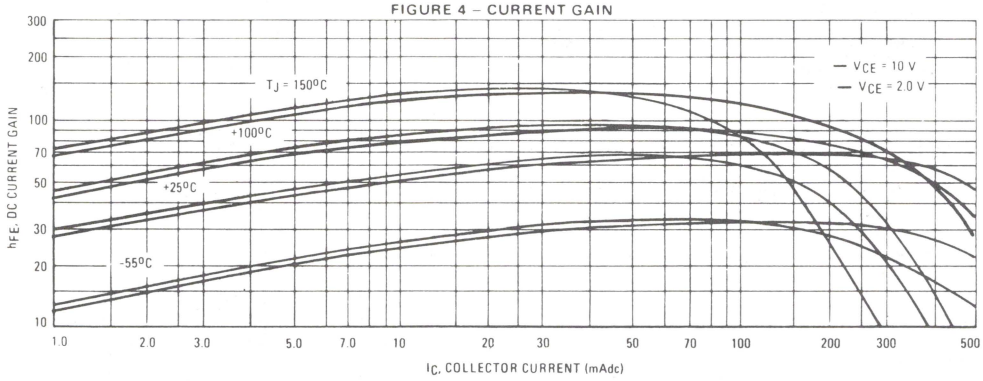

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD165
BD167
BD169

PLASTIC MEDIUM POWER
SILICON NPN TRANSISTOR

. . . designed for use as audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 165, 167, 169 are complementary with BD 166, 168, 170

1.5 AMPERE
POWER TRANSISTOR

NPN SILICON

45, 60, 80 VOLTS
20 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 165 BD 167 BD 169	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 165 BD 167 BD 169	45 60 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		1.5	Adc
Base Current	I_B		0.5	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.25 8	Watts mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		20 160	Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	100	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}*	BD 165 BD 167 BD 169	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD 165 BD 167 BD 169	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.15 A, V_{CE} = 2 V) (I_C = 0.5 A, V_{CE} = 2 V)	h_{FE}*		40 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 0.5 Adc, I_B = 0.05 Adc)	$V_{CE(sat)}$*		—	0.5	Vdc
Base-Emitter On Voltage* (I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	0.95	Vdc
Current-Gain-Bandwidth Product (I_C = 500 mAdc, V_{CE} = 2 Vdc, f = 1.0 MHz)	f_T		6.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION

CASE 77-05
TO-126

3

FIGURE 1 – P_D–T_C DERATING CURVE

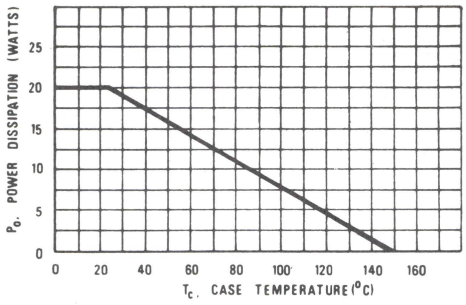

FIGURE 2 – SAFE OPERATING AREA

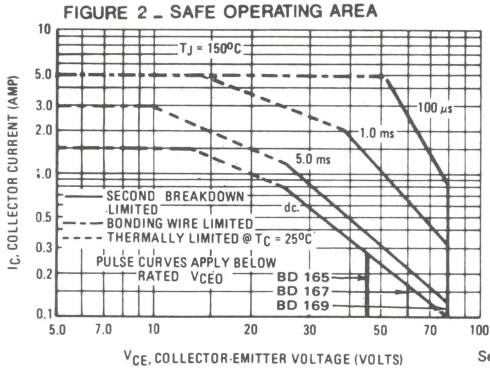

See Note 1

FIGURE 3 – COLLECTOR SATURATION REGION

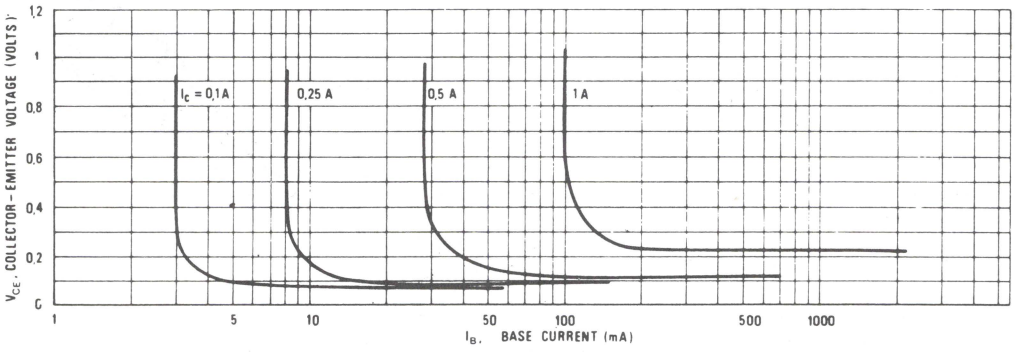

FIGURE 4 – CURRENT GAIN

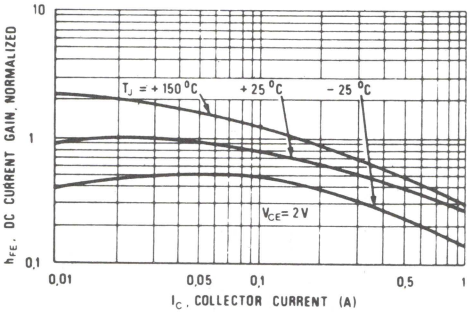

FIGURE 5 – "ON" VOLTAGE

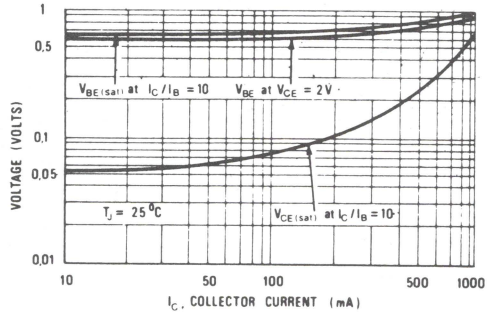

Note 1:

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)}$ ≤150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415)

BD166
BD168
BD170

PLASTIC MEDIUM POWER
SILICON PNP TRANSISTOR

. . . designed for use as audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 166, 168, 170 are complementary with BD 165, 167, 169

1.5 AMPERE
POWER TRANSISTOR

PNP SILICON

45, 60, 80 VOLTS
20 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 166 BD 168 BD 170	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 166 BD 168 BD 170	45 60 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		1.5	Adc
Base Current	I_B		0.5	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.25 10	Watts mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		20 160	Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	100	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}	BD 166 BD 168 BD 170	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD 166 BD 168 BD 170	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.15 A, V_{CE} = 2 V) (I_C = 0.5 A, V_{CE} = 2 V)	h_{FE}*		40 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 0.5 Adc, I_B = 0.05 Adc)	$V_{CE(sat)}$		—	0.5	Vdc
Base-Emitter On Voltage* (I_C = 0.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$		—	0.95	Vdc
Current-Gain-Bandwidth Product (I_C = 500 mAdc, V_{CE} = 2 Vdc, f = 1.0 MHz)	f_T		6.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.29	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION

CASE 77-05
TO-126

3

FIGURE 1 – P_θ–T_c DERATING CURVE

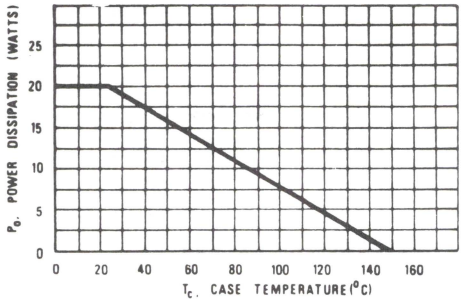

FIGURE 2 – SAFE OPERATING AREA

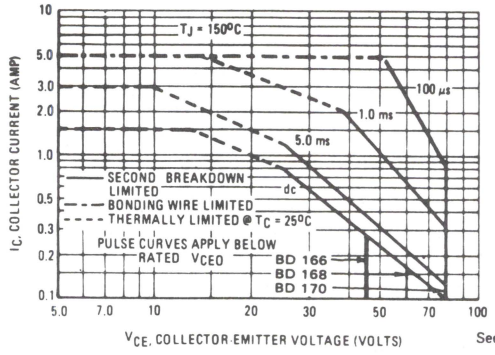

See Note

FIGURE 3 – COLLECTOR SATURATION REGION

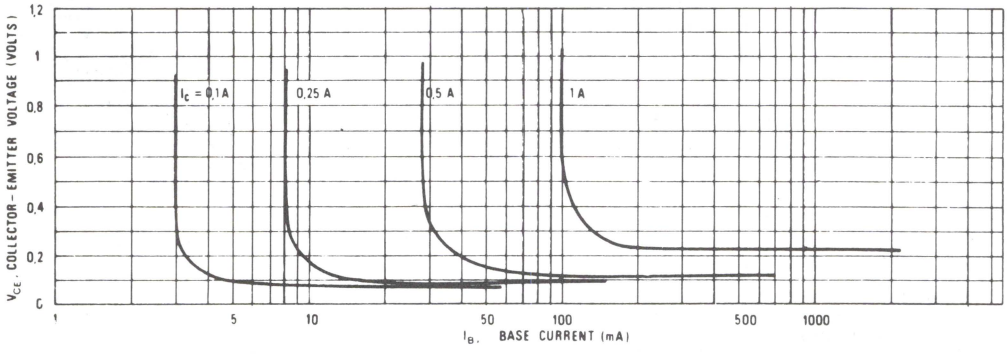

FIGURE 4 – CURRENT GAIN

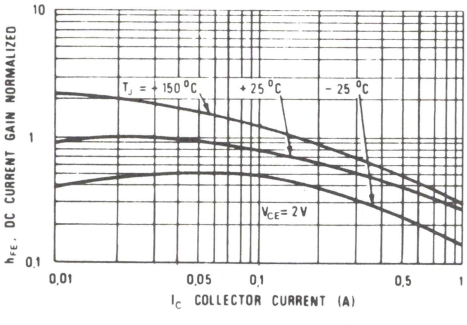

FIGURE 5 – "ON" VOLTAGE

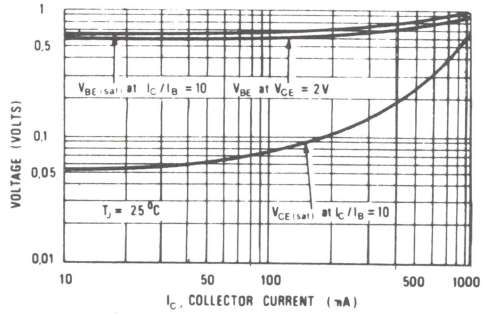

Note 1:

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415)

BD175,-6,-10,-16
BD177,-6,-10
BD179,-6,-10

PLASTIC MEDIUM POWER
SILICON NPN TRANSISTOR

. . . designed for use in 5 to 10 Watt audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 175, 177, 179 are complementary with BD 176, 178, 180
- Available in H_{FE} groups -6, -10, -16

3 AMPERE
POWER TRANSISTOR

NPN SILICON

45, 60, 80 VOLTS
30 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 175 BD 177 BD 179	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 175 BD 177 BD 179	45 60 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		3.0	Adc
Base Current	I_B		1.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		30 240	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		4.16	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}*	BD 175 BD 177 BD 179	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD 175 BD 177 BD 179	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.15 A, V_{CE} = 2 V) group -6 group -10 group -16 (I_C = 1 A, V_{CE} = 2 V)	h_{FE}*		40 63 100 15	100 160 250	
Collector-Emitter Saturation Voltage* (I_C = 1 Adc, I_B = 0.1 Adc)	$V_{CE(sat)}$*		—	0.8	Vdc
Base-Emitter On Voltage* (I_C = 1 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.3	Vdc
Current-Gain-Bandwidth Product (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		3.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

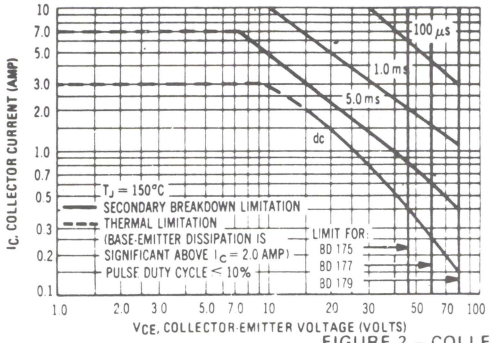

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

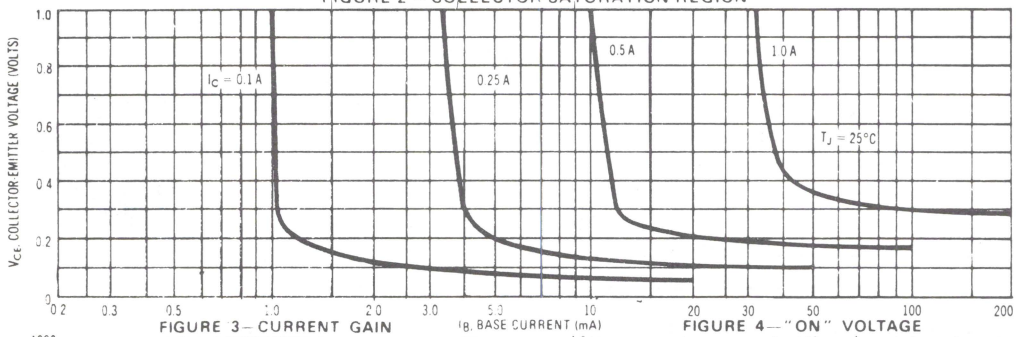

FIGURE 3 – CURRENT GAIN

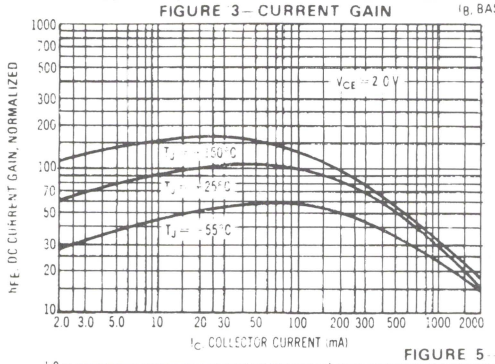

FIGURE 4 – "ON" VOLTAGE

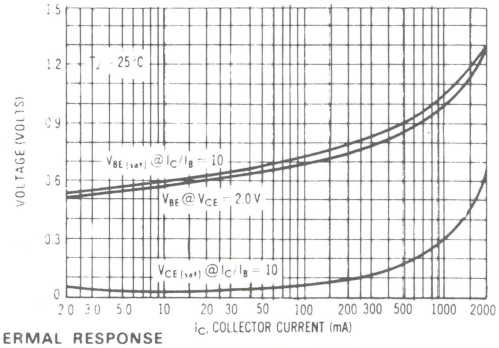

FIGURE 5 – THERMAL RESPONSE

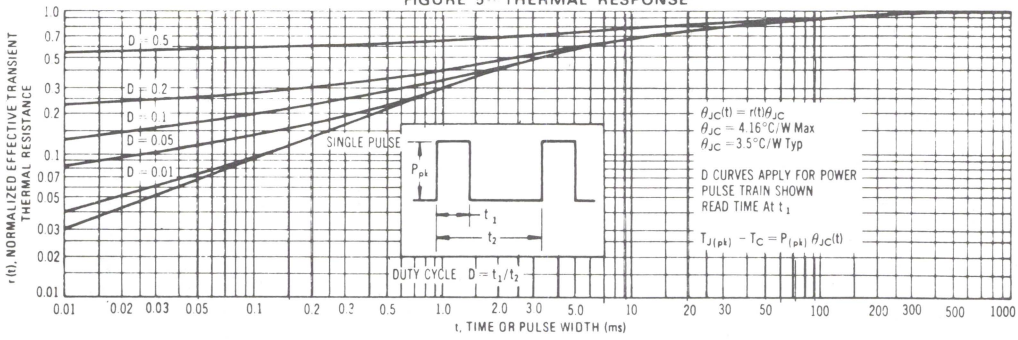

3

BD176,-6,-10,-16
BD178,-6,-10
BD180,-6,-10

PLASTIC MEDIUM POWER
SILICON PNP TRANSISTOR

. . . designed for use in 5 to 10 Watt audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 176, 178, 180 are complementary with BD 175, 177, 179
- Available in H_{FE} groups -6, -10, -16

3 AMPERE
POWER TRANSISTOR

PNP SILICON

45, 60, 80 VOLTS
30 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 176 BD 178 BD 180	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 176 BD 178 BD 180	45 60 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		3.0	Adc
Base Current	I_B		1.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		30 240	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		4.16	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}*	BD 176 BD 178 BD 180	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD 176 BD 178 BD 180	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC Current Gain (I_C = 0.15 A, V_{CE} = 2 V) group -6 group -10 group -16 (I_C = 1 A, V_{CE} = 2 V)	h_{FE}*		40 63 100 15	100 160 250	
Collector-Emitter Saturation Voltage* (I_C = 1 Adc, I_B = 0.1 Adc)	$V_{CE(sat)}$*		—	0.8	Vdc
Base-Emitter On Voltage* (I_C = 1 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.3	Vdc
Current-Gain-Bandwidth Product (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		3.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

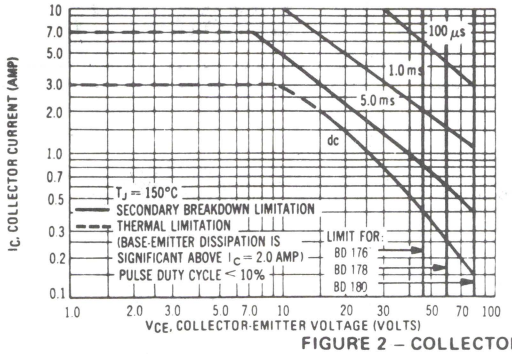

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

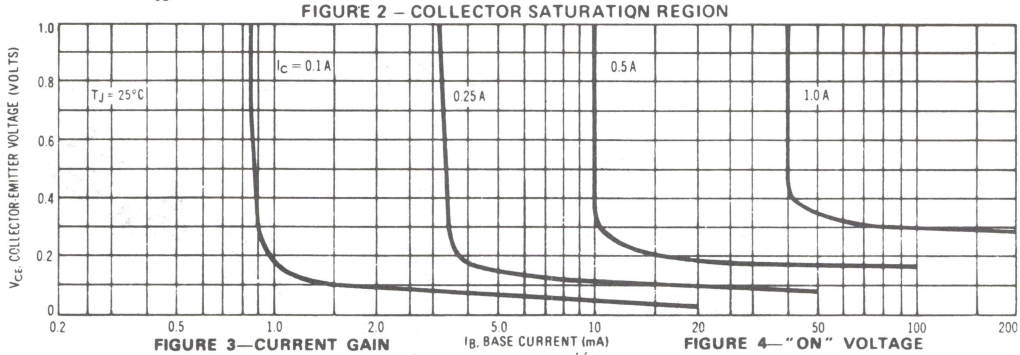

FIGURE 3—CURRENT GAIN

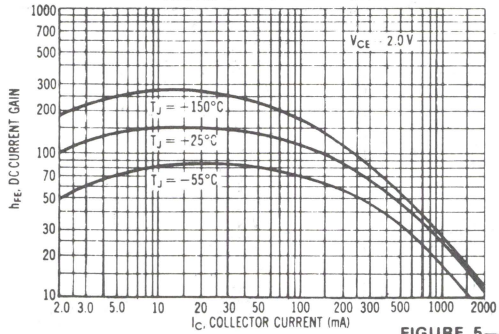

FIGURE 4—"ON" VOLTAGE

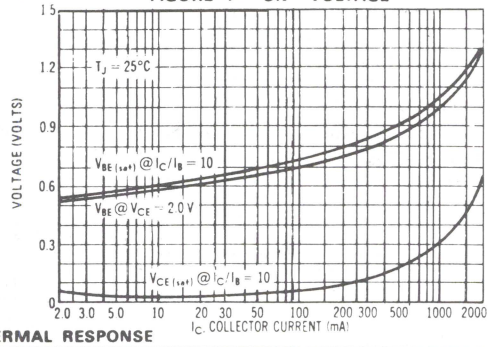

FIGURE 5—THERMAL RESPONSE

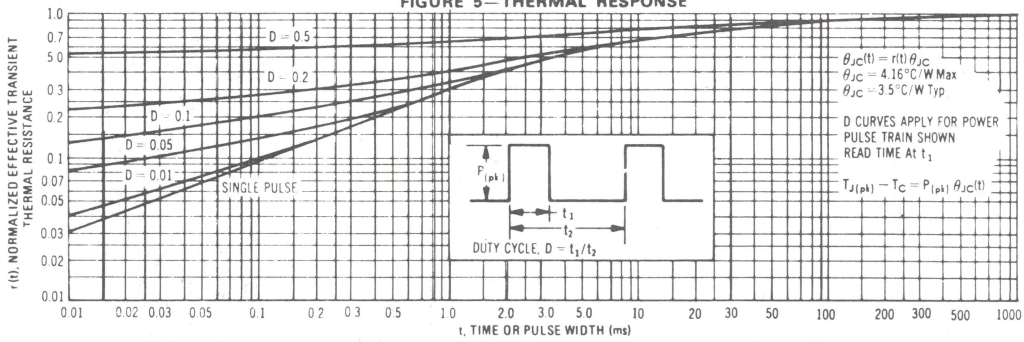

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD185
BD187
BD189

PLASTIC MEDIUM POWER
SILICON NPN TRANSISTOR

. . . designed for use in 5 to 10 Watt audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.5 Adc
- BD 185, 187, 189 are complementary with BD 186, 188, 190

4 AMPERE
POWER TRANSISTOR

NPN SILICON

30, 45, 60 VOLTS
40 WATTS

MARCH 1970—E-003



MAXIMUM RANGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 185 BD 187 BD 189	30 45 60	Vdc
Collector-Base Voltage	V_{CBO}	BD 185 BD 187 BD 189	40 55 70	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		4.0	Adc
Base Current	I_B		2.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		40 320	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		3.12	° C/W

ELECTRICAL CHARACTERISTICS (T_c = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}*	BD 185 BD 187 BD 189	30 45 60	— — —	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0) (V_{CB} = 55 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0)	I_{CBO}	BD 185 BD 187 BD 189	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.5 A, V_{CE} = 2 V) (I_C = 2A, V_{CE} = 2 V)	h_{FE}*		40 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 2Adc, I_B = 0.2 Adc)	$V_{CE(sat)}$*		—	1.0	Vdc
Base-Emitter On Voltage* (I_C = 2Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.5	Vdc
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		2.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

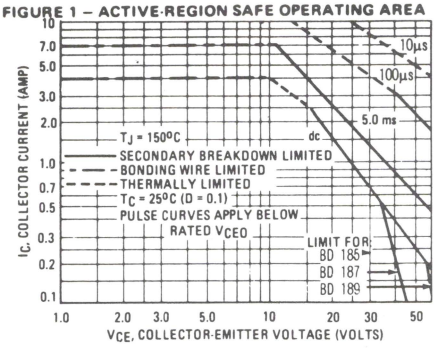

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

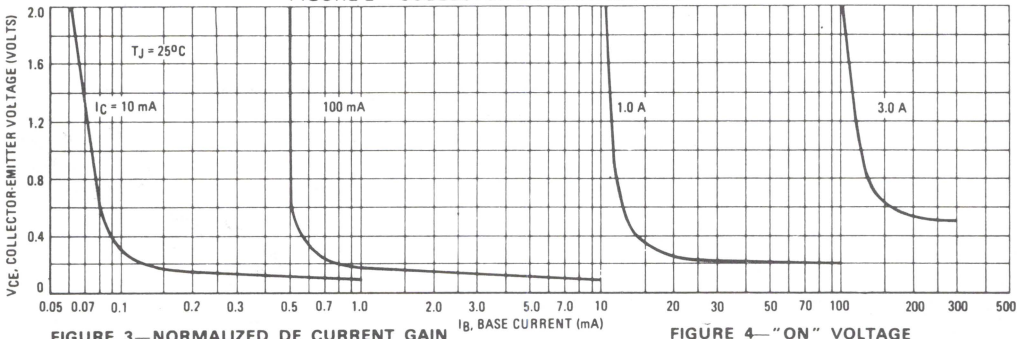

FIGURE 3—NORMALIZED DE CURRENT GAIN

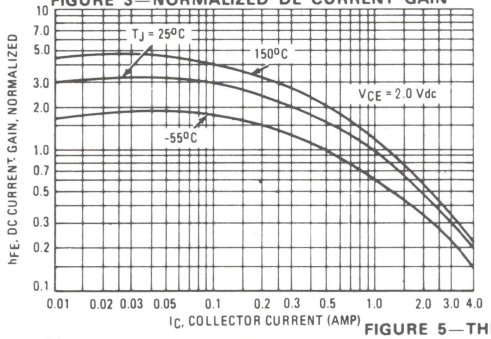

FIGURE 4—"ON" VOLTAGE

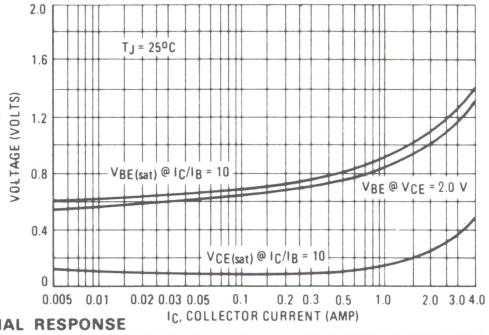

FIGURE 5—THERMAL RESPONSE

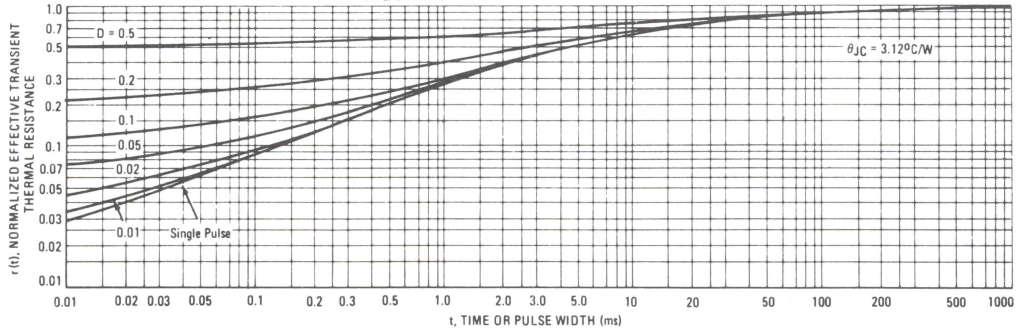

BD186
BD188
BD190

PLASTIC MEDIUM POWER
SILICON PNP TRANSISTOR

. . . designed for use in 5 to 10 Watt audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current—h_{FE} = 40 (Min) @ I_C = 0.5 Adc
- BD 186, 188, 190 are complementary with BD 185, 187, 189

4 AMPERE
POWER TRANSISTOR

PNP SILICON

30, 45, 60 VOLTS
40 WATTS



MAXIMUM RANGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 186 BD 188 BD 190	30 45 60	Vdc
Collector-Base Voltage	V_{CBO}	BD 186 BD 188 BD 190	40 55 70	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		4.0	Adc
Base Current	I_B		2.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		40 320	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		3.12	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}*	BD 186 BD 188 BD 190	30 45 60	— — —	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0) (V_{CB} = 55 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0)	I_{CBO}	BD 186 BD 188 BD 190	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.5 A, V_{CE} = 2 V) (I_C = 2 A, V_{CE} = 2 V)	h_{FE}*		40 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 2.0 Adc, I_B = 0.2 Adc)	$V_{CE(sat)}$*		—	1.0	Vdc
Base-Emitter On Voltage* (I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.5	Vdc
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		2.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs. Duty Cycle ≤ 2.0%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

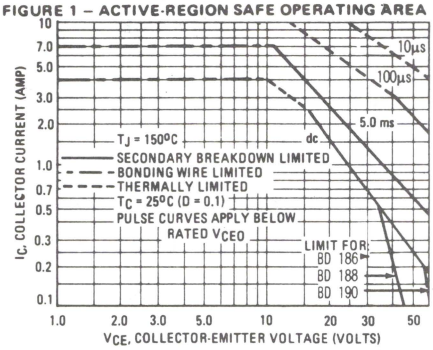

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

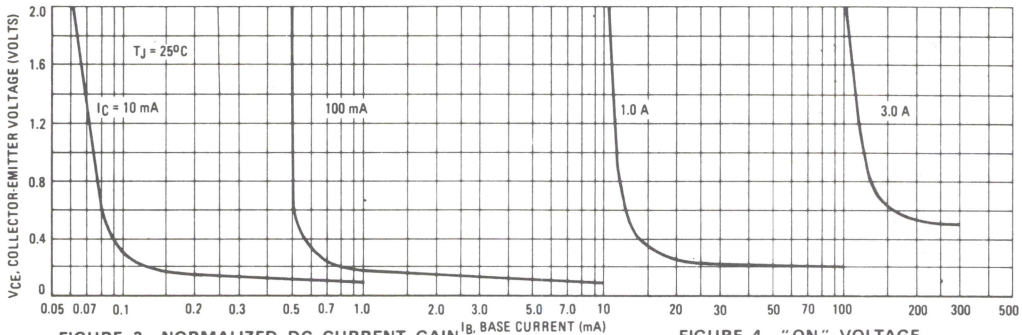

FIGURE 3—NORMALIZED DC CURRENT GAIN

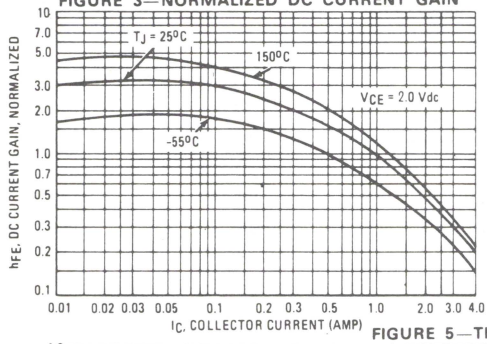

FIGURE 4—"ON" VOLTAGE

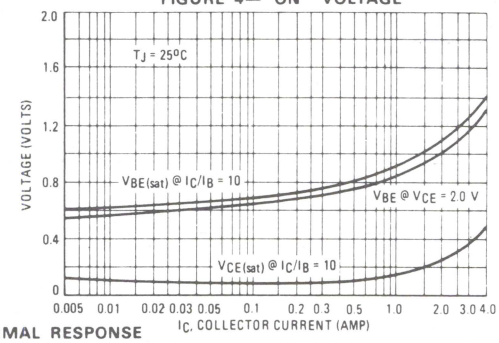

FIGURE 5—THERMAL RESPONSE

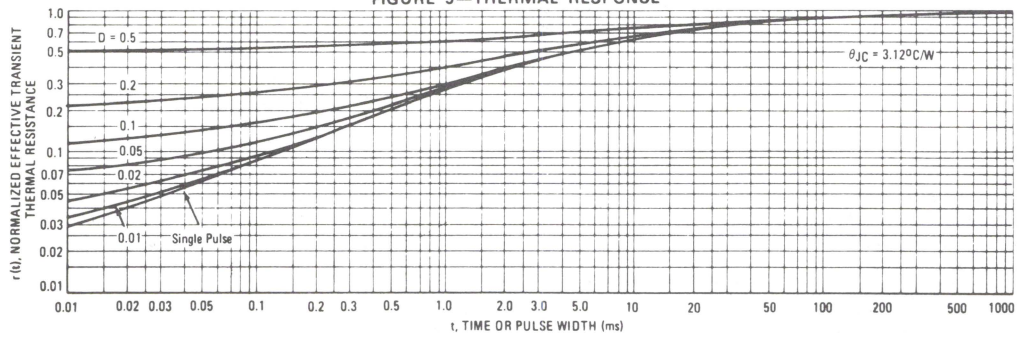

BD205
BD207

PLASTIC HIGH POWER
SILICON NPN TRANSISTOR

. . . designed for use in high power audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 30 (Min) @ I_C = 2.0 Adc
- BD 205, 207 are complementary with BD 206, 208

10 AMPERE
POWER TRANSISTOR

NPN SILICON

45, 60 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 205 BD 207	45 60	Vdc
Collector-Base Voltage	V_{CBO}	BD 205 BD 207	55 70	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		10.0	Adc
Base Current	I_B		6.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		90 720	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		1.39	° C/W

ELECTRICAL CHARACTERISTICS (T_c = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.2 Adc, I_B = 0)	BV_{CEO}*	BD 205 BD 207	45 60	— —	Vdc
Collector Cutoff Current (V_{CB} = 55 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0)	I_{CBO}	BD 205 BD 207	— —	1.0 1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	2.0	mAdc
DC current Gain (I_C = 2A, V_{CE} = 2 V) (I_C = 4A, V_{CE} = 2 V)	h_{FE}*		30 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 4 Adc, I_B = 0.4 Adc)	$V_{CE(sat)}$*		—	1.1	Vdc
Base-Emitter On Voltage* (I_C = 4 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.6	Vdc
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		1.5	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

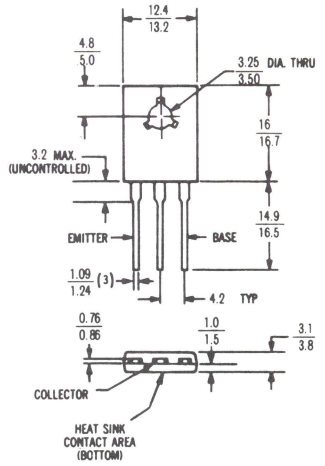

When mounting the device, torque not to exceed 0.09 m-kg.

If lead bending is required, use suitable clamps or other supports between transistor case and point of bend.
All dimensions in millimeters

CASE 90

3

FIGURE 1 — ACTIVE REGION DC SAFE OPERATING AREA

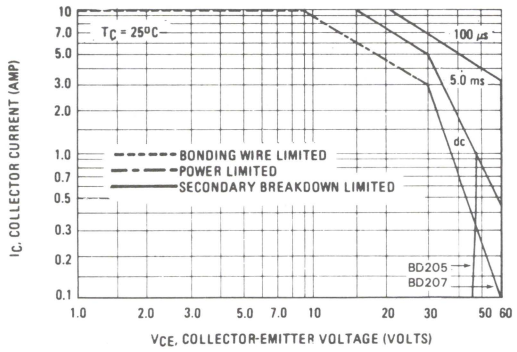

FIGURE 2 — POWER-TEMPERATURE DERATING CURVE

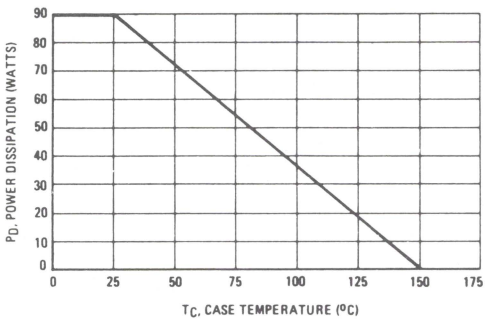

FIGURE 3 — "ON" VOLTAGES

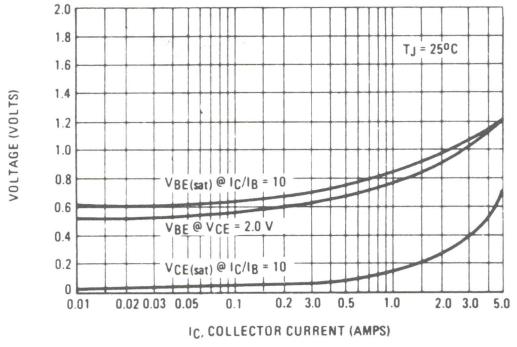

FIGURE 4 — CURRENT GAIN

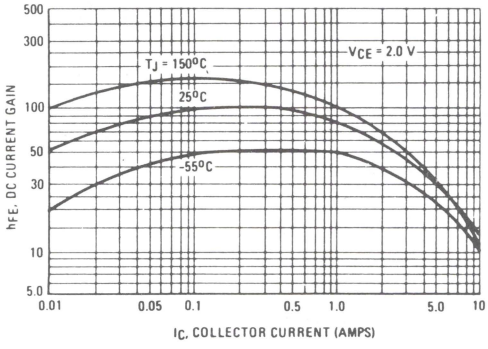

3

FIGURE 5 — THERMAL RESPONSE

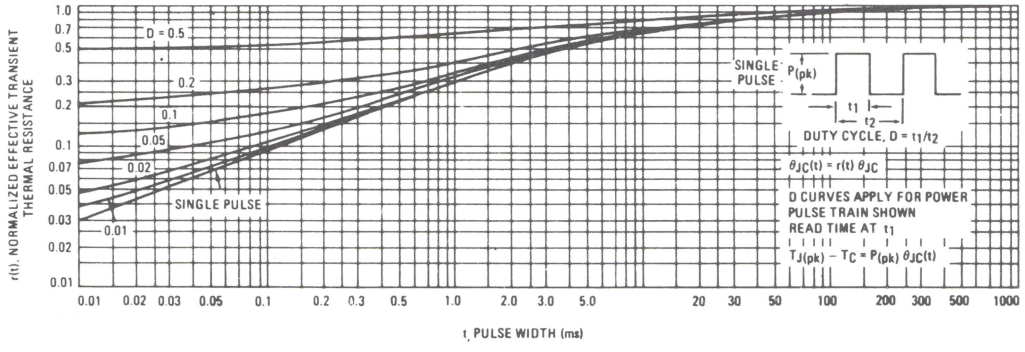

BD206
BD208

PLASTIC HIGH POWER
SILICON PNP TRANSISTOR

. . . designed for use in high power audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current—h_{FE} = 30 (Min) @ I_C = 2.0 Adc
- BD 206, 208 are complementary with BD 205, 207

10 AMPERE
POWER TRANSISTOR

PNP SILICON

45, 60 VOLTS
90 WATTS

MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 206 BD 208	45 60	Vdc
Collector-Base Voltage	V_{CBO}	BD 206 BD 208	55 70	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		10.0	Adc
Base Current	I_B		6.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		90 720	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		1.39	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.2 Adc, I_B = 0)	BV_{CEO}*	BD 206 BD 208	45 60	— —	Vdc
Collector Cutoff Current (V_{CB} = 55 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0)	I_{CBO}	BD 206 BD 208	— —	1.0 1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	2.0	mAdc
DC current Gain (I_C = 2A, V_{CE} = 2 V) (I_C = 4A, V_{CE} = 2 V)	h_{FE}*		30 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 4 Adc, I_B = 0.4 Adc)	$V_{CE(sat)}$*		—	1.1	Vdc
Base-Emitter On Voltage* (I_C = 4 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.6	Vdc
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		1.5	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs. Duty Cycle ≤ 2.0%.

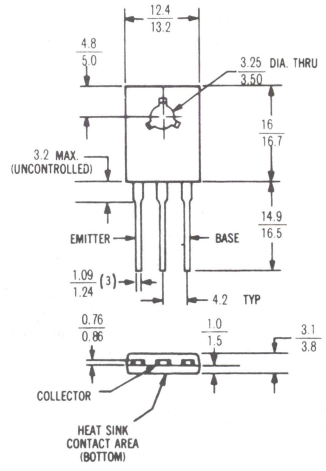

When mounting the device, torque not to exceed 0.09 m-kg.

If lead bending is required, use suitable clamps or other supports between transistor case and point of bend.
All dimensions in millimeters

CASE 90

3

FIGURE 1 — ACTIVE REGION DC SAFE OPERATING AREA

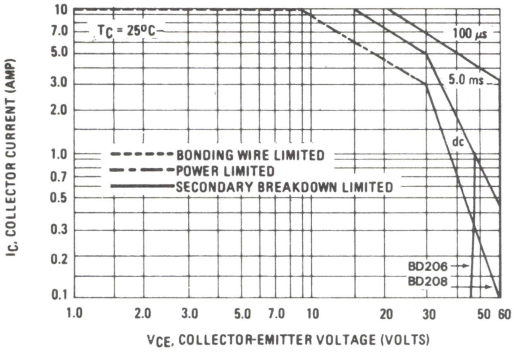

FIGURE 2 — POWER-TEMPERATURE DERATING CURVE

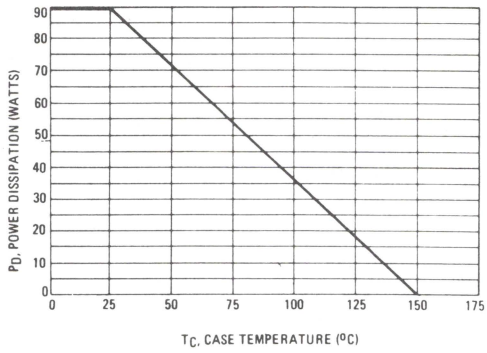

FIGURE 3 — "ON" VOLTAGES

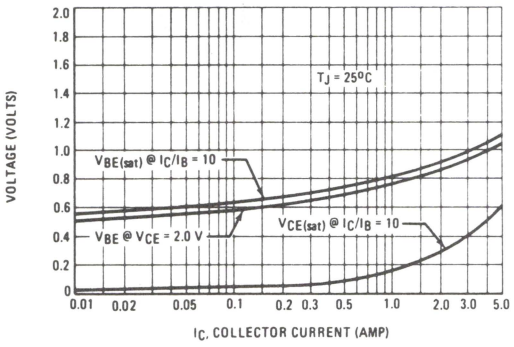

FIGURE 4 — CURRENT GAIN

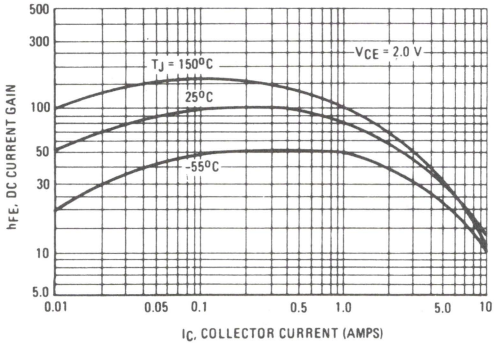

3

FIGURE 5 — THERMAL RESPONSE

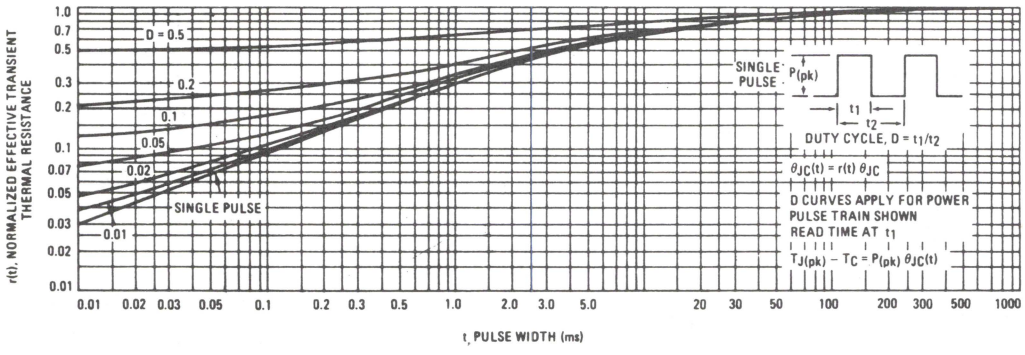

BD232

NPN SILICON MEDIUM POWER TRANSISTORS

- For Power Ouput Stages and Line Driver in Television Receivers

0.5 AMPERES

NPN SILICON POWER TRANSISTOR

300 VOLTS
20 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	300	Vdc
Collector-Emitter Voltage	V_{CES}	500	Vdc
Emitter-Base Voltage	V_{EBO}	5	Vdc
Collector Current — Continuous	I_C	0.5	Adc
Base Current	I_B	0.25	Adc
Total Device Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	20 160	Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to 150	^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	°C/W

FIGURE 1 – POWER DERATING

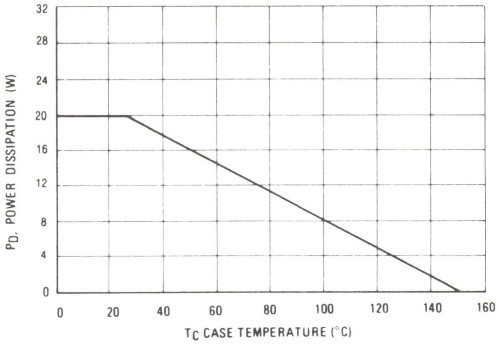



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.68	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A B S AT MAXIMUM MATERIAL CONDITION.

CASE 77-05
TO-126

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS (1)				
Collector-Emitter Sustaining Voltage (I_C = 10 mAdc, I_B = 0)	$V_{CEO(sus)}$	300	–	Vdc
Collector Cutoff Current (V_{CE} = 500 Vdc, V_{BE} = 0)	I_{CES}	–	0.1	mAdc
Base-Emitter Voltage (V_{CE} = 5 Vdc, I_C = 150 mA)	V_{BE}	–	1.0	Vdc
DC Current Gain (V_{CE} = 5 V, I_C = 50 mA) (V_{CE} = 5 V, I_C = 150 mA)	h_{FE}	25 20	150	
Collector Emitter Saturation Voltage (I_C = 150 mA, I_B = 15 mA)	$V_{CE(sat)}$	–	1.0	Vdc

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

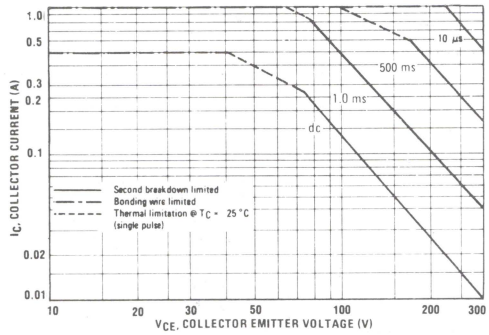

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 6 is based on $T_{J(pk)}$ = 150°C. T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in figure 7. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A)

3

FIGURE 3 – "ON" VOLTAGES

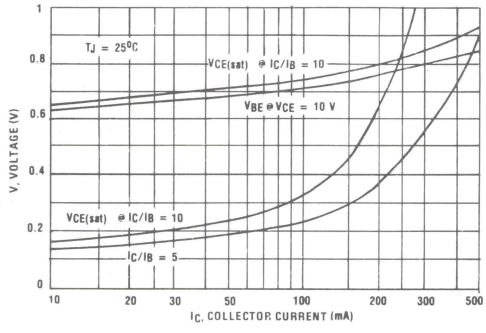

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD233
BD235
BD237

PLASTIC MEDIUM POWER
SILICON NPN TRANSISTOR

. . . designed for use in 5 to 10 Watt audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 233, 235, 237 are complementary with BD 234, 236, 238

2 AMPERE
POWER TRANSISTOR

NPN SILICON

45, 60, 80 VOLTS
25 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 233 BD 235 BD 237	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 233 BD 235 BD 237	45 60 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		2.0	Adc
Base Current	I_B		1.0	Adc
Total Device Dissipation T_C=25°C	P_D		25	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}		55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		5 0	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}	BD 233 BD 235 BD 237	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD 233 BD 235 BD 237	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.15 A, V_{CE} = 2 V) (I_C = 1 A, V_{CE} = 2 V)	h_{FE1} h_{FE2}		40 25	— —	
Collector-Emitter Saturation Voltage* (I_C = 1 Adc, I_B = 0.1 Adc)	$V_{CE(sat)}$*		—	0.6	Vdc
Base-Emitter On Voltage* (I_C = 1 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.3	Vdc
Current-Gain-Bandwidth Product (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		3.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

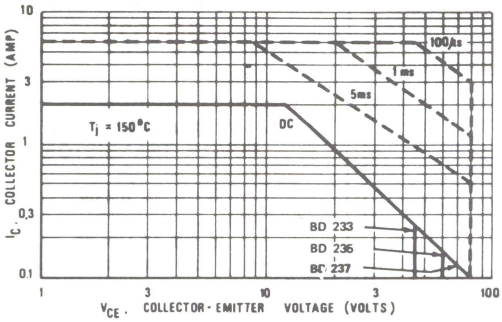

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

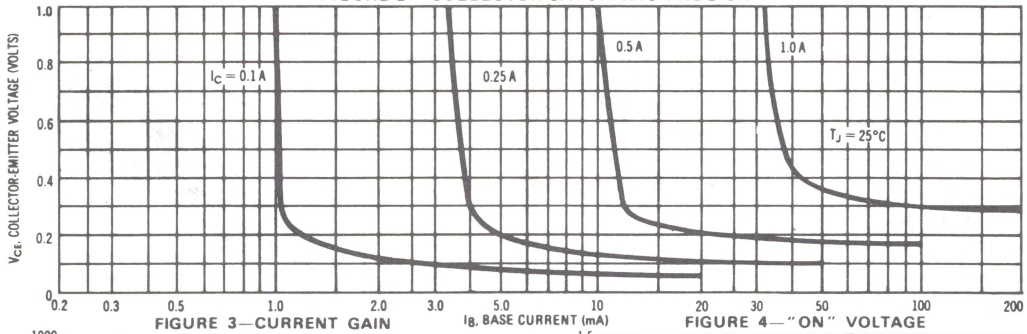

FIGURE 3—CURRENT GAIN

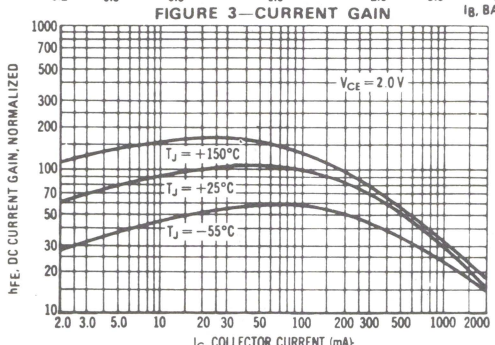

FIGURE 4—"ON" VOLTAGE

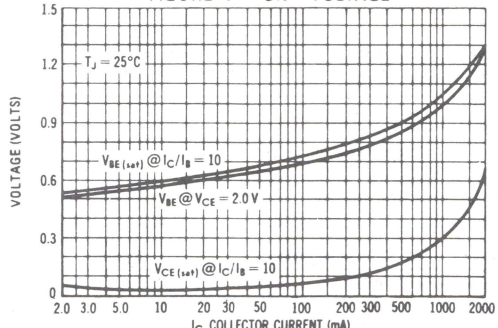

FIGURE 5—THERMAL RESPONSE

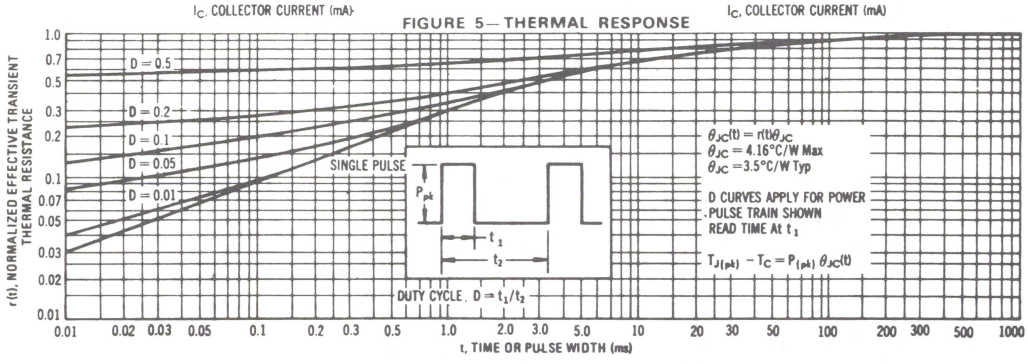

BD234
BD236
BD238

PLASTIC MEDIUM POWER
SILICON PNP TRANSISTOR

. . . designed for use in 5 to 10 Watt audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 0.15 Adc
- BD 234, 236, 238 are complementary with BD 233, 235, 237

2 AMPERE
POWER TRANSISTOR

PNP SILICON

45, 60, 80 VOLTS
25 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD 234 BD 236 BD 238	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD 234 BD 236 BD 238	45 60 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		2.0	Adc
Base Current	I_B		1.0	Adc
Total Device Dissipation T_C=25°C	P_D		25	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		5.0	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0)	BV_{CEO}*	BD 234 BD 236 BD 238	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD 234 BD 236 BD 238	— — —	0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 0.15 A, V_{CE} = 2 V) (I_C = 1 A, V_{CE} = 2 V)	h_{FE1} h_{FE2}		40 25	— —	
Collector-Emitter Saturation Voltage* (I_C = 1 Adc, I_B = 0.1 Adc)	$V_{CE(sat)}$*		—	0.6	Vdc
Base-Emitter On Voltage* (I_C = 1 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.3	Vdc
Current-Gain-Bandwidth Product (I_C = 250 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		3.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	2° TYP		2° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

CASE 77-05
TO-126

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

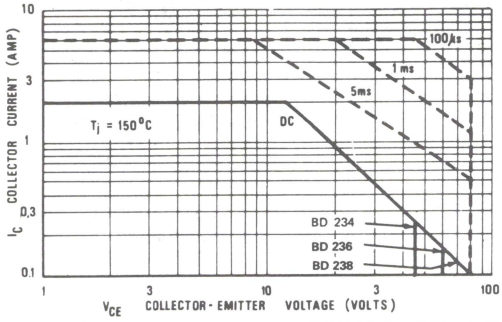

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

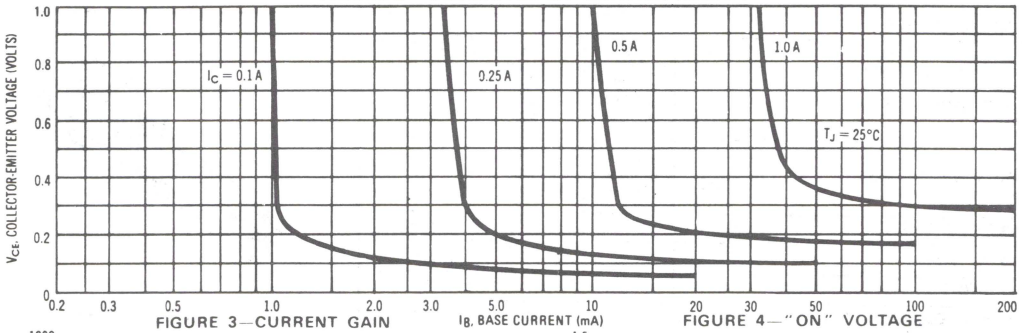

FIGURE 3—CURRENT GAIN

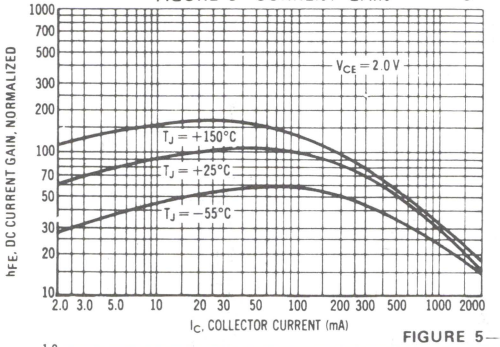

FIGURE 4—"ON" VOLTAGE

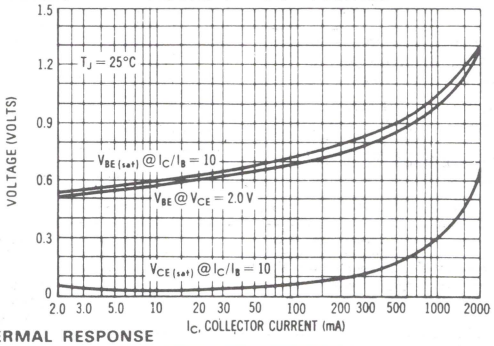

FIGURE 5—THERMAL RESPONSE

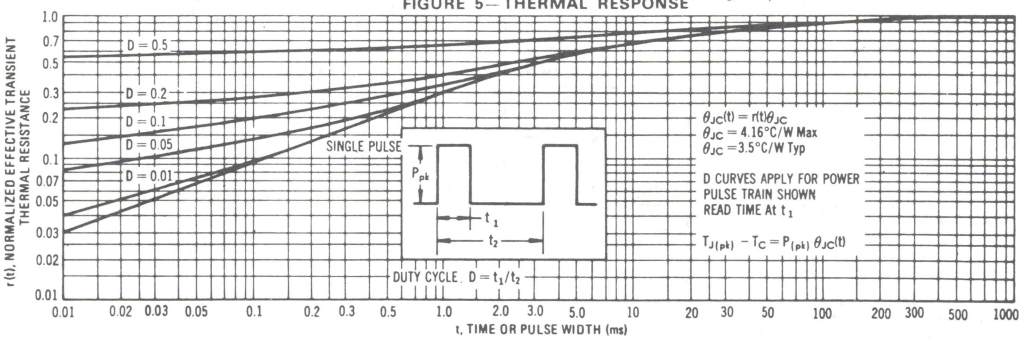

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
BD239	BD240
BD239A	BD240A
BD239B	BD240B
BD239C	BD240C

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications. Compact TO-220 AB package. TO-66 leadform also available ordered with "66" suffix.

2 AMPERE

POWER TRANSISTORS COMPLEMENTARY SILICON

45, 60, 80, 100 VOLTS
30 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD239 BD240	BD239A BD240A	BD239B BD240B	BD239C BD240C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Emitter Voltage	V_{CB}	55	70	90	115	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current – Continuous Peak	I_C	2 4				Adc
Base Current	I_B	0.6				Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	30 0.24				Watts W/°C
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	2.0 0.016				Watts W/°C
Unclamped Inductive Load Energy (See Note 3)	E	32				mJ
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.167	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	BD239, BD240 BD239A, BD240A BD239B, BD240B BD239C, BD240C	$V_{CEO(sus)}$	45 60 80 100	– – – –	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0)	 BD239A, BD240A BD239B,C, BD240B, C	I_{CEO}	 – –	 0.3 0.3	mAdc
Collector Cutoff Current (V_{CE} = 45 Vdc, V_{EB} = 0) (V_{CE} = 60 Vdc, V_{EB} = 0) (V_{CE} = 80 Vdc, V_{EB} = 0) (V_{CE} = 100 Vdc, V_{EB} = 0)	 BD239, BD240 BD239A, BD240A BD239B, BD240A BD239C, BD240C	I_{CES}	 – – – –	 200 200 200 200	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 0.2 Adc, V_{CE} = 4.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)		h_{FE}	 40 15	 –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 200 mAdc)		$V_{CE(sat)}$	–	0.7	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	1.3	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2) (I_C = 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0	–	MHz
Small-Signal Current Gain (I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		h_{fe}	20	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
(2) $f_T = |h_{fe}| \cdot f_{test}$
(3) This rating based on testing with L_C = 20 mH, R_{BE} = 100 Ω, R_E = 0.1 Ω, I_C = 1.8 A.

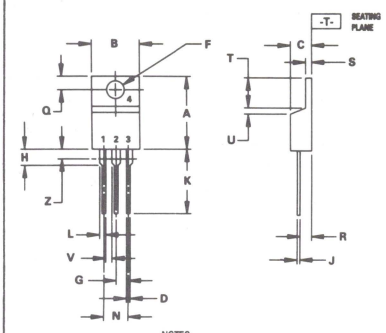

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	–	0.045	–
Z	–	2.04	–	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 – DC CURRENT GAIN

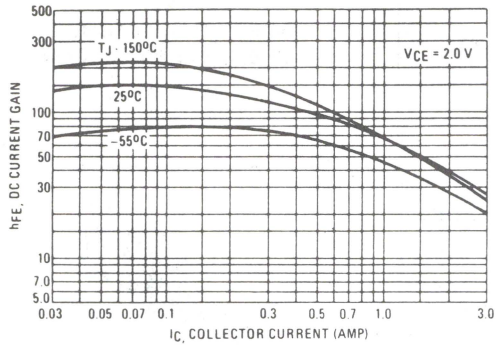

FIGURE 2 – TURN-OFF TIME

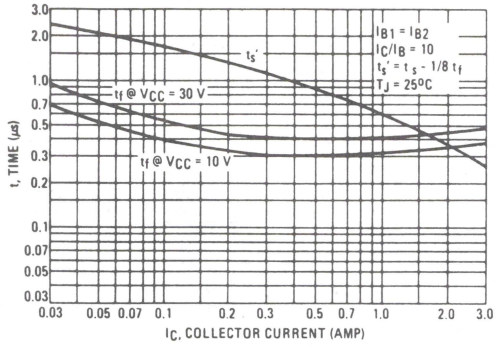

FIGURE 3 – SWITCHING TIME EQUIVALENT CIRCUIT

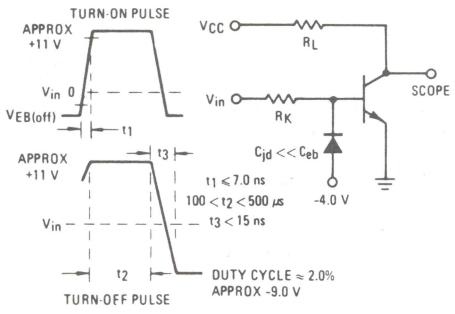

FIGURE 4 – TURN-ON TIME

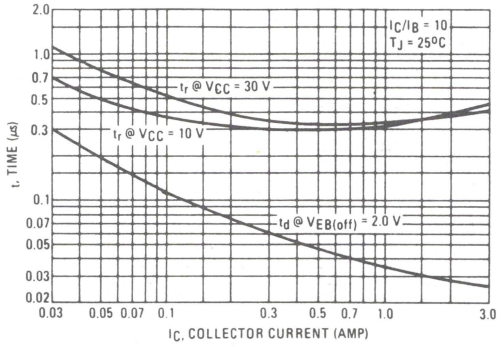

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

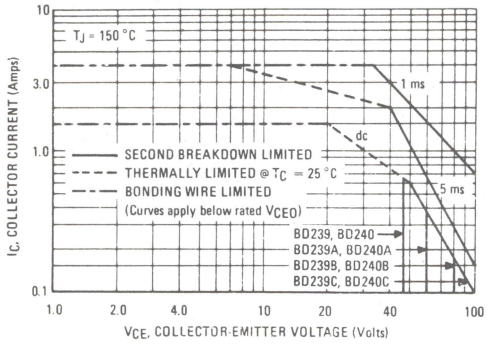

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A).

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
BD241	BD242
BD241A	BD242A
BD241B	BD242B
BD241C	BD242C

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications.

- Collector-Emitter Saturation Voltage –
  V_{CE} = 1.2 Vdc (Max) @ I_C = 3.0 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 45 Vdc (Min.) BD241, BD242
  = 60 Vdc (Min.) BD241A, BD242A
  = 80 Vdc (Min.) BD241B, BD242B
  = 100 Vdc (Min.) BD241C, BD242C
- High Current Gain – Bandwidth Product
  f_T = 3.0 MHz (Min) @ I_C = 500 mAdc
- Compact TO-220 AB Package
- TO-66 Leadform Also Available ordered with "–66" suffix.

3 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
45, 60, 80, 100 VOLTS
40 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD241 BD242	BD241A BD242A	BD241B BD242B	BD241C BD242C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Emitter Voltage	V_{CES}	55	70	90	115	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current – Continuous	I_C	3.0				Adc
Peak		5.0				Adc
Base Current	I_B	1.0				Adc
Total Device Dissipation @ T_C = 25°C	P_D	40				Watts
Derate above 25°C		0.32				W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.125	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

FIGURE 1 – POWER DERATING

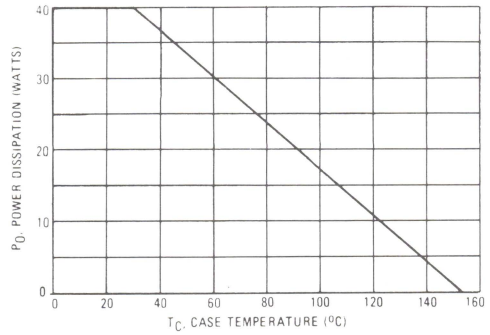

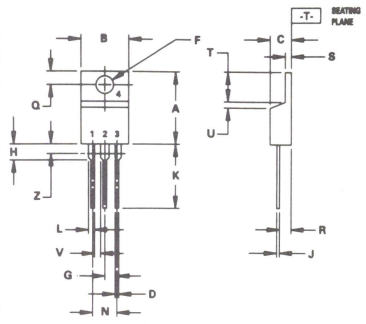

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Max.	Unit.
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage[1] (I_C = 30 mAdc, I_B = 0)	BD241, BD242 BD241A, BD242A BD241B, BD242B BD241C, BD242C	V_{CEO}	45 60 80 100		Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0)	BD241, BD241A, BD242, BD242A, BD241B, BD241C, BD242B, BD242C	I_{CEO}		0.3 0.3	mAdc
Collector Cutoff Current (V_{CE} = 45 Vdc, V_{EB} = 0) (V_{CE} = 60 Vdc, V_{EB} = 0) (V_{CE} = 80 Vdc, V_{EB} = 0) (V_{CE} = 100 Vdc, V_{EB} = 0)	 BD241, BD242 BD241A, BD242A BD241B, BD242B BD241C, BD242C	I_{CES}		 200 200 200 200	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}		1.0	mAdc
ON CHARACTERISTICS[1]					
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc) (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)		h_{FE}	 25 10		
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 600 Adc)		$V_{CE(sat)}$		1.2	Vdc
Base-Emitter On Voltage (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$		1.8	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product[2] (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0		MHz
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1kHz)		h_{fe}	20		

[1] Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%
[2] $f_T = |h_{fe}| \bullet f_{test}$

3

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

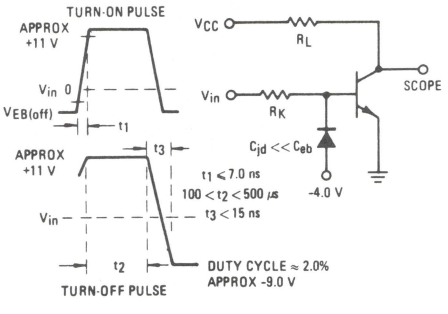

FIGURE 3 – TURN-ON TIME

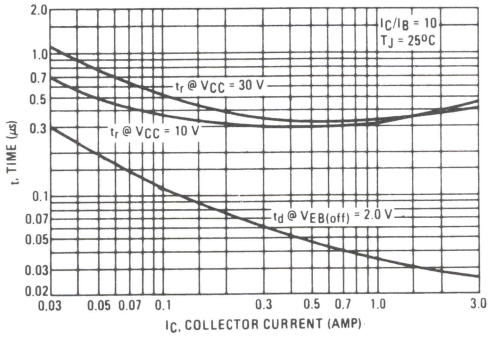

FIGURE 4 – THERMAL RESPONSE

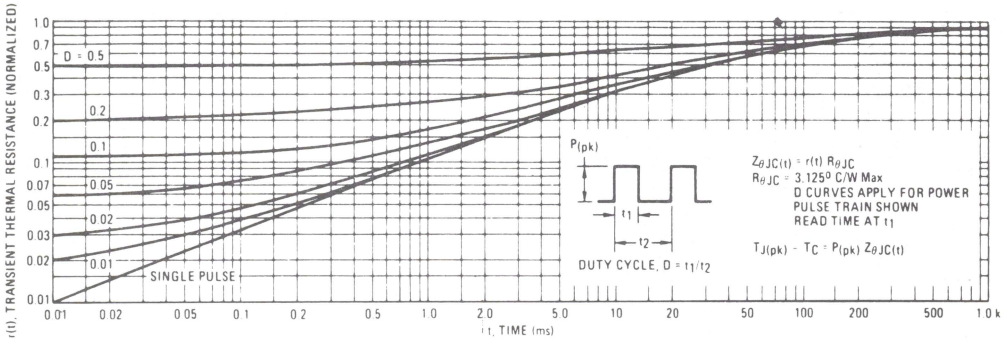

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

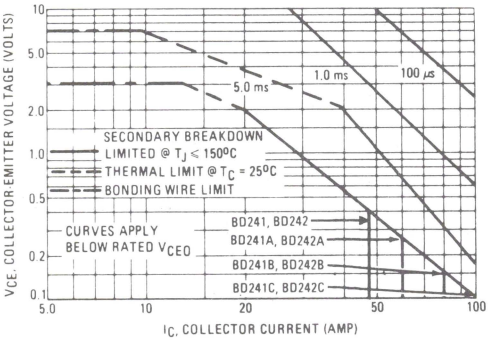

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150^{\circ}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A).

FIGURE 6 – TURN-OFF TIME

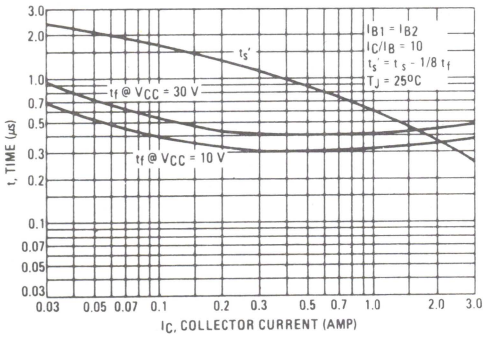

FIGURE 7 – CAPACITANCE

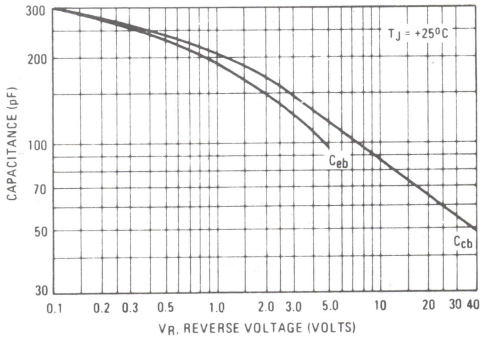

3

FIGURE 8 – DC CURRENT GAIN

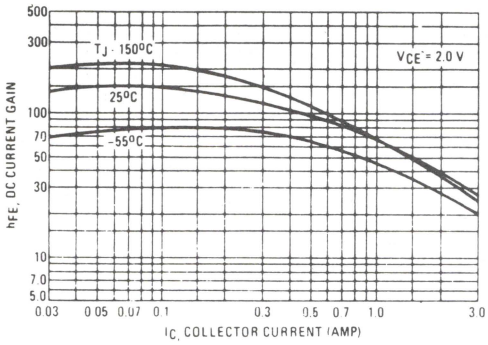

FIGURE 9 – COLLECTOR SATURATION REGION

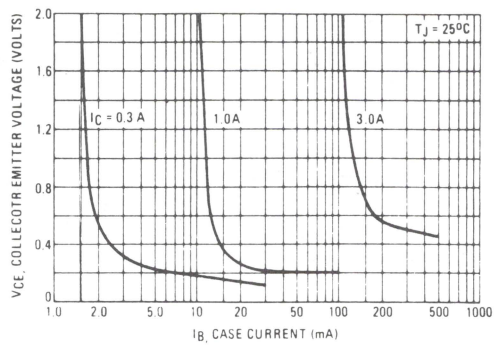

FIGURE 10 – "ON" VOLTAGES

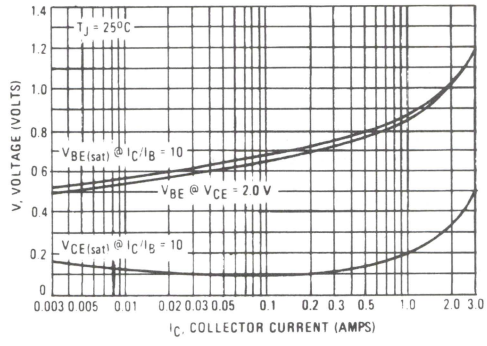

FIGURE 11 – TEMPERATURE COEFFICIENTS

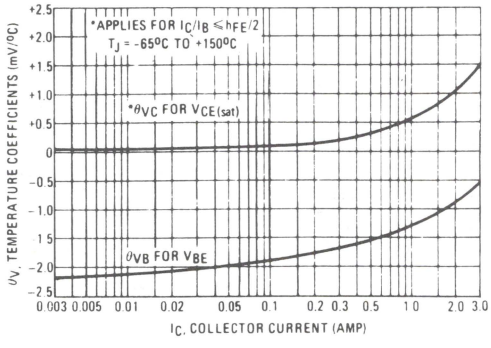

3

FIGURE 12 – COLLECTOR CUT-OFF REGION

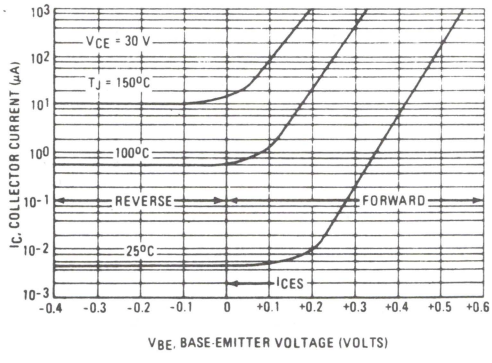

FIGURE 13 – EFFECTS OF BASE-EMITTER RESISTANCE

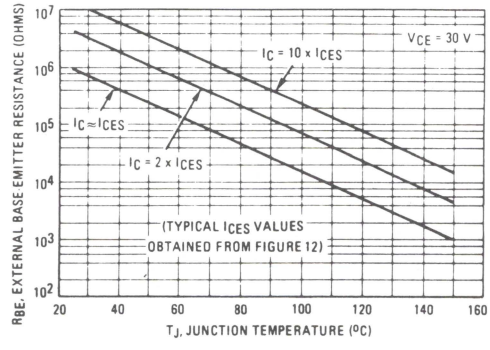

BD243 BD243A BD243B BD243C
BD244 BD244A BD244B BD244C

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications.

- Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.5 Vdc (Max) @ I_C = 6.0 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 45 Vdc (Min) — BD243, BD244
  = 60 Vdc (Min) — BD243A, BD244A
  = 80 Vdc (Min) — BD243B, BD244B
  = 100 Vdc (Min) — BD243C, BD244C
- High Current Gain – Bandwidth Product
  f_T = 3.0 MHz (Min) @ I_C = 500 mAdc
- Compact TO-220 AB Package

6 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON

45-60-80-100 VOLTS
65 WATTS



*MAXIMUM RATINGS

Rating	Symbol	BD243 BD244	BD243A BD244A	BD243B BD244B	BD243C BD244C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current Continuous	I_C	6				Adc
Peak		10				
Base Current	I_B	2.0				Adc
Total Device Dissipation @ T_C = 25°C	P_D	65				Watts
Derate above 25°C		0.52				W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.92	°C/W

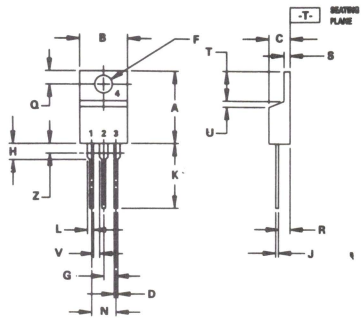

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

FIGURE 1 – POWER DERATING

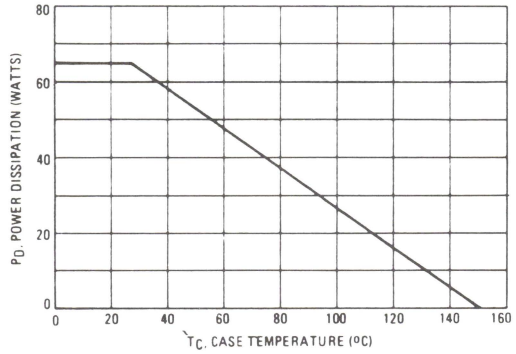

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	BD243, BD244	$V_{CEO(sus)}$	45	–	Vdc
	BD243A, BD244A		60	–	
	BD243B, BD244B		80	–	
	BD243C, BD244C		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	BD243, BD243A, BD244, BD244A		–	0.7	
(V_{CE} = 60 Vdc, I_B = 0)	BD243B, BD243C, BD244B, BD244C		–	0.7	
Collector Cutoff Current		I_{CES}			μAdc
(V_{CE} = 45 Vdc, V_{EB} = 0)	BD243, BD244		–	400	
(V_{CE} = 60 Vdc, V_{EB} = 0)	BD243A, BD244A		–	400	
(V_{CE} = 80 Vdc, V_{EB} = 0)	BD243B, BD244B		–	400	
(V_{CE} = 100 Vdc, V_{EB} = 0)	BD243C, BD244C		–	400	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 0.3 Adc, V_{CE} = 4.0 Vdc)			30	–	
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)			15	–	
Collector-Emitter Saturation Voltage (I_C = 6.0 Adc, I_B = 1 Adc)		$V_{CE(sat)}$	–	1.5	Vdc
Base-Emitter On Voltage (I_C = 6.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	2.0	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2) (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0	–	MHz
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		h_{fe}	20	–	–

(1) Pulse Test: Pulsewidth ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = h_{fe} \bullet f_{test}$

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

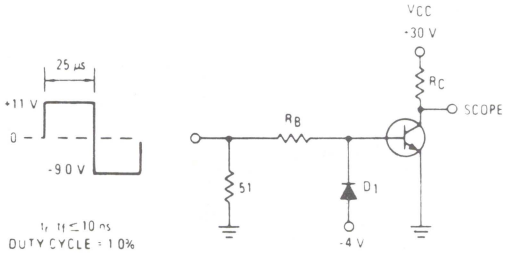

RB and RC VARIED TO OBTAIN DESIRED CURRENT LEVELS

D1 MUST BE FAST RECOVERY TYPE eg
MBD5200 USED ABOVE IB 100 mA
MSD6100 USED BELOW IB 100 mA

FIGURE 3 – TURN-ON TIME

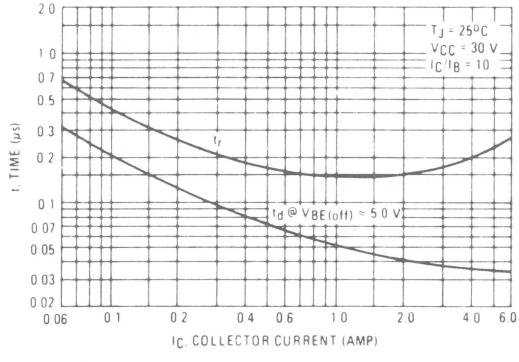

FIGURE 4 – THERMAL RESPONSE

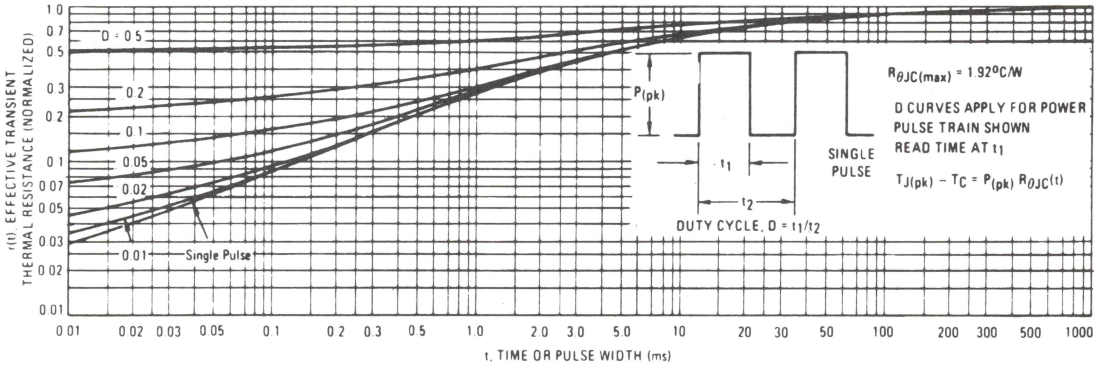

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

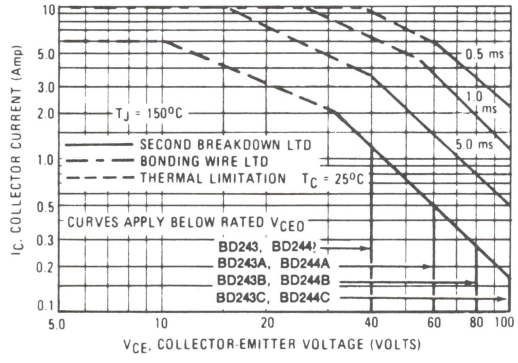

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^{\circ}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A).

FIGURE 6 – TURN-OFF TIME

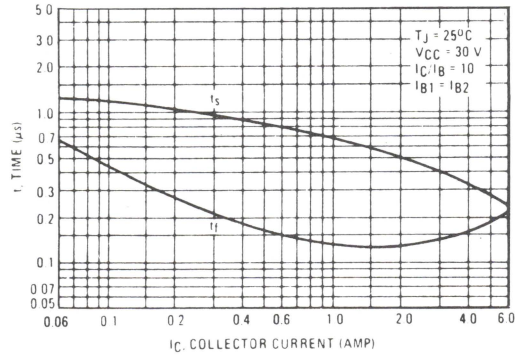

FIGURE 7 – CAPACITANCE

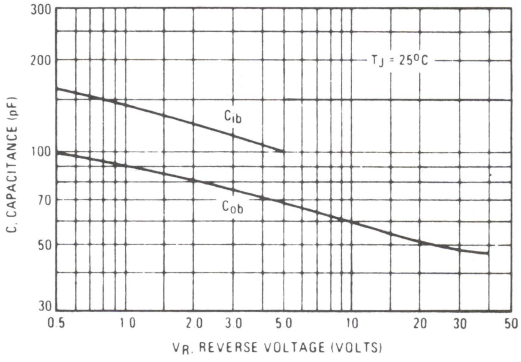

3

FIGURE 8 – DC CURRENT GAIN

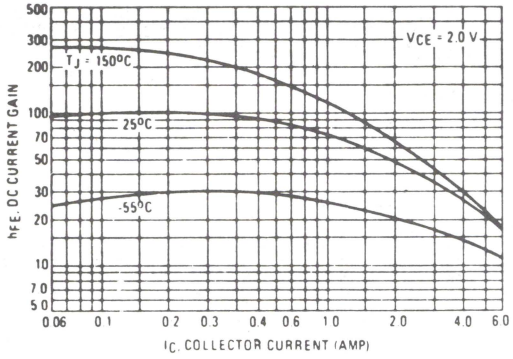

FIGURE 9 – COLLECTOR SATURATION REGION

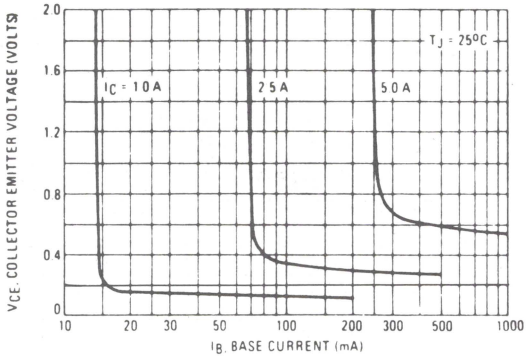

FIGURE 10 – "ON" VOLTAGES

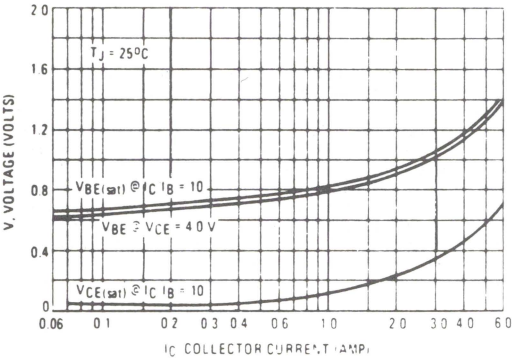

FIGURE 11 – TEMPERATURE COEFFICIENTS

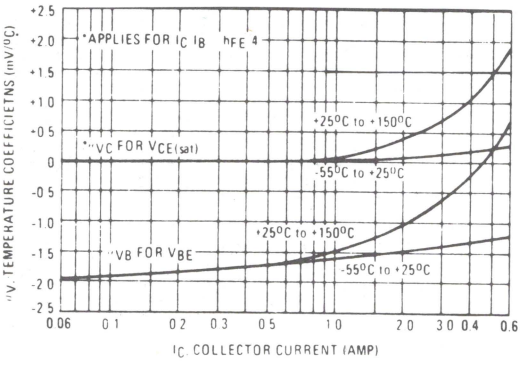

3

FIGURE 12 – COLLECTOR CUT-OFF REGION

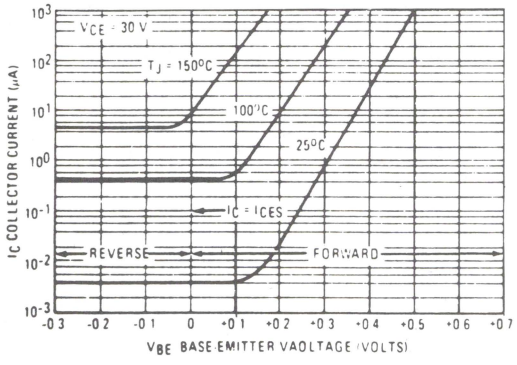

FIGURE 13 – EFFECTS OF BASE-EMITTER RESISTANCE

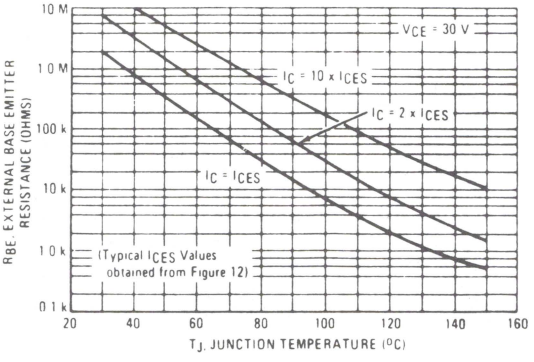

NPN
BD311
PNP
BD312

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . designed for high quality amplifiers operating up to 60 Watts into 4 ohm load.

- High DC Current Gain
- Excellent Safe Operating Area
- High Current Gain – Bandwidth Product – Typical
  f_T = 4.0 MHz @ I_C = 0.5 A

10 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60 VOLTS 115 WATTS

MAXIMUM RATINGS

Rating	Symbol	BD311/312	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Base Voltage	V_{CB}	60	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current – Continuous Peak	I_C	10 20	Adc
Base Current	I_B	4.0	Adc
Total Device Dissipation @ T_C = 25 °C Derate above 25 °C	P_D	115 0.658	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit.
Thermal Resistance, Junction to Case	θ_{JC}	1.52	°C/W

FIGURE 1 – POWER DERATING

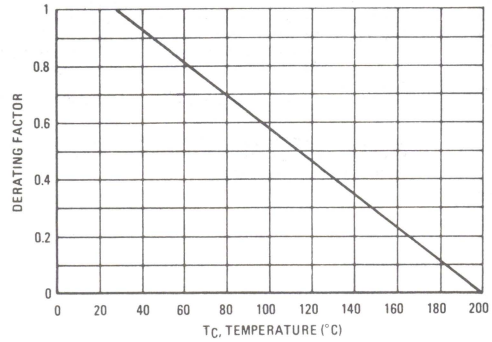

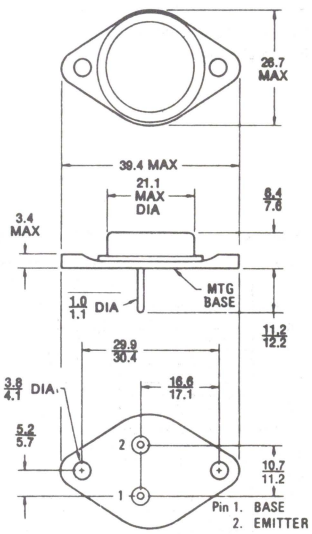

Dimensions in millimeters
Collector connected to case

CASE 11
TO-3

3

ELECTIRCAL CHARACTERISTICS* (T_C = 25 °C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit.
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage[1] (I_C = 200 mAdc, I_B = 0)	$V_{CEO(sus)}$	60		Vdc
Collector-Base Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)	I_{CBO}		1.0	mAdc
Emitter-Base Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)	I_{EBO}		1.0	mAdc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 5.0 Vdc, V_{CE} = 4.0 Vdc) (I_C = 10 Adc, V_{CE} = 4.0 Vdc)	H_{FE}	25 5		–
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.5 Adc)	$V_{CE(sat)}$		1.0	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.5 Adc)	$V_{BE(sat)}$		1.8	Vdc
Base-Emitter On Voltage (I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS[1]				
Current-Gain – Bandwidth Product[2] (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)	f_T	4.0		MHz
SECOND BREAKDOWN				
Second Breakdown Collector Current (V_{CE} = 39 Vdc, t = 0.5 sec.) (V_{CE} = 50 Vdc, t = 0.5 sec.)	$I_{S/B}$	2.95 0.60		Adc

[1] Pulse test: Pulse width ≤ 300 μs, Duty Cycle ≥ 2%

[2] $f_T = |h_{fe}| \cdot f_{test}$

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

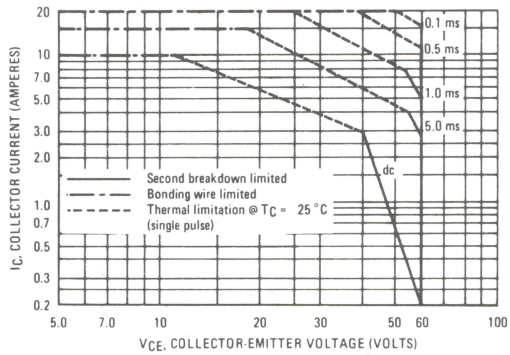

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.
Second breakdown pulse limits are valid for duty cycles to 10%.

At high case temperatures, thermal limitation may reduce the power that can be handled to values less than the limitations imposed by second breakdown.

PNP DEVICE
BD312

NPN DEVICE
BD311

FIGURE 3 – DC CURRENT GAIN

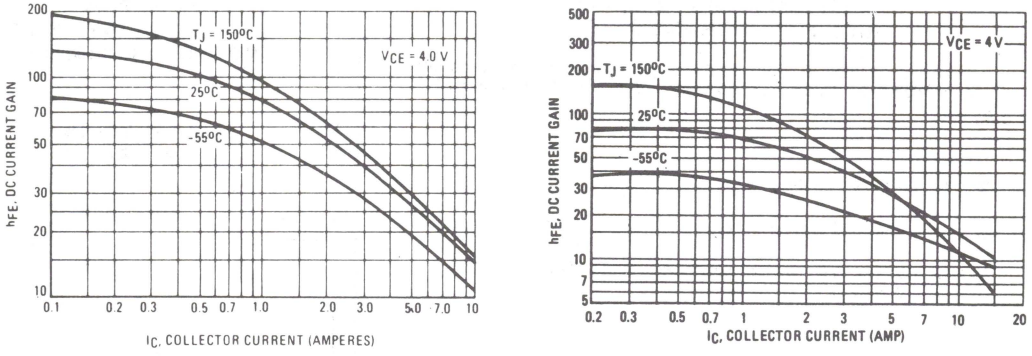

FIGURE 4 – "ON" VOLTAGES

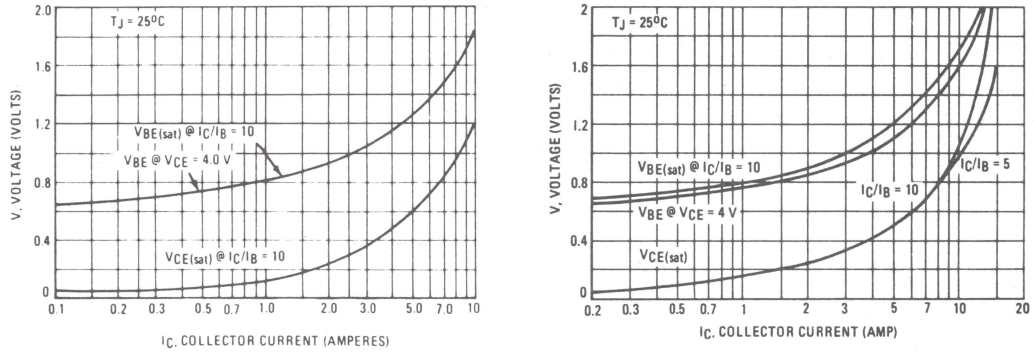

3

NPN
BD315, BD316
PNP
BD317, BD318

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

... designed for high quality amplifiers operating up to 100 Watts into 4 ohm load with BD315, BD316 and into 8 ohm load with BD317, BD318.

- High DC Current Gain
- Excellent Safe Operating Area
- High Current Gain — Bandwidth Product — Typical f_T = 2.0 MHz @ I_C = 1.0 A

16 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

80-100 VOLTS
200 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD315 BD316	BD317 BD318	Unit
Collector-Emitter Voltage	V_{CEO}	80	100	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	7.0		Vdc
Collector Current — Continuous Peak	I_C	16 20		Adc
Base Current — Continuous	I_B	5.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.14		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTE
1. DIM "Q" IS DIA

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A		39.37	–	1.550
B		21.08		0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E		3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R		26.67	–	1.050

Collector connected to case

CASE 11 (TO-3)

FIGURE 1 – POWER DERATING

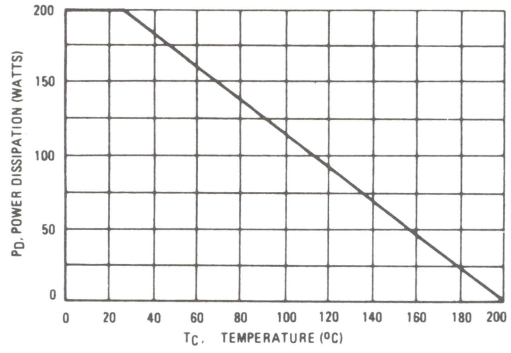

*** ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	BD315, BD316 BD317, BD318	$V_{CEO(sus)}$	 80 100	 — —	Vdc
Collector-Base Cutoff Current (V_{CB} = Rated V_{CB}, I_E = 0)		I_{CBO}	—	1.0	mAdc
Emitter-Base Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)		I_{EBO}	—	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain I_C = 5.0 Adc, V_{CE} = 4.0 Vdc I_C = 8.0 Adc, V_{CE} = 4.0 Vdc I_C = 10 Adc, V_{CE} = 4.0 Vdc	 BD317, BD318 BD315, BD316 All Types	h_{FE}	 25 25 15		—
Collector-Emitter Saturation Voltage I_C = 8.0 Adc, I_B = 0.8 Adc		$V_{CE(sat)}$	—	1.0	Vdc
Base-Emitter Saturation Voltage I_C = 8.0 Adc, I_B = 0.8 Adc		$V_{BE(sat)}$	—	1.8	Vdc
Base-Emitter On Voltage (I_C = 8.0 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	—	1.5	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (2) (I_C = 1.0 Adc, V_{CE} = 20 Vdc, f_{test} = 0.5 MHz)		f_T	1.0	—	MHz

(1) Pulse Test: Pulse Width $\leq$ 300 μs, Duty Cycle $\geq$ 2.0%.
(2) $f_T = |h_{fe}| \bullet f_{test}$.

3

FIGURE 2 — ACTIVE REGION SAFE OPERATING AREA

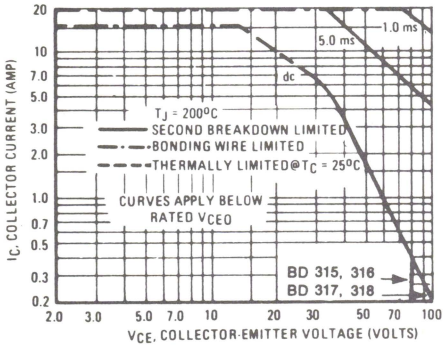

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C — V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)}$ <200°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415).

PNP DEVICES
BD316 and BD318

NPN DEVICES
BD315 and BD317

FIGURE 3 — DC CURRENT GAIN

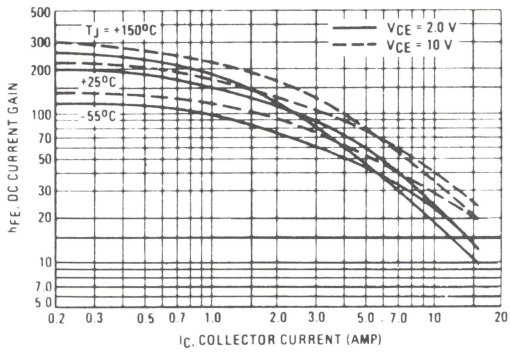

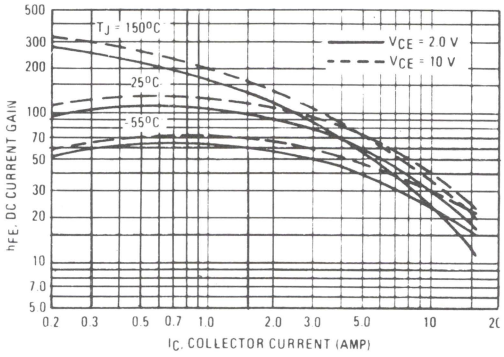

FIGURE 4 — "ON" VOLTAGES

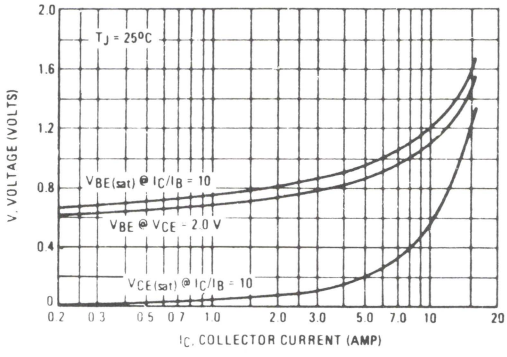

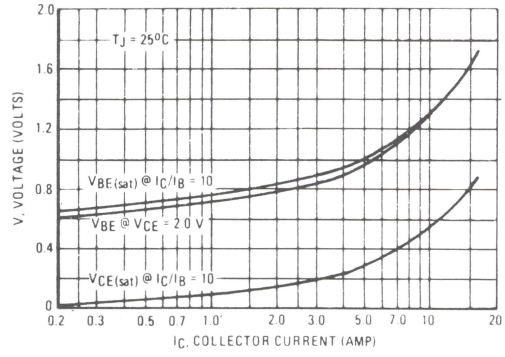

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD433, BD435 BD437, BD439 BD441

PLASTIC MEDIUM POWER SILICON
NPN TRANSISTOR

. . . for amplifier and switching applications Complementary types: BD434/436/438/440/442

4 AMPERE
POWER TRANSISTOR
NPN SILICON



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector Emitter Voltage	V_{CEO}	BD433 BD435 BD437 BD439 BD441	22 32 45 60 80	Vdc
Collector Base Voltage	V_{CBO}	BD433 BD435 BD437 BD439 BD441	22 32 45 60 80	Vdc
Emitter Base Voltage	V_{EBO}		5	Vdc
Collector current	I_C		4	Adc
Base Current	I_B		1	Adc
Total Device Dissipation T_C = 25°C Derate above 25°C	P_D		 36 288	Watts mW/°C
Operating and Storage Junction Temperature range.	I_J, I_{stg}		−55 to +150	°C



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

THERMAL CHARACTERISTICS

	Symbol	Max.	Unit
Thermal Resistance Junction to Case	θ_{JC}	3.5	°C/W

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristics		Symbol	Min.	Typ.	Max.	Unit
Collector Emitter Breakdown Voltage (I_C = 100 mA, I_B = 0)	BD433	BV_{CEO}	22			Vdc
	BD435		32			
	BD437		45			
	BD439		60			
	BD441		80			
Collector Base Breakdown Voltage (I_C = 100 μA, I_B = 0)	BD433	BV_{CBO}	22			Vdc
	BD435		32			
	BD437		45			
	BD439		60			
	BD441		80			
Emitter Base Breakdown Voltage (I_E = 100 μA, I_C = 0)		BV_{EBO}	5			Vdc
Collector Cutoff Current						
(V_{CB} = 22 V, I_E = 0)	BD433	I_{CBO}			0.1	mAdc
(V_{CB} = 32 V, I_E = 0)	BD435				0.1	
(V_{CB} = 45 V, I_E = 0)	BD437				0.1	
(V_{CB} = 60 V, I_E = 0)	BD439				0.1	
(V_{CB} = 80 V, I_E = 0)	BD441				0.1	
Emitter Cutoff Current (V_{EB} = 5 V)		I_{EBO}			1	mAdc
DC Current Gain						
(I_C = 10 mA, V_{CE} = 5 V)	BD433	H_{FE}	40			
	BD435		40			
	BD437		30			
	BD439		20			
	BD441		15			
DC Current Gain						
(I_C = 500 mA, V_{CE} = 1 V)	BD433	H_{FE}	85		475	
	BD435		85		475	
	BD437		85		375	
	BD439		40		475	
	BD441		40		475	
DC Current Gain						
(I_C = 2 A, V_{CE} = 1 V)	BD433	H_{FE}	50			
	BD435		50			
	BD437		40			
	BD439		25			
	BD441		15			
Collector Saturation Voltage						
(I_C = 2 A, I_B = 0.2 A)	BD433	$V_{CE\ (sat)}$			0.5	Vdc
	BD435				0.5	
(I_C = 3 A, I_B = 0.3 A)	BD437				0.7	
	BD439				0.8	
	BD441				0.8	
Base – Emitter on voltage (I_C = 2 A, V_{CE} = 1 V)	BD433/435/437	$V_{BE(ON)}$			1.1	Vdc
	BD439/441				1.5	
Current Gain Bandwidth Product (V_{CE} = 1 V, I_C = 250 mA, f = 1 MHz)		f_T	3			MHz

FIGURE 1 – COLLECTOR SATURATION REGION

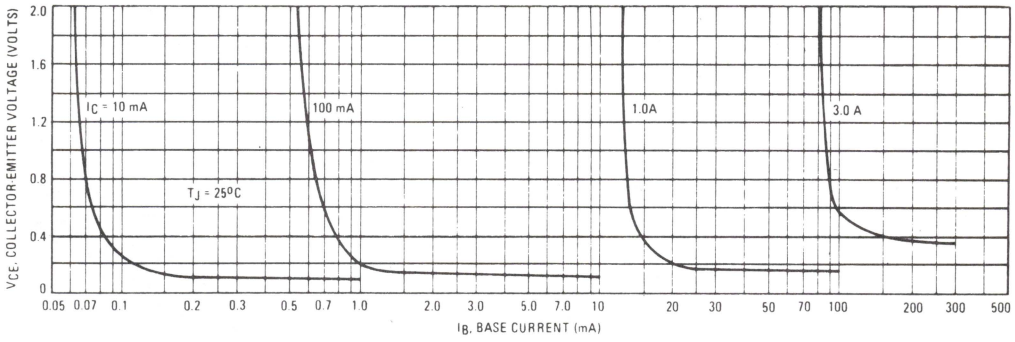

FIGURE 2 – CURRENT GAIN

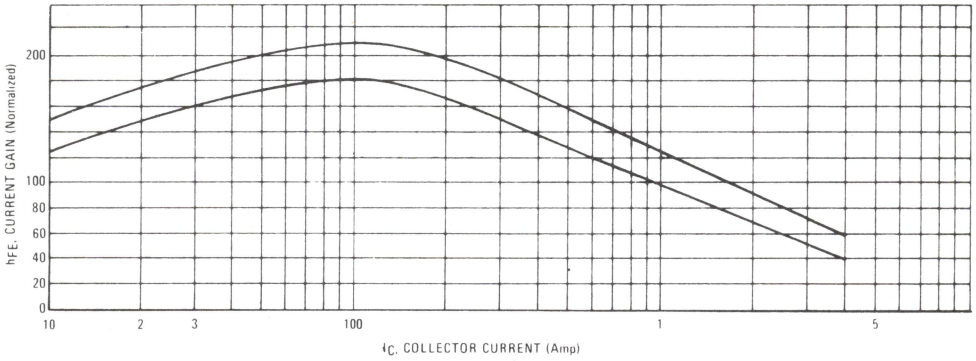

FIGURE 3 – "ON" VOLTAGE

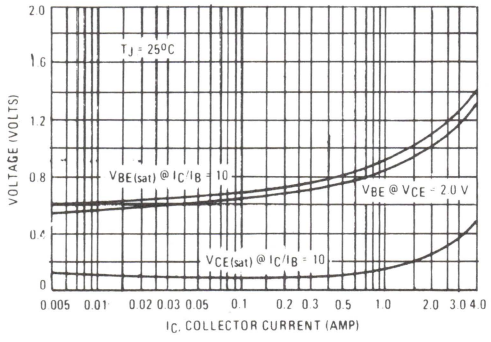

FIGURE 4 – ACTIVE REGION SAFE OPERATING AREA

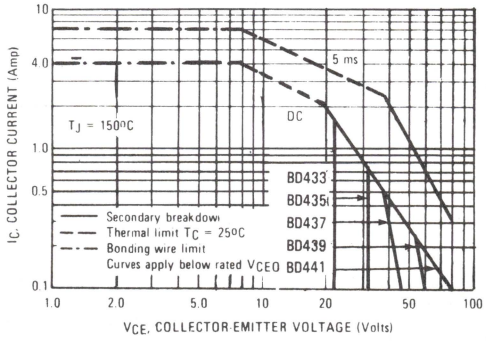

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD434, BD436
BD438, BD440
BD442

PLASTIC MEDIUM POWER SILICON
PNP TRANSISTOR

. . . for amplifier and switching applications Complementary types: BD433/435/437/439/441.

4 AMPERE
POWER TRANSISTOR
PNP SILICON



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector Emitter Voltage	V_{CEO}	BD434 BD436 BD438 BD440 BD442	22 32 45 60 80	Vdc
Collector Base Voltage	V_{CBO}	BD434 BD436 BD438 BD440 BD442	22 32 45 60 80	Vdc
Emitter Base Voltage	V_{EBO}		5	Vdc
Collector current	I_C		4	Adc
Base Current	I_B		1	Adc
Total Device Dissipation T_C = 25°C Derate above 25°C	P_D		 36 288	Watts mW/°C
Operating and Storage Junction Temperature range.	I_J, I_{stg}		−55 to +150	°C



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

THERMAL CHARACTERISTICS

	Symbol	Max.	Unit
Thermal Resistance Junction to Case	θJ_C	3.5	°C/W

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristics		Symbol	Min.	Typ.	Max.	Unit
Collector Emitter Breakdown Voltage (I_C = 100 mA, I_B = 0)	BD434	BV_{CEO}	22			Vdc
	BD436		32			
	BD438		45			
	BD440		60			
	BD442		80			
Collector Base Breakdown Voltage (I_C = 100 μA, I_B = 0)	BD434	BV_{CBO}	22			Vdc
	BD436		32			
	BD438		45			
	BD440		60			
	BD442		80			
Emitter Base Breakdown Voltage (I_E = 100 μA, I_C = 0)		BV_{EBO}	5			Vdc
Collector Cutoff Current						
(V_{CB} = 22 V, I_E = 0)	BD434	CBO			0.1	mAdc
(V_{CB} = 32 V, I_E = 0)	BD436				0.1	
(V_{CB} = 45 V, I_E = 0)	BD438				0.1	
(V_{CB} = 60 V, I_E = 0)	BD440				0.1	
(V_{CB} = 80 V, I_E = 0)	BD442				0.1	
Emitter Cutoff Current (V_{EB} = 5 V)		I_{EBO}			1	mAdc
DC Current Gain						
(I_C = 10 mA, V_{CE} = 5 V)	BD434	H_{FE}	40			
	BD436		40			
	BD438		30			
	BD440		20			
	BD442		15			
DC Current Gain						
(I_C = 500 mA, V_{CE} = 1 V)	BD434	H_{FE}	85		475	
	BD436		85		475	
	BD438		85		375	
	BD440		40		475	
	BD442		40		475	
DC Current Gain						
(I_C = 2 A, V_{CE} = 1 V)	BD434	H_{FE}	50			
	BD436		50			
	BD438		40			
	BD440		25			
	BD442		15			
Collector Saturation Voltage						
(I_C = 2 A, I_B = 0.2 A)	BD434	$V_{CE\ (sat)}$			0.5	Vdc
	BD436				0.5	
(I_C = 3 A, I_B = 0.3 A)	BD438				0.7	
	BD440				0.8	
	BD442				0.8	
Base—Emitter on voltage	BD434/436/438	$V_{BE(ON)}$			1.1	Vdc
(I_C = 2 A, V_{CE} = 1 V)	BD440/442				1.5	
Current Gain Bandwidth Product (V_{CE} = 1 V, I_C = 250 mA, f = 1 MHz)		f_T	3			MHz

3

FIGURE 1 – COLLECTOR SATURATION REGION

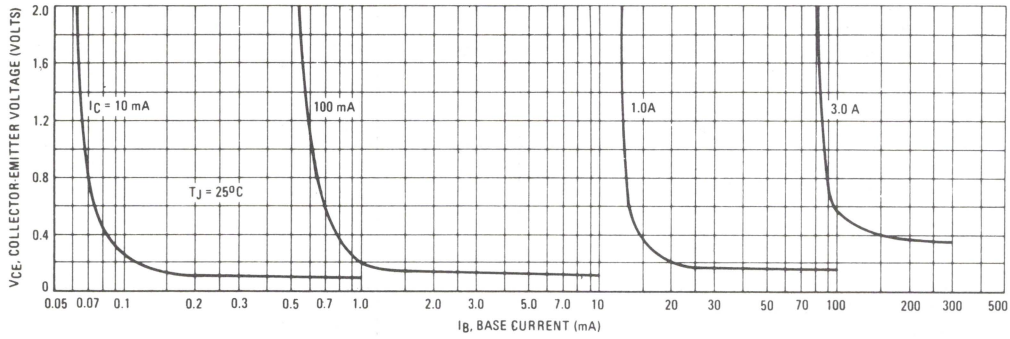

FIGURE 2 – CURRENT GAIN

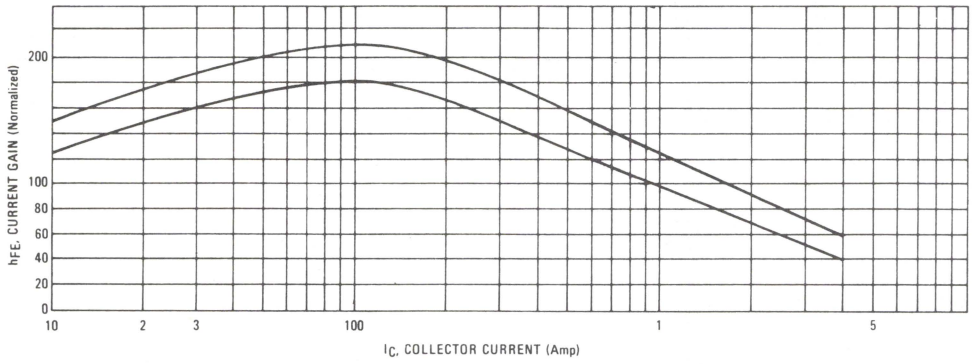

3

FIGURE 3 – "ON" VOLTAGE

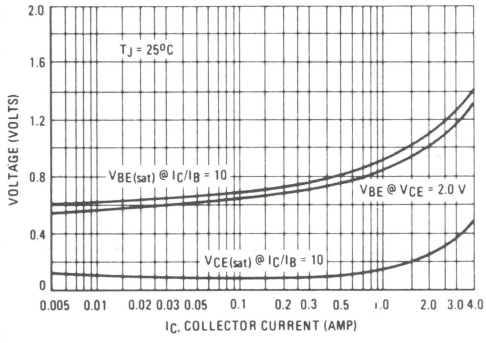

FIGURE 4 – ACTIVE REGION SAFE OPERATING AREA

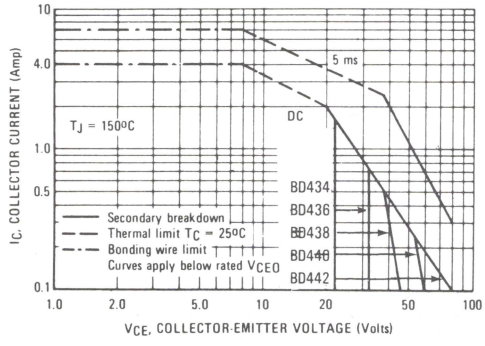

BD505
BD507
BD509

NPN SILICON ANNULAR♦ TRANSISTORS

. . . designed for complementary symmetry audio circuits

- Excellent Current Gain Linearity — 1.0 mAdc to 1.0 Adc
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 0.7 Vdc (Max) @ I_C = 1.0 Adc
- Complements to PNP BD506, BD508, BD510
- Uniwatt▲ Package for Excellent Thermal Properties —
  1.0 Watt @ T_A = 25°C
  10.0 Watts @ T_C = 25°C

NPN SILICON AUDIO TRANSISTORS

20 - 30 - 40 VOLTS
10 WATTS



(1) Standard package: BD505, 507, 509
(2) Tab formed for flat mounting BD505-1, 507-1, 509-1
Also available with leads formed to TO-5 configuration BD505-5, 507-5, 509-5

MAXIMUM RATINGS

Rating	Symbol	BD505	BD507	BD509	Unit
Collector-Emitter Voltage	V_{CEO}	20	30	40	Vdc
Collector-Base Voltage	V_{CB}	30	40	50	Vdc
Emitter-Base Voltage	V_{EB}	——	5.0	——	Vdc
Collector Current — Continuous	I_C	——	2.0	——	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.0 8.0		Watt mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	12.5	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	125	°C/W

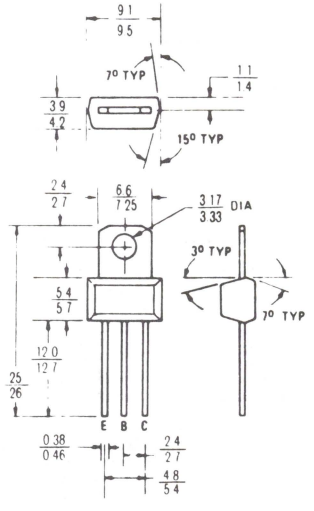

All dimensions in millimeters
Collector connected to tab

CASE 152

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	BD505	BV_{CEO}	20	—	—	Vdc
	BD507		30	—	—	
	BD509		40	—	—	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	5	—	—	Vdc
Collector Cutoff Current	BD505	I_{CBO}	—	—	100	nAdc
(V_{CB} = 20, 30, 40 Vdc, I_E = 0)	BD507		—	—	100	
	BD509		—	—	100	
ON CHARACTERISTICS						
DC Current Gain (1)		h_{FE}				—
(I_C = 250 mAdc, V_{CE} = 2 Vdc)			60	160	—	
(I_C = 1.0 Adc, V_{CE} = 2 Vdc)			40	90	—	
Collector-Emitter Saturation Voltage(1) (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	—	0.30	0.7	Vdc
Base-Emitter On Voltage (1) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	—	0.91	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain--Bandwidth Product (I_C = 50 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	250	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	—	—	30	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 1 — DC CURRENT GAIN

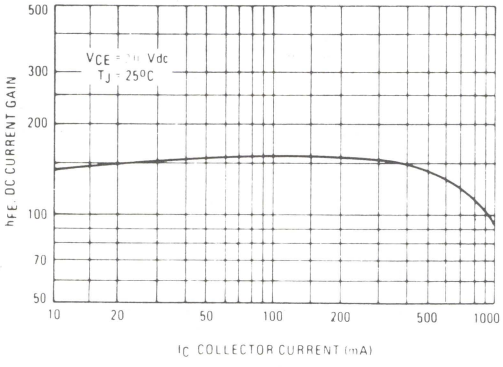

FIGURE 2 — "ON" VOLTAGES

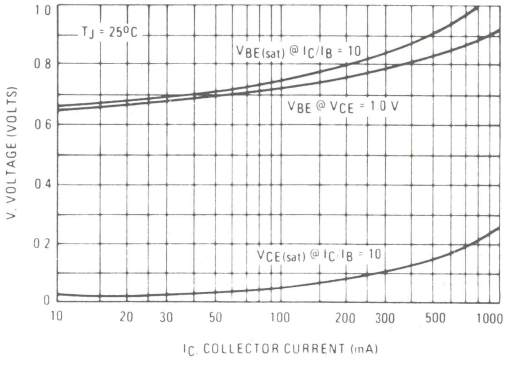

FIGURE 3 — DC SAFE OPERATING AREA

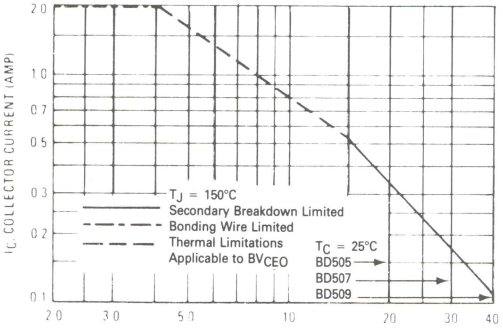

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD506
BD508
BD510

PNP SILICON ANNULAR♦ TRANSISTORS

. . . designed for complementary symmetry audio circuits

- Excellent Current Gain Linearity — 1.0 mAdc to 1.0 Adc
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 0.7 Vdc (Max) @ I_C = 1.0 Adc
- Complements to NPN BD505, BD507, BD509
- Uniwatt▲ Package for Excellent Thermal Properties —
  1.0 Watt @ T_A = 25°C
  10.0 Watts @ T_C = 25°C

PNP SILICON AUDIO TRANSISTORS

20 - 30 - 40 VOLTS
10 WATTS



(1) Standard package: BD506, 508, 510
(2) Tab formed for flat mounting: BD506-1, 508-1, 510-1
Also available with leads formed to TO-5 configuration: BD506-5, 508-5, 510-5

MAXIMUM RATINGS

Rating	Symbol	BD506	BD508	BD510	Unit
Collector-Emitter Voltage	V_{CEO}	20	30	40	Vdc
Collector-Base Voltage	V_{CB}	30	40	50	Vdc
Emitter-Base Voltage	V_{EB}	—	5.0	—	Vdc
Collector Current — Continuous	I_C	—	2.0	—	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.0 8.0		Watt mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}		-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	12.5	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	125	°C/W

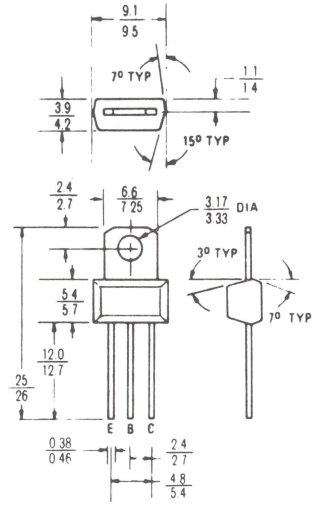

All dimensions in millimeters
Collector connected to tab

CASE 152

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	BD506	BV_{CEO}	20	—	—	Vdc
	BD508		30	—	—	
	BD510		40	—	—	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	5.0	—	—	Vdc
Collector Cutoff Current (V_{CB} = 20, 30, 40 Vdc, I_E = 0)	BD506	I_{CBO}	—	—	100	nAdc
	BD508		—	—	100	
	BD510		—	—	100	
ON CHARACTERISTICS						
DC Current Gain (1) (I_C = 250 mAdc, V_{CE} = 2.0 Vdc)		h_{FE}	60	135	—	—
(I_C = 1.0 Adc, V_{CE} = 2.0 Vdc)			40	90	—	
Collector-Emitter Saturation Voltage(1) (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	—	0.40	0.7	Vdc
Base-Emitter On Voltage (1) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	—	0.92	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain--Bandwidth Product (I_C = 50 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	180	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	—	—	30	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 1 — DC CURRENT GAIN

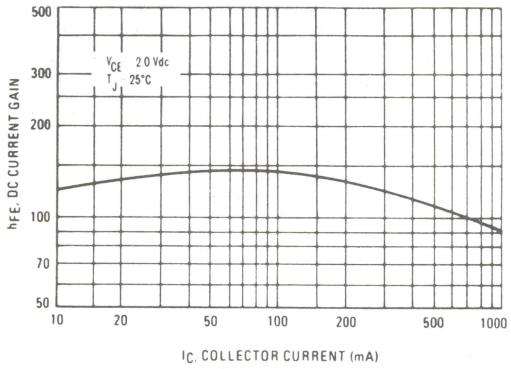

FIGURE 2 — "ON" VOLTAGES

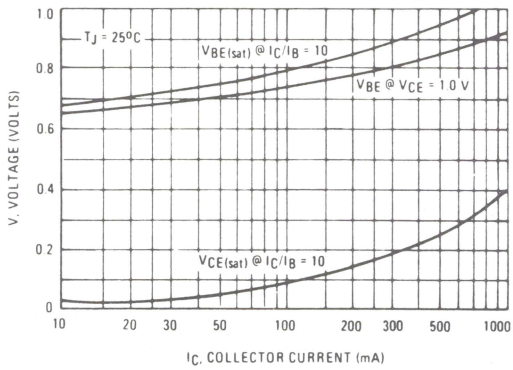

FIGURE 3 — DC SAFE OPERATING AREA

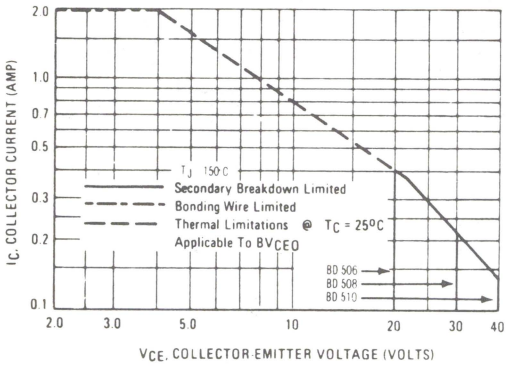

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on T_J (pk) = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

BD515
BD517
BD519

NPN SILICON ANNULAR AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage —
  BV_{CEO} = 45 Vdc (Min) @ I_C = 1 mAdc — BD515
  60 Vdc (Min) @ I_C = 1 mAdc — BD517
  80 Vdc (Min) @ I_C = 1 mAdc — BD519
- High Power Dissipation — P_D = 10 W @ T_C = 25°C
- Complements to BD516, BD518, BD520

NPN SILICON AMPLIFIER TRANSISTORS

45 - 60 - 80 VOLTS
10 WATTS



(1) **Standard package: BD515, 517, 519**
(2) Tab formed for flat mounting. BD515-1, 517-1, 519-1

Also available with leads formed to TO-5 configuration: BD515-5, 517-5, 519-5

MAXIMUM RATINGS

Rating	Symbol	BD515	BD517	BD519	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	Vdc
Emitter-Base Voltage	V_{EB}	——	4.0	——	Vdc
Collector Current — Continuous	I_C	——	2.0	——	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.0 8.0		Watt mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	12.5	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	125	°C/W

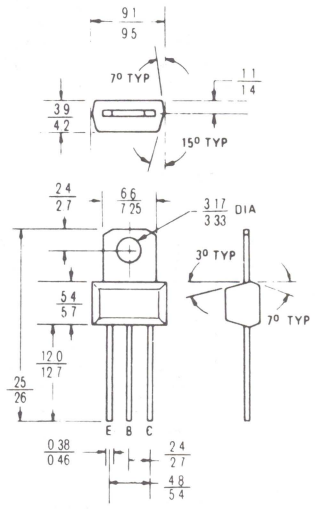

All dimensions in millimeters
Collector connected to tab

CASE 152

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	BD515	BV_{CEO}	45	—	—	Vdc
	BD517		60	—	—	
	BD519		80	—	—	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	4.0	—	—	Vdc
Collector Cutoff Current						nAdc
(V_{CB} = 30 Vdc, I_E = 0)	BD515	I_{CBO}	—	—	100	
(V_{CB} = 40 Vdc, I_E = 0)	BD517		—	—	100	
(V_{CB} = 60 Vdc, I_E = 0)	BD519		—	—	100	
ON CHARACTERISTICS						
DC Current Gain (1)		h_{FE}				—
(I_C = 10 mAdc, V_{CE} = 2.0 Vdc)			—	115	—	
(I_C = 150 mAdc, V_{CE} = 2.0 Vdc)			60	125	350	
(I_C = 500 mAdc, V_{CE} = 2.0 Vdc)			25	55	—	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$				Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			—	0.18	0.5	
(I_C = 500 mAdc, I_B = 25 mAdc)			—	0.24	—	
Base-Emitter On Voltage (1) (I_C = 500 mAdc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	—	0.74	1.0	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain--Bandwidth Product (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	160	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	—	6.0	12	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 1 — TYPICAL DC CURRENT GAIN

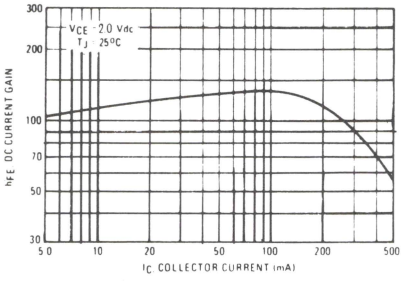

FIGURE 2 — "SATURATION" AND "ON" VOLTAGES

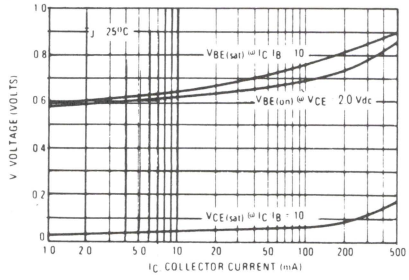

FIGURE 3 — DC SAFE OPERATING AREA

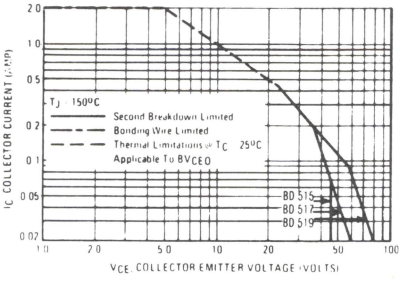

FIGURE 4 — CURRENT-GAIN — BANDWIDTH PRODUCT

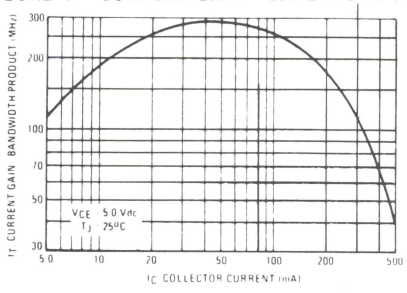

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C — V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C. T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

BD516
BD518
BD520

PNP SILICON ANNULAR AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage —
  BV_{CEO} = 45 Vdc (Min) @ I_C = 1 mAdc — BD516
  60 Vdc (Min) @ I_C = 1 mAdc — BD518
  80 Vdc (Min) @ I_C = 1 mAdc — BD520
- High Power Dissipation — P_D = 10 W @ T_C = 25°C
- Complements to BD515, BD517, BD519

PNP SILICON ANNULAR • AMPLIFIER TRANSISTORS

45 - 60 - 80 VOLTS
10 WATTS



(1) **Standard package: BD516, 518, 520**
(2) Tab formed for flat mounting BD516-1, 518-1, 520-1

Also available with leads formed to TO-5 configuration BD516-5, 518-5, 520-5

MAXIMUM RATINGS

Rating	Symbol	BD516	BD518	BD520	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	Vdc
Emitter-Base Voltage	V_{EB}	——	4.0	——	Vdc
Collector Current – Continuous	I_C	——	2.0	——	Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D		1.0 8.0		Watt mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}		-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	12.5	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	125	°C/W

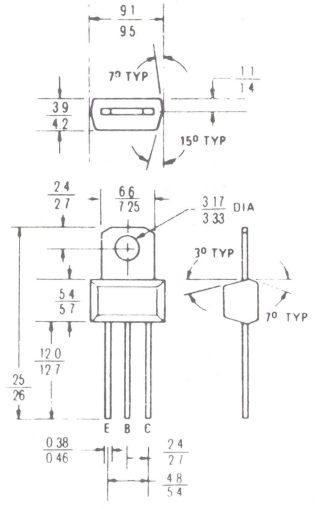

All dimensions in millimeters
Collector connected to tab

CASE 152

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	BD516	BV_{CEO}	45	—	—	Vdc
	BD518		60	—	—	
	BD520		80	—	—	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	4.0	—	—	Vdc
Collector Cutoff Current						nAdc
(V_{CB} = 30 Vdc, I_E = 0)	BD516	I_{CBO}	—	—	100	
(V_{CB} = 40 Vdc, I_E = 0)	BD518		—	—	100	
(V_{CB} = 60 Vdc, I_E = 0)	BD520		—	—	100	
ON CHARACTERISTICS						
DC Current Gain (1)		h_{FE}				—
(I_C = 10 mAdc, V_{CE} = 2.0 Vdc)			—	150	—	
(I_C = 150 mAdc, V_{CE} = 2.0 Vdc)			60	130	350	
(I_C = 500 mAdc, V_{CE} = 2.0 Vdc)			25	80	—	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$				Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			—	0.24	0.5	
(I_C = 500 mAdc, I_B = 25 mAdc)			—	0.32	—	
Base-Emitter On Voltage (1) (I_C = 500 mAdc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	—	0.78	1.0	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain--Bandwidth Product (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	125	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	—	10	15	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 — DC CURRENT GAIN

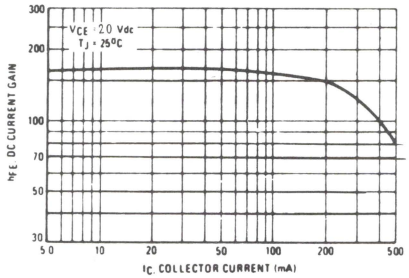

FIGURE 2 — "ON" VOLTAGES

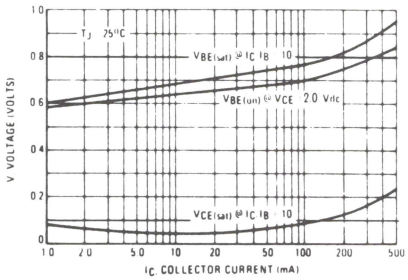

FIGURE 3 — DC SAFE OPERATING AREA

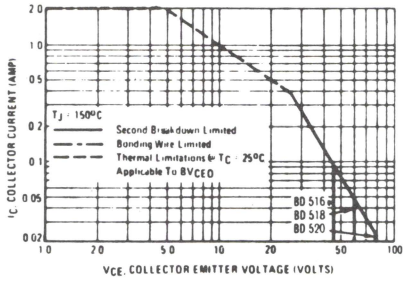

FIGURE 4 — CURRENT-GAIN–BANDWIDTH PRODUCT

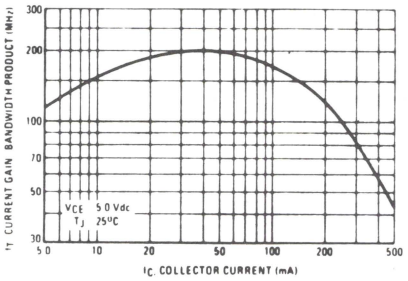

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150 °C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD525
BD527
BD529

NPN SILICON ANNULAR♦ AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage —
  BV_{CEO} = 60 Vdc (Min) @ I_C = 1.0 mAdc — BD525
  80 Vdc (Min) @ I_C = 1.0 mAdc — BD527
  100 Vdc (Min) @ I_C = 1.0 mAdc — BD529
- High Power Dissipation — P_D = 10 W @ T_C = 25°C
- Complements to PNP BD526, BD528, BD530

NPN SILICON AMPLIFIER TRANSISTORS

60 - 80 - 100 VOLTS
10 WATTS



(1) Standard package: BD525, 527, 529
(2) Tab formed for flat mounting: BD525-1, 527-1, 529-1
Also available with leads formed to TO-5 configuration: BD525-5, 527-5, 529-5

MAXIMUM RATINGS

Rating	Symbol	BD525	BD527	BD529	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	—— 4.0 ——			Vdc
Collector Current – Continuous	I_C	—— 2.0 ——			Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0			Watt mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80			Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-55 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	12.5	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	125	°C/W

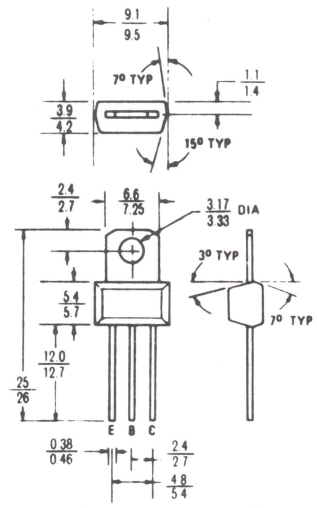

All dimensions in millimeters
Collector connected to tab

CASE 152

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	BD525	BV_{CEO}	60	—	—	Vdc
	BD527		80	—	—	
	BD529		100	—	—	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	4.0	—	—	Vdc
Collector Cutoff Current						nAdc
(V_{CB} = 40 Vdc, I_E = 0)	BD525	I_{CBO}	—	—	100	
(V_{CB} = 60 Vdc, I_E = 0)	BD527		—	—	100	
(V_{CB} = 80 Vdc, I_E = 0)	BD529		—	—	100	
ON CHARACTERISTICS						
DC Current Gain (1)		h_{FE}				—
(I_C = 50 mAdc, V_{CE} = 2.0 Vdc)			60	115	—	
(I_C = 250 mAdc, V_{CE} = 2.0 Vdc)			30	95	—	
Collector-Emitter Saturation Voltage(1)		$V_{CE(sat)}$				Vdc
(I_C = 250 mAdc, I_B = 10 mAdc)			—	0.18	0.5	
(I_C = 250 mAdc, I_B = 25 mAdc)			—	0.1	—	
Base-Emitter On Voltage (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	—	0.74	1.0	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain--Bandwidth Product (I_C = 250 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	150	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	—	6.0	12	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 — TYPICAL DC CURRENT GAIN

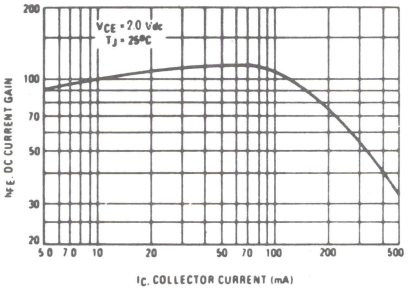

FIGURE 2 — "SATURATION" AND "ON" VOLTAGES

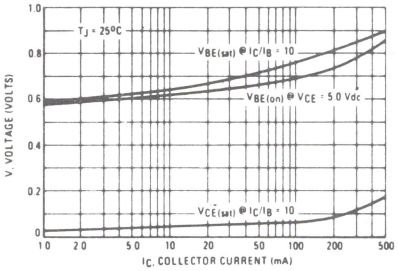

FIGURE 3 -- SAFE OPERATING AREA

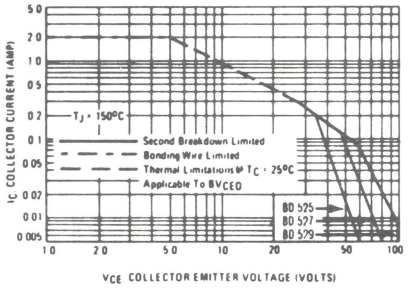

FIGURE 4 CURRENT-GAIN BANDWIDTH PRODUCT

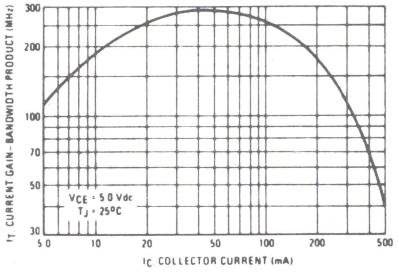

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on TJ(pk) = 150 °C. TC is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD526
BD528
BD530

PNP SILICON ANNULAR♦ AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage —
  BV_{CEO} = 60 Vdc (Min) @ I_C = 1.0 mAdc — BD526
  80 Vdc (Min) @ I_C = 1.0 mAdc — BD528
  100 Vdc (Min) @ I_C = 1.0 mAdc — BD530
- High Power Dissipation — P_D = 10 W @ T_C = 25°C
- Complements to NPN BD525, BD527 BD529

PNP SILICON AMPLIFIER TRANSISTORS

60 - 80 - 100 VOLTS
10 WATTS



(1) Standard package: BD526, 528, 530
(2) Tab formed for flat mounting BD526-1, 528-1, 530-1
Also available with leads formed to TO-5 configuration BD526-5, 528-5, 530-5

MAXIMUM RATINGS

Rating	Symbol	BD526	BD528	BD530	Unit
Collector Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector Base Voltage	V_{CB}	60	80	100	Vdc
Emitter Base Voltage	V_{EB}	—— 4.0 ——			Vdc
Collector Current Continuous	I_C	—— 2.0 ——			Adc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0			Watt mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80			Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	12.5	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	125	°C/W

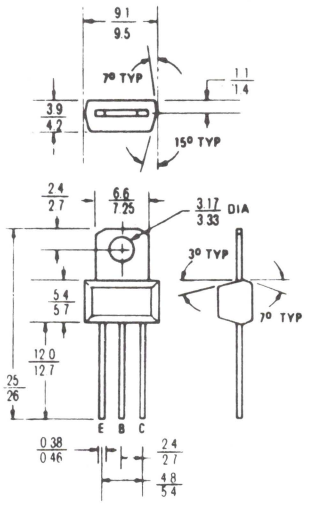

All dimensions in millimeters
Collector connected to tab

CASE 152

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	BD526	BV_{CEO}	60	—	—	Vdc
	BD528		80	—	—	
	BD530		100	—	—	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		BV_{EBO}	4.0	—	—	Vdc
Collector Cutoff Current						nAdc
(V_{CB} = 40 Vdc, I_E = 0)	BD526	I_{CBO}	—	—	100	
(V_{CB} = 60 Vdc, I_E = 0)	BD528		—	—	100	
(V_{CB} = 80 Vdc, I_E = 0)	BD530		—	—	100	
ON CHARACTERISTICS						
DC Current Gain (1)		h_{FE}				—
(I_C = 50 mAdc, V_{CE} = 2.0 Vdc)			60	153	—	
(I_C = 250 mAdc, V_{CE} = 2.0 Vdc)			30	98	—	
Collector-Emitter Saturation Voltage(1)		$V_{CE(sat)}$				Vdc
(I_C = 250 mAdc, I_B = 10 mAdc)			—	0.22	0.5	
(I_C = 250 mAdc, I_B = 25 mAdc)			—	0.15	—	
Base-Emitter On Voltage (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	—	0.78	1.0	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain--Bandwidth Product (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	100	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	—	10	15	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 1 – DC CURRENT GAIN

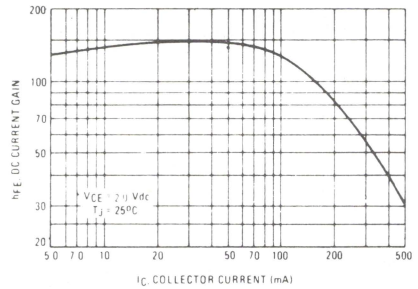

FIGURE 2 – "ON" VOLTAGES

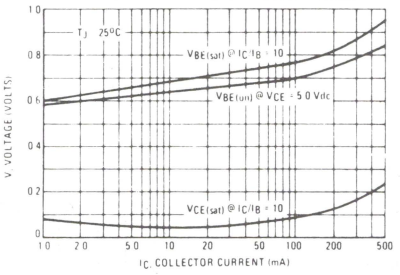

FIGURE 3 – DC SAFE OPERATING AREA

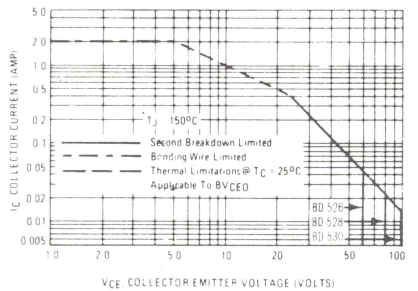

FIGURE 4 – CURRENT-GAIN--BANDWIDTH PRODUCT

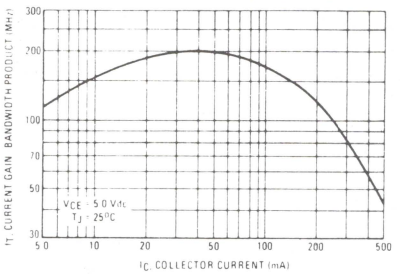

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

NPN	PNP
BD533	BD534
BD535	BD536
BD537	BD538

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications.

- Collector-Emitter Saturation Voltage –
  V_{CE} = 0.8 Vdc (Max) @ I_C = 2.0 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 45 Vdc (Min) BD533, BD534
  = 60 Vdc (Min) BD535, BD536
  = 80 Vdc (Min) BD537, BD538
- High Current Gain – Bandwidth Product
  f_T = 3.0 MHz (Min) @ I_C = 250 mAdc
- Compact TO-220 AB Package
- TO-66 Leadform Also Available ordered with "–66" suffix

4 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
45, 60, 80 VOLTS
50 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD533 BD534	BD535 BD536	BD537 BD538	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current - Continuous	I_C	4.0			Adc
Peak		8.0			
Base Current	I_B	1.0			Adc
Total Device Dissipation @ T_C = 25°C	P_D	50			Watts
Derate above 25°C		0.4			W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	70	°C/W

FIGURE 1 – POWER DERATING

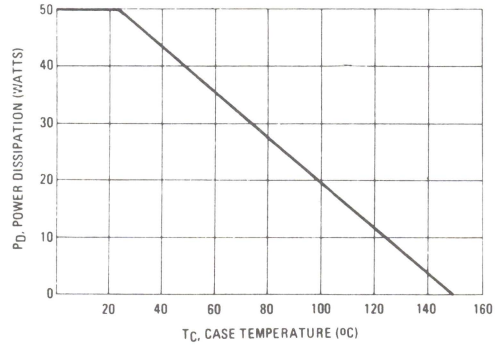

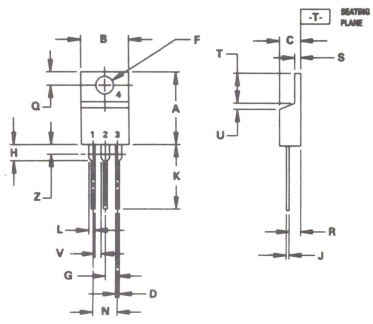

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage[1]		$V_{CEO(sus)}$			Vdc
(I_C = 0.1 Adc, I_B = 0)	BD533, BD534		45		
	BD535, BD536		60		
	BD537, BD538		80		
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 45 Vdc, I_E = 0)	BD533, BD534			0.1	
(V_{CB} = 60 Vdc, I_E = 0)	BD535, BD536			0.1	
(V_{CB} = 80 Vdc, I_E = 0)	BD537, BD538			0.1	
Collector Cutoff Current		I_{CES}			μAdc
(V_{CE} = 45 Vdc, V_{EB} = 0)	BD533, BD534			100	
(V_{CE} = 60 Vdc, V_{EB} = 0)	BD535, BD536			100	
(V_{CE} = 80 Vdc, V_{EB} = 0)	BD537, BD538			100	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)				1.0	
ON CHARACTERISTICS[1]					
DC Current Gain		h_{FE}			
(I_C = 10 mAdc, V_{CE} = 5 Vdc)	BD533, BD534		20		
	BD535, BD536		20		
	BD537, BD538		15		
(I_C = 500 mAdc, V_{CE} = 2 Vdc)			40		
(I_C = 2 Adc, V_{CE} = 2 Vdc)	BD533, BD534		25		
	BD535, BD536		25		
	BD537, BD538		15		
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 0.2 Adc)				0.8	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)				1.5	
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product[2]		f_T			MHz
(I_C = 250 mAdc, V_{CE} = 1 Vdc, f_{test} = 1 MHz)			3.0		

[1] Pulse test = Pulse width ≤ 300 μs, Duty Cycle ≤ 2.0%.
[2] $f_T = |h_{fe}| \cdot f_{test}$

3

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

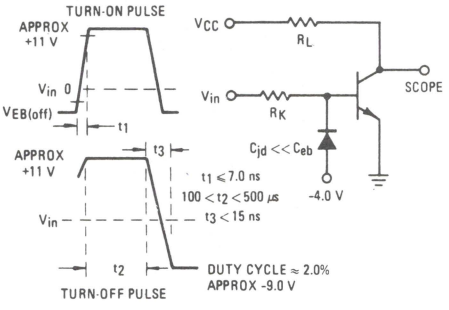

FIGURE 3 – TURN-ON TIME

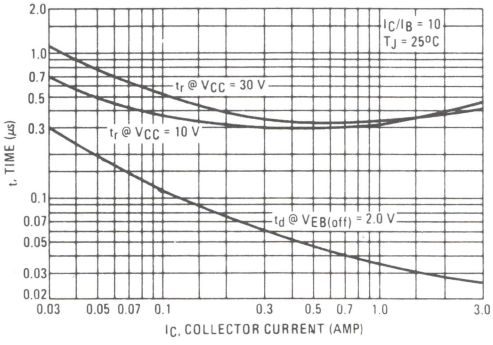

FIGURE 4 – THERMAL RESPONSE

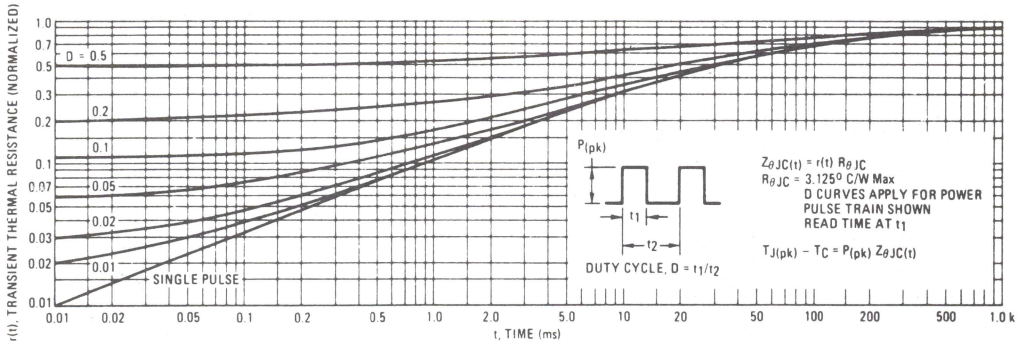

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

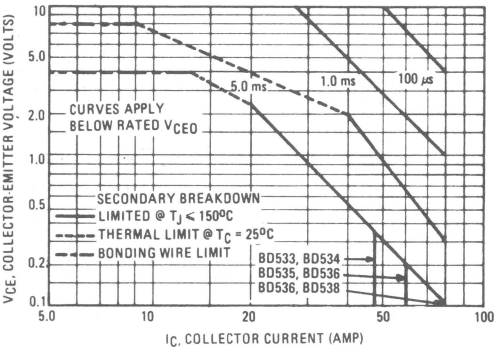

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A).

FIGURE 6 – TURN-OFF TIME

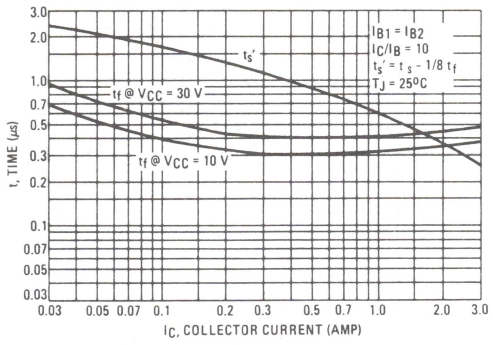

FIGURE 7 – CAPACITANCE

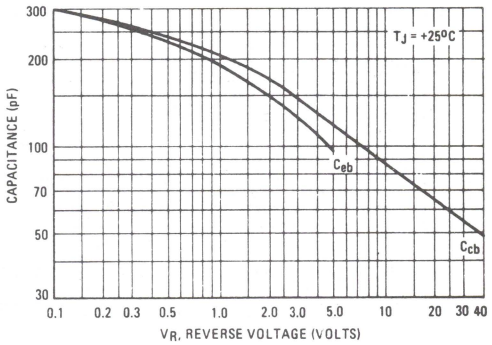

3

FIGURE 8 – DC CURRENT GAIN

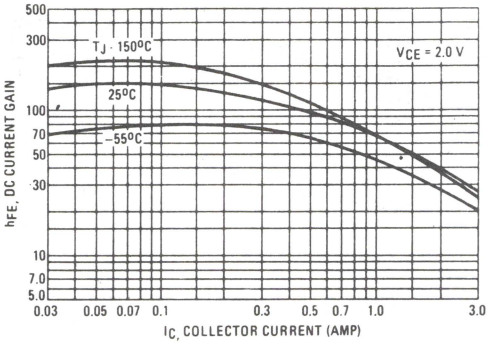

FIGURE 9 – COLLECTOR SATURATION REGION

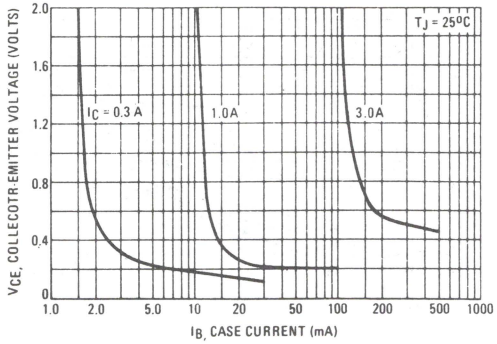

FIGURE 10 – "ON" VOLTAGES

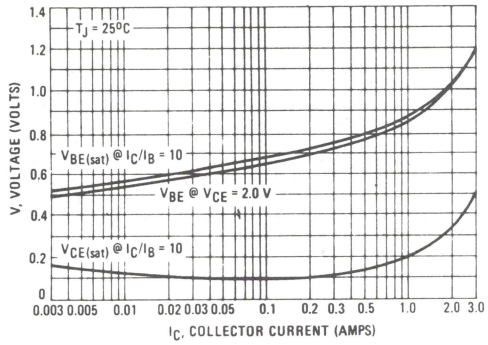

FIGURE 11 – TEMPERATURE COEFFICIENTS

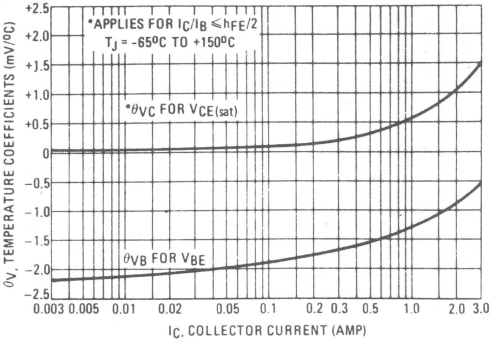

FIGURE 12 – COLLECTOR CUT-OFF REGION

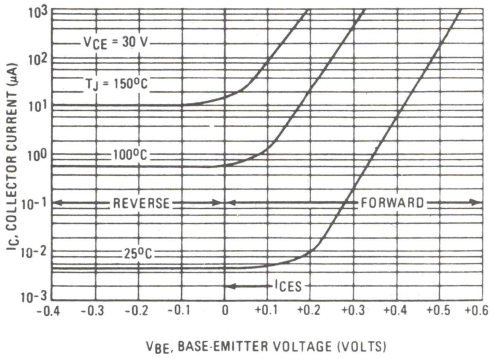

FIGURE 13 – EFFECTS OF BASE-EMITTER RESISTANCE

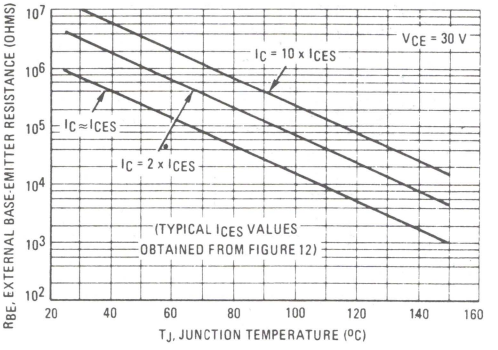

BD675, BD675A
BD677, BD677A
BD679, BD679A
BD681

PLASTIC MEDIUM-POWER SILICON NPN DARLINGTONS

. . . for use as output devices in complementary general-purpose amplifier applications.

- High DC Current Gain – h_{FE} = 750 (Min) @ I_C = 1.5 and 2.0 Adc
- Monolithic Construction
- BD675, 675A, 677, 677A, 679, 679A, 681 are complementary with BD676, 676A, 678, 678A, 680, 680A, 682
- BD 677, 677A, 679, 679A are equivalent to MJE 800, 801, 802, 803

4.0 AMPERE
DARLINGTON POWER TRANSISTORS NPN SILICON

45, 60, 80, 100 VOLTS
40 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD675 BD675A	BD677 BD677A	BD679 BD679A	BD681	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current	I_C	4.0				Adc
Base Current	I_B	0.1				Adc
Total Device Dissipation @ T_C = 25 °C Derate above 25 °C	P_D	40 0.32				Watts W/°C
Operating and Storage Junction Temperating Range	T_J, T_{stg}	−55 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.13	°C/W

FIGURE 1 – POWER TEMPERATURE DERATING

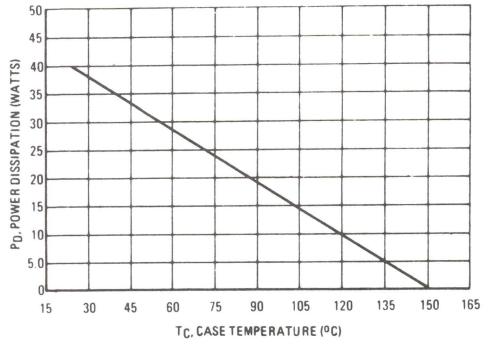



DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.88	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

CASE 77-05
TO-126

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage(1) (I_C = 50 mAdc, I_B = 0)	BD675, 675A BD677, 677A BD679, 679A BD681	BV_{CEO}	45 60 80 100	– – – –	Vdc
Collector Cutoff Current (V_{CE} = Half Rated V_{CEO}, I_B = 0)		I_{CEO}	–	500	μAdc
Collector Cutoff Current (V_{CB} = Rated BV_{CEO}, I_E = 0) (V_{CB} = Rated BV_{CEO}, I_E = 0, T_C = 100°C)		I_{CBO}	– –	0.2 2.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain(1) (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc) (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	BD675, 677, 679, 681 BD 675A, 677A, 679A	h_{FE}	750 750	– –	–
Collector-Emitter Saturation Voltage(1) (I_C = 1.5 Adc, I_B = 30 mAdc) (I_C = 2.0 Adc, I_B = 40 mAdc)	BD 677, 679, 681 BD 675A, 677A, 679A	$V_{CE(sat)}$	– –	2.5 2.8	Vdc
Base-Emitter On Voltage(1) (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc) (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	BD 677, 679, 681 BD 675A, 677A, 679A	$V_{BE(on)}$	– –	2.5 2.5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		h_{fe}	1.0	–	–

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC SAFE OPERATING AREA

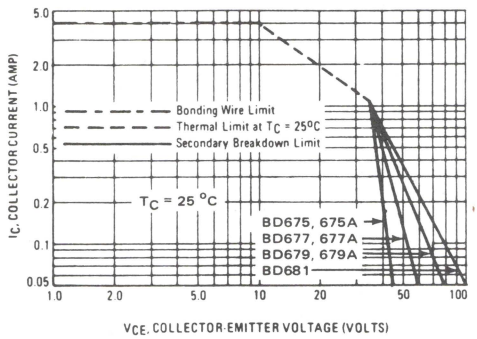

There are two limitations on the power handling ability of a transistor: average junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown. (See AN-415)

FIGURE 3 DARLINGTON CIRCUIT SCHEMATIC

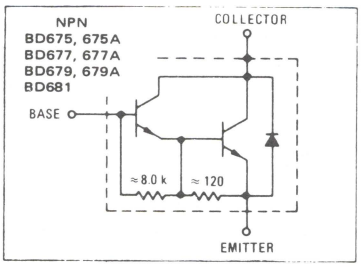

BD676, BD676A
BD678, BD678A
BD680, BD680A
BD682

PLASTIC MEDIUM-POWER SILICON PNP DARLINGTONS

. . . for use as output devices in complementary general-purpose amplifier applications.

- High DC Current Gain — h_{FE} = 750 (Min) @ I_C = 1.5 and 2.0 Adc
- Monolithic Construction
- BD676, 676A, 678, 678A, 680, 680A, 682 are complementary with BD675, 675A, 677, 677A, 679, 679A, 681
- BD 678, 678A, 680, 680A are equivalent to MJE 700, 701, 702, 703

4.0 AMPERE
DARLINGTON POWER TRANSISTORS PNP SILICON

45, 60, 80, 100 VOLTS
40 WATTS



MAXIMUM RATING

Rating	Symbol	BD676 BD676A	BD678 BD678A	BD680 BD680A	BD682	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current	I_C	4.0				Adc
Base Current	I_B	0.1				Adc
Total Device Dissipation @ T_C = 25 °C Derate above 25 °C	P_D	40 0.32				Watts W/°C
Operating and Storage Junction Temperating Range	T_J, T_{stg}	−55 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.13	°C/W

FIGURE 1 – POWER TEMPERATURE DERATING

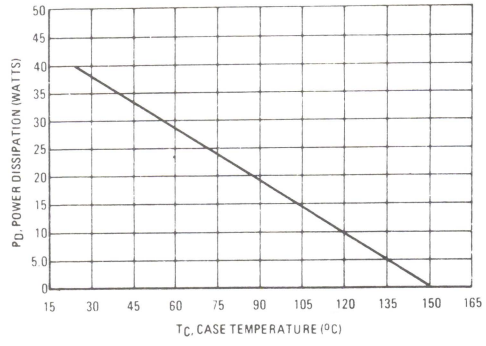



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT – MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

CASE 77-05
TO-126

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage(1) (I_C = 50 mAdc, I_B = 0)	BD676, 676A BD678, 678A BD680, 680A BD682	BV_{CEO}	45 60 80 100	– – – –	Vdc
Collector Cutoff Current (V_{CE} = Half Rated V_{CEO}, I_B = 0)		I_{CEO}	–	500	μAdc
Collector Cutoff Current (V_{CB} = Rated BV_{CEO}, I_E = 0) (V_{CB} = Rated BV_{CEO}, I_E = 0, T_C = 100°C)		I_{CBO}	– –	0.2 2.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain(1) (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc) (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	 BD676, 678, 680, 682 BD 676A, 678A, 680A	h_{FE}	 750 750	 – –	–
Collector-Emitter Saturation Voltage(1) (I_C = 1.5 Adc, I_B = 30 mAdc) (I_C = 2.0 Adc, I_B = 40 mAdc)	 BD 678, 680, 682 BD 676A, 678A, 680A	$V_{CE(sat)}$	 – –	 2.5 2.8	Vdc
Base-Emitter On Voltage(1) (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc) (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	 BD 678, 680, 682 BD 676A, 678A, 680A	$V_{BE(on)}$	 – –	 2.5 2.5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1.5 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		h_{fe}	1.0	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 - DC SAFE OPERATING AREA

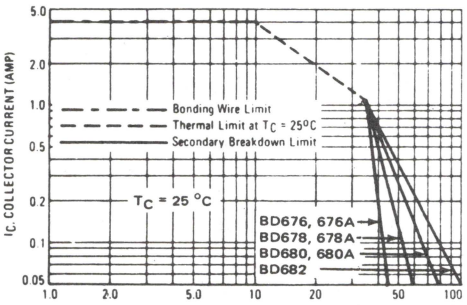

There are two limitations on the power handling ability of a transistor: average junction temperature and secondary breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown. (See AN-415)

FIGURE 3 - DARLINGTON CIRCUIT SCHEMATIC

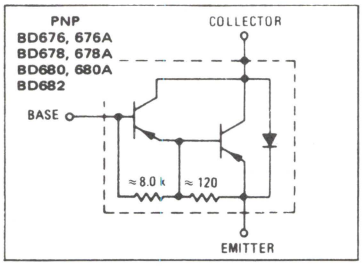

NPN	PNP
BD775	BD776
BD777	BD778
BD779	BD780

PLASTIC DARLINGTON COMPLEMENTARY SILICON ANNULAR◇ POWER TRANSISTORS

. . . designed for general purpose amplifier and high-speed switching applications such as hammer drivers for desk calculators.

- High DC Current Gain
  h_{FE} = 1400 (Typ) @ I_C = 2.0 Adc
- Collector-Emitter Sustaining Voltage – @ 10 mAdc
  V_{CEO} (sus) = 45 Vdc (Min) – BD775, 776
  = 60 Vdc (Min) – BD777, 778
  = 80 Vdc (Min) – BD779, 780
- Reverse Voltage Protection Diode
- Monolithic Construction with Built-in Base-Emitter output Resistor
- Thermopad II△ Construction with Hard Solder for High Reliability.

DARLINGTON 4-AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

45, 60, 80 VOLTS
15 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD775 BD776	BD777 BD778	BD779 BD780	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current – Continuous Peak	I_C	4.0 6.0			Adc
Base Current	I_B	100			mAdc
Total Device Dissipation T_C = 25°C – Derate above 25°C	P_D	15 0.12			Watts W/°C
Operating and Storage junction Temperature Range	T_J, T_{stg} T_J, T_{stg}	– 65 to + 150			°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	$R\theta JC$	8.34	°C/W
Thermal Resistance, junction to Ambient	$R\theta JA$	83.3	°C/W

FIGURE 1 – POWER DERATING

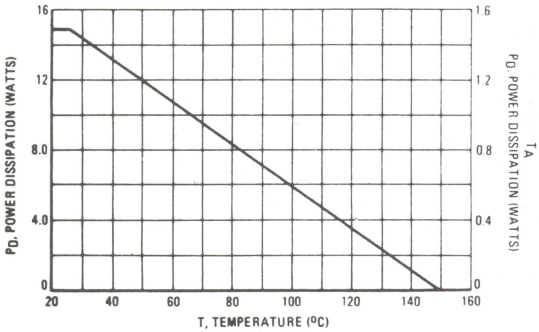



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

◇ Annular Semiconductors Patented by Motorola Inc.
△ Trademark of Motorola Inc.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
OFF CHARACTERISTICS				
Collector-Emitter Collector-Emitter Sustaining Voltage (1) (I_O = 10 mAdc, I_B = 0) BD775, BD776 / BD777, BD778 / BD779, BD780	V_{CEO} (sus)	45 60 80		Vdc
Collector Cutoff Current (V_{CE} = 20 Vdc, I_B = 0) BD775, BD776 / (V_{CE} = 30 Vdc, I_B = 0) BD777, BD778 / (V_{CE} = 40 Vdc, I_B = 0) BD779, BD780	I_{CEO}		100 100 100	μAdc
Collector Cutoff Current (V_{CB} = Rated, V_{CEO} (sus), I_E = 0) / (V_{CB} = Rated, V_{CEO} (sus), I_E = 0, I_C = 100 °C)	I_{CBO}		1.0 100	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		1.0	μAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	H_{FE}	750		
Collector-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 6 mAdc)	V_{CE} (Sat)		1.5	Vdc
Base Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 6 mAdc)	V_{BE} (Sat)		2.5	Vdc
Base-Emitter On Voltage (I_C = 1.5 Adc, V_{CE} = 3 Vdc)	V_{BE} (On)		2.3	Vdc
Output Diode Voltage Drop (I_{EC} = 2.0 Adc)	V_{EC}		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 2.0 Vdc)	f_T	20		MHz
	SYMBOL		**TYP.**	**UNIT**
Turn-On Time (I_C = 250 mA/V_{CE} = 2 V) BD775-777-779 / BD776-778-780	t_{on}	25	250 250 150	ns
Turn Off Time (I_C = 250 mA, V_{CE} = 2 V) BD775-777-779 / BD776-778-780	t_{off}		600 400	ns

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA



FIGURE 3 – TYPICAL DC CURRENT GAIN



FIGURE 4 – DARLINGTON CIRCUIT SCHEMATIC

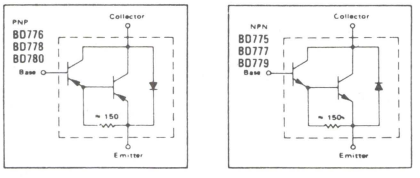

NPN
BD785, BD787
PNP
BD786, BD788

COMPLEMENTARY PLASTIC SILICON ANNULAR♦ POWER TRANSISTORS

. . . designed for low power audio amplifier and low current, high-speed switching applications.

- Low Collector-Emitter Sustaining Voltage –
  V_{CEO} (sus) 45 Vdc (Min) – BD785, BD786
  60 Vdc (Min) – BD787, BD788
- High Current-Gain – Bandwidth Product –
  f_T = 50 MHz (Min) @ I_C = 100 mAdc
- DC Current Gain Specified at 0.2, 1.0, 2.0 and 4.0 Adc
- Collector-Emitter Saturation Voltage Specified at 0.5, 1.0, 2.0 and 4.0 Adc

4 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
45, 60VOLTS
15 WATTS



*MAXIMUM RATINGS

Rating	Symbol	BD785 BD786	BD787 BD788	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	Vdc
Collector-Base Voltage	V_{CBO}	60	80	Vdc
Emitter-Base Voltage	V_{EBO}	6.0		Vdc
Collector Current – Continuous – Peak	I_C	4.0 8.0		Adc Adc
Base Current	I_B	1.0		Adc
Total Power Dissipation @ T_C = 25°C Derate Above 25°C	P_D	15 0.12		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.34	°C/W



NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

FIGURE 1 – POWER DERATING

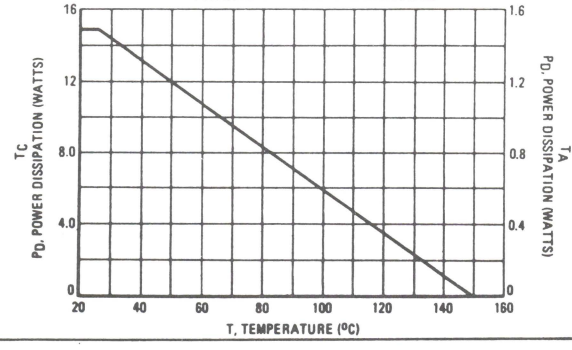

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 10 mAdc, I_B = 0)	BD785, BD786		45	–	
	BD787, BD788		60	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 20 Vdc, I_B = 0)	BD785, BD786		–	100	
(V_{CE} = 30 Vdc, I_B = 0)	BD787, BD788		–	100	
Collector Cutoff Current		I_{CEX}			
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	BD785, BD786		–	1.0	μAdc
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	BD787, BD788		–	1.0	
(V_{CE} = 30 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	BD785, BD786		–	0.1	mAdc
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C	BD787, BD788		–	0.1	
Emitter Cutoff Current		I_{EBO}	–	1.0	μAdc
(V_{EB} = 6.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 200 mAdc, V_{CE} = 3.0 Vdc)			40	250	
(I_C = 1.0 Adc, V_{CE} = 3.0 Vdc)			25	–	
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)			20	–	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			–	0.4	
(I_C = 1.0 Adc, I_B = 100 mAdc)			–	0.6	
(I_C = 2.0 Adc, I_B = 200 mAdc)			–	0.8	
(I_C = 4.0 Adc, I_B = 800 mAdc)			–	2.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	–	2.0	Vdc
(I_C = 2.0 Adc, I_B = 200 mAdc)					
Base-Emitter on Voltage		$V_{BE(on)}$	–	1.8	Vdc
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T	50	–	MHz
(I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)					
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_C = 0)	BD785, BD787		–	50	
f = 0.1 MHz)	BD786, BD788		–	70	
Small-Signal Current Gain		h_{fe}	10	–	–
(I_C = 200 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)					

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

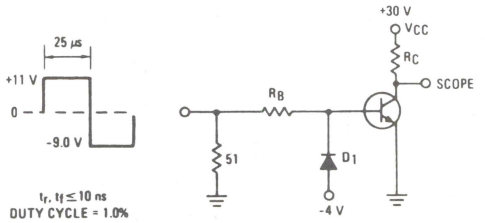

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈100 mA
MSD6100 USED BELOW I_B ≈100 mA

FOR PNP TEST CIRCUIT, REVERSE ALL POLARITIES

FIGURE 3 – TURN-ON TIME

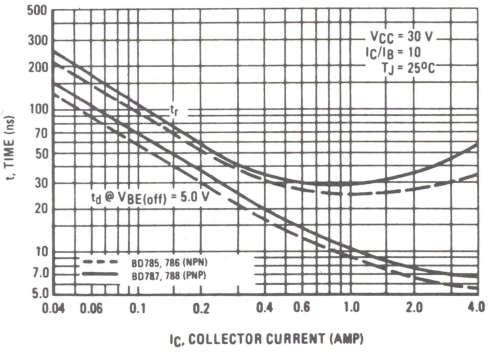

FIGURE 4 – THERMAL RESPONSE

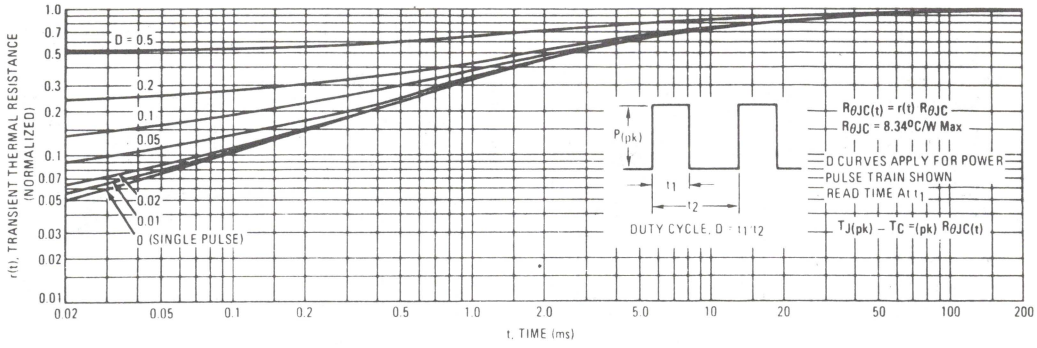

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

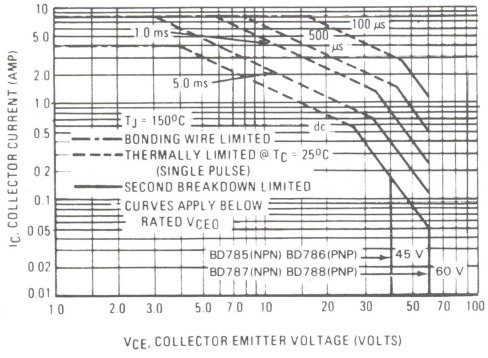

There are two limitations on the power handling ability of a transistor – average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150^{\circ}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A)

FIGURE 6 – TURN-OFF TIME

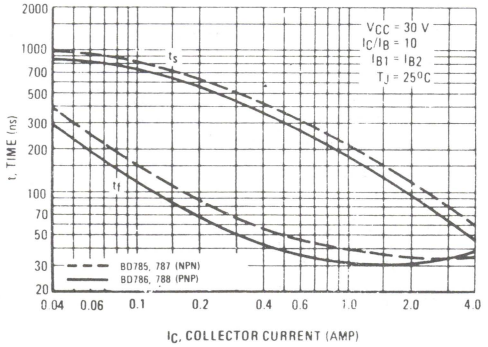

FIGURE 7 – CAPACITANCE

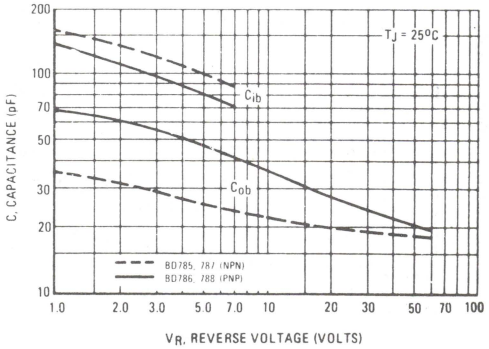

3

NPN
BD785, BD787

PNP
BD786, BD788

FIGURE 8 – DC CURRENT GAIN

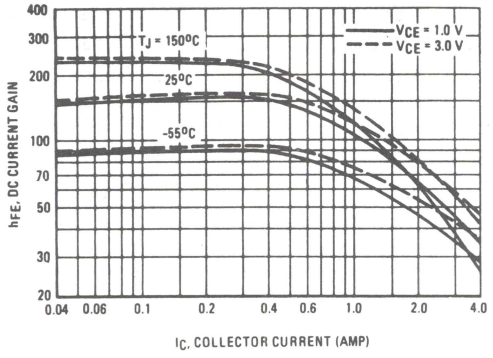

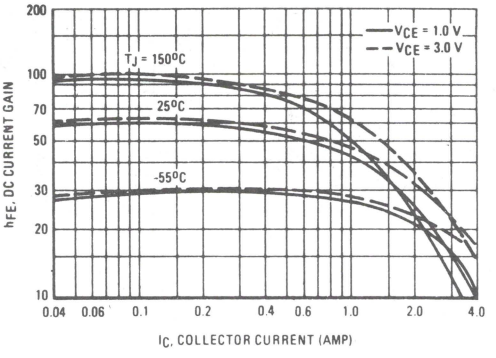

FIGURE 9 – "ON" VOLTAGES

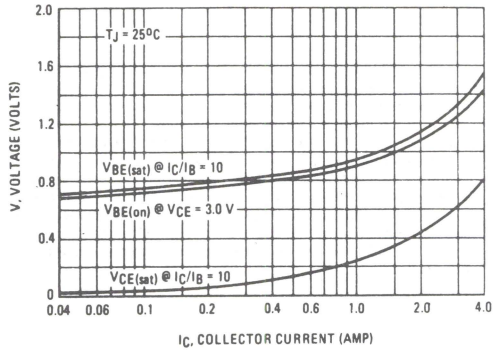

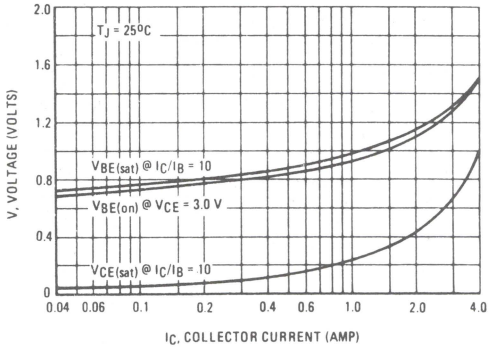

FIGURE 10 – TEMPERATURE COEFFICIENTS

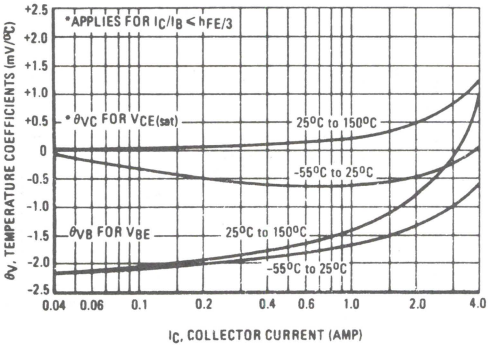

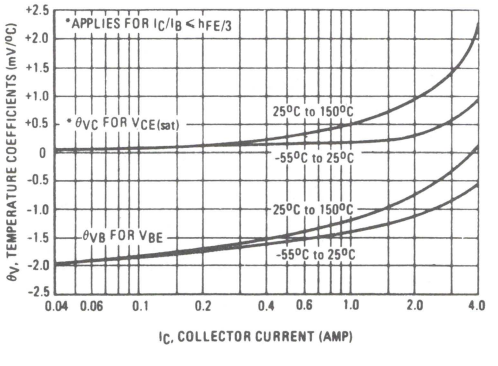

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
BD789, BD791
PNP
BD790, BD792

COMPLEMENTARY PLASTIC SILICON ANNULAR♦ POWER TRANSISTORS

. . . designed for low power audio amplifier and low-current, high speed switching applications.

- High Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 80 Vdc (Min) – BD789, BD790
  = 100 Vdc (Min) –BD791, BD792
- High DC Current Gain @ I_C = 200 mAdc
  h_{FE} = 40-250
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.5 Vdc (Max) @ I_C = 500 mAdc
- High Current Gain – Bandwidth Product –
  f_T = 40 MHz (Min) @ I_C = 100 mAdc)

4 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
80, 100 VOLTS
15 WATTS



*MAXIMUM RATINGS

Rating	Symbol	BD789 BD790	BD791 BD792	Unit
Collector-Emitter Voltage	V_{CEO}	80	100	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EBO}	6.0		Vdc
Collector Current – Continuous – Peak	I_C	4.0 8.0		Adc
Base Current	I_B	1.0		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.34	°C/W



NOTES:
1. MT = MAIN TERMINAL.
2. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05
TO-126

FIGURE 1 – POWER DERATING

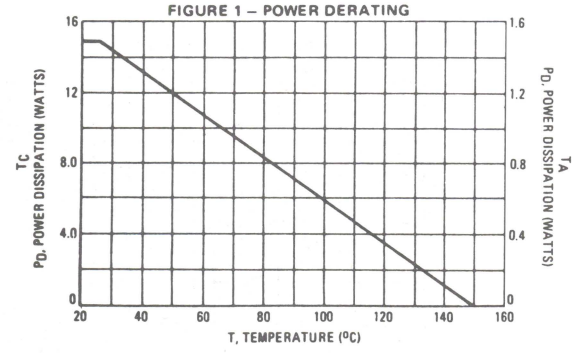

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 10 mAdc, I_B = 0)	BD789, BD790		80	–	
	BD791, BD792		100	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 40 Vdc, I_B = 0)	BD789, BD790		–	100	
(V_{CE} = 50 Vdc, I_B = 0)	BD791, BD792		–	100	
Collector Cutoff Current		I_{CEX}			
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	BD789, BD790		–	1.0	μAdc
(V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	BD791, BD792		–	1.0	
(V_{CE} = 40 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	BD789, BD790		–	0.1	mAdc
(V_{CE} = 50 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	BD791, BD792		–	0.1	
Emitter Cutoff Current		I_{EBO}	–	1.0	μAdc
(V_{EB} = 6.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 200 mAdc, V_{CE} = 3.0 Vdc)			40	250	
(I_C = 1.0 Adc, V_{CE} = 3.0 Vdc)			20	–	
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)			10	–	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			5.0	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			–	0.5	
(I_C = 1.0 Adc, I_B = 100 mAdc)			–	1.0	
(I_C = 2.0 Adc, I_B = 200 mAdc)			–	2.5	
(I_C = 4.0 Adc, I_B = 800 mAdc)			–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	–	1.8	Vdc
(I_C = 2.0 Adc, I_B = 200 mAdc)					
Base-Emitter On Voltage		$V_{BE(on)}$	–	1.5	Vdc
(I_C = 200 mAdc, V_{CE} = 3.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T	40	–	MHz
(I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 10 MHz)					
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_C = 0, f = 0.1 MHz	BD789, BD791		–	50	
	BD790, BD792		–	70	
Small-Signal Current Gain		h_{fe}	10	–	–
(I_C = 200 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)					

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

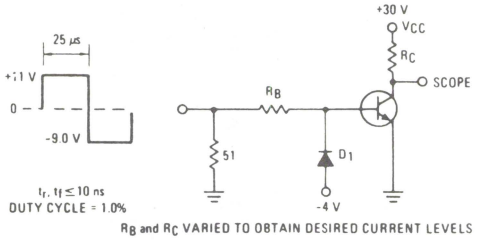

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈ 100 mA
MSD6100 USED BELOW I_B ≈ 100 mA

FOR PNP TEST CIRCUIT, REVERSE ALL POLARITIES

FIGURE 3 – TURN-ON TIME

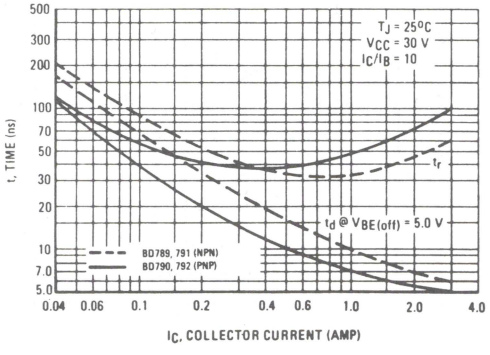

FIGURE 4 – THERMAL RESPONSE

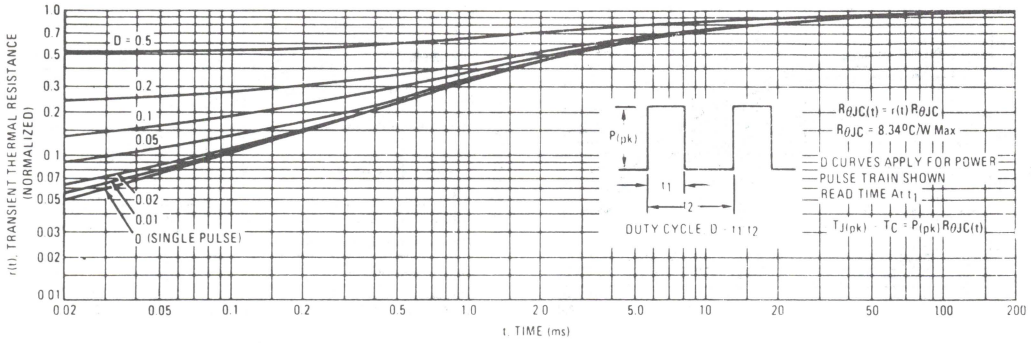

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

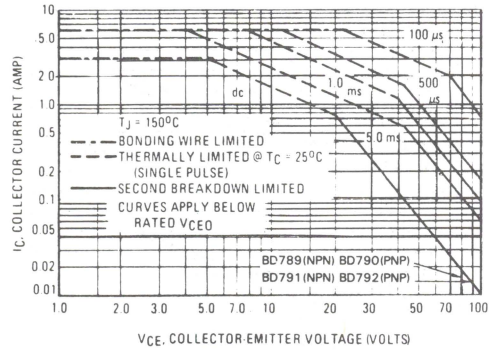

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C V_{CE} limits of the transistor that must be observed for reliable operation. i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150°C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A)

FIGURE 6 – TURN-OFF TIME

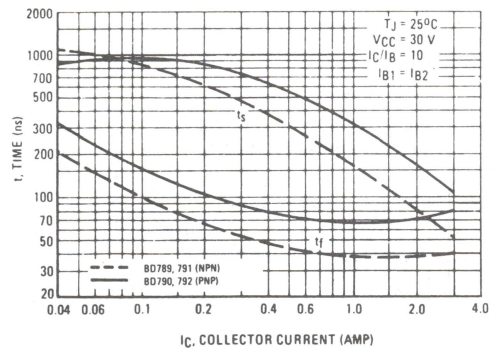

FIGURE 7 – CAPACITANCE

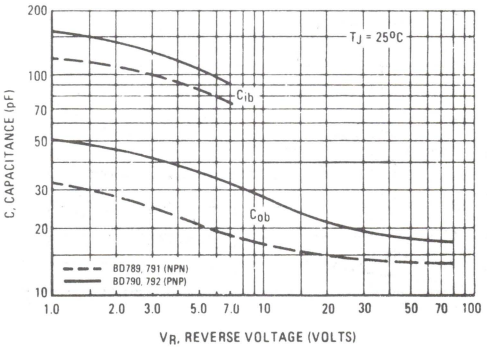

3°

NPN
BD789, BD791

PNP
BD790, BD792

FIGURE 8 – DC CURRENT GAIN

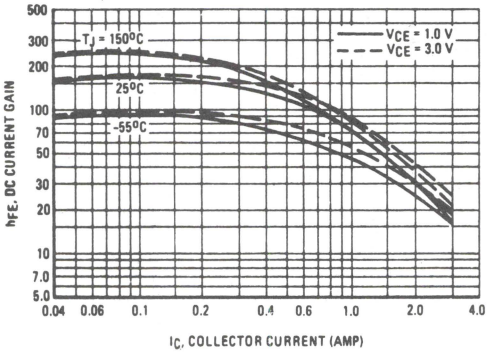

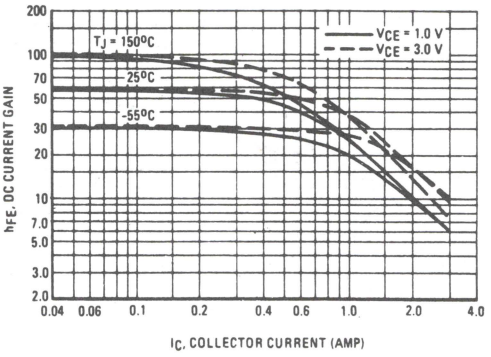

FIGURE 9 – "ON" VOLTAGES

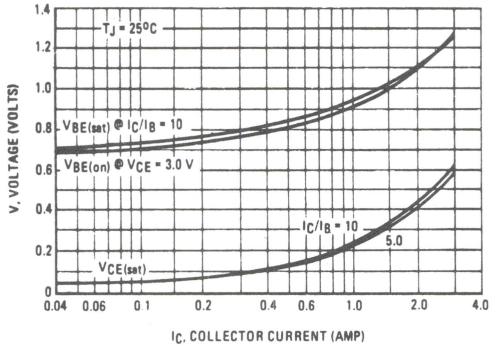

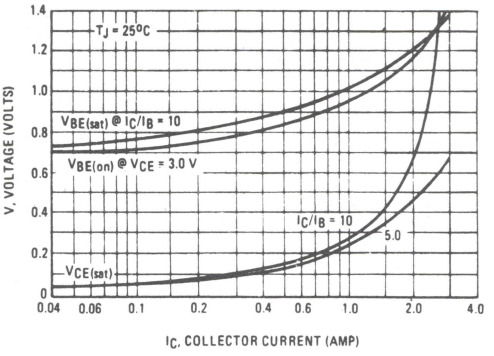

3

FIGURE 10 – TEMPERATURE COEFFICIENTS

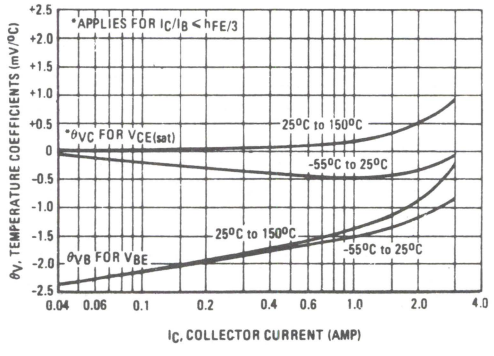

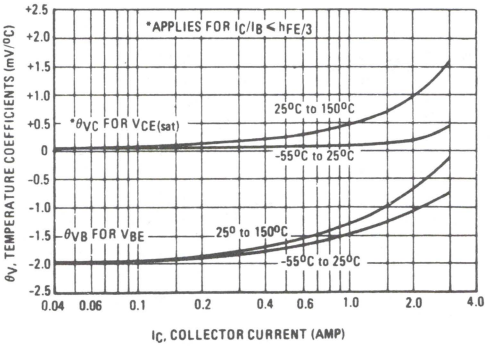

BD795 BD799
BD797 BD801

PLASTIC HIGH POWER SILICON NPN TRANSISTOR

. . . designed for use up to 30 Watt audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 1.0 Adc
- BD 795, 797, 799, 801 are complementary with BD 796, 798, 800, 802

8 AMPERE POWER TRANSISTOR

NPN SILICON

45, 60, 80, 100 VOLTS
65 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD795 BD797 BD799 BD801	45 60 80 100	Vdc
Collector-Base Voltage	V_{CBO}	BD795 BD797 BD799 BD801	45 60 80 100	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		8	Adc
Base Current	I_B		3	Adc
Total Device Dissipation T_C = 25°C Derate avove 25°C	P_D		65 522	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		1.92	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0) (I_C = 0.05 Adc, I_B = 0)	BV_{CEO}*	BD795 BD797 BD799 BD801	45 60 80 100	— — — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0) (V_{CB} = 100 Vdc, I_E = 0)	I_{CBO}	BD795 BD797 BD799 BD801	— — — —	0.1 0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 1 A, V_{CE} = 2 V) (I_C = 3 A, V_{CE} = 2 V)	h_{FE}*	BD 795/797 BD 799/801 BD 795/797 BD 799/801	40 30 25 15	— — — —	
Collector-Emitter Saturation Voltage* (I_C = 3 Adc, I_B = 0.3 Adc)	$V_{CE(sat)}$*		—	1.0	Vdc
Base-Emitter On Voltage* (I_C = 3 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.6	Vdc
Current-Gain-Bandwidth Product (I_C =0.25Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		3.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

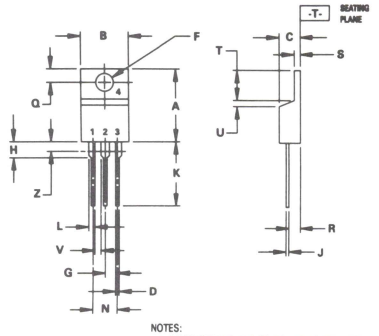

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

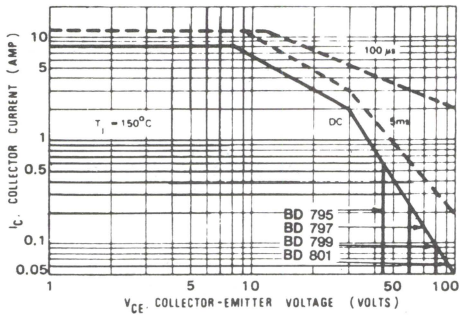

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

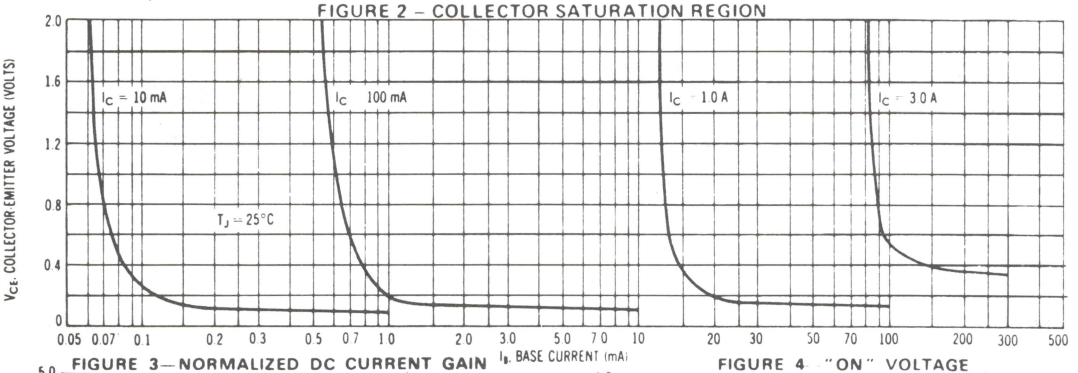

FIGURE 3—NORMALIZED DC CURRENT GAIN

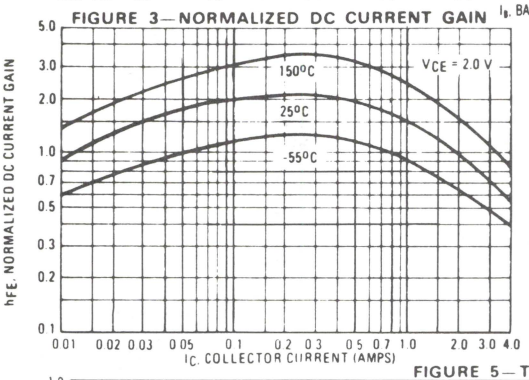

FIGURE 4 "ON" VOLTAGE

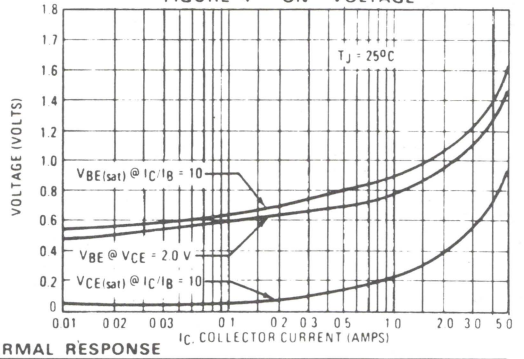

FIGURE 5—THERMAL RESPONSE

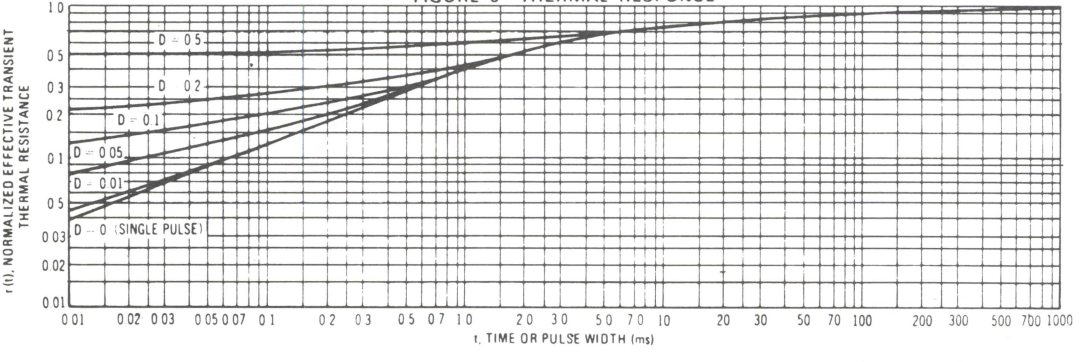

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD796 BD800
BD798 BD802

PLASTIC HIGH POWER SILICON PNP TRANSISTOR

. . . designed for use up to 30 Watt audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current Gain—h_{FE} = 40 (Min) @ I_C = 1.0 Adc
- BD 796, 798, 800, 802 are complementary with BD 795, 797, 799, 801

8 AMPERE POWER TRANSISTOR

PNP SILICON

45, 60, 80, 100 VOLTS
65 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD796 BD798 BD800 BD802	45 60 80 100	Vdc
Collector-Base Voltage	V_{CBO}	BD796 BD798 BD800 BD802	45 60 80 100	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		8	Adc
Base Current	I_B		3	Adc
Total Device Dissipation T_C=25°C Derate avove 25°C	P_D		65 522	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		1.92	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.1 Adc, I_B = 0) (I_C = 0.05 Adc, I_B = 0)	BV_{CEO}*	BD796 BD798 BD800 BD802	45 60 80 100	— — — —	Vdc
Collector Cutoff Current (V_{CB} = 45 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0) (V_{CB} = 100 Vdc, I_E = 0)	I_{CBO}	BD796 BD798 BD800 BD802	— — — —	0.1 0.1 0.1 0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	1.0	mAdc
DC current Gain (I_C = 1 A, V_{CE} = 2 V) (I_C = 3 A, V_{CE} = 2 V)	h_{FE}*	BD 796/798 BD 800/802 BD 796/788 BD 800/802	40 30 25 15	— — — —	
Collector-Emitter Saturation Voltage* (I_C = 3 Adc, I_B = 0.3 Adc)	$V_{CE(sat)}$*		—	1.0	Vdc
Base-Emitter On Voltage* (I_C = 3 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.6	Vdc
Current-Gain-Bandwidth Product (I_C =0.25Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		3.0	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

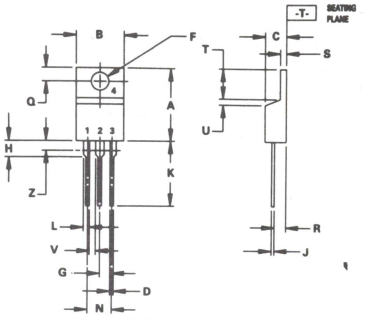

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

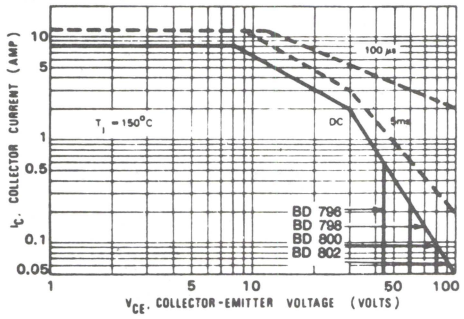

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – COLLECTOR SATURATION REGION

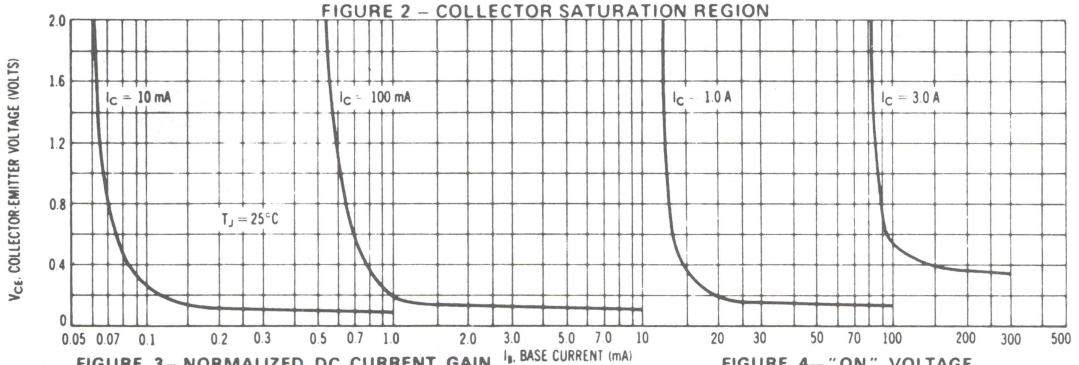

FIGURE 3—NORMALIZED DC CURRENT GAIN

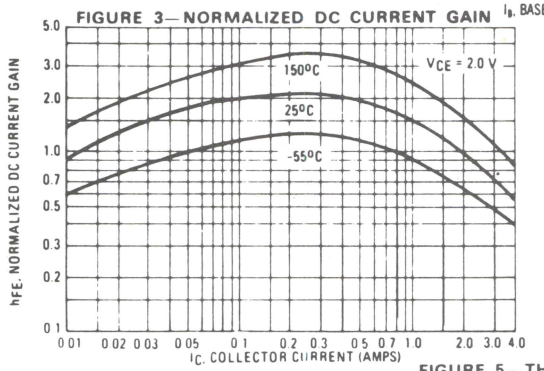

FIGURE 4—"ON" VOLTAGE

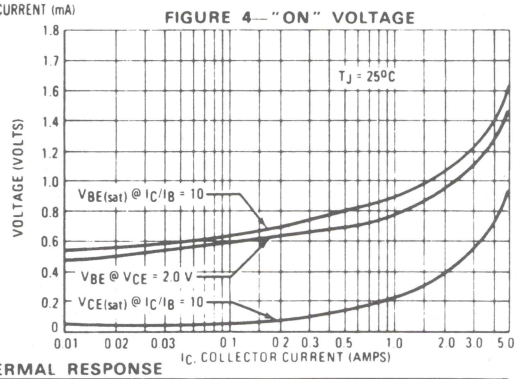

FIGURE 5—THERMAL RESPONSE

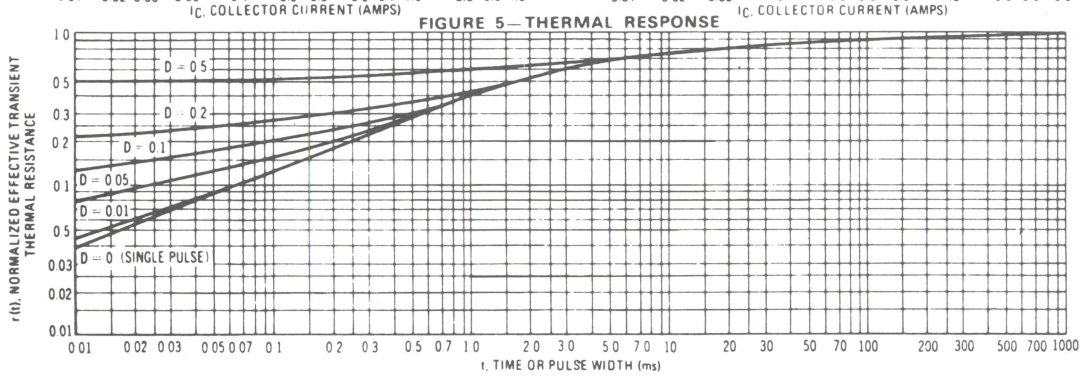

BD805
BD807
BD809

PLASTIC HIGH POWER SILICON NPN TRANSISTOR

. . . designed for use in high power audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current—h_{FE} = 30 (Min) @ I_C = 2.0 Adc
- BD 805, 807, 809 are complementary with BD 806, 808, 810

10 AMPERE POWER TRANSISTOR

NPN SILICON

45, 60, 80 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD805 BD807 BD809	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD805 BD807 BD809	55 70 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		10.0	Adc
Base Current	I_B		6.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		90 720	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		—55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		1.39	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.2 Adc, I_B = 0)	BV_{CEO}*	BD805 BD807 BD809	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 55 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD805 BD807 BD809	— — —	1.0 1.0 1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	2.0	mAdc
DC current Gain (I_C = 2A, V_{CE} = 2 V) (I_C = 4A, V_{CE} = 2 V)	h_{FE}*		30 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 4 Adc, I_B = 0.4 Adc)	$V_{CE(sat)}$*		—	1.1	Vdc
Base-Emitter On Voltage* (I_C = 4 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.6	Vdc
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		1.5	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

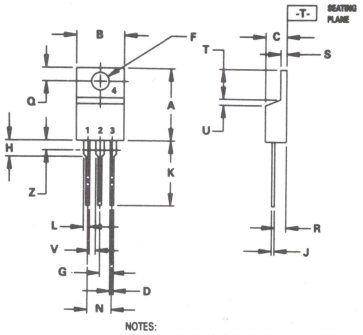

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 — ACTIVE REGION DC SAFE OPERATING AREA

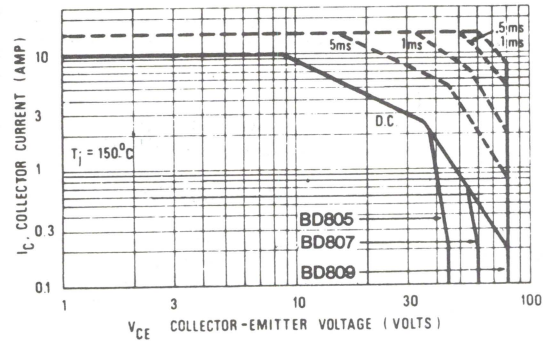

See Note 1

FIGURE 2 — POWER-TEMPERATURE DERATING CURVE

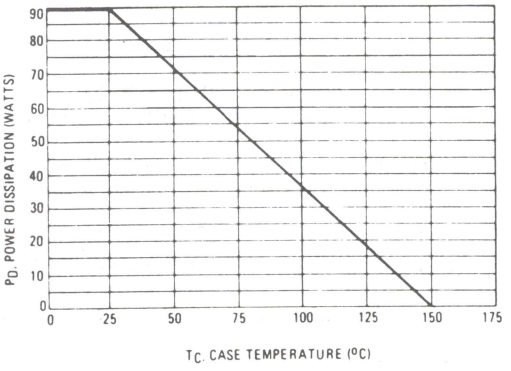

FIGURE 3 — "ON" VOLTAGES

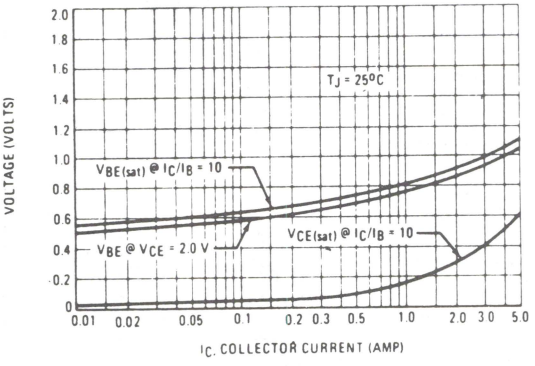

FIGURE 4 — CURRENT GAIN

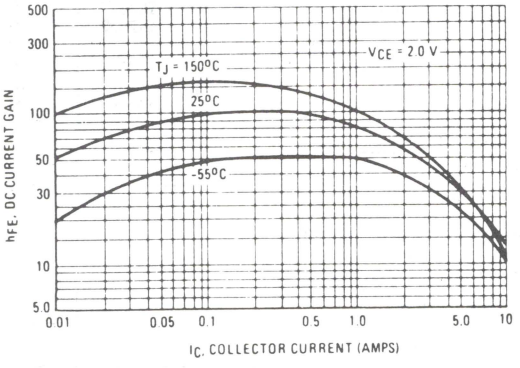

FIGURE 5 — THERMAL RESPONSE

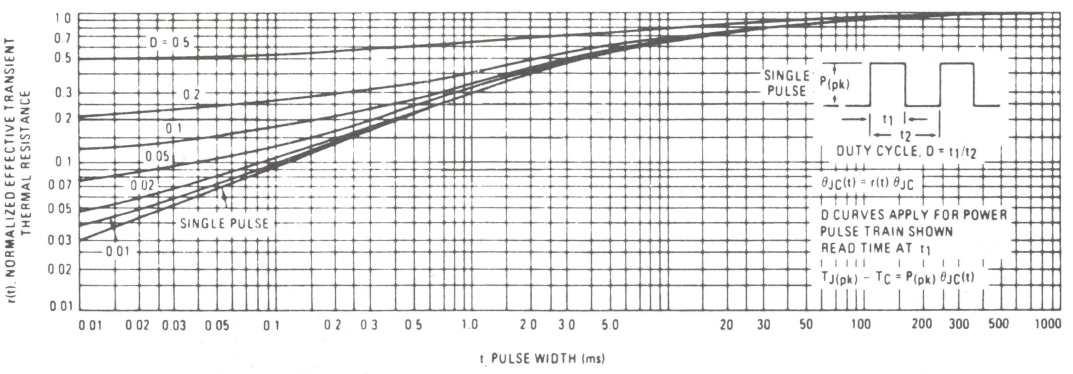

Note 1:

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)}$ ≤150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415)

BD806
BD808
BD810

PLASTIC HIGH POWER
SILICON PNP TRANSISTOR

. . . designed for use in high power audio amplifiers utilizing complementary or quasi complementary circuits.

- DC Current—h_{FE} = 30 (Min) @ I_C = 2.0 Adc
- BD 806, 808, 810 are complementary with BD 805, 807, 809

10 AMPERE
POWER TRANSISTOR

PNP SILICON

45, 60, 80 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	Type	Value	Unit
Collector-Emitter Voltage	V_{CEO}	BD806 BD808 BD810	45 60 80	Vdc
Collector-Base Voltage	V_{CBO}	BD806 BD808 BD810	55 70 80	Vdc
Emitter-Base Voltage	V_{EBO}		5	Vdc
Collector Current	I_C		10.0	Adc
Base Current	I_B		6.0	Adc
Total Device Dissipation T_C=25°C Derate above 25°C	P_D		90 720	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol		Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		1.39	° C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Type	Min	Max	Unit
Collector-Emitter Sustaining Voltage* (I_C = 0.2 Adc, I_B = 0)	BV_{CEO}*	BD806 BD808 BD810	45 60 80	— — —	Vdc
Collector Cutoff Current (V_{CB} = 55 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0) (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	BD806 BD808 BD810	— — —	1.0 1.0 1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}		—	2.0	mAdc
DC current Gain (I_C = 2A, V_{CE} = 2 V) (I_C = 4A, V_{CE} = 2 V)	h_{FE}*		30 15	— —	
Collector-Emitter Saturation Voltage* (I_C = 4 Adc, I_B = 0.4 Adc)	$V_{CE(sat)}$*		—	1.1	Vdc
Base-Emitter On Voltage* (I_C = 4 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$*		—	1.6	Vdc
Current-Gain-Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T		1.5	—	MHz

* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

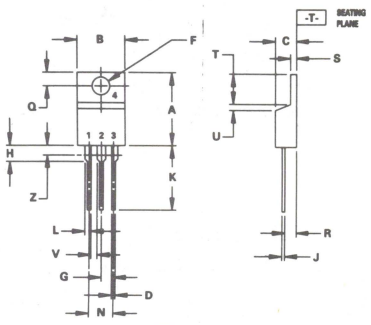

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 – ACTIVE REGION DC SAFE OPERATING AREA

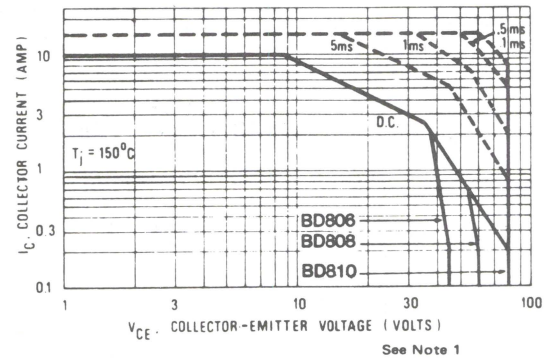

See Note 1

FIGURE 2 — POWER-TEMPERATURE DERATING CURVE

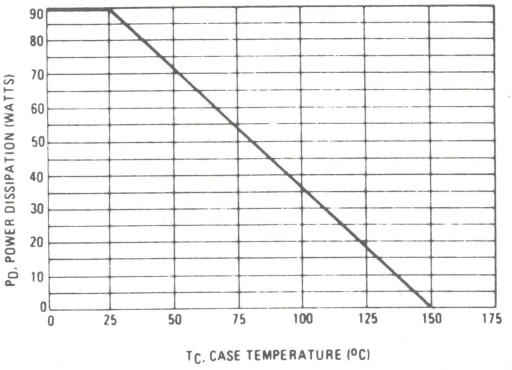

FIGURE 3 – "ON" VOLTAGES

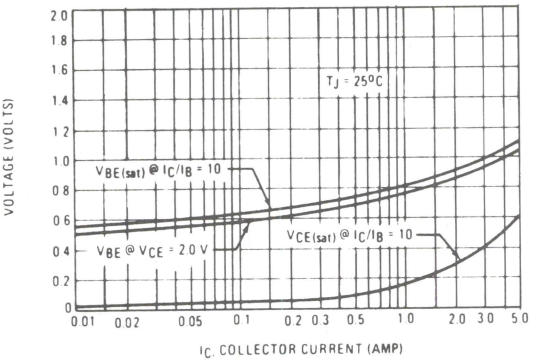

FIGURE 4 – CURRENT GAIN

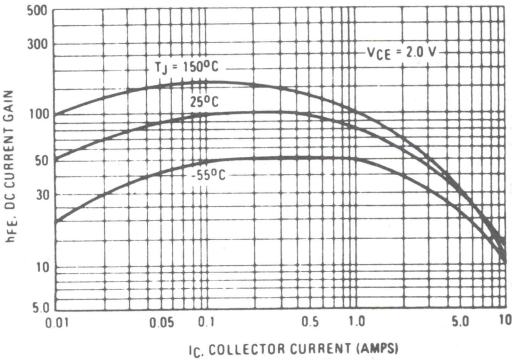

FIGURE 5 — THERMAL RESPONSE

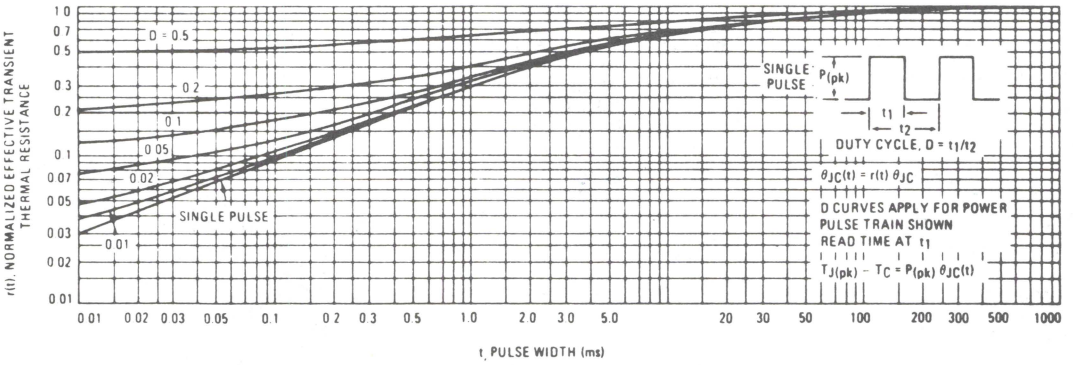

Note 1:

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)}$ ≤150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415)

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BD895, BD895A
BD897, BD897A
BD899, BD899A
BD901

PLASTIC POWER SILICON NPN DARLINGTONS

. . . for use as output devices in complementary general-purpose amplifier applications.

- High DC Current Gain –
  h_{FE} = 750 (Min) @ I_C = 3.0 and 4.0 Adc
- Monolithic Construction
- BD895, 895A, 897, 897A, 899, 899A, 901 are complementary with BD896, 896A, 898, 898A, 900, 900A, 902.
- Electrical equivalents to BD695A, 697, 697A, 699, 699A, 701.

DARLINGTON
8 AMPERE
NPN SILICON
POWER TRANSISTORS

45-60-80-100 VOLTS
70 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD895 BD895A	BD897 BD897A	BD899 BD899A	BD901	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current	I_C	8.0				Adc
Base Current	I_B	0.1				Adc
Total Device Dissipation @ T_C = 25 °C	P_D	70				Watts
Derate above 25 °C		0.56				W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.79	°C/W

FIGURE 1 – POWER TEMPERATURE DERATING CURVE

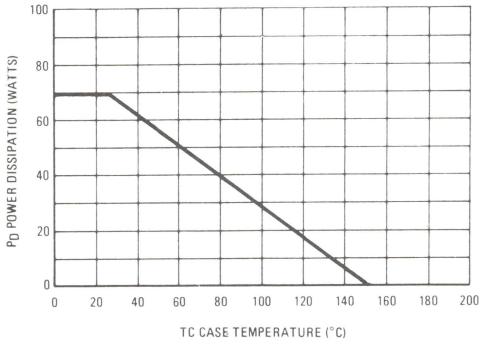

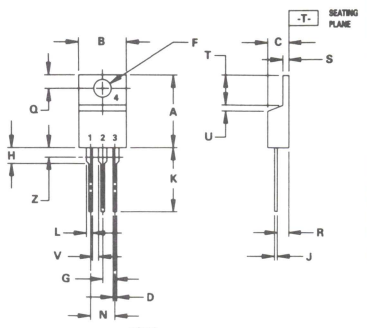

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage[1] (I_C = 100 mAdc, I_B = 0)	BD895, 895A	BV_{CEO}	45	–	Vdc
	BD897, 897A		60	–	
	BD899, 899A		80	–	
	BD901		100	–	
Collector Cutoff Current (V_{CE} = Half Rated V_{CEO}, I_B = 0)		I_{CEO}	–	500	μAdc
Collector Cutoff Current (V_{CB} = Rated BV_{CEO}, I_E = 0)		I_{CBO}	–	0.2	mAdc
(V_{CB} = Rated BV_{CEO}, I_E = 0, T_C = 100 °C)			–	2.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain[1]		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)	BD895, 897, 899, 901		750	–	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	BD895A, 897A, 899A		750	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 12 mAdc)	BD895, 897, 899, 901		–	2.5	
(I_C = 4.0 Adc, I_B = 16 mAdc)	BD895A, 897A, 899A		–	2.8	
Base-Emitter On Voltage[1]		$V_{BE(on)}$			Vdc
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)	BD895, 897, 899, 901		–	2.5	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	BD895A, 897A, 899A		–	2.5	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		h_{fe}	1.0	–	–

[1] Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown (see AN-415).

3

FIGURE 2 – DC SAFE OPERATING AREA

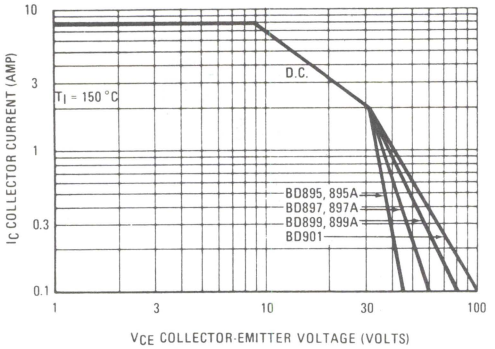

FIGURE 3 – DARLINGTON CIRCUIT SCHEMATIC

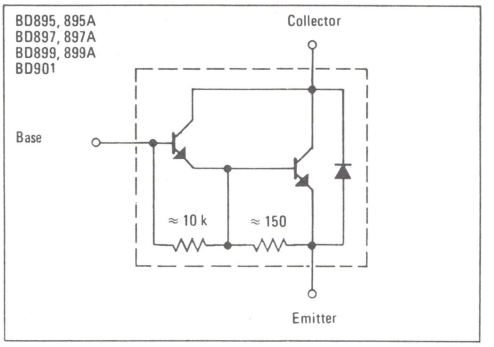

BD896, BD896A
BD898, BD898A
BD900, BD900A
BD902

PLASTIC MEDIUM-POWER PNP TRANSISTORS

. . . for use as output devices in complementary general-purpose amplifier applications.

- High DC Current Gain – h_{FE} = 750 (Min) @ I_C = 3.0 and 4.0 Adc
- Monolithic Construction
- **BD896A, 898, 898A, 900, 900A, 902 are complementary with BD895A, 897, 897A, 899, 899A, 901**
- **Electrical equivalents to BD696A, 698, 698A, 700, 700A, 702**

DARLINGTON
8 AMPERE
SILICON
POWER TRANSISTORS
45-60-80-100 VOLTS
70 WATTS



MAXIMUM RATINGS

Rating	Symbol	BD896 BD896A	BD898 BD898A	BD900 BD900A	BD902	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current	I_C	8.0				Adc
Base Current	I_B	0.1				Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	70 0.56				Watts W/°C
Operating and Storage Junction Temperating Range	T_J, T_{stg}	-55 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.79	°C/W

FIGURE 1 – POWER TEMPERATURE DERATING CURVE

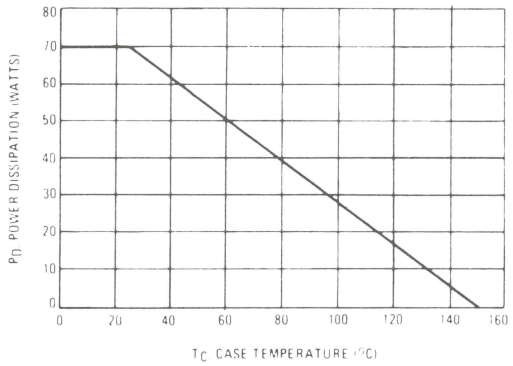

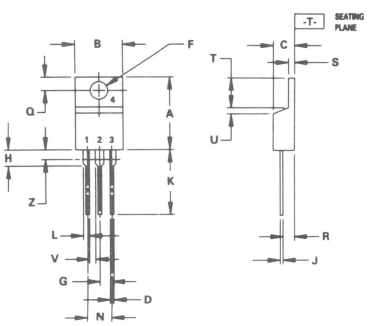

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage[1] (I_C = 100 mAdc, I_B = 0)	BD896, 896A BD898, 898A BD900, 900A BD902	BV_{CEO}	45 60 80 100	– – – –	Vdc
Collector Cutoff Current (V_{CE} = Half Rated V_{CEO}, I_B = 0)		I_{CEO}	–	500	μAdc
Collector Cutoff Current (V_{CB} = Rated BV_{CEO}, I_E = 0) (V_{CB} = Rated BV_{CEO}, I_E = 0, T_C = 100°C)		I_{CBO}	– –	0.2 2.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain[1] (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc) (I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	BD896, 898, 900, 902 BD896A, 898A, 900A	h_{FE}	750 750	– –	–
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 12 mAdc) (I_C = 4.0 Adc, I_B = 16 mAdc)	BD896, 898, 900, 902 BD896A, 898A, 900A	$V_{CE(sat)}$	– –	2.5 2.8	Vdc
Base-Emitter On Voltage[1] (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc) (I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	BD896, 898, 900, 902 BD896A, 898A, 900A	$V_{BE(on)}$	– –	2.5 2.5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		h_{fe}	1.0	–	–

[1]Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC SAFE OPERATING AREA

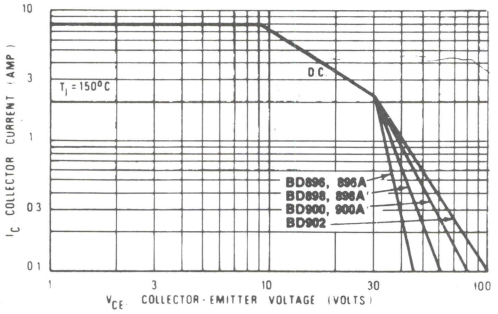

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown. (See AN-415)

FIGURE 3 – DARLINGTON CIRCUIT SCHEMATIC

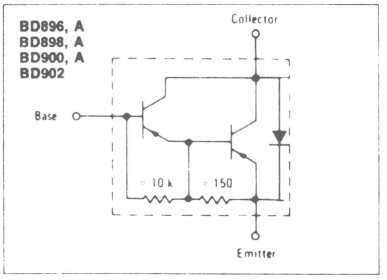

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
BDV65	BDV64
BDV65A	BDV64A
BDV65B	BDV64B
BDV65C	BDV64C

COMPLEMENTARY SILICON PLASTIC POWER DARLINGTONS

. . . for use as output devices in complementary general purpose amplifier applications.

- High DC Current Gain
  HFE = 1000 (min.) @ 5 Adc
- Monolithic Construction with Built-in
  Base Emitter Shunt Resistors

DARLINGTONS
10 AMPERES

COMPLEMENTARY SILICON POWER TRANSISTORS

60-80-100-120 VOLTS
125 WATTS



MAXIMUM RATINGS

Rating	Symbol	BDV 65 BDV 64	BDV 65A BDV 64A	BDV 65B BDV 64B	BDV 65C BDV 64C	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	120	V_{dc}
Collector-Base Voltage	V_{CB}	60	80	100	120	V_{dc}
Emitter-Base Voltage	V_{EB}	5				V_{dc}
Collector Current – Continuous – Peak	I_C	10 20				A_{dc}
Base Current	I_B	0.5				A_{dc}
Total Device Dissipation @ Tc = 25°C Derate above 25°C	P_D	125 1				Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1	°C/W



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
(TO-218AC)

FIGURE 1 – POWER DERATING

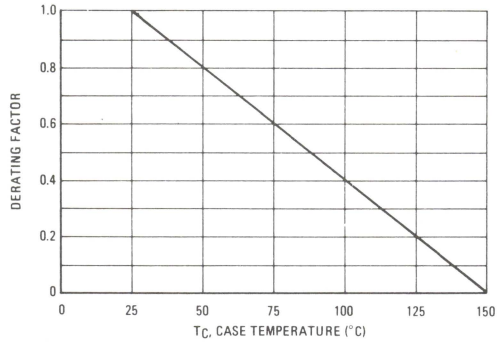

3

ELECTRICAL CHARACTERISTICS

Characteristic		Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO\ (sus)}$			Vdc
(I_C = 30 mAdc, I_B = 0)	BDV65 -BDV64		60		
	BDV65A-BDV64A		80		
	BDV65B-BDV64B		100		
	BDV65C-BDV64C		120		
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	BDV65 -BDV64			1	
(V_{CE} = 40 Vdc, I_B = 0)	BDV65A-BDV64A			1	
(V_{CE} = 50 Vdc, I_B = 0)	BDV65B-BDV64B			1	
(V_{CE} = 60 Vdc, I_B = 0)	BDV65C-BDV64C			1	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	BDV65 -BDV64			.4	
(V_{CB} = 80 Vdc, I_E = 0)	BDV65A-BDV64A			.4	
(V_{CB} = 100 Vdc, I_E = 0)	BDV65B-BDV64B			.4	
(V_{CB} = 120 Vdc, I_E = 0)	BDV65C-BDV64C			.4	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 30 Vdc, I_E = 0, T_C = 150°C)	BDV65 -BDV64			2	
(V_{CB} = 40 Vdc, I_E = 0, T_C = 150°C)	BDV65A-BDV64A			2	
(V_{CB} = 50 Vdc, I_E = 0, T_C = 150°C)	BDV65B-BDV64B			2	
(V_{CB} = 60 Vdc, I_E = 0, T_C = 150°C)	BDV65C-BDV64C			2	
Emitter Cutoff Current		I_{EBO}		5	mAdc
(V_{BE} = 5 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain					
(I_C = 5 Adc, V_{CE} = 4 Vdc)		HFE	1000		
Collector-Emitter Saturation Voltage		$V_{CE\ (sat)}$		2	Vdc
(I_C = 5 Adc, I_B = 0.02 Adc)					
Base-Emitter Saturation Voltage		$V_{BE\ (on)}$		2.5	Vdc
(I_C = 5 Adc, V_{CE} = 4 Vdc)					

3

NPN

FIGURE 2 – DC CURRENT GAIN

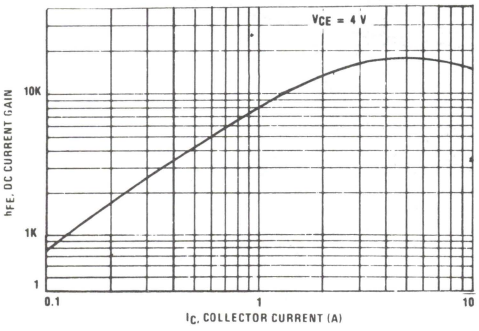

PNP

FIGURE 3 – DC CURRENT GAIN

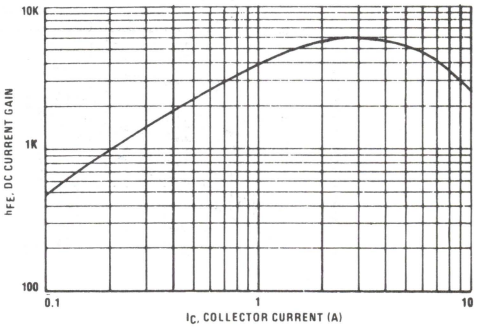

FIGURE 4 – "ON" VOLTAGES

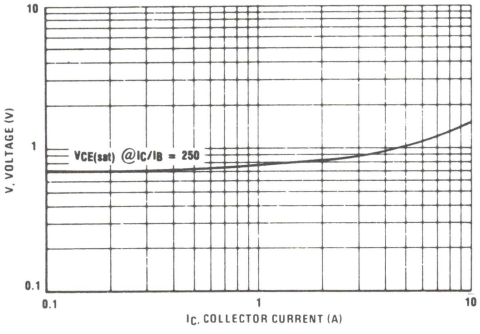

FIGURE 5 – "ON" VOLTAGES

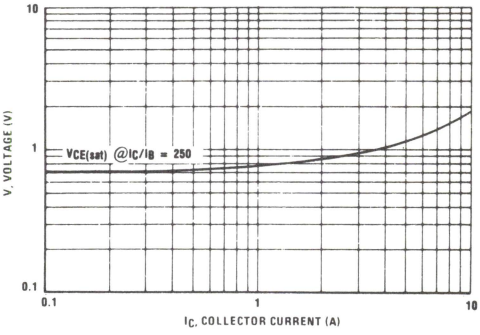

FIGURE 6 – ACTIVE REGION SAFE OPERATING AREA

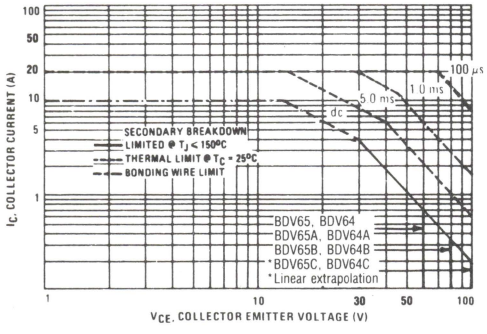

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 6 is based on $T_{J(pk)}$ 150°C, T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in figure 7. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A)

3

FIGURE 7 – THERMAL RESPONSE

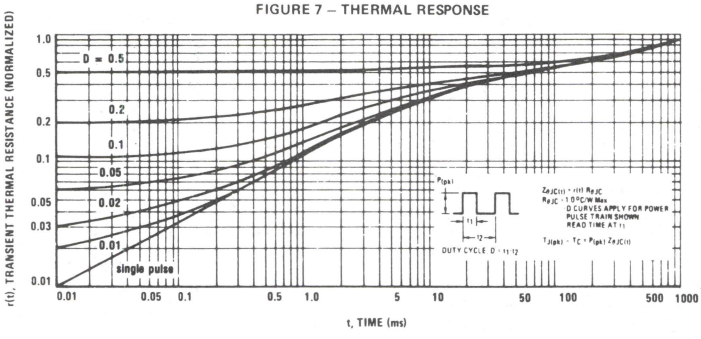

NPN BDW39 thru BDW43 — PNP BDW44 thru BDW48

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general purpose and low speed switching applications.

- High DC Current Gain – h_{FE} = 2500 (typ.) @ I_C = 5.0 Adc.
- Collector Emitter Sustaining Voltage @ 30 mAdc:
  $V_{CEO(sus)}$ = 45 Vdc (min.) – BDW39/BDW44
  60 Vdc (min.) – BDW40/BDW45
  80 Vdc (min.) – BDW41/BDW46
  100 Vdc (min.) – BDW42/BDW47
  120 Vdc (min.) – BDW43/BDW48
- Low Collector Emitter Saturation Voltage:
  $V_{CE(sat)}$ = 2.0 Vdc (max.) @ I_C = 5.0 Adc
  3.0 Vdc (max.) @ I_C = 10.0 Adc
- Monolithic Construction with Built-In Base Emitter Shunt resistors
- TO-220AB Compact Package
- TO-66 Lead form also available ordered with "-66" suffix.

DARLINGTON 15 AMPERE

COMPLEMENTARY SILICON
POWER TRANSISTORS
45-60-80-100-120 VOLTS
85 WATTS



MAXIMUM RATINGS

Rating	Symbol	BDW39 BDW44	BDW40 BDW45	BDW41 BDW46	BDW42 BDW47	BDW43 BDW48	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	120	V_{dc}
Collector-Base Voltage	V_{CB}	45	60	80	100	120	V_{dc}
Emitter-Base Voltage	V_{EB}	5.0					V_{dc}
Collector Current – Continuous	I_C	15					A_{dc}
Base Current	I_B	0.5					A_{dc}
Total Device Dissipation @ T_C = 25 C Derate above 25 C	P_D	85 0.68					Watts W/ C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 55 to + 150					C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	$R_{\Theta JC}$	1.47	C/W

FIGURE 1 – POWER TEMPERATURE DERATING CURVE

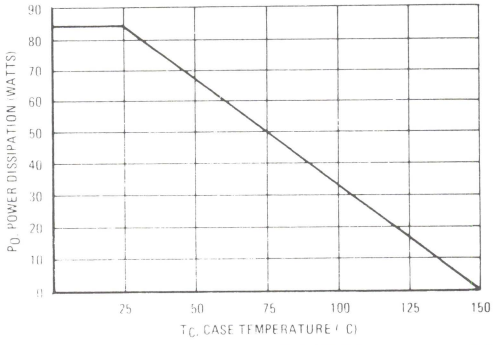

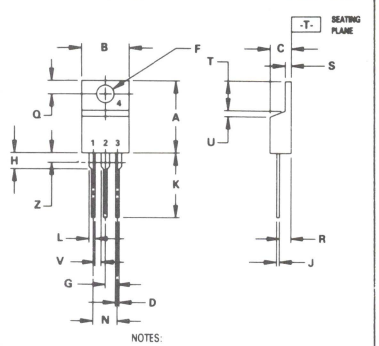

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min.	Max.	Unit	
OFF CHARACTERISTICS						
Collector Emitter Sustaining Voltage [1]		$V_{CEO(sus)}$				Vdc
(I_C = 30 mAdc, I_B = 0)	BDW39/BDW44		45			
	BDW40/BDW45		60			
	BDW41/BDW46		80			
	BDW42/BDW47		100			
	BDW43/BDW48		120			
Collector Cutoff Current		I_{CEO}				mAdc
(V_{CE} = 22.5 Vdc, I_B = 0)	BDW39/BDW44			2		
(V_{CE} = 30 Vdc, I_B = 0)	BDW40/BDW45			2		
(V_{CE} = 40 Vdc, I_B = 0)	BDW41/BDW46			2		
(V_{CE} = 50 Vdc, I_B = 0)	BDW42/BDW47			2		
(V_{CE} = 60 Vdc, I_B = 0)	BDW43/BDW48			2		
Collector Cutoff Current		I_{CBO}				mAdc
(V_{CB} = 45 Vdc, I_E = 0)	BDW39/BDW44			1		
(V_{CB} = 60 Vdc, I_E = 0)	BDW40/BDW45			1		
(V_{CB} = 80 Vdc, I_E = 0)	BDW41/BDW46			1		
(V_{CB} = 100 Vdc, I_E = 0)	BDW42/BDW47			1		
(V_{CB} = 120 Vdc, I_E = 0)	BDW43/BDW48			1		
Emitter Cutoff Current		I_{EBO}				mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)				2		
ON CHARACTERISTICS[1]						
DC Current Gain		h_{FE}				
(I_C = 5 Adc, V_{CE} = 4.0 Vdc)			1000			
(I_C = 10 Adc, V_{CE} = 4.0 Vdc)			250			
for all except BDW43/48						
for BDW 43/48					250	
Collector-Emitter Saturation Voltage		$V_{CE\ (sat.)}$				Vdc
(I_C = 5 Adc, I_B = 10 mAdc)				2		
(I_C = 10 Adc, I_B = 50 mAdc)				3		
Base-Emitter On Voltage		$V_{BE\ (on)}$				Vdc
(I_C = 10 Adc, V_{CE} = 4 Vdc)				3		
SECOND BREAKDOWN[2]						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$				Adc
BDW39/BDW40/BDW41/BDW42/BDW43	V_{CE} = 28.4 Vdc		3			
	V_{CE} = 40 Vdc		1.2			
BDW44/BDW45/BDW46/BDW47/BDW48	V_{CE} = 22.5 Vdc		3.8			
	V_{CE} = 36 Vdc		1.2			
DYNAMIC CHARACTERISTICS						
Magnitude of common emitter small signal short circuit current transfer ratio		f_T				MHz
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)			4.0			
Output capacitance		C_{ob}				PF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)						
	BDW39/BDW40/BDW41/BDW42/BDW43				200	
	BDW44/BDW45/BDW46/BDW47/BDW48				300	
Small signal current gain		h_{fe}				
I_C = 3.0 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)			300			

Indicates JEDEC Registered Data.

[1] Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0 %.
[2] Pulse Test non repetitive: Pulse Width = 250 ms.

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

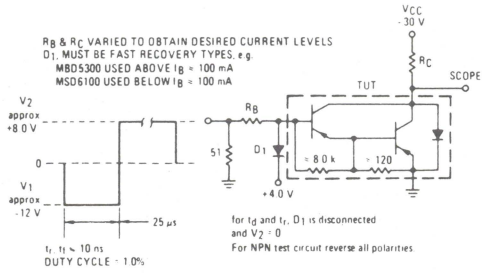

FIGURE 3 – SWITCHING TIMES

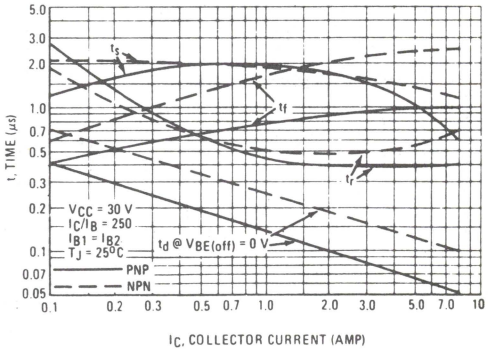

FIGURE 4 – THERMAL RESPONSE

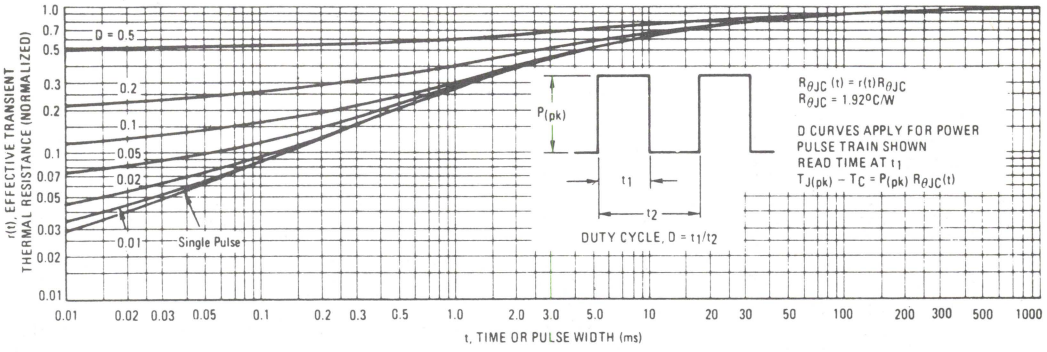

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 5 – BDW39 THRU BDW43

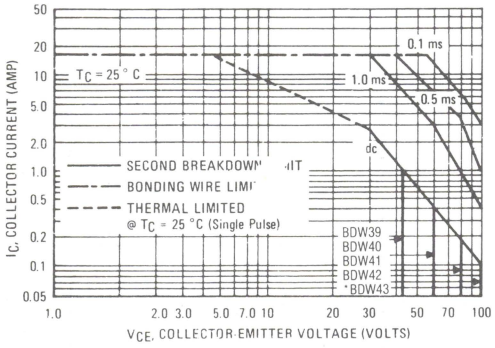

FIGURE 6 – BDW44 THRU BDW48

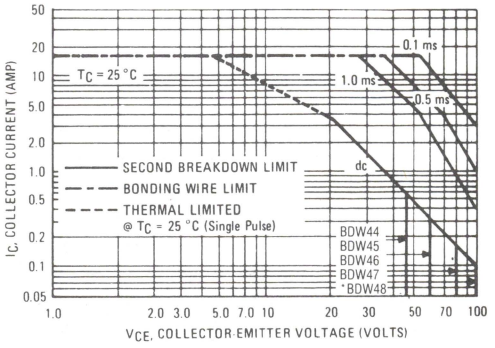

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate. The data of Fig. 5 and 6 is based on $T_{J(pk)}$ = 200 °C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200$ °C. $T_{J(pk)}$ may be calculated from the data in Fig. 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See an-415).

*Linear extrapolation

3

FIGURE 7 – SMALL-SIGNAL CURRENT GAIN

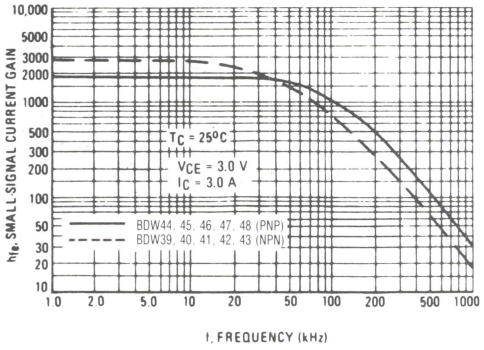

FIGURE 8 – CAPACITANCE

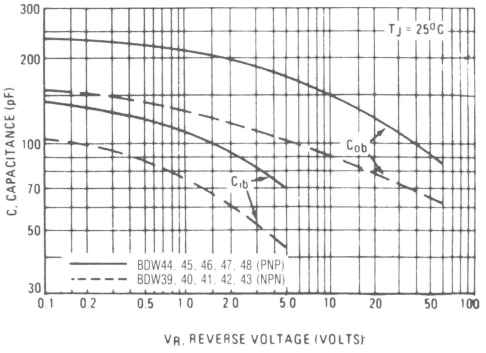

BDW39, 40, 41, 42, 43 (NPN)

BDW44, 45, 46, 47, 48 (PNP)

FIGURE 9 – DC CURRENT GAIN

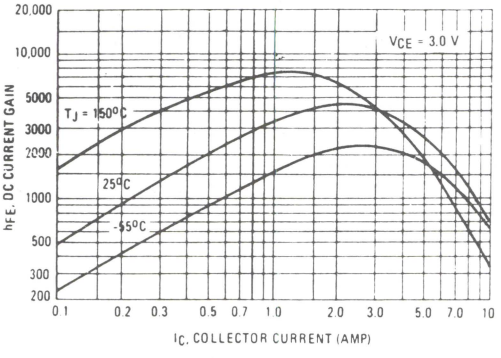

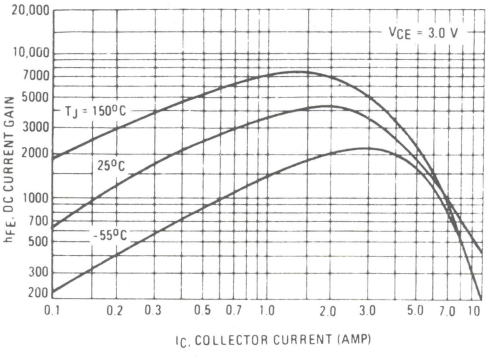

3

FIGURE 10 – COLLECTOR SATURATION REGION

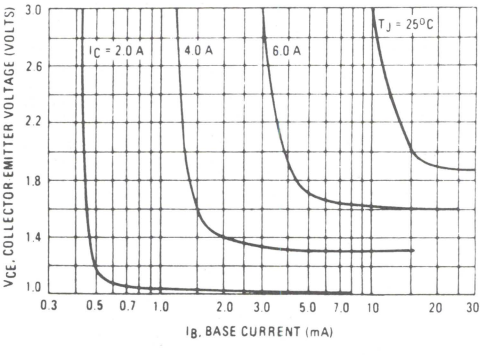

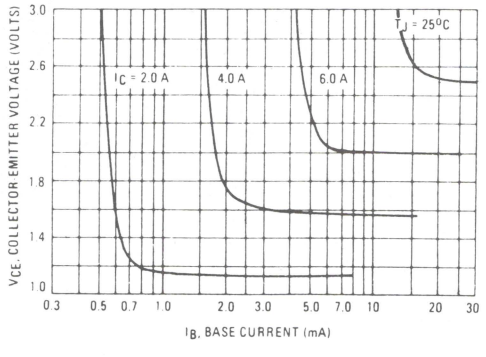

BDW39, 40, 41, 42, 43 (NPN)

BDW44, 45, 46, 47, 48 (PNP)

FIGURE 11 – "ON" VOLTAGES

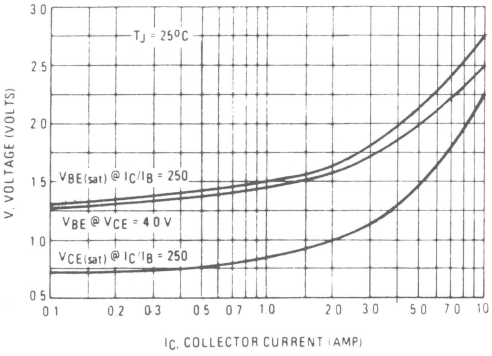

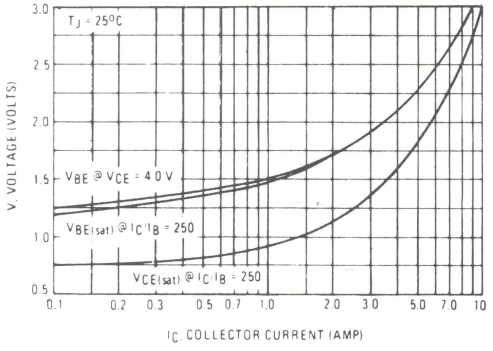

FIGURE 12 – TEMPERATURE COEFFICIENTS

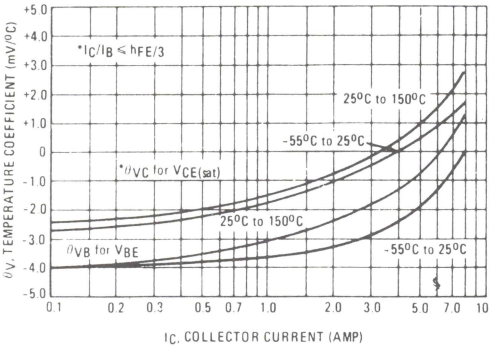

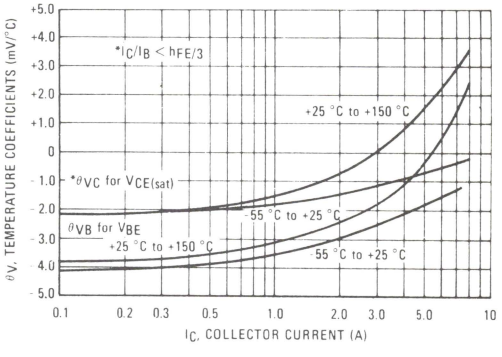

FIGURE 13 – COLLECTOR CUT-OFF REGION

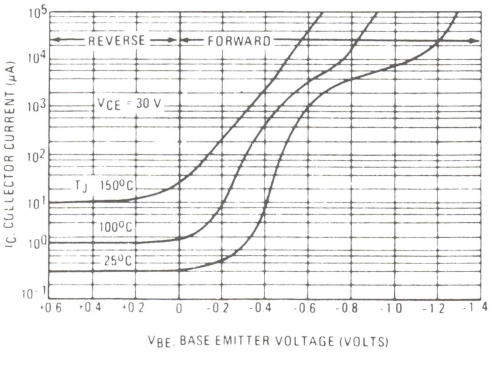

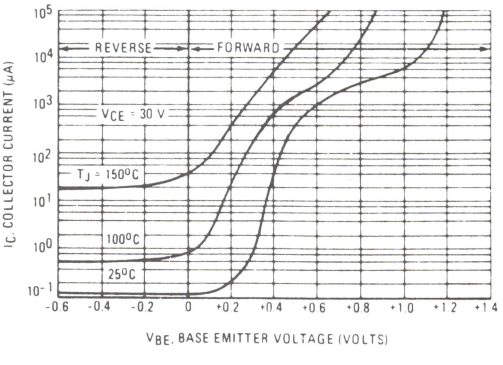

3

FIGURE 14 – DARLINGTON SCHEMATIC

NPN	PNP
BDX33	BDX34
BDX33A	BDX34A
BDX33B	BDX34B
BDX33C	BDX34C

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general purpose and low speed switching applications.

- High DC Current Gain – h_{FE} = 2500 (typ.) at I_C = 4.0 Adc
- Collector Emitter sustaining Voltage at 100 mAdc
  $V_{CEO(sus)}$ = 45 Vdc (min.) – BDX33, 34
  60 Vdc (min.) – BDX33A, 34A
  80 Vdc (min.) – BDX33B, 34B
  100 Vdc (min.) – BDX33C, 34C
- Low Collector Emitter Saturation Voltage
  $V_{CE(sat)}$ = 2.5 Vdc (max.) at I_C = 4.0 Adc – BDX33, 33A/34, 34A
  2.5 Vdc (max.) at I_C = 3.0 Adc – BDX33B, 33C/34B, 34C
- Monolithic Construction with Built-In Base Emitter Shunt resistors
- TO-220AB Compact Package
- TO-66 Lead form also available ordered with "-66" suffix.

DARLINGTON 10 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS
45-60-80-100 VOLTS
70 Watts



MAXIMUM RATINGS

Rating	Symbol	BDX33 BDX34	BDX33A BDX34A	BDX33B BDX34B	BDX33C BDX34C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current - Continuous Peak	I_C	10 15				Adc
Base Current	I_B	0.25				Adc
Total Device Dissipation @ T_C = 25 °C Derate above 25 °C	P_D	 70 0.56				Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.78	°C/W

FIGURE 1 – POWER DERATING

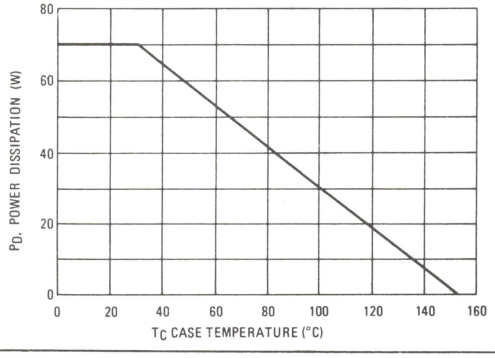

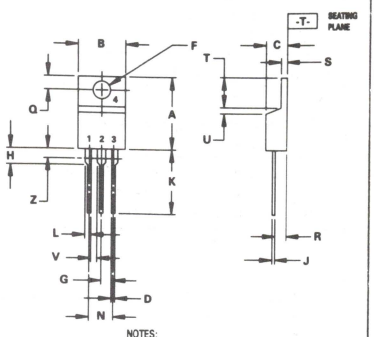

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage[1]		$V_{CEO(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0)	BDX33/BDX34		45		
	BDX33A/BDX34A		60		
	BDX33B/BDX34B		80		
	BDX33C/BDX34C		100		
Collector-Emitter Sustaining Voltage[1]		$V_{CER(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0, R_{BE} = 100)	BDX33/BDX34		45		
	BDX33A/BDX34A		60		
	BDX33B/BDX34B		80		
	BDX33C/BDX34C		100		
Collector-Emitter Sustaining Voltage[1]		$V_{CEX(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0, V_{BE} = 1.5 Vdc)	BDX33/BDX34		45		
	BDX33A/BDX34A		60		
	BDX33B/BDX34B		80		
	BDX33C/BDX34C		100		
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = ½ rated V_{CEO}, I_B = 0)	T_C = 25 °C			0.5	
	T_C = 100 °C			10	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = rated V_{CBO}, I_E = 0)	T_C = 25 °C			1	
	T_C = 100 °C			5	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)				10	
ON CHARACTERISTICS					
DC Current Gain[1]		h_{FE}			–
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	BDX33, 33A/34, 34A		750		
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)	BDX33B, 33C/34B, 34C		750		
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 4.0 Adc, I_B = 8 mAdc)	BDX33, 33A/34, 34A			2.5	
(I_C = 3.0 Adc, I_B = 6 mAdc)	BDX33B, 33C/34B, 34C			2.5	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 4.0 Adc, V_{CE} = 3 V)	BDX33, 33A/34, 34A			2.5	
(I_C = 3.0 Adc, V_{CE} = 3 Vdc)	BDX33B, 33C/34B, 34C			2.5	
Diode Forward Voltage		V_F			Vdc
(I_C = 8 Adc)				4	
SECOND BREAKDOWN[2]					
Second Breakdown Collector Current		$I_{S/b}$			Adc
With Base Forward Biased					
(V_{CE} = 25 Vdc)	BDX33 Series		2.8		
(V_{CE} = 20 Vdc)	BDX34 Series		3.5		
(V_{CE} = 36 Vdc)	BDX33 Series		1.0		
(V_{CE} = 33 Vdc)	BDX34 Series		1.0		
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain		h_{fe}			–
(T_C = 1.0 Adc, V_{CE} = 5.0 Vdc, f = 1 MHz)			1000		
Current Gain-Bandwidth product		f_T			MHz
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc, f = 1.0 MHz)			3		
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	BDX33 Series			200	
	BDX34 Series			300	

[1] Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%
[2] Pulse Test non repetitive: Pulse Width = 0.25 s.

FIGURE 2 – THERMAL RESPONSE

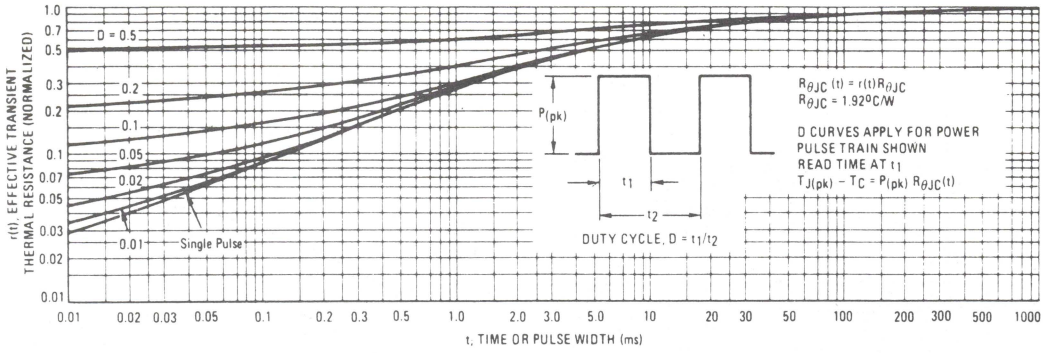

FIGURE 3 – ACTIVE-REGION SAFE OPERATING AREA

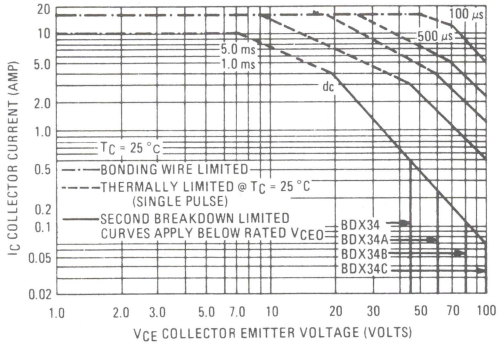

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate. The data of Fig. 3 is based on $T_{J(pk)}$ = 150 °C;

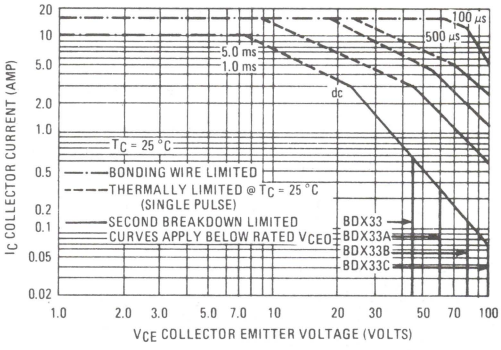

T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)}$ 150 °C $T_{J(pk)}$ may be calculated from the data in Fig. . At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown (see AN-415A).

3

FIGURE 4 – SMALL-SIGNAL CURRENT GAIN

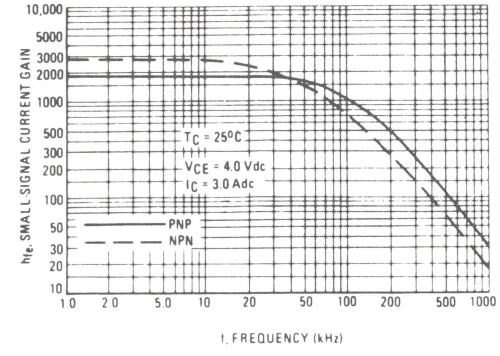

FIGURE 5 – CAPACITANCE

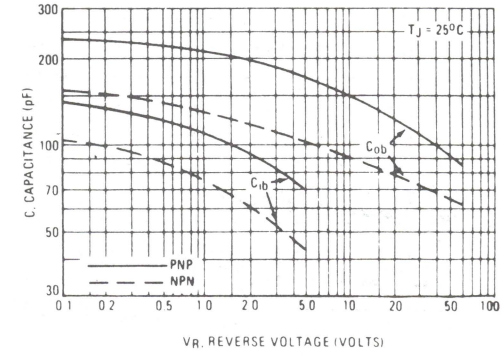

NPN
BDX33, 33A, 33B, 33C

PNP
BDX34, 34A, 34B, 34C

FIGURE 6 – DC CURRENT GAIN

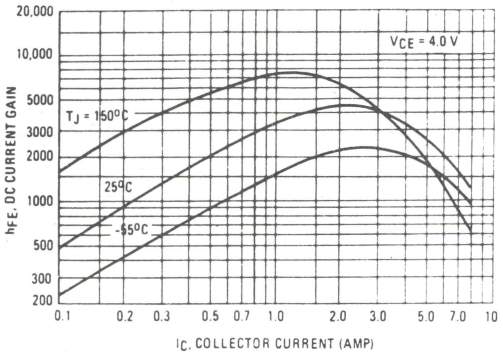

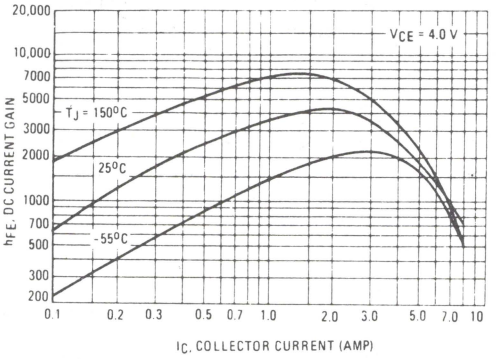

FIGURE 7 – COLLECTOR SATURATION REGION

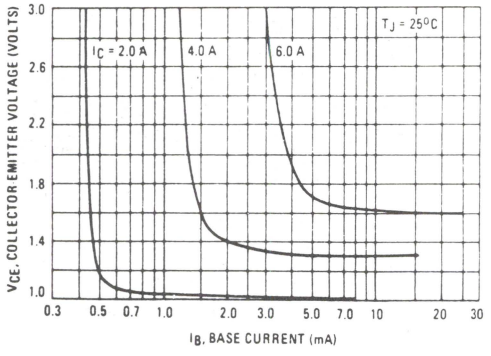

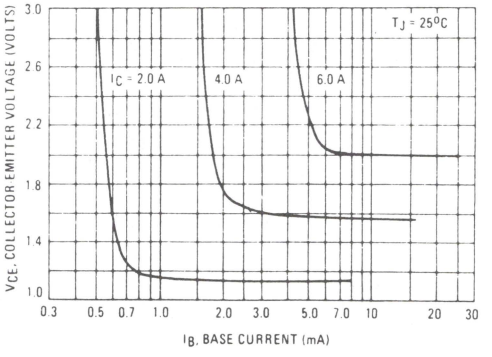

3

FIGURE 8 – "ON" VOLTAGES

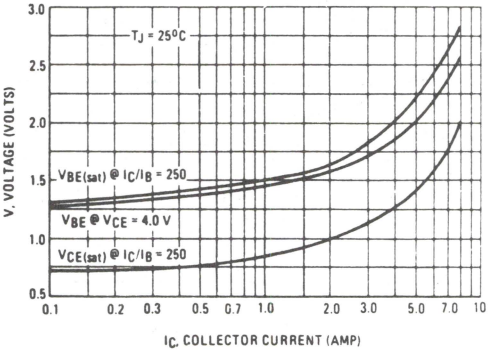

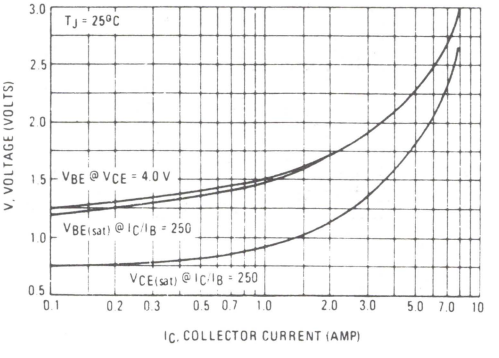

NPN	PNP
BDX53	BDX54
BDX53A	BDX54A
BDX53B	BDX54B
BDX53C	BDX54C

PLASTIC MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain –
  h_{FE} = 2500 (Typ) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage – @ 100 mAdc
  $V_{CEO(sus)}$ = 45 Vdc (Min) — BDX53, 54
  = 60 Vdc (Min) — BDX53A, 54A
  = 80 Vdc (Min) — BDX53B, 54B
  = 100 Vdc (Min) — BDX53C, 54C
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 3.0 Adc
  = 4.0 Vdc (Max) @ I_C = 5.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors
- TO-220AB Compact Package

DARLINGTON 8 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60-80-100 VOLTS
65 WATTS



*MAXIMUM RATINGS

Rating	Symbol	BDX53 BDX54	BDX53A BDX54A	BDX53B BDX54B	BDX53C BDX54C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	45	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current — Continuous	I_C	8				Adc
Peak		12				
Base Current	I_B	0.2				Adc
Total Device Dissipation @ T_C = 25°C	P_D	60				Watts
Derate above 25°C		0.48				W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.08	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	70	°C/W

FIGURE 1 – POWER DERATING

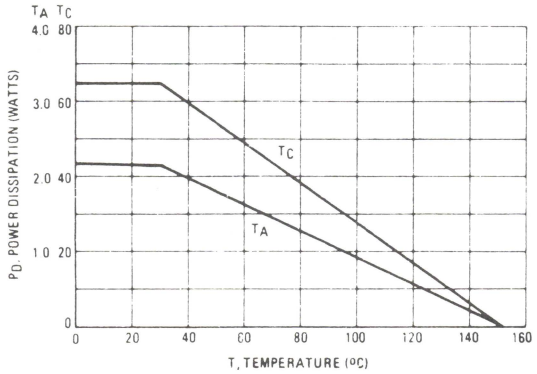

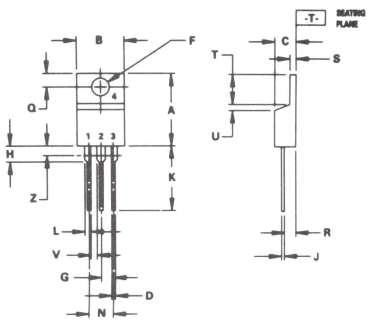

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	BDX53, BDX54	$V_{CEO(sus)}$	45		Vdc
	BDX53A, BDX54A		60	–	
	BDX53B, BDX54B		80	–	
	BDX53C, BDX54C		100	–	
Collector Cutoff Current		I_{CEO}		0.5	mAdc
(VCE = 22 Vdc, IB = 0)	BDX53, BDX54		–	0.5	
(VCE = 30 Vdc, IB = 0)	BDX53A, BDX54A		–	0.5	
(VCE = 40 Vdc, IB = 0)	BDX53B, BDX54B		–	0.5	
(VCE = 50 Vdc, IB = 0)	BDX53C, BDX54C		–	0.5	
Collector Cutoff Current		I_{CBO}		0.2	mAdc
(VCB = 45 Vdc, IE = 0)	BDX53, BDX54		–	0.2	
(VCB = 60 Vdc, IE = 0)	BDX53A, BDX54A		–	0.2	
(VCB = 80 Vdc, IE = 0)	BDX53B, BDX54B		–	0.2	
(VCB = 100 Vdc, IE = 0)	BDX53C, BDX54C		–	0.2	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)			750	–	
				–	
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 12 mAdc)		$V_{CE(sat)}$	–	2.0	Vdc
			–	4.0	
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_C = 12 mA)		$V_{BE(sat)}$	–	2.5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	4.0	–	–
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	BDX53, 53A, 53B, 53C	C_{ob}	–	300	pF
	BDX54, 54A, 54B, 54C		–	200	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

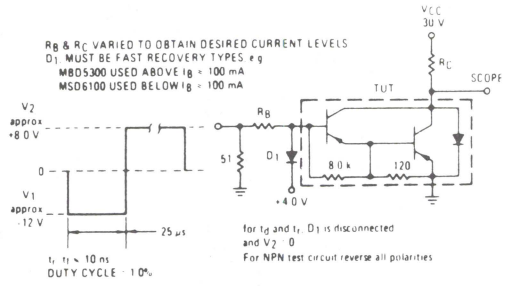

FIGURE 3 – SWITCHING TIMES

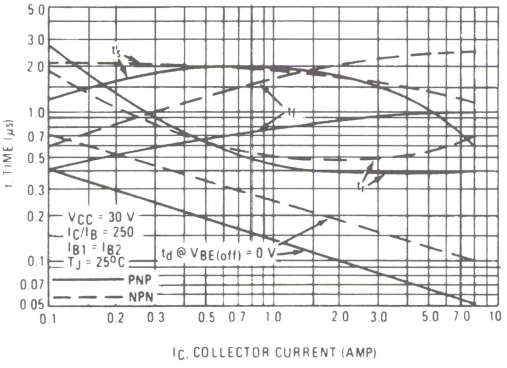

FIGURE 4 – THERMAL RESPONSE

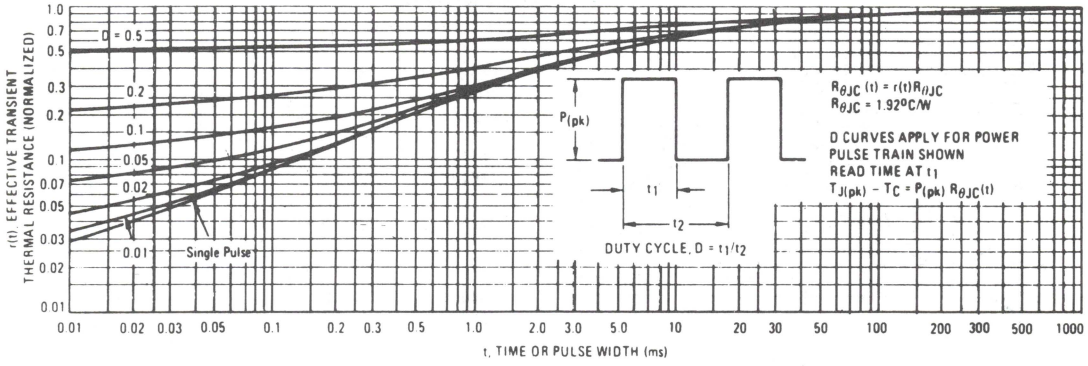

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

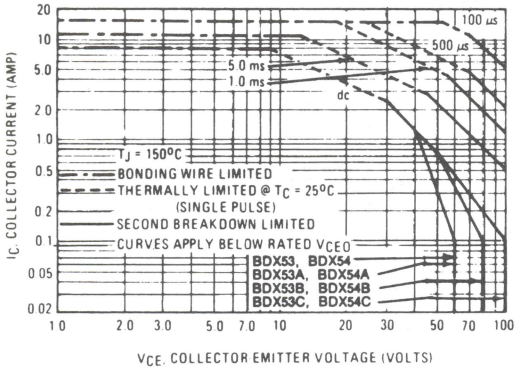

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown (see AN-415A).

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

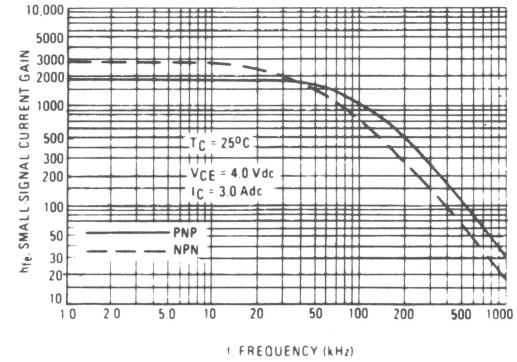

FIGURE 7 – CAPACITANCE

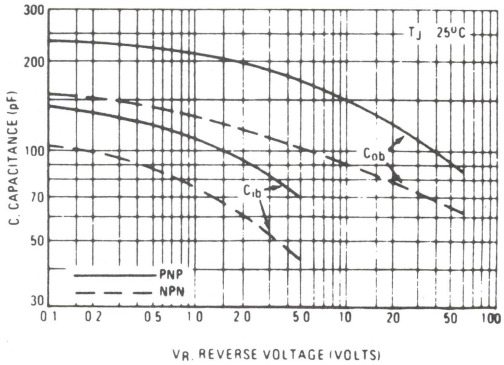

3

NPN

BDX53, BDX53A, BDX53B, BDX53C

PNP

BDX54, BDX54A, BDX54B, BDX54C

FIGURE 8 – DC CURRENT GAIN

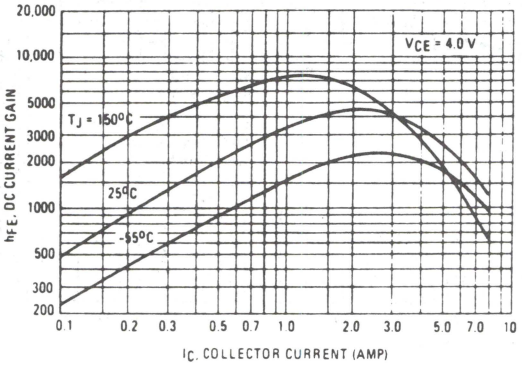

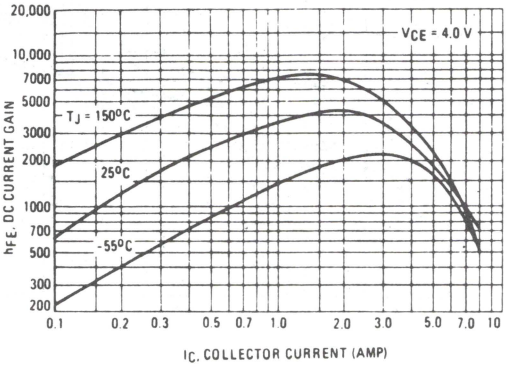

FIGURE 9 – COLLECTOR SATURATION REGION

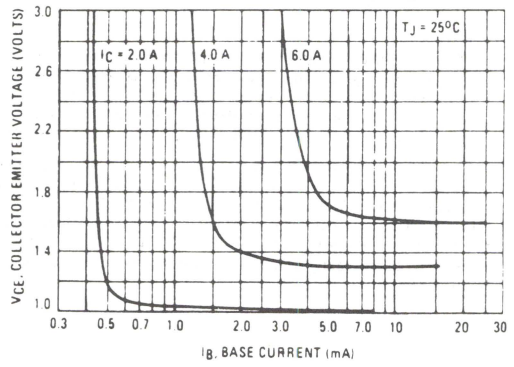

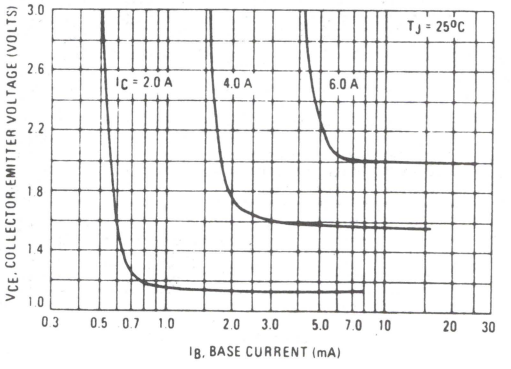

3

FIGURE 10 – "ON" VOLTAGES

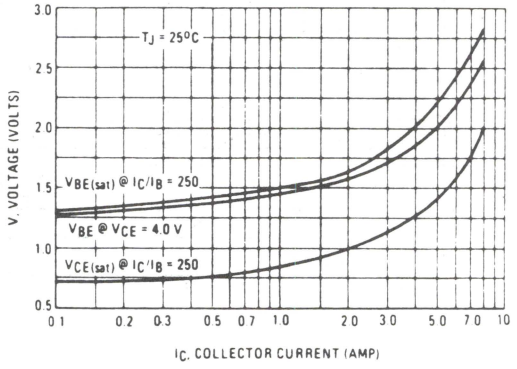

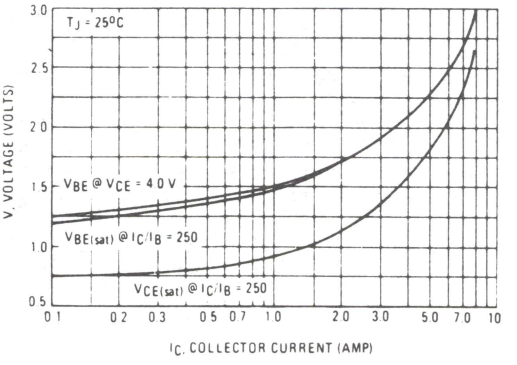

NPN

BDX53, BDX53A, BDX53B, BDX53C

PNP

BDX54, BDX54A, BDX54B, BDX54C

FIGURE 11 – TEMPERATURE COEFFICIENTS

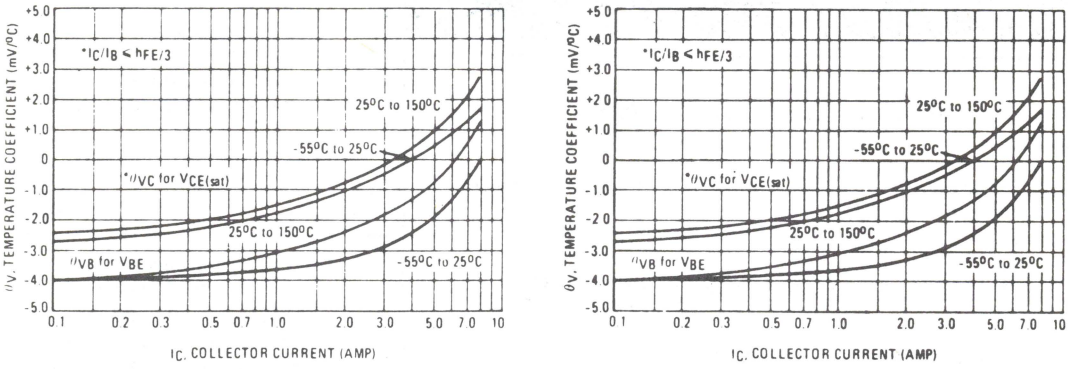

FIGURE 12 – COLLECTOR CUT-OFF REGION

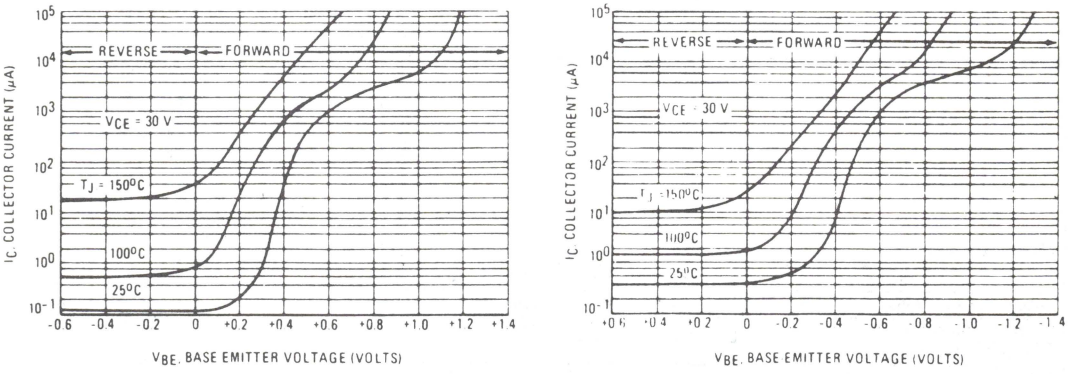

FIGURE 13 – DARLINGTON SCHEMATIC

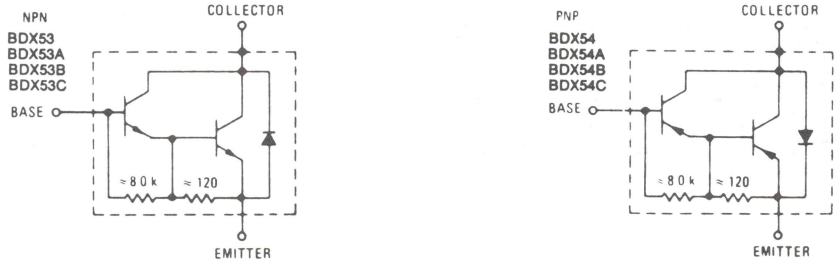

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BU204
BU205

Designers Data Sheet

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in large screen color deflection circuits.

- Collector-Emitter Voltage — V_{CEX} = 1300 Vdc — BU204
  1500 Vdc — BU205
- Glassivated Base-Collector Junction
- Switching Times with Inductive Loads —
  t_f = 0.65 μs (Typ) @ I_C = 2A

2.5 AMPERE

NPN SILICON POWER TRANSISTORS

1300 AND 1500 VOLTS
36 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BU204	BU205	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	600	700	Vdc
Collector-Emitter Voltage	V_{CEX}	1300	1500	Vdc
Emitter Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	2.5 3		Adc
Base Current — Peak (1)	I_{BM}	2.5		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 90°C Derate above 25°C	P_D	36 10 0.4		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +115		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

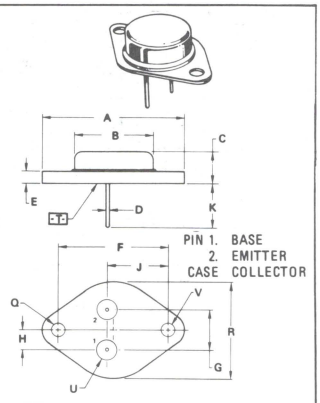

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05

3

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0)	BU204 BU205	$V_{CEO(sus)}$	600 700	– –	– –	Vdc
Collector Cutoff Current (V_{CE} = 1300 Vdc, V_{BE} = 0) (V_{CE} = 1500 Vdc, V_{BE} = 0)	 BU204 BU205	I_{CES}	 – –	 – –	 1.0 1.0	mAdc
Emitter Base Voltage (I_E = 10 mA, I_C = 0)		V_{EBO}	5.0	–	–	Vdc
ON CHARACTERISTICS (1)						
Collector-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 1.0 Adc)		$V_{CE(sat)}$	–	–	5.0	Vdc
Base Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 1.0 Adc)		$V_{BE(sat)}$	–	–	1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased		$I_{S/B}$	See Figure 14			
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (1) (I_C =0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)		f_T	–	4.0	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)		C_{ob}	–	50	–	pF
SWITCHING CHARACTERISTICS						
Fall Time (I_C = 2.0 Adc, I_{B1} = 1.0 Adc, L_B = 25 μH) (See Figure 1)		t_f	–	0.65	–	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

FIGURE 1 – TEST CIRCUIT

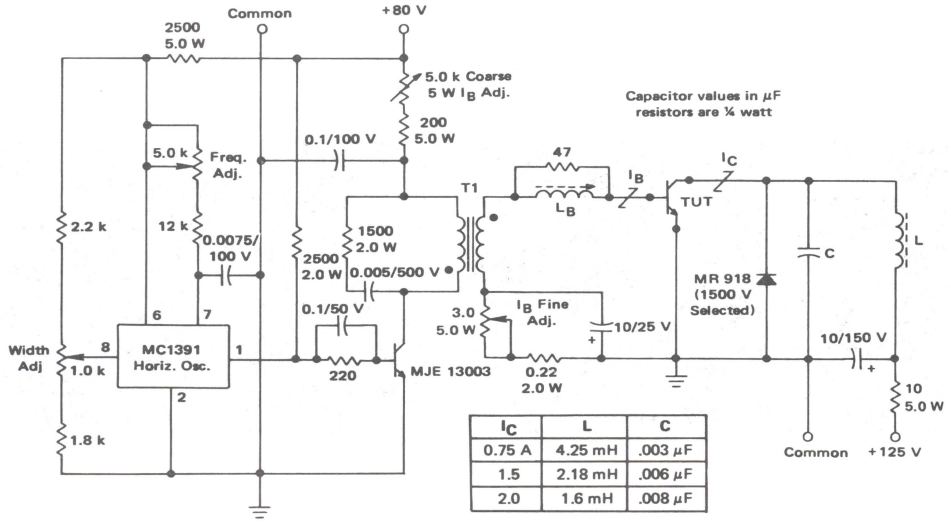

I_C	L	C
0.75 A	4.25 mH	.003 μF
1.5	2.18 mH	.006 μF
2.0	1.6 mH	.008 μF

DRIVER TRANSFORMER (T1)

Motorola part number 25D68782A-05-1/4" laminate "E" iron core. Primary Inductance – 39 mH. Secondary Inductance – 22 mH, Leakage Inductance with primary shorted – 2.0 μH, Primary 260 turns #28 AWG enamel wire, Secondary 17 turns, #22 AWG enamel wire.

BASE DRIVE: The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Figure 2. This results in rapid, but only partial, collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Figure 3, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically, since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B as shown in Figures 4 and 5. This shows the parameter that really matters, dissipation, whether caused by switching or by saturation. The negative slope of these curves at the left (low I_{B1}) is caused by saturation losses. The positive slope portion at higher I_{B1}, and low values of L_B is due to switching losses as described above. Note that for very low L_B a very narrow optimum is obtained. This occurs when $I_{B1}\ h_{FE} = I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1}\ h_{FE} = I_{CM}$ point as the turn-off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor initiation of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left or right according to the relation $I_{B1}\ h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accommodate the lowest h_{FE} part specified. Figure 8 gives values recommended for L_B and I_{B1} for this device over a wide range of I_{CM}. These values were chosen from a large number of curves like Figure 4 and Figure 5. Neither L_B nor I_{B1} are absolutely critical, as can be seen from the examples shown, and values of Figure 8 are provided for guidance only.

TEST CIRCUIT WAVEFORMS

FIGURE 2

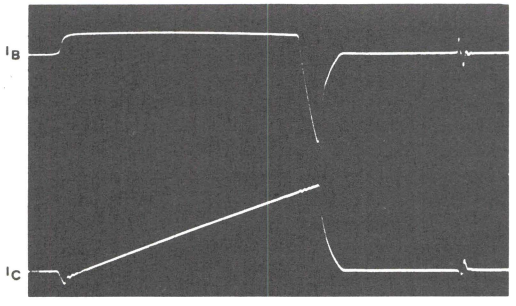

FIGURE 3

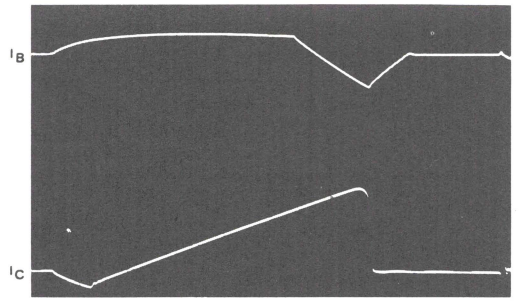

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance.

Once the required transistor operating current is determined, fixed circuit values may be selected from the table. Factory testing is performed by reading the current meter only, since the input power is proportional to current. No adjustment of the test apparatus is required.

FIGURE 4 – OPTIMIZING DRIVE @ I_C = 0.75 A

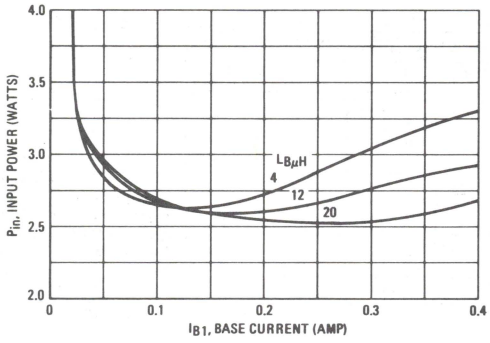

FIGURE 5 – OPTIMIZING DRIVE @ I_C 1.5 A

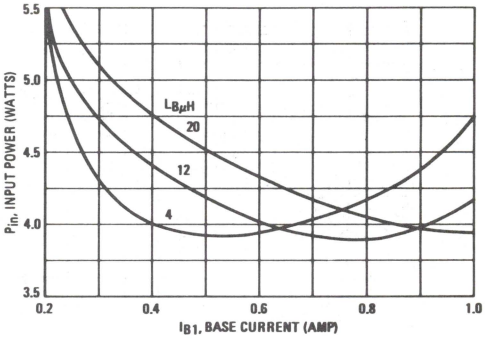

FIGURE 6 – OPTIMIZING DRIVE @ I_C = 2.0 A

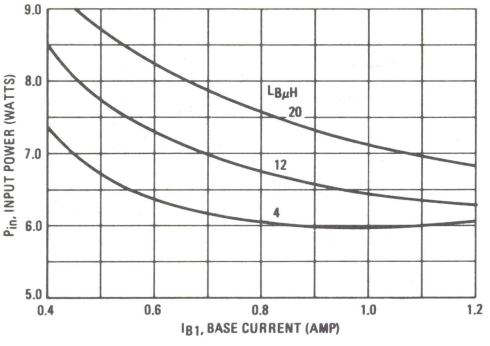

FIGURE 7 – SWITCHING BEHAVIOR versus TEMPERATURE

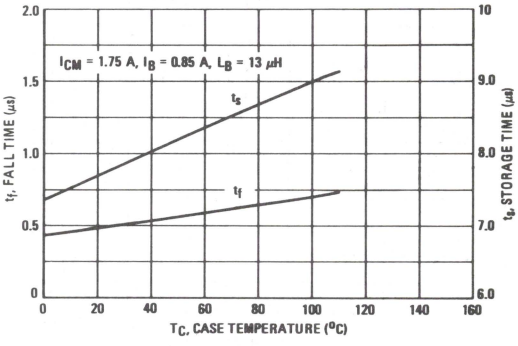

FIGURE 8 – OPTIMUM DRIVE CONDITIONS

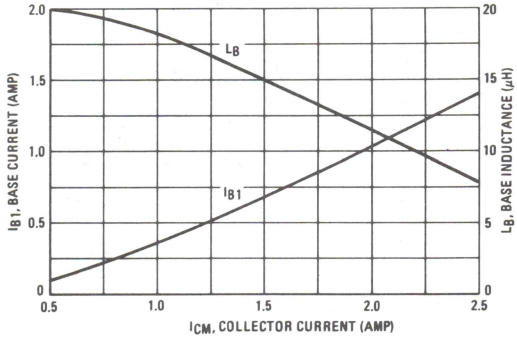

FIGURE 9 – SWITCHING BEHAVIOR versus I_{CM}

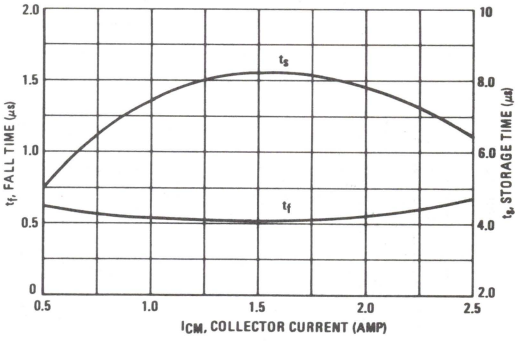

3

FIGURE 10 – THERMAL RESPONSE

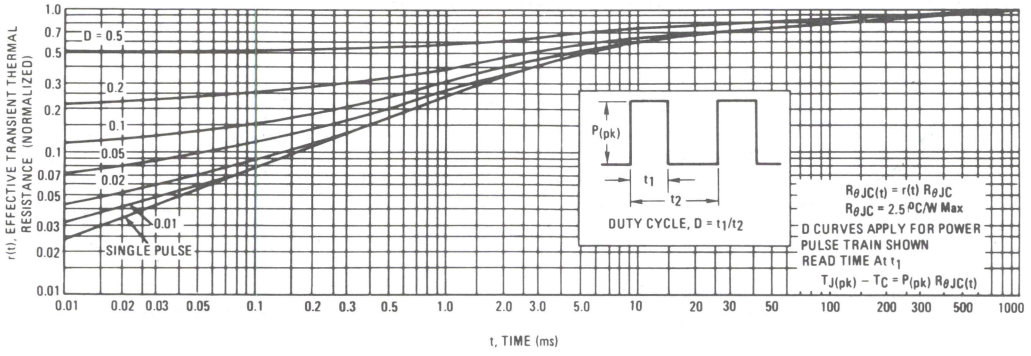

FIGURE 11 – COLLECTOR SATURATION REGION

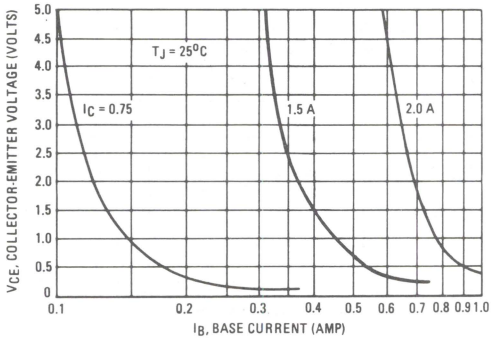

FIGURE 12 – DC CURRENT GAIN

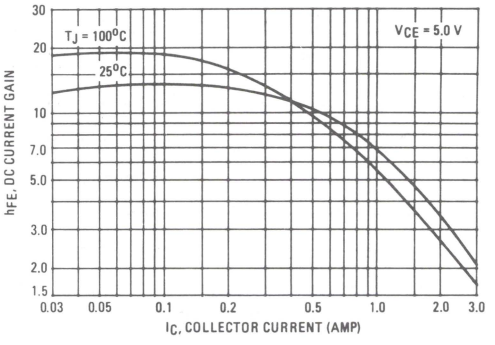

FIGURE 13 – "ON" VOLTAGES

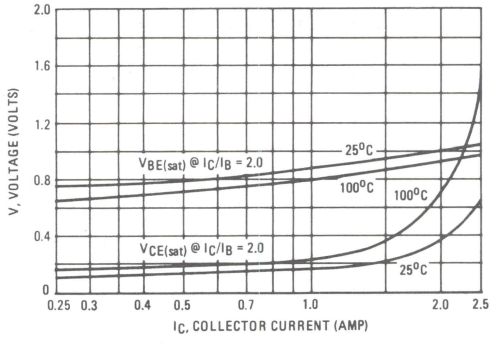

FIGURE 14-MAXIMUM FORWARD BIAS SAFE OPERATING AREA

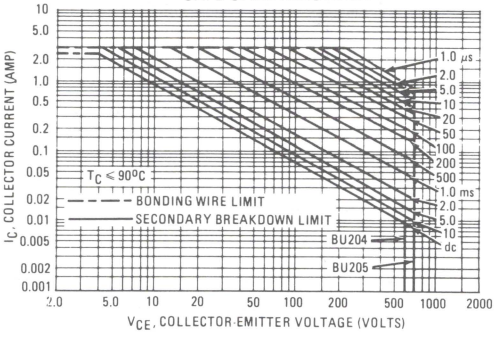

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BU207
BU208

Designers Data Sheet

5 AMPERE
NPN SILICON
POWER TRANSISTORS
1300 AND 1500 VOLTS

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in large screen color deflection circuits.

- Collector-Emitter Voltage —
  V_{CEX} = 1300 Vdc — BU207
  1500 Vdc — BU208
- Collector-Emitter Sustaining Voltage —
  $V_{CEO(sus)}$ = 600 Vdc — BU207
  700 Vdc — BU208
- Switching Times with Inductive Loads, t_f = 0.4 μs (Typ) @ I_C = 4.5 A
- Optimum Drive Condition Curves
- Glass Base-Collector Junction

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀0.13 (0.005) Ⓜ T V Ⓜ
   FOR LEADS:
   ⌖ ⌀0.13 (0.005) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05

*MAXIMUM RATINGS

Rating	Symbol	BU207	BU208	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	600	700	Vdc
Collector-Emitter Voltage	V_{CEX}	1300	1500	Vdc
Emitter Base Voltage	V_{EB}	5		Vdc
Collector Current — Continuous Peak (1)	I_C I_{CM}	5 7.5		Adc
Base Current — Peak (1)	I_{BM}	4		Adc
Total Power Dissipation @ T_C = 95°C Derate above 95°C	P_D	12.5 0.625		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +115		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta JC$	1.6	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0)	BU207 BU208	$V_{CEO(sus)}$	 600 700	 – –	 – –	Vdc
Collector Cutoff Current (V_{CE} = 1300 Vdc, V_{BE} = 0) (V_{CE} = 1500 Vdc, V_{BE} = 0)	 BU207 BU208	I_{CES}	 – –	 – –	 1.0 1.0	mAdc
Emitter Base Voltage (I_E = 10 mA, I_C = 0)		V_{EBO}	5.0	–	–	Vdc
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 4.5 Adc, V_{CE} = 5 Vdc)		h_{FE}	2.25	–	–	–
Collector-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 Adc)		$V_{CE(sat)}$	–	–	5	Vdc
Base Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 Adc)		$V_{BE(sat)}$	–	–	1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$		See Figure 14		
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1 MHz)		f_T	–	4.0	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	–	125	–	pF
SWITCHING CHARACTERISTICS						
Fall Time	(I_C = 4.5 Adc, I_B = 1.8 Adc, L_B = 10 μH, see Figure 1)	t_f	–	0.6	–	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

FIGURE 1 – SWITCHING TIMES TEST CIRCUIT

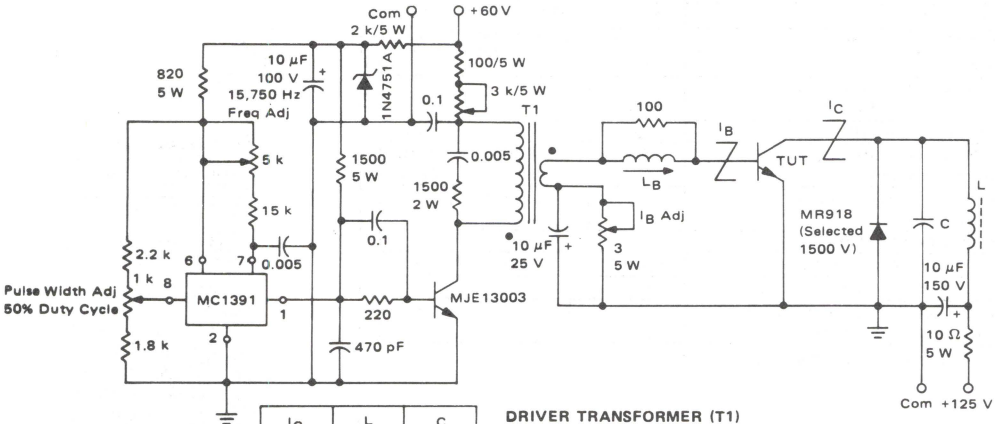

I_C A	L mH	C μF
3.5	0.87	0.013
4.5	0.67	0.017

DRIVER TRANSFORMER (T1)

Motorola part number 25D68782A-05-1/4" laminate "E" iron core. Primary Inductance – 39 mH, Secondary Inductance – 0.22 mH, Leakage Inductance with primary shorted – 2.0 μH. Primary 260 turns, #28 AWG enamel wire, Secondary 17 turns, #22 AWG enamel wire.

BASE DRIVE: The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst-case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Figure 2. This results in rapid, but only partial, collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Figure 3, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically, since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B as shown in Figures 4 and 5. This shows the parameter that really matters, dissipation, whether caused by switching or by saturation. The negative slope of these curves at the left (low I_{B1}) is caused by saturation losses. The positive slope portion at higher I_{B1}, and low values of L_B is due to switching losses as described above. Note that for very low L_B a very narrow optimum is obtained. This occurs when $I_{B1}\ h_{FE} = I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1}\ h_{FE} = I_{CM}$ point as the turn-off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor *initiation* of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left or right according to the relation $I_{B1}\ h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accommodate the lowest h_{FE} part specified. Figure 8 gives values recommended for L_B and I_{B1} for this device over a wide range of I_{CM}. These values were chosen from a large number of curves like Figure 4 and Figure 5. Neither L_B nor I_{B1} are absolutely critical, as can be seen from the examples shown, and values of Figure 8 are provided for guidance only.

TEST CIRCUIT WAVEFORMS

FIGURE 2

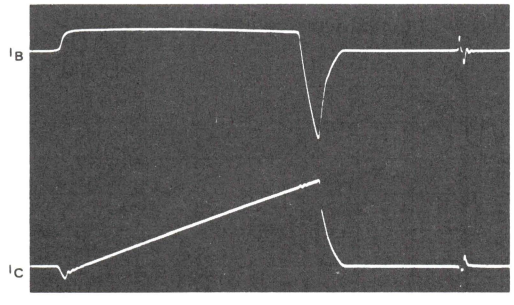

FIGURE 3

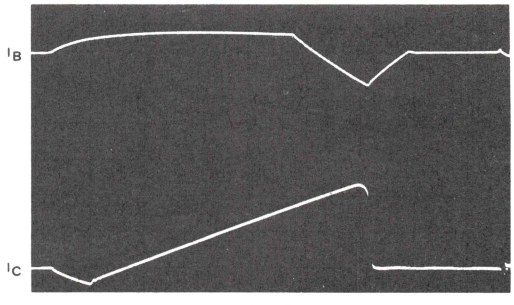

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance.

Once the required transistor operating current is determined, fixed circuit values may be selected from the table. Factory testing is performed by reading the current meter only, since the input power is proportional to current. No adjustment of the test apparatus is required.

FIGURE 4 – OPTIMIZING DRIVE @ I_C = 3.5 A

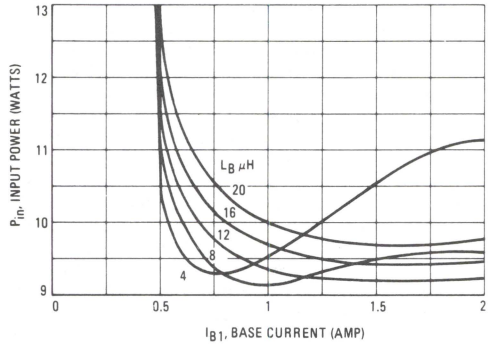

FIGURE 5 – OPTIMIZING DRIVE @ I_C = 4.5 A

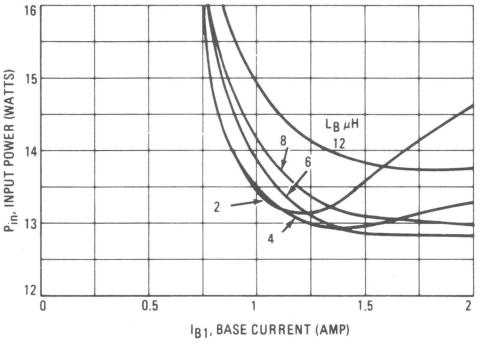

FIGURE 6 – SWITCHING BEHAVIOR versus TEMPERATURE
I_{CM} = 3.5 A, I_B = 1.5 A, L_B = 14 μH

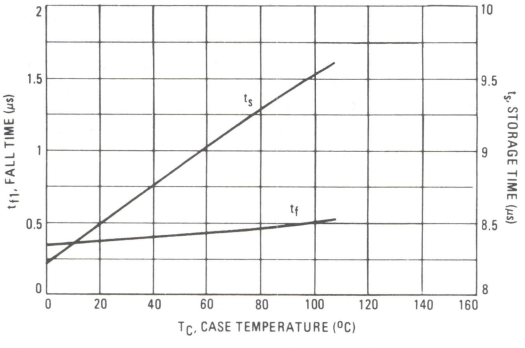

FIGURE 7 – SWITCHING BEHAVIOR versus TEMPERATURE
I_{CM} = 4.5 A, I_B = 1.75 A, L_B = 8 μH

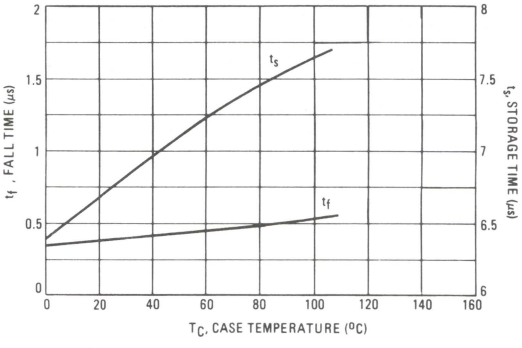

FIGURE 8 – OPTIMUM DRIVE CONDITIONS

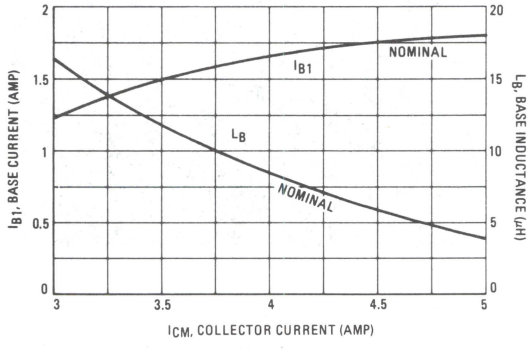

FIGURE 9 – SWITCHING BEHAVIOR versus I_{CM}

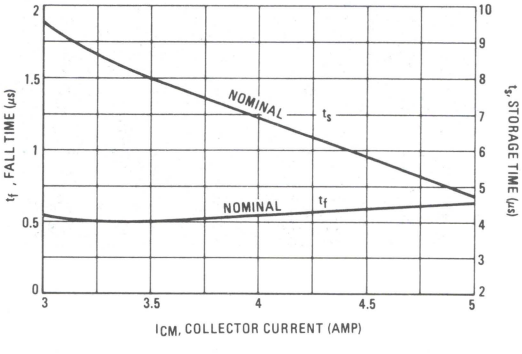

3

FIGURE 10 – THERMAL RESPONSE

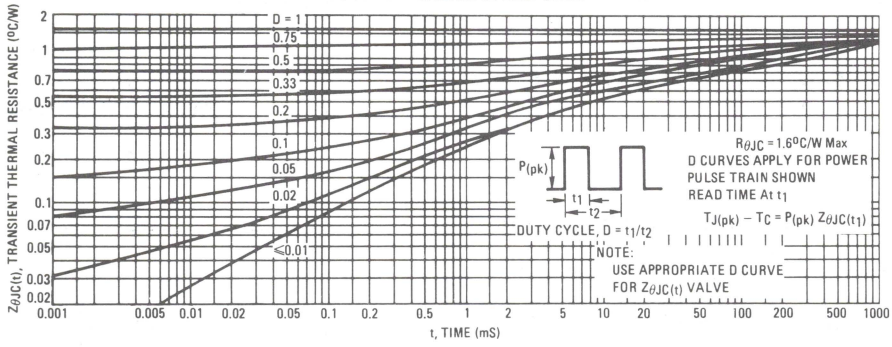

FIGURE 11 – COLLECTOR SATURATION REGION

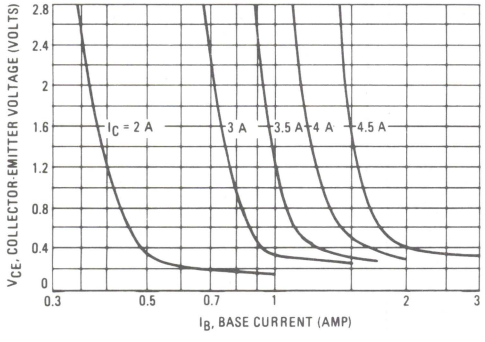

FIGURE 12 – DC CURRENT GAIN

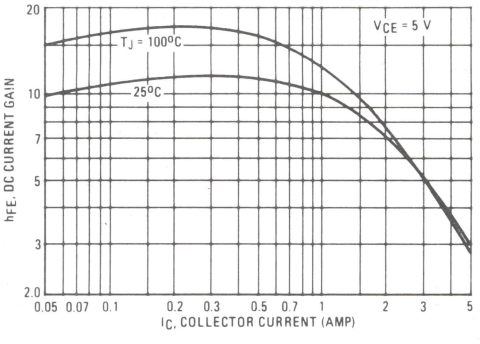

FIGURE 13 – "ON" VOLTAGES

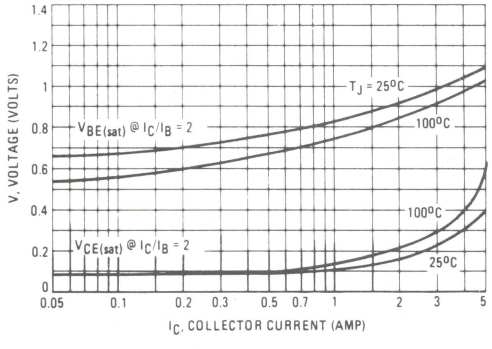

FIGURE 14-MAXIMUM FORWARD BIAS SAFE OPERATING AREA

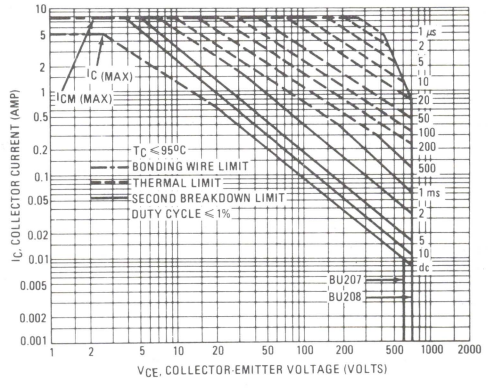

3

BU208A

HORIZONTAL DEFLECTION TRANSISTOR

. . . designed for use in televisions.

- Collector-Emitter Voltages V_{CES} 1500/1700 Volts
- Fast Switching – 400 ns Typical Fall Time
- Low $V_{CE(sat)}$ 0.3 Vdc Typical at 4.5 Adc/2.25 Adc (BU208A)
- Low thermal Resistance 1 °C/W increased reliability
- Glass passivated (patented photoglass). Triple diffused Mesa Technology for long term stability.

6 AND 7 AMPERES
NPN SILICON
POWER TRANSISTORS
1500 to 1700 VOLTS





NOTES
1. DIMENSIONS Q AND V ARE DATUMS
2. T IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ ⌀ 13 (0.005) M T V M
   FOR LEADS
   ⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 (TO-3)

MAXIMUM RATINGS

Rating	Symbol	BU208A	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	Vdc
Collector-Emitter Voltage	V_{CES}	1500	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current – Continuous – Peak	 I_C I_{CM}	 7 (5) 15 (7.5)	Vdc
Base Current – Continuous – Peak (Negative)	 I_B I_{BM}	 4 3.5	Adc
Total Power Dissipation at T_C = 95°C Derate above 95°C	P_D	 20 (12.5) 1 (0.625)	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +115	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	1.0 (1.6)	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

NOTE: 1. Pulsed 5 ms, Duty Cycle ≤ 10%.
2. See page 3 for Additional Ratings on A Type.
3. Figures in ( ) are Standard Ratings Motorola Guarantees are Superior.

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristics	Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, L = 25 mH)	$V_{CEO(sus)}$	700			Vdc
Collector Cutoff Current[1] (V_{CE} = rated V_{CES}, V_{BE} = 0) ALL TYPES	I_{CES}			1.0	mAdc
Emitter Base Voltage[1] (I_C = 0, I_E = 10 mAdc)	V_{EBO}	5			Vdc
(I_C = 0, I_E = 100 mAdc)			7		
ON CHARACTERISTICS[1]					
DC Current Gain (I_C = 4.5 Adc, V_{CE} = 5 Vdc)	h_{FE}	2.25			
Collector-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 Adc)	$V_{CE(sat)}$			5	Vdc
(I_C = 4.5 Adc, I_B = 2 Adc)				1	
Base-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 Adc)	$V_{BE(sat)}$			1.5	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5 Vdc, f_{test} = 1 MHz)	f_T		4		MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0), f_{test} = 1 MHz)	C_{ob}		125		pF
SWITCHING CHARACTERISTICS					
Storage Time (see test circuit fig. 1) (I_C = 4.5 Adc, I_{B1} = 1.8 Adc, L_B = 10 μH)	t_s		8		μS
Fall time (see test circuit fig. 1) (I_C = 4.5 Adc, I_{B1} = 1.8 Adc, L_B = 10 μH)	t_f		0.4		μS

Pulse test: PW = 300 μS; Duty cycle ≤ 2%.

3

FIGURE 1 – SWITCHING TIME TEST CIRCUIT

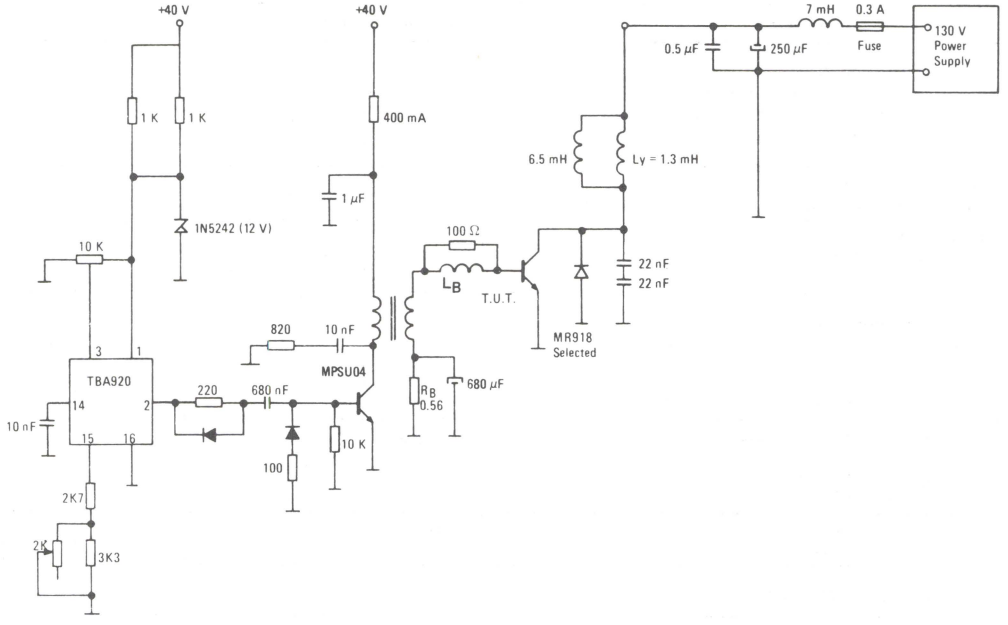

FLASHOVER PERFORMANCE

The BU208A is guaranteed to the following additional maximum ratings

I_C PEAK	10A	20 pulses maximum of Pulse Width ⩽ 50 μS. Duty cycle ⩽ 50%.
Followed by		
V_{CES} PEAK	1650V	

3

FIGURE 2 – POWER DERATING

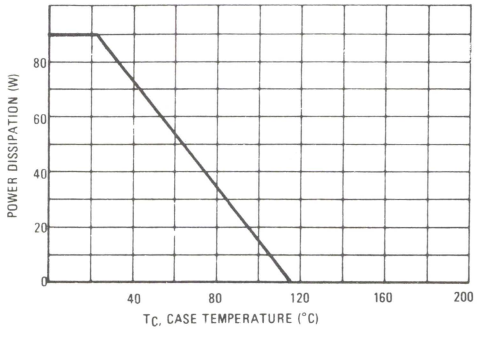

BASE DRIVE
The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst-case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Fig. 3. This results in rapid, but only partial collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Fig. 4, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B. This shows the parameter that really matters, dissipation, whether caused by switching or by saturation. For very low L_B a very narrow optimum is obtained. This occurs when $I_{B1} \cdot h_{FE} \cong I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1} \cdot h_{FE} = I_{CM}$ point as the turn off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor initiation of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left, or right according to the relation $I_{B1} \cdot h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accomodate the lowest h_{FE} part specified. Neither L_B nor I_{B1} are absolutely critical. Due to the high gain of Motorola devices it is suggested that in general a low value of I_{B1} be used to obtain optimum efficiency— eg. for BU208A with I_{CM} = 4.5 A use $I_{B1} \approx$ 1.5 A, at I_{CM} = 4 A use $I_{B1} \approx$ 1.2 A. These values are lower than for most competition devices but practical tests have showed comparable efficiency for Motorola devices even at the higher level of I_{B1}.

An L_B of 10 uH to 12 uH should give satisfactory operation of BU208A with I_{CM} of 4 to 4.5 A and I_{B1} between 1.2 and 2 A.

TEST CIRCUIT WAVEFORMS

FIGURE 3

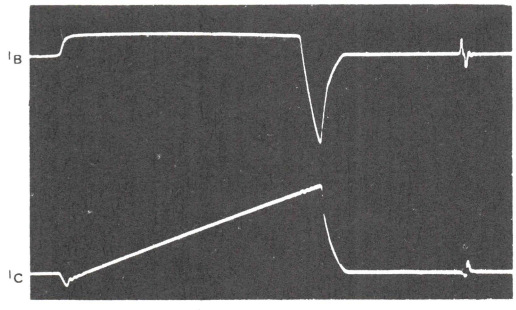

FIGURE 4

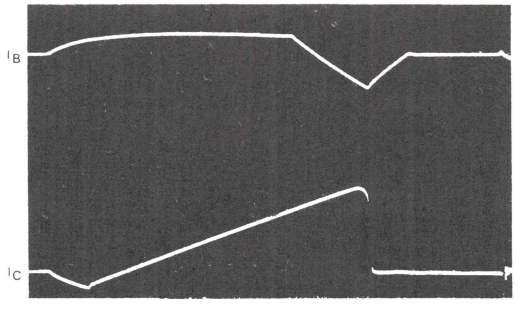

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance. Once the required transistor operating current is determined, fixed circuit values may be selected.

FIGURE 5 – DC CURRENT GAIN

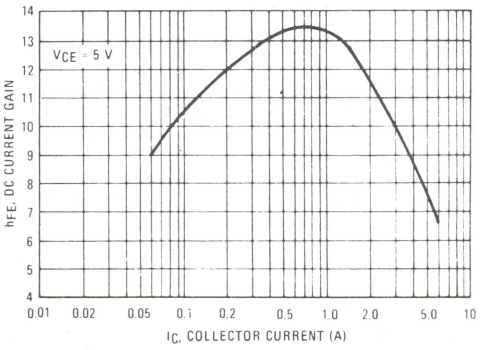

FIGURE 6 – COLLECTOR-EMITTER SATURATION VOLTAGE

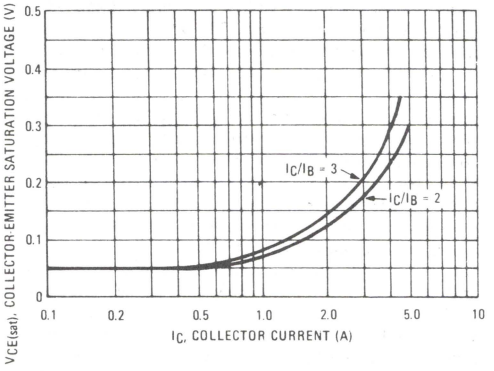

FIGURE 7 – BASE EMITTER SATURATION VOLTAGE

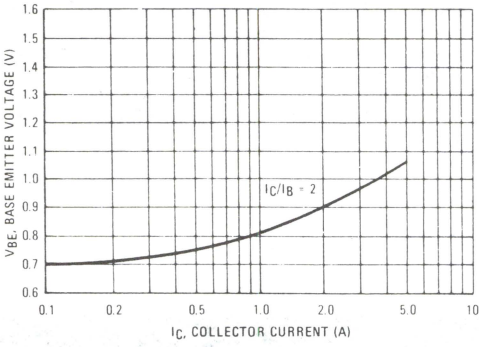

FIGURE 8 – COLLECTOR SATURATION REGION

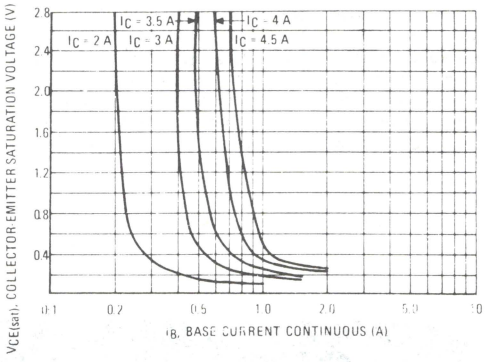

3

FIGURE 9 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

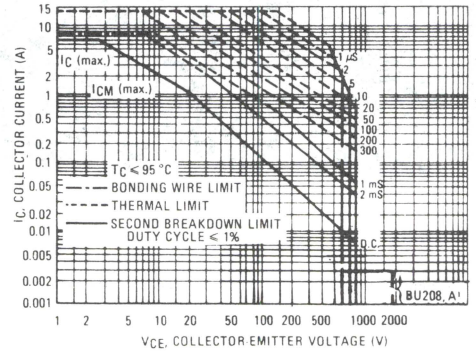

[1] Pulse width ≤ 20 μs. Duty cycle ≤ 0.25. $R_{BE} \leq 100$ Ohms.

BU208D

NPN SILICON HORIZONTAL DEFLECTION TRANSISTOR WITH INTEGRATED DAMPER DIODE

. . . specifically designed for use in large screen color deflection circuits



- V_{CES} = 1500 V;
  $V_{CEO(sus)}$ = 700 V (min)
- Low saturation:
  $V_{CE(sat)}$ = 1.0 V (max) @ I_C = 4.5 Adc

5 AMPERES

NPN SILICON POWER TRANSISTORS

1500 VOLTS
60 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	700	Vdc
Collector-Emitter Voltage (R_{BE} = 0)	V_{CES}	1500	Vdc
Emitter Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous — Peak	I_C I_{CM}	5.0 7.5	Adc
Base Current — Peak	I_B	3.5	Adc
Total Device Dissipation T_C = 25°C Derate above 25°C	P_D	60 0.666	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 115	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.5	°C/W

FIGURE 1 — POWER DERATING

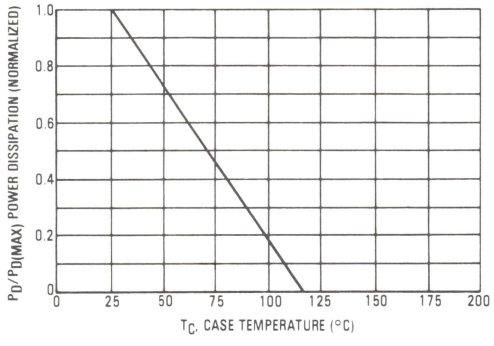



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA (Type)
(Formerly TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0, L = 25 mH, V_{clamp} = 800 V)		$V_{CEO(sus)}$	700	—	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)		I_{CES}	—	1.0	mAdc
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)		I_{EBO}	—	300	mAdc
ON CHARACTERISTICS (1)					
Diode Forward Voltage (I_F = 4.0 A)		V_F	—	2.0	Vdc
Collector-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2.0 Adc)		$V_{CE(sat)}$	—	1.0	Vdc
Base-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2.0 Adc)		$V_{BE(sat)}$	—	1.5	Vdc
SWITCHING CHARACTERISTICS (Inductive Load)					
Fall Time	(I_C (end) = 4.5 Adc, V_{CC} = 140 Vdc, I_B (end) = 1.8 A, L_C = 0.9 mH, L_B = 10 μH)	t_f	—	0.6 (typ)	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 3%.

3

BU323
BU323A

NPN SILICON POWER DARLINGTON TRANSISTOR

The BU323, BU323A are monolithic darlington transistors designed for automotive ignition, switching regulator and motor control applications.

- V_{CE} Sat Specified at -40°C = 2 V Max. at I_C = 6 A.
- 550 mJ Energy Capability Tested in Automotive Ignition Circuit.
- Photoglass Passivation for Reliability and Stability.



16 AMPERE PEAK

POWER TRANSISTORS
DARLINGTON NPN SILICON

350 - 400 VOLTS
175 WATTS



MAXIMUM RATINGS

Rating	Symbol	BU323	BU323A	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	350	400	Vdc
Collector-Base Voltage	V_{CBO}	500	600	Vdc
Emitter-Base Voltage	V_{EBO}	8	8	Vdc
Collector Current — Continuous Peak (1)	I_C	10 16	10 16	Adc
Base Current — Continuous	I_B	3	3	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1	175 100 1	Watts Watts W/°C
Operating and Storage Junction	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ | ⌀13 (0.005) M | T | V M
FOR LEADS
⌖ | ⌀13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS[1]						
Collector-Emitter Sustaining Voltage (Figure 1) L = 10 mH (I_C = 200 mAdc, I_B = 0, V_{clamp} = Rated V_{CEO})	 BU323 BU323A	$V_{CEO(sus)}$	 350 400			Vdc
Collector-Emitter sustaining Voltage (Figure 1) (I_C = 3 A, R_{BE} = 100 Ohms, L = 500 μH) Unclamped	 BU323 BU323A	$V_{CER(sus)}$	 400 475			Vdc
Collector Cutoff Current (Rated V_{CER}, R_{BE} = 100 Ohms)		I_{CER}			1	mAdc
Collector Cutoff Current (Rated V_{CBO}, I_E = 0)		I_{CBO}			1	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)		I_{EBO}			40	mAdc
ON CHARACTERISTICS[1]						
DC Current Gain (I_C = 3 Adc, V_{CE} = 6 Vdc) (I_C = 6 Adc, V_{CE} = 6 Vdc) (I_C = 10 Adc, V_{CE} = 6 Vdc)		h_{FE}	 300 150 50	 550 350 150	 2000	
Collector-Emitter Saturation Voltage (I_C = 3 Adc I_B = 60 mAdc) (I_C = 6 Adc, I_B = 120 mAdc) (I_C = 10 Adc, I_B = 300 mAdc) (I_C = 6 Adc, I_B = 120 mAdc, T_C = −40 °C)		$V_{CE(sat)}$			 1.5 1.7 2.7 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 6 Adc, I_B = 120 mAdc) (I_C = 10 Adc, I_B = 300 mAdc) (I_C = 6 Adc, I_B = 120 mAdc, T_C = −40 °C)		$V_{BE(sat)}$			 2.2 3 2.4	Vdc
Base-Emitter On Voltage (I_C = 10 Adc, V_{CE} = 6 Vdc)		$V_{BE(on)}$			2.5	Vdc
Diode Forward Voltage (I_F = 10 Adc)		V_f		2	3.5	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)		C_{ob}		165	350	pF
SWITCHING CHARACTERISTICS						
Storage Time	(V_{CC} = 12 Vdc, I_C = 6 Adc, I_{B1} = I_{B2} = 0.3 Adc) Fig. 2	t_s		7.5	15	μs
Fall Time		t_f		5.2	15	μs
FUNCTIONAL TESTS						
Second Breakdown Collector Current with Base-Forward Biased		$I_{S/B}$		See Figure 10		
Pulsed Energy Test (See Figure 12)		$\frac{I_C^2 L}{2}$	550			mJ

[1] Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

FIGURE 1 – SUSTAINING VOLTAGE TEST CIRCUIT

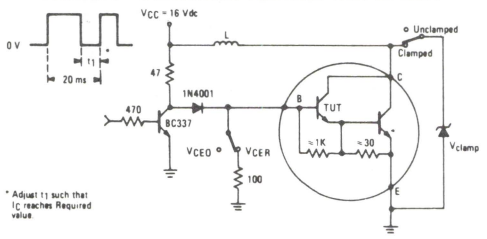

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

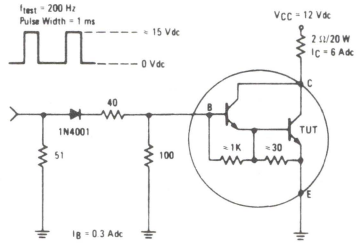

FIGURE 3 – DC CURRENT GAIN

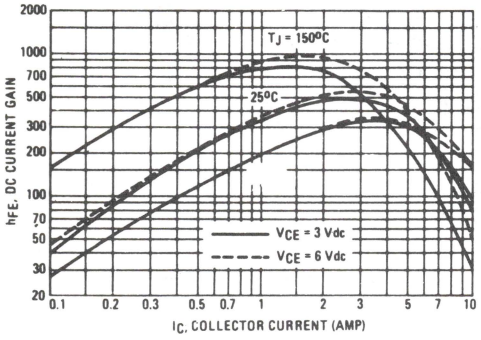

FIGURE 4 – COLLECTOR-SATURATION REGION

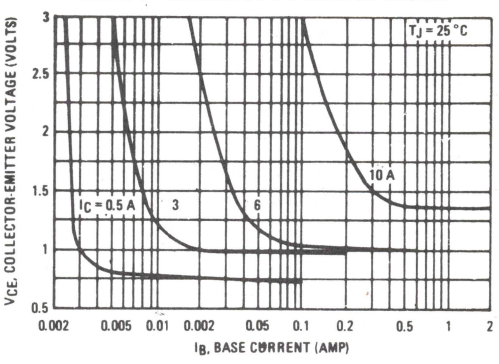

FIGURE 5 – COLLECTOR-EMITTER SATURATION VOLTAGE

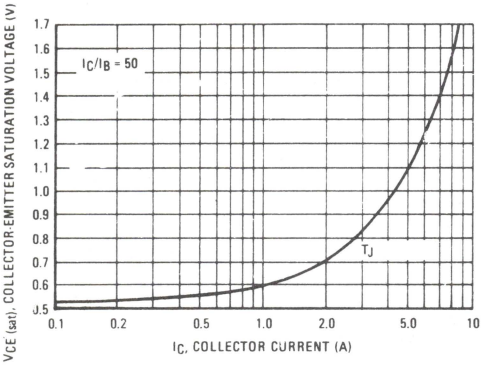

FIGURE 6 – BASE-EMITTER VOLTAGE

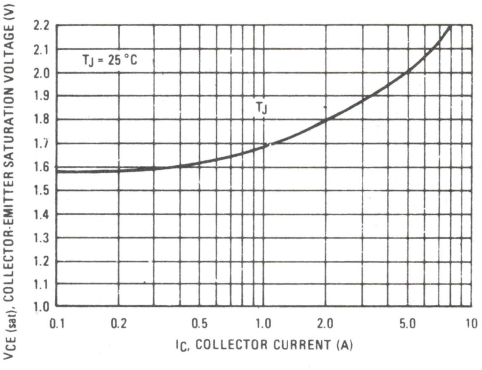

FIGURE 7 – TURN-OFF SWITCHING TIME

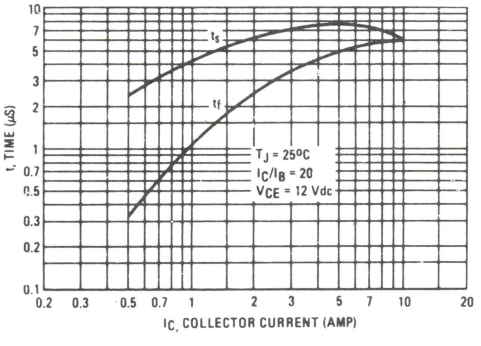

FIGURE 8 – COLLECTOR CUTOFF REGION

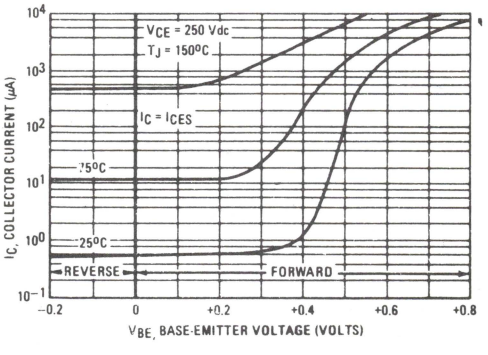

3

FIGURE 9 – THERMAL RESPONSE

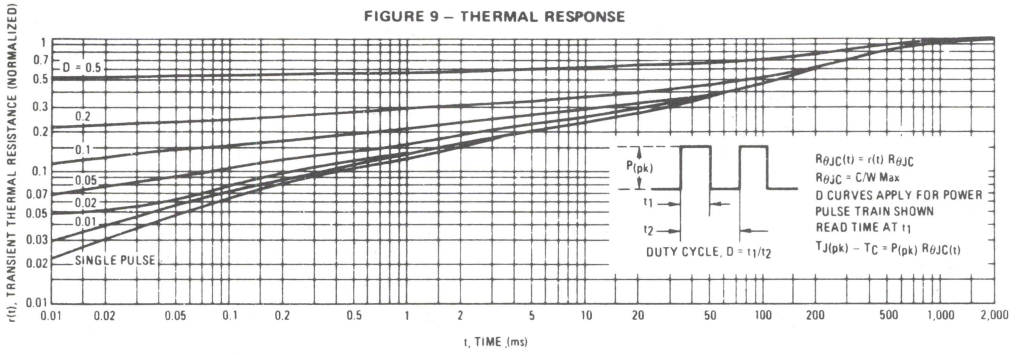

FIGURE 10 – FORWARD BIAS SAFE OPERATING AREA

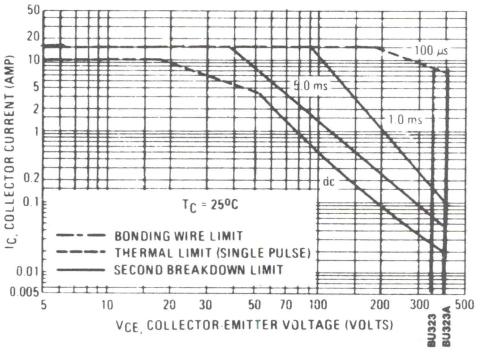

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 10 may be found at any case temperature by using the appropriate curve on Figure 11.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 11 – POWER DERATING

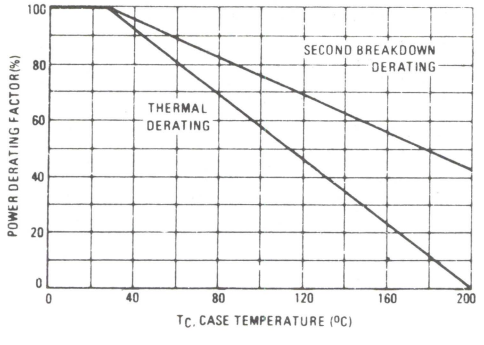

FIGURE 12 – IGNITION TEST CIRCUIT

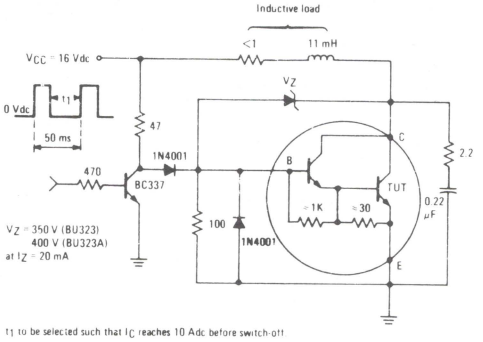

t1 to be selected such that I_C reaches 10 Adc before switch-off.

NOTE – Figure 12 specifies energy handling capabilities in an automotive ignition circuit.

3

BU323P
BU323AP

DARLINGTON NPN SILICON POWER TRANSISTORS

350 & 400 VOLTS
125 WATTS

The BU323P, BU323APare monolithic darlington transistors designed for automotive ignition, switching regulator and motor control applications.

- Collector-Emitter Sustaining Voltage – $V_{CER\ (sus)}$ = 475 Vdc (Min. BU323AP)
- 125 Watts Capability at 50 Volts
- V_{CE} Sat Specified at −40°C = 2 V Max. at I_C = 6 A
- 550 mJ Energy Capability Tested in Automotive Ignition Circuit
- Photoglass Passivation for Reliability and Stability





MAXIMUM RATINGS

Rating	Symbol	BU323P	BU323AP	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	200	250	Vdc
Collector-Emitter Voltage	V_{CEV}	300	350	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current – Continuous – Peak (1) – Overload	I_C I_{CM} I_{ol}	50 100	40 80	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	10	16	Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	125 100 1		Watts Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes: ⅛" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≦ 10%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
(TO-218AC)

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS[1]						
Collector-Emitter Sustaining Voltage (Figure 1) L = 10 mH (I_C = 200 mAdc, I_B = 0, V_{clamp} = Rated V_{CEO})	 BU323P BU323AP	$V_{CEO(sus)}$	 350 400			Vdc
Collector-Emitter sustaining Voltage (Figure 1) (I_C = 3 A, R_{BE} = 100 Ohms, L = 500 μH) Unclamped	 BU323P BU323AP	$V_{CER(sus)}$	 400 475			Vdc
Collector Cutoff Current (Rated V_{CER}, R_{BE} = 100 Ohms)		I_{CER}			1	mAdc
Collector Cutoff Current (Rated V_{CBO}, I_E = 0)		I_{CBO}			1	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)		I_{EBO}			40	mAdc
ON CHARACTERISTICS[1]						
DC Current Gain (I_C = 3 Adc, V_{CE} = 6 Vdc) (I_C = 6 Adc, V_{CE} = 6 Vdc) (I_C = 10 Adc, V_{CE} = 6 Vdc)		h_{FE}	 300 150 50	 550 350 150	 2000	
Collector-Emitter Saturation Voltage (I_C = 3 Adc I_B = 60 mAdc) (I_C = 6 Adc, I_B = 120 mAdc) (I_C = 10 Adc, I_B = 300 mAdc) (I_C = 6 Adc, I_B = 120 mAdc, T_C = -40 °C)		$V_{CE(sat)}$			 1.5 1.7 2.7 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 6 Adc, I_B = 120 mAdc) (I_C = 10 Adc, I_B = 300 mAdc) (I_C = 6 Adc, I_B = 120 mAdc, T_C = -40 °C)		$V_{BE(sat)}$			 2.2 3 2.4	Vdc
Base-Emitter On Voltage (I_C = 10 Adc, V_{CE} = 6 Vdc)		$V_{BE(on)}$			2.5	Vdc
Diode Forward Voltage (I_F = 10 Adc)		V_f		2	3.5	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)		C_{ob}		165	350	pF
SWITCHING CHARACTERISTICS						
Storage Time	(V_{CC} = 12 Vdc,	t_s		7.5	15	μs
Fall Time	I_C = 6 Adc, I_{B1} = I_{B2} = 0.3 Adc) Fig. 2	t_f		5.2	15	μs
FUNCTIONAL TESTS						
Second Breakdown Collector Current with Base-Forward Biased		$I_{S/B}$		See Figure 10		
Pulsed Energy Test (See Figure 12)		$\frac{I_C^2 L}{2}$	550			mJ

[1] Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

FIGURE 1 – SUSTAINING VOLTAGE TEST CIRCUIT

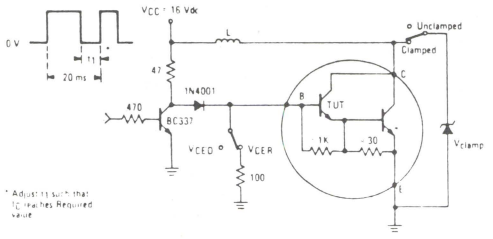

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

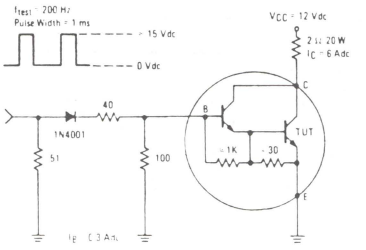

FIGURE 3 – DC CURRENT GAIN

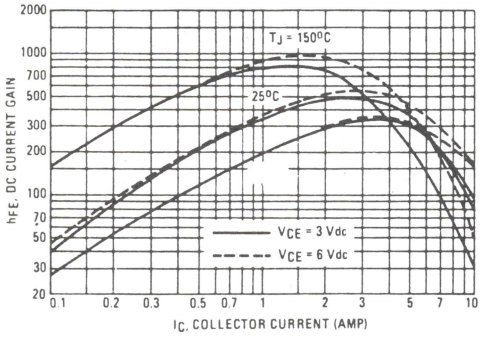

FIGURE 4 – COLLECTOR-SATURATION REGION

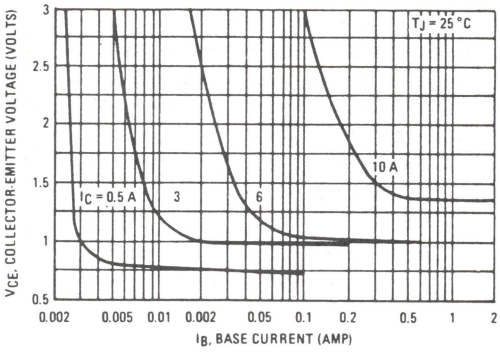

FIGURE 5 – COLLECTOR-EMITTER SATURATION VOLTAGE

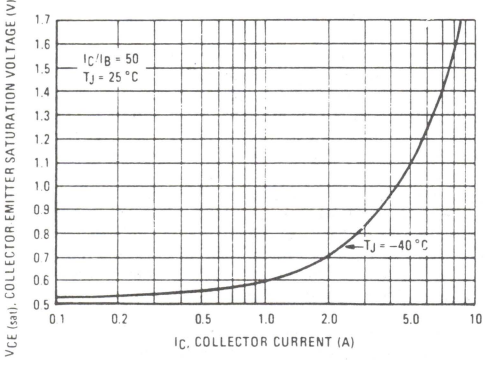

FIGURE 6 – BASE-EMITTER VOLTAGE

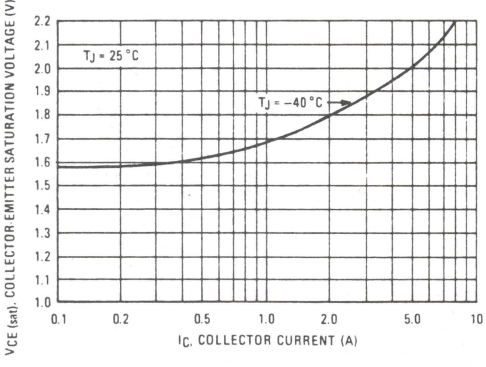

FIGURE 7 – TURN-OFF SWITCHING TIME

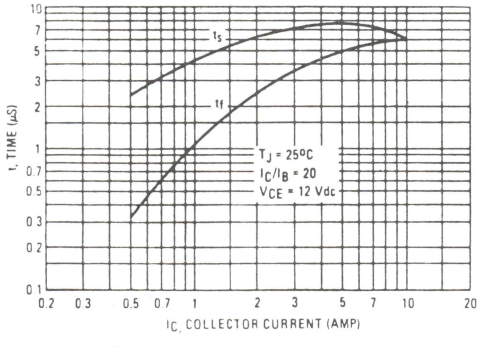

FIGURE 8 – COLLECTOR CUTOFF REGION

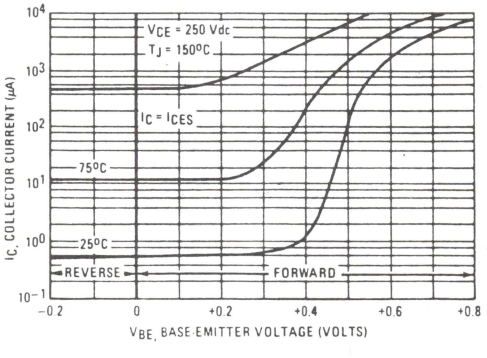

3

FIGURE 9 – THERMAL RESPONSE

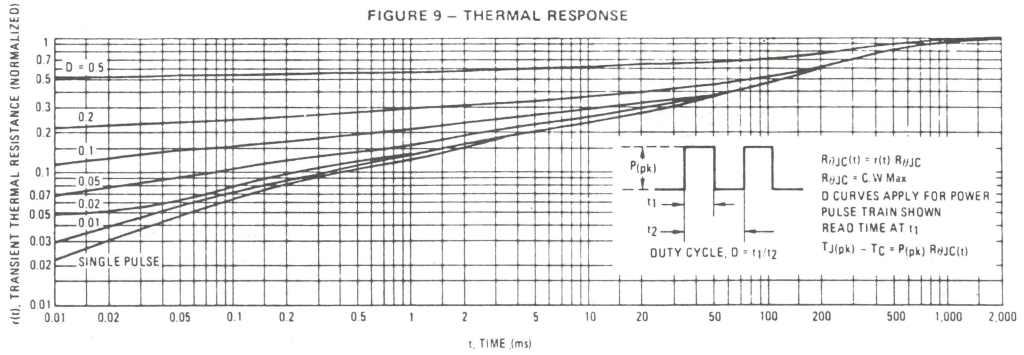

FIGURE 10 – FORWARD BIAS SAFE OPERATING AREA

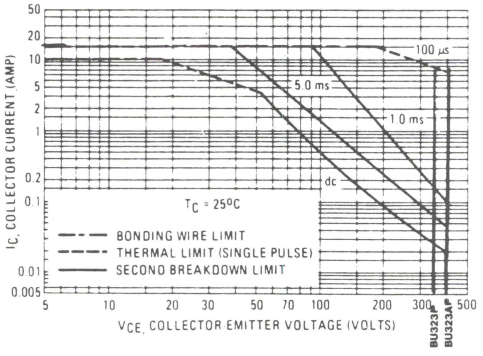

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 10 may be found at any case temperature by using the appropriate curve on Figure 11.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 11 – POWER DERATING

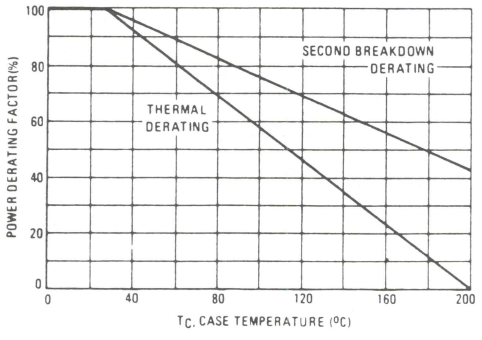

FIGURE 12 – IGNITION TEST CIRCUIT

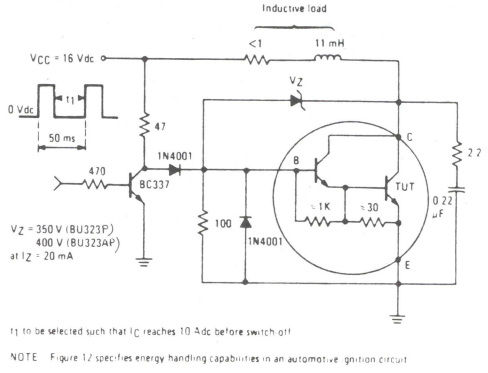

NOTE – Figure 12 specifies energy handling capabilities in an automotive ignition circuit.

BU326
BU326A

HIGH VOLTAGE NPN SILICON TRANSISTOR

. . . Designed for use in the switch-mode power supplies of colour television receivers.

- Collector-Emitter Voltage V_{CES} = 800 V and 900 V
- Collector-Current I_C = 6 A DC
- Low collector emitter saturation voltage
  $V_{CE\ (sat)}$ = 3 V max. at I_C = 4 A
- Fall time at I_C = 2.5 A
  T_F = 1 μs max. at T_C = 100 °C

6 AMPERES

NPN SILICON POWER TRANSISTORS

375, 400 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	BU326	BU326A	Unit
Collector-Emitter Voltage	$V_{CEO\ (sus)}$	375	400	Vdc
Collector-Emitter Voltage	V_{CES}	800	900	Vdc
Emitter Base Voltage	V_{EB}	10		Vdc
Collector Current — Continuous — Peak[1]	I_C I_{CM}	6 8		Adc
Base Current — Continuous — Peak[1]	I_B I_{BM}	2 3		Adc
Reverse Base Current 20 ms max. — Peak during turn off	I_B I_{BM}	100 3		mA A
Total Power Dissipation Derate above 25 °C	P_D	90 0.6		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	1.65	°C/W

[1] Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES
1. DIMENSIONS Q AND V ARE DATUMS
2. T IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ | ϕ0.13 (0.005) M | T | V M
   FOR LEADS
   ⌖ | ϕ0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic		Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS[1]						
Collector-Emitter Sustaining Voltage (I_C = 100 mA, I_B = 0, L = 25 mH)	BU326	$V_{CEO(sus)}$	375			Vdc
	BU326A		400			
Collector-Cutoff Current		I_{CES}				mAdc
(V_{CE} = 800 V, V_{BE} = 0)	BU326				1.0	
(V_{CE} = 900 V, V_{BE} = 0)	BU326A				1.0	
Collector Cutoff Current		I_{CES}				mAdc
(V_{CE} = 800 V, V_{BE} = 0, T_J = 125 °C)	BU326				2.0	
(V_{CE} = 900 V, V_{BE} = 0, T_J = 125 °C)	BU326A				2.0	
Emitter Cutoff Current (V_{EB} = 10 V, I_C = 0)		I_{EBO}			10	mAdc
ON CHARACTERISTICS[1]						
DC Current Gain (I_C = 0.6 A, V_{CE} = 5 V)		h_{FE}		30		–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 2.5 A, I_B = 0.25 A)					10	
(I_C = 4.0 A, I_B = 1.25 A)					3	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 2.5 A, I_B = 0.25 A)					1.4	
(I_C = 4.0 A, I_B = 1.25 A)					1.6	
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)		f_T		6		MHz
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Turn On Time	(I_C = 2.5 A, I_{B1} = 0.5 A) (I_{B2} = 1.0 A, V_{CC} = 250 V)	t_{on}			0.5	μs
Storage Time		t_s			3.5	μs
Fall Time		t_f		0.3		μs
Fall Time	(I_C = 2.5 A, I_{B1} = 0.5 A) (I_{B2} = 1.0 A, V_{CC} = 250 V, T_C = 100 °C)	t_f			1.0	μs

[1] Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

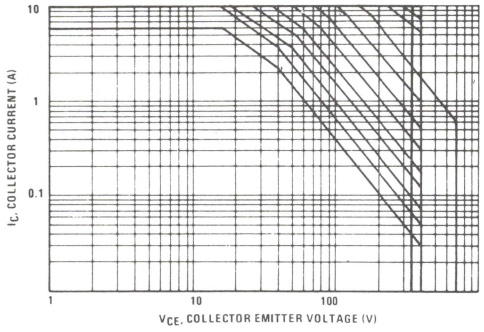

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 2 – "ON" VOLTAGES

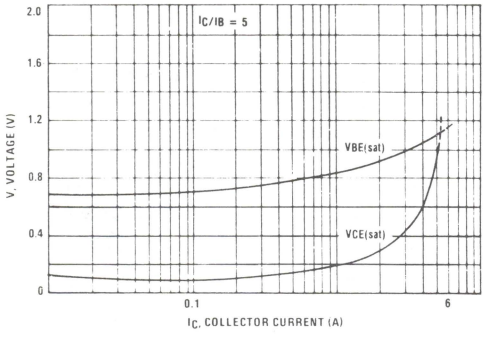

FIGURE 3 – DC CURRENT GAIN

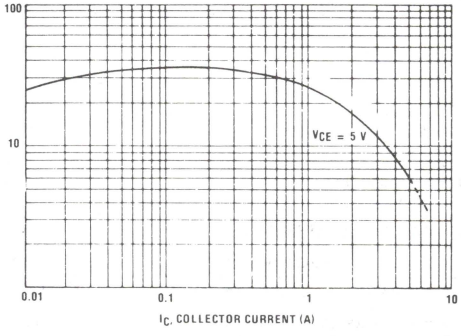

FIGURE 4 – RESISTIVE SWITCHING PERFORMANCE

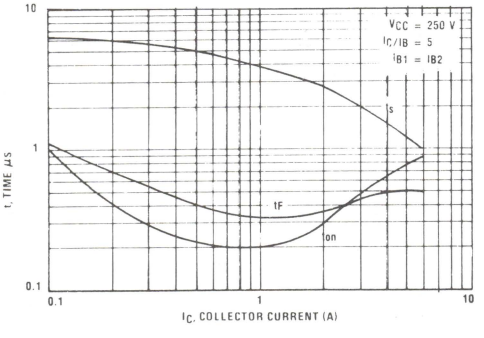

FIGURE 5 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B Non inductive resistances

3

NPN Power Transistors

BU406,D
BU407,D

These devices are high voltage, high speed transistors for horizontal deflection output stages of TV's and CRT's.

- High Voltage: V_{CEV} = 330 or 400 V
- Fast Switching Speed: t_f = 750 ns (max)
- Low Saturation Voltage: $V_{CE(sat)}$ = 1 V (max) @ 5 A
- Packaged in Compact JEDEC TO-220AB
- "D" Suffix w/Integral Damper Diode

7 AMPERES
NPN SILICON
POWER TRANSISTORS
60 WATTS
150 and 200 VOLTS



"D" SUFFIX ONLY



CASE 221A-04
TO-220AB

MAXIMUM RATINGS

Rating	Symbol	BU406,D	BU407,D	Unit
Collector-Emitter Voltage	V_{CEO}	200	150	Vdc
Collector-Emitter Voltage	V_{CEV}	400	330	Vdc
Collector-Base Voltage	V_{CBO}	400	330	Vdc
Emitter Base Voltage	V_{EBO}	6		Vdc
Collector Current — Continuous Peak Repetitive Peak (10 ms)	I_C	7 10 15		Adc
Base Current	I_B	4		Adc
Total Device Dissipation, T_C = 25°C Derate above T_C = 25°C	P_D	60 0.48		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.08	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	70	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage(1) (I_C = 100 mAdc, I_B = 0)	BU406,D BU407,D	$V_{CEO(sus)}$	200 150	— —	— —	Vdc
Collector Cutoff Current		I_{CES}				mAdc
(V_{CE} = Rated V_{CEV}, V_{BE} = 0)			—	—	5	
(V_{CE} = Rated V_{CEO} + 50 Vdc, V_{BE} = 0)			—	—	0.1	
(V_{CE} = Rated V_{CEO} + 50 Vdc, V_{BE} = 0, T_C = 150°C)			—	—	1	
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)	BU406, BU407 BU406D, BU407D	I_{EBO}	— —	— —	1 400	mAdc
ON CHARACTERISTICS(1)						
Collector-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 0.5 Adc)		$V_{CE(sat)}$	—	—	1	Vdc
Base-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 0.5 Adc)		$V_{BE(sat)}$	—	—	1.2	Vdc
Forward Diode Voltage (I_{EC} = 5 Adc) "D" only		V_{EC}	—	—	2	Volts

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 1%.

(continued)

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
DYNAMIC CHARACTERISTICS					
Current-Gain — Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 20 MHz)	f_T	10	—	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1 MHz)	C_{ob}	—	80	—	pF
SWITCHING CHARACTERISTICS					
Inductive Load Crossover Time (V_{CC} = 40 Vdc, I_C = 5 Adc, I_{B1} = I_{B2} = 0.5 Adc, L = 150 μH)	t_c	—	—	0.75	μs

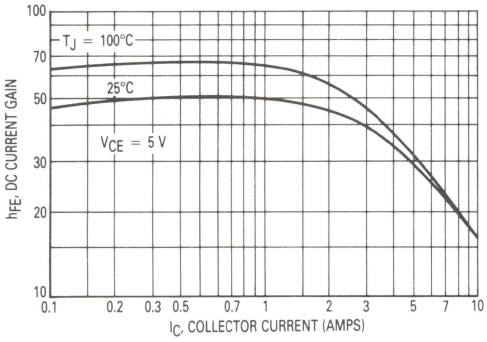

Figure 1. DC Current Gain

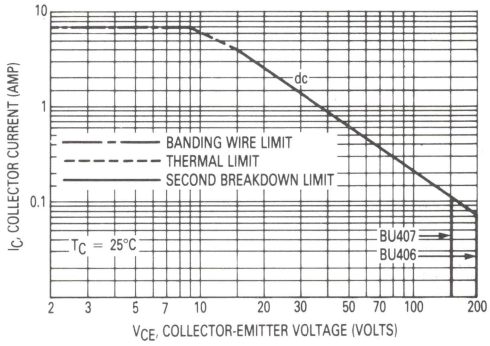

Figure 2. Maximum Rated Forward Bias Safe Operating Area

OUTLINE DIMENSIONS

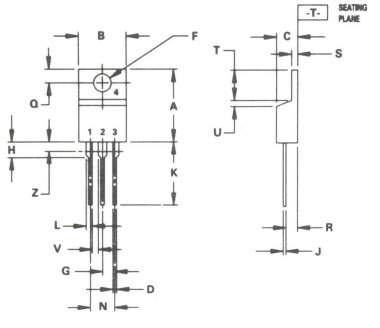

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

BU426
BU426A

HIGH VOLTAGE NPN SILICON TRANSISTOR

. . . designed for use in the switched mode power supply of 90° and 110° colour television receivers.

- High Collector-Emitter Voltage
  V_{CES} = 800 V, 900 V
- Collector Current
  I_C = 6 Adc
- Low Collector Emitter Saturation Voltage
  $V_{CE(sat)}$ = 3 Vdc, @ I_C = 4 A, I_B = 1.25 Adc
- Fall Time @ I_C = 2.5 A, $I_{B\,(end)}$ = 1 A
  t_f = 0,3 μsec (typ)

6 AMPERES

TRIPLE DIFFUSED NPN SILICON POWER TRANSISTORS

800, 900 VOLTS
113 WATTS



MAXIMUM RATINGS

Rating	Symbol	BU426	BU426A	Unit
Collector-Emitter Voltage	V_{CEO}	375	400	Vdc
Collector-Emitter Voltage V_{BE} = 0	V_{CES}	800	900	Vdc
Emitter-Base Voltage	V_{EB}	10		Vdc
Collector Current — Continuous — Peak	I_C	6 12		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	113 0.90		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.1	°C/W



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
(TO-218AC)

FIGURE 1 — POWER DERATING

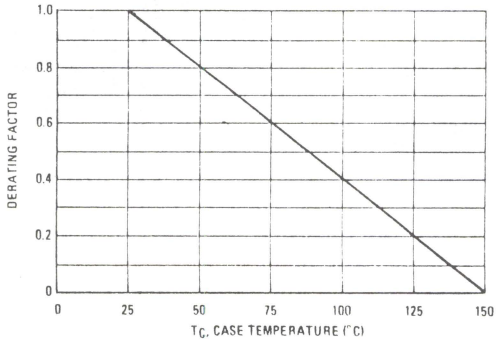

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage See Figure 8	BU426	V_{CEO}	375	–	–	Vdc
(I_C = 100 mA, L = 25 mH)	BU426A		400	–	–	
Collector-Cutoff Current		I_{CES}				mAdc
(V_{CES} = Rated Value, T_C = 25°C)			–	–	1.0	
(V_{CES} = Rated Value, T_C = 125°C)			–	–	2.0	
Emitter Cutoff Current		I_{EBO}	–	–		mAdc
V_{EB} = 10 Vdc, I_C = 0)					10	
ON CHARACTERISTICS						
DC Current Gain		h_{FE}		30	–	–
(I_C = 0.6 Adc, V_{CE} = 5 Vdc)						
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 0.5 Adc)			–	–	1.5	
(I_C = 4 Adc, I_B = 1.25 Adc)			–	–	3	
			–	–		
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 4 Adc, I_B = 1.25 Adc)			–	–	1.6	
(I_C = 2.5 Adc, I_B = 0.5 Adc)			–	–	1.4	
DYNAMIC CHARACTERISTICS						
Current Gain – Bandwidth Product		f_T		6		MHz
(I_C = 0.2 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)						

SWITCHING CHARACTERISTICS (Resistive Load)

			MIN.	TYP.	MAX.	
Turn on Time	(I_C = 2.5 A, I_{B1} = 0.5 A) (I_{B2} = 1.0 A, V_{CC} = 250 V)	t_{on}		0.2	0.6	μs
Storage Time		t_s		2	3.5	
Fall Time		t_f		0.5		
Fall Time	(I_C = 2.5 A, I_{B1} = 0.5 A) (I_{B2} = 1.0 A, V_{CC} = 250 V, T_C = 95°C)	t_f			0.75	μs
		t_f				

3

FIGURE 2 – DC CURRENT GAIN

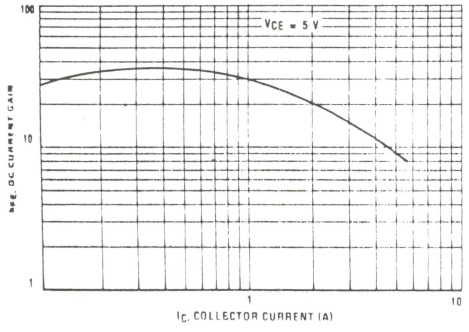

FIGURE 3 – "ON VOLTAGE"

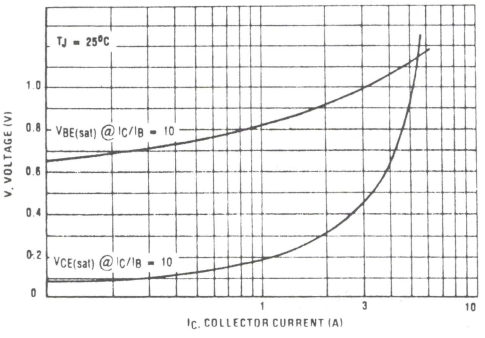

FIGURE 4 – TURN ON TIMES

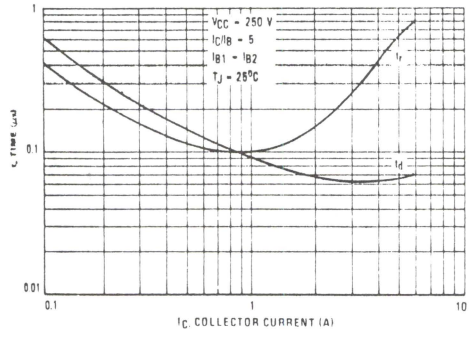

FIGURE 5 – TURN OFF TIMES

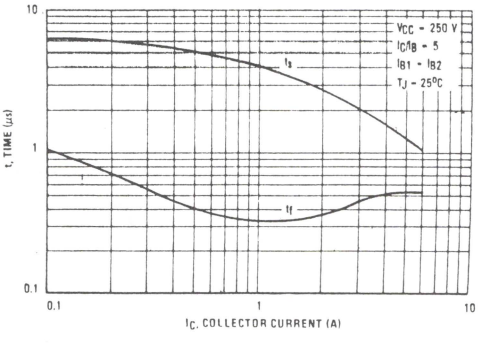

FIGURE 6 – ACTIVE REGION SAFE OPERATING AREA

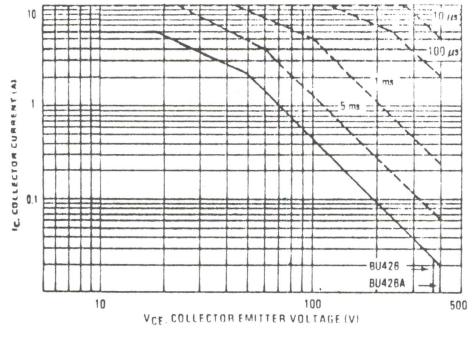

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 6 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in figure 7. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN 415A)

FIGURE 7 – THERMAL RESPONSE

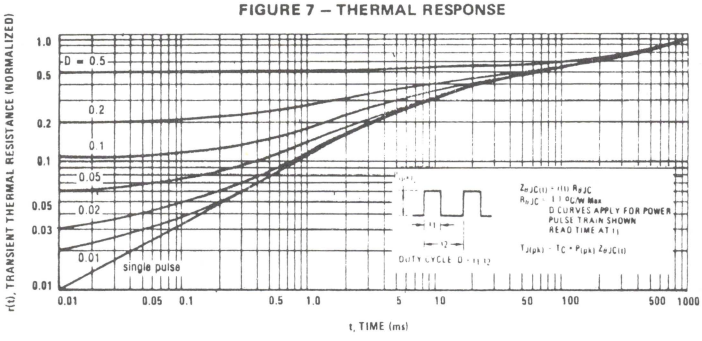

FIGURE 8 – SUSTAINING VOLTAGE TEST CIRCUIT

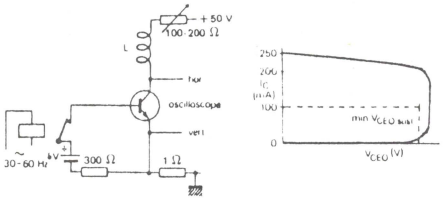

3

BU500

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in large screen color deflection circuits

- V_{CEX} = 1500 V;
  $V_{CEO(sus)}$ = 700 V (min.)
- Low saturation:
  $V_{CE(sat)}$ = 1 V (max.) @ Ic = 4.5 Adc

6 AMPERES

NPN SILICON POWER METAL TRANSISTOR

1500 VOLTS
75 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	Vdc
Collector-Base Voltage	V_{CBO}	1500	Vdc
Emitter-Base Voltage	V_{EBO}	5	Vdc
Collector-Emitter Voltage (V_{BE} = −2.0 V)	V_{CEX}	1500	Vdc
Collector-Current — continuous — peak (pw ≤ 300 μs)	I_C I_{CM}	6 16	Adc Apk
Base-Current continuous	I_B	4	Adc
Total Power Dissipation @ T_C = 25°C	P_D	75	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.66	°C/W



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS
2. T IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ ⌀ 13 (0.005) M T V M
   FOR LEADS
   ⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	—	3.43	—	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

FIGURE 1 – POWER DERATING

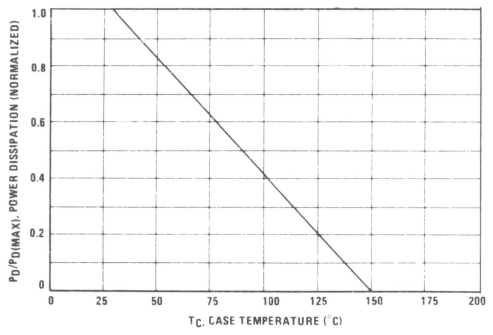

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS (1)				
Collector-Emitter Sustaining Voltage (I_C = 500 mAdc, I_B = 0) L = 10 mH	$V_{CEO(sus)}$	700		Vdc
Collector Cutoff Current at Reverse Bias: (V_{CE} = 1000 V, I_E = 0) (V_{CE} = 1500 V, I_E = 0)	I_{CBO}		0.02 1.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 1500 V, V_{BE} = -2 V)	I_{CEX}		1.0	mAdc
Emitter-Base Reverse Voltage (I_E = 100 mA)	V_{EBO}	5		V
Emitter Cutoff Current (V_{EB} = 4 V)	I_{EBO}		10	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 4.5 Adc, V_{CE} = 5 V)	h_{FE}	3.0		–
Collector-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 A)	$V_{CE(sat)}$		1.0	Vdc
Base-Emitter On Voltage (I_C = 4.5 Adc, V_{CE} = 2 A)	$V_{BE(on)}$		1.3	Vdc

SWITCHING CHARACTERISTICS (Resistive Load)

	(V_{CC} = 100 Vdc, I_C = 4.5 A, I_{B1} = 1.5 A, I_{B2} = 1.5 A)		–		μs
Storage Time		t_s	–	1.2	
Fall Time		t_f	–	1.0	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

BU508
BU508D
BU508A
BU508AD

NPN Silicon Power Transistors
Horizontal Deflection

. . . specifically designed for use in large screen color deflection circuits.

- Glass Passivated (Patented Photoglass)
- Triple Diffused Mesa Technology for Long Term Stability
- Collector-Emitter Voltage — V_{CE} = 1500 Vdc
- Collector-Emitter Sustaining Voltage — $V_{CEO(sus)}$ = 700 Vdc
- Switching Times with Inductive Loads, t_f = 0.5 μs (Typ) @ I_C = 4.5 A
- Optimum Drive Condition Curves
- Glass Base-Collector Junction
- TO-218 Package for Low Cost Mounting
- Available with Internal Flyback Diode, "D" Suffix



"D" SUFFIX

POWER TRANSISTORS
8 AMPERES
1500 VOLTS



CASE 340-01
TO-218 AC

MAXIMUM RATINGS

Rating	Symbol	All Parts	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	Vdc
Collector-Emmiter Voltage	V_{CES}	1500	Vdc
Emitter Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous Peak(1)	I_C I_{CM}	8 15	Adc
Base Current — Continuous Peak(1)	I_B I_{BM}	4 6	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	125 1	Watts W/°C
Operating and Storage Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes, 1/8" from Case for 5 seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS(1)						
Collector-Emitter sustaining voltage (I_C = 100 mAdc, I_B = 0)		$V_{CEO(sus)}$	700	—	—	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0, T_C = 25°C) (V_{CE} = 1500 Vdc, V_{BE} = 0, T_C = 125°C)		I_{CES}	— —	— —	0.1 2	mAdc
Emitter Base Leakage (V_{EB} = 6 V, I_C = 0)	BU508, A BU508D, AD	I_{EBO}		—	10 300	mAdc
ON CHARACTERISTICS(1)						
DC Current Gain (I_C = 4.5 Adc, V_{CE} = Vdc)		h_{FE}	2.25	—	—	—
Collector-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 Adc)	BU508, D BU508A, AD	$V_{CE(sat)}$	—	—	3 1	Vdc
Base Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 2 Adc)		$V_{BE(sat)}$	—	—	1.3	Vdc
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 11			
DYNAMIC CHARACTERISTICS						
Current-Gain — Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5 Vdc, f_{test} = 1 MHz)		f_T	—	7	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	—	125	—	pF
SWITCHING CHARACTERISTICS						
Fall Time	(I_C = 4.5 Adc, I_B = 1.8 Adc, dI_B/dt = 1 A/μs, LB = 10 μH, see Figure 1)	t_s t_f		8 0.5		μs

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

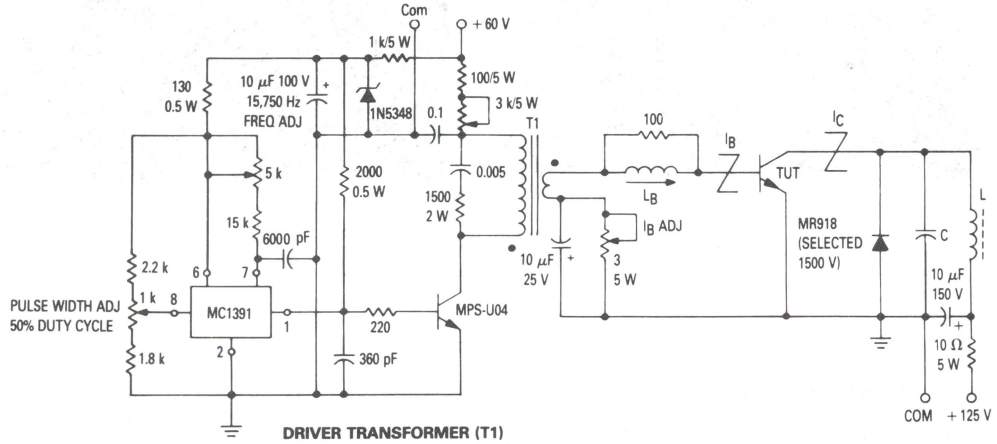

I_C A	L mH	C μF
3.5	0.87	0.013
4.5	0.67	0.017

DRIVER TRANSFORMER (T1)

- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance L_P = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

Figure 1. Switching Times Test Circuit

BASE DRIVE: The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst-case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Figure 2. This results in rapid, but only partial, collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Figure 3, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically, since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B. This kind of analysis shows the parameter which really matters is dissipation, whether caused by switching or by saturation. The negative slope of these curves at the left (low I_{B1}) is caused by saturation losses. The positive slope portion at higher I_{B1}, and low values of L_B is due to switching losses as described above. For very low L_B a very narrow optimum is obtained. This occurs when $I_{B1}\, h_{FE} = I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1}\, h_{FE} = I_{CM}$ point as the turn-off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor *initiation* of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left or right according to the relation $I_{B1}\, h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accommodate the lowest h_{FE} part specified. Neither L_B nor I_{B1} are absolutely critical, and should be selected for the specific required condition. Similar curves relating to this discussion can be found on Motorola's data sheet for the BU207.

TEST CIRCUIT WAVEFORMS

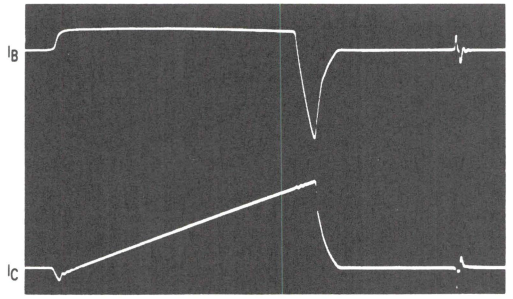

Figure 2.

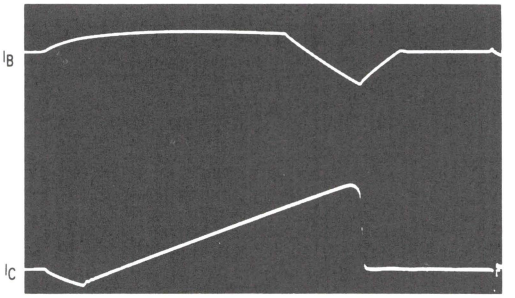

Figure 3.

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance. Once the required transistor operating current is determined, fixed circuit values may be selected from the table. Factory testing is performed by reading the current meter only, since the input power is proportional to current. No adjustment of the test apparatus is required.

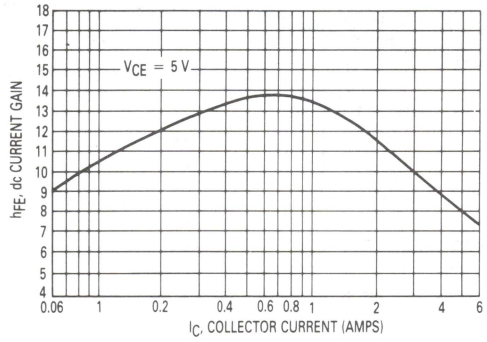

Figure 4. Typical dc Current Gain

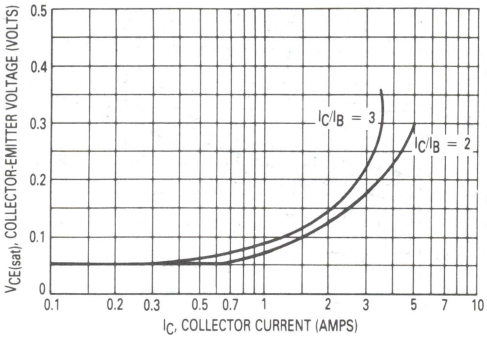

Figure 5. Typical Collector Saturation Voltage

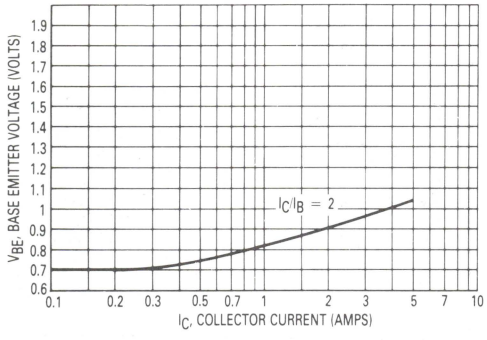

Figure 6. Typical Base Emitter Saturation Voltage

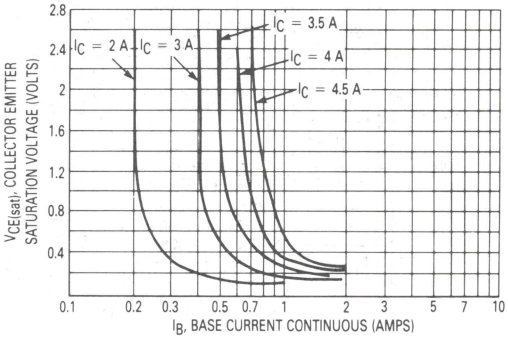

Figure 7. Typical Collector Saturation Region

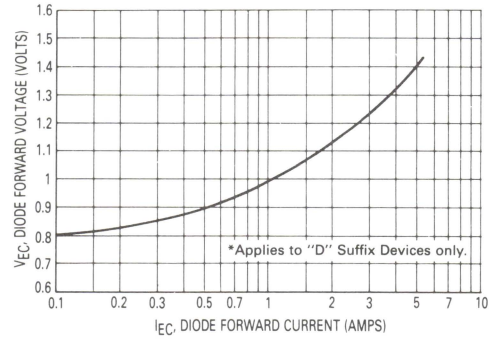

Figure 8. Typical Damper Diode Forward Voltage*

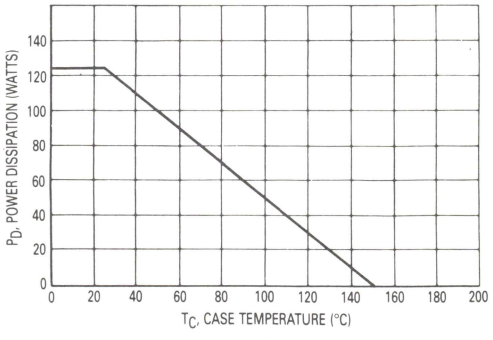

Figure 9. Power-Temperature Derating Curve

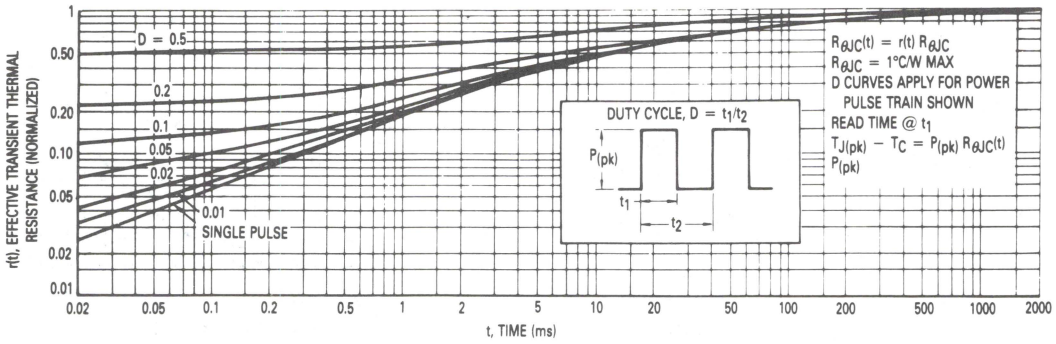

Figure 10. Thermal Response

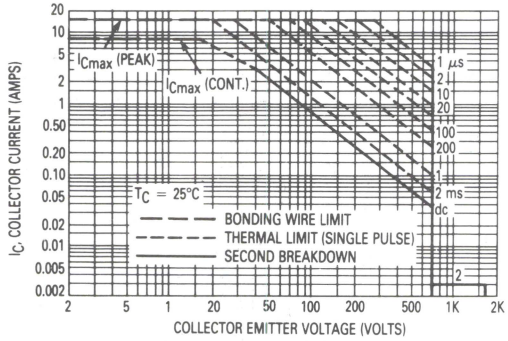

Figure 11. Maximum Forward Biased Safe Operating Area

Note (2) Operation in this area limited to Pulse Width < 20 μs, Duty Cycle < 0.25, R_{BE} < 100 ohms

CASE 340-01
TO-218 AC

STYLE 1:
PIN 1. BASE 3. EMITTER
2. COLLECTOR 4. COLLECTOR



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

3

BU522
BU522A
BU522B

HIGH VOLTAGE SILICON POWER DARLINGTONS

Power Transistor mainly intended for use as ignition circuit output transistor.

- Specified minimum sustaining voltage:
  $V_{CER(sus)}$ = 350 V (BU522)
  at I_C = 1 A 400 V (BU522A)
  425 V (BU522B)
- High S.O.A. capability:
  V_{CE} = 350 V (BU522) at I_C = 5 A
  400 V (BU522A, BU522B)
- Low $V_{CE(sat)}$ = 2.0 V max. at I_C = 4 A (BU522A, BU522B)

7 AMPERES

**DARLINGTON
TRIPLE DIFFUSED
POWER TRANSISTORS
NPN SILICON**

**375, 425, 450 VOLTS
75 WATTS**



MAXIMUM RATINGS

Rating	Symbol	BU522	BU522A	BU522B	Unit
Collector-Emitter Voltage Sust.	$V_{CER(sus)}$	350	400	425	Vdc
Collector-Emitter Voltage	V_{CER}	375	425	450	Vdc
Collector-Base Voltage	V_{CBO}	400	450	475	Vdc
Emitter-Base Voltage	V_{EBO}		5.0		Vdc
Collector Current - Continuous	I_C		7.0		Adc
Base Current	I_B		2.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		75 0.60		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−65 to 150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.67	°C/W

FIGURE 1 – POWER DERATING

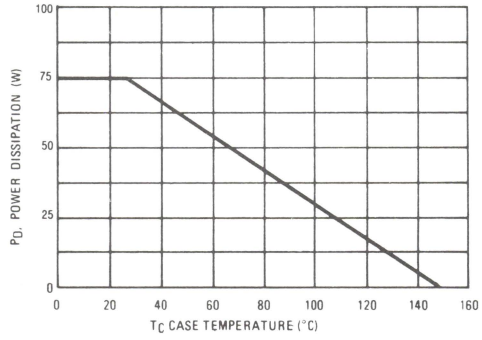

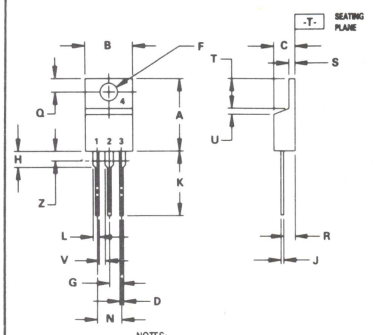

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

**CASE 221A-04
TO-220AB**

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (See Figure 2)		$V_{CER(sus)}$				Vdc
(I_C = 1.0 A) See Figure 2	BU522		350			
	BU522A		400			
	BU522B		425			
Collector Cutoff Current (Rated V_{CER}, R_{BE} = 270 Ω)		I_{CER}			1.0	mAdc
Collector Cutoff Current (Rated V_{CBO}, I_E = 0)		I_{CBO}			1.0	mAdc
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)		I_{EBO}			40	mAdc
ON CHARACTERISTICS						
DC Current Gain (I_C = 2.5 Adc, V_{CE} = 5 Vdc)		h_{FE}	250			–
Collector-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 80 mAdc)	BU522	$V_{CE(sat)}$			2.5	Vdc
	BU522A, BU522B				2	
Base-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 80 mAdc)		$V_{BE(sat)}$			2.5	Vdc
DYNAMIC CHARACTERISTICS						
Current Gain – Bandwidth Product (I_C = 0.3 mAdc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)		f_T		7.5		MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz		C_{ob}		150		pF

3

FIGURE 2 – SUSTAINING VOLTAGE TEST $V_{CER\ (sus)}$

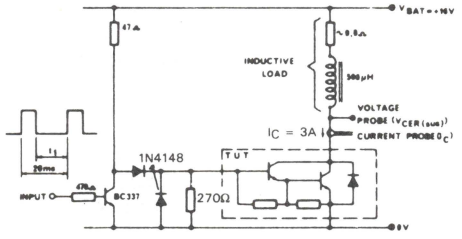

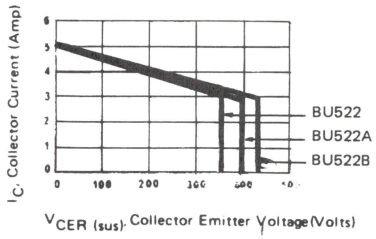

t_1 to be selected that I_C reaches 3 Adc before switch-off

Case temperature of the power transistor: T_C = 25°C

Test conditions of the Collector-Base Clamping Circuit:

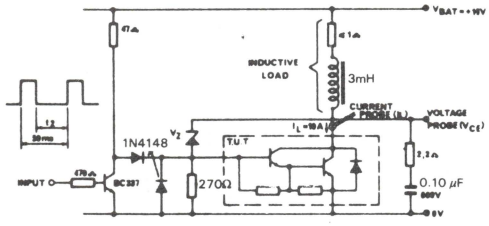

Clamping device characteristics:

V_Z = 350 V (BU522) / 400 V (BU522A/B) ± 1% at I_Z = 20 mA

Clamping duration is around 45 μsec (BU522) / 40 μsec (BU522A/B)

t_2 to be selected that I_L reaches 5 Adc before switch-off

Case temperature of the power transistor: T_C = 25°C.

FIGURE 3 – S.O.A. TEST

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BU806
BU807

8.0 AMPERE
DARLINGTON NPN POWER TRANSISTORS
60 WATTS
150 and 200 VOLTS

NPN DARLINGTON POWER TRANSISTORS

These Darlington transistors are high voltage, high speed devices for horizontal deflection circuits in TV's and CRT's.

- High Voltage: V_{CEV} = 330 or 400 V
- Fast Switching Speed: t_c = 1.0 μs (max)
- Low Saturation Voltage: $V_{CE(sat)}$ = 1.5 V (max)
- Packaged in JEDEC TO-220AB
- Damper Diode V_F is specified. V_F = 2.0 V (max)





MAXIMUM RATINGS

Rating	Symbol	BU806	BU807	Unit
Collector-Emitter Voltage	V_{CEO}	200	150	Vdc
Collector-Emitter Voltage	V_{CEV}	400	330	Vdc
Collector-Base Voltage	V_{CBO}	400	330	Vdc
Emitter-Base Voltage	V_{EBO}	6.0		Vdc
Collector Current — Continuous — Peak	I_C	8.0 15		Adc
Emitter-Collector Diode Current	I_F	10		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation, T_C = 25°C Derate above T_C = 25°C	P_D	60 0.48		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.08	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	70	°C/W
Lead Temperature for Soldering Purposes, 1/8" from Case for 5.0 Seconds	T_L	275	°C

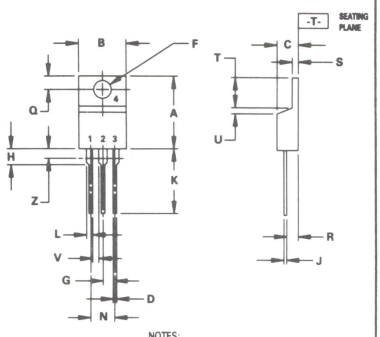

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	BU806 BU807	$V_{CEO(sus)}$	200 150	— —	— —	Vdc
Collector Cutoff Current (V_{CE} = Rated V_{CBO}, V_{BE} = 0)		I_{CES}	—	—	100	μAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, $V_{BE(off)}$ = 6.0 Vdc)		I_{CEV}	—	—	100	μAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	—	—	3.0	mAdc
ON CHARACTERISTICS (1)						
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 50 mAdc)		$V_{CE(sat)}$	—	—	1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 50 mAdc)		$V_{BE(sat)}$	—	—	2.4	Vdc
Emitter-Collector Diode Forward Voltage (I_F = 4.0 Adc)		V_F	—	—	2.0	Vdc
SWITCHING CHARACTERISTICS						
Turn-On Time	(Resistive Load, V_{CC} = 100 Vdc, I_C = 5.0 Adc, I_{B1} = 50 mAdc, I_{B2} = 500 mAdc)	t_{on}	—	0.35	—	μs
Storage Time		t_s	—	0.55	—	μs
Fall Time		t_f	—	0.20	—	μs
Crossover Time (I_C = 5.0 Adc, I_{B1} = 50 mAdc, $V_{BE(off)}$ = 4.0 Vdc, V_{clamp} = 200 Vdc, L = 500 μH)		t_c	—	0.40	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 1%.

FIGURE 1 — DC CURRENT GAIN

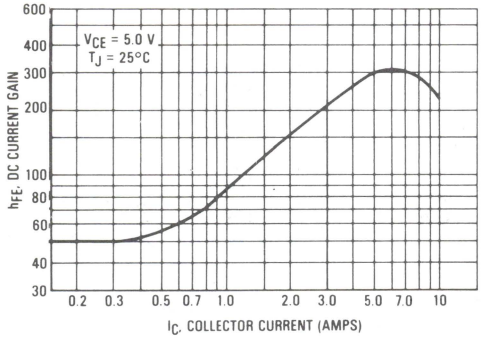

FIGURE 2 — SAFE OPERATING AREA (FBSOA)

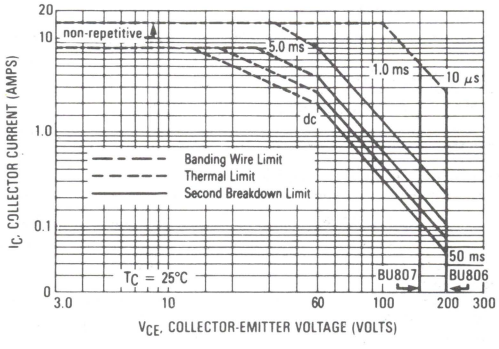

3

BUS36
BUS37

SWITCHMODE II▲ SERIES
NPN SILICON POWER TRANSISTORS

The BUS36 and BUS37 transistors are designed for low voltage, high speed, power switching in inductive and resistive circuits where turn-off times are critical. They are particularly suited for battery-operated Switchmode applications and driver applications such as :

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls



Fast Turn-Off Times
60 ns Inductive Fall Time – 25°C (Typ)
110 ns Inductive Crossover Time – 25°C (Typ)

Operating Temperature Range – 65 to + 175°C

100°C Performance Specified for :
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

12 AMPERES

NPN SILICON POWER TRANSISTORS

120 & 150 VOLTS
107 WATTS

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUS36	BUS37	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	120	150	Vdc
Collector-Emitter Voltage	V_{CEV}	250	300	Vdc
Emitter Base Voltage	V_{EB}	8		Vdc
Collector Current – Continuous – Peak(1) – Overload	I_C I_{OL}	12 25 40		Adc
Base Current – Continuous – Peak(1)	I_B I_{BM}	7 15		Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	107 53 0.71		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to + 175		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 50 mA, I_B = 0) L = 25 mH BUS36 BUS37	$V_{CEO(sus)}$	 120 150	 – –	 –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	I_{CEV}	 – –	 – –	 0.1 1.0	mAdc
Collector Cutoff Current BUS36 : V_{CE} = 60 V BUS37 : V_{CE} = 75 V	I_{CEO}	 – –	 – –	 0.05 0.05	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)	I_{EBO}			 0.1	mAdc
Emitter-base breakdown Voltage (I_E = 50 mA - I_C = 0)	BV_{EBO}	 8.0			Vdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$		See Figure 12		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 13		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 10 Adc, V_{CE} = 2 Vdc) (I_C = 0.5 Amp, V_{CE} = 2 V)	hFE	 30 50	 – –	 – –	–
Collector-Emitter Saturation Voltage (I_C = 12 Amp, I_B = 1.2 Amp) (I_C = 12 Amp, I_B = 1.2 Amp, T_c = 100°C)	$V_{CE(sat)}$	 – –	 – –	 0.8 1.0	Vdc
Base-Emitter Saturation Voltage (I_C = 12 Amp, I_B = 1.2 Amp) (I_C = 12 Amp, I_B = 1.2 Amp, T_c = 100°C)	$V_{BE(sat)}$	 – –	 – –	 1.8 1.8	Vdc
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 khz)	C_{ob}	–	–	300	pF
Current Gain – Bandwidth Product (2) (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz	f_T	30	–	–	MHz

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)

Delay Time	(V_{CC} = 100 Vdc, I_C = 12 A, I_{B1} = 1.2 A, t_p = 30 μs, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5 V)	t_d	–	0.07	0.15	μs
Rise Time		t_r	–	0.15	0.3	
Storage Time		t_s	–	0.5	1.0	
Fall Time		t_f	–	0.12	0.25	

Inductive Load, Clamped (Table 1)

Storage Time	($I_{C(pk)}$ = 12 A, I_{B1} = 1.2 A, $V_{BE(off)}$ = 5 V, $V_{CE(c1)}$ = 100 V)	(T_C = 25°C)	t_{sv}	–	0.5	–	μs
Fall Time			t_{fi}	–	0.06	–	
Storage Time		(T_C = 100°C)	t_{sv}	–	0.6	1.0	
Fall Time			t_{fi}	–	0.15	0.30	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

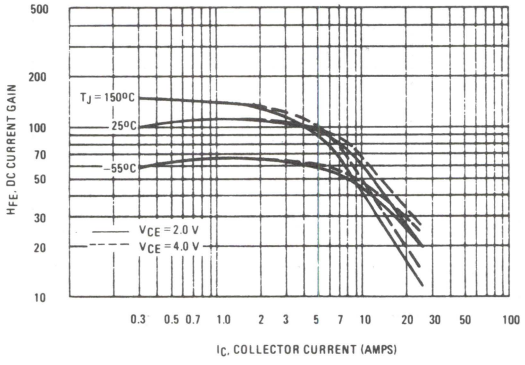

FIGURE 2 – COLLECTOR SATURATION REGION

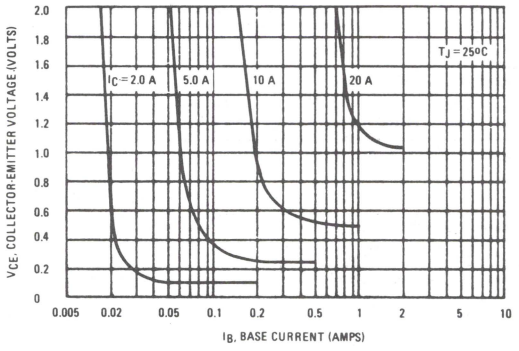

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

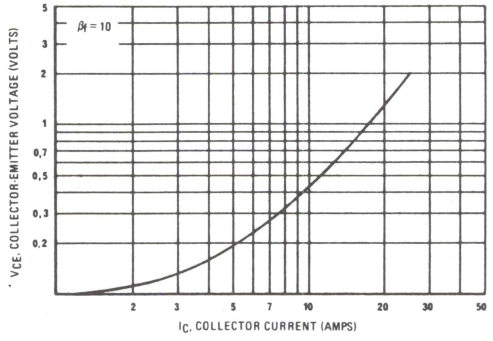

FIGURE 4 – BASE-EMITTER VOLTAGE

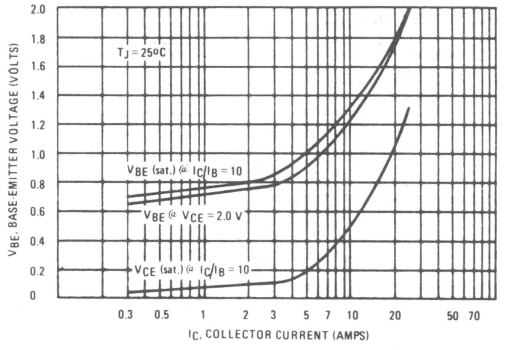

3

FIGURE 5 – COLLECTOR CUTOFF REGION

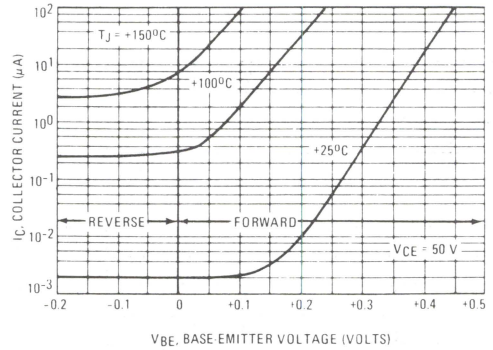

FIGURE 6 – CAPACITANCE

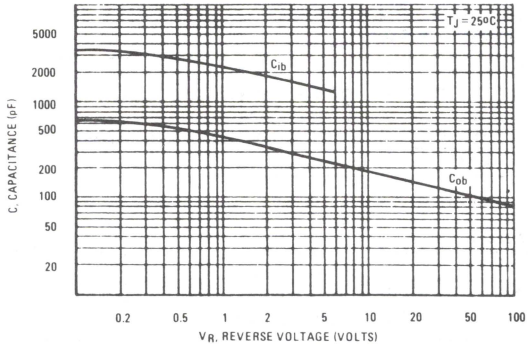

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+10 V, 33 2w, D1, 22uF, 2N6438, MR854, 160, 220, 100, 2N5859, 680pF, D3, 22, D1, D2, D3, D4, 1N4934, 1uF, Ib1 Adjust, Ib2 Adjust, dTb Adjust / dt, 680pF, 680 pF, 2N3763, 22, D4, MR854, 160, 33 2w, D3, 22uF, 2N6339, Vcc pulses ω 3%	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} 180 μH R_{coil} 0.05 Ω V_{CC} 20 V V_{clamp} 250 V R_B adjusted to attain desired I_{B1}	V_{CC} 250 V R_L 83 Ω Pulse Width 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, See Above for Detailed Conditions, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

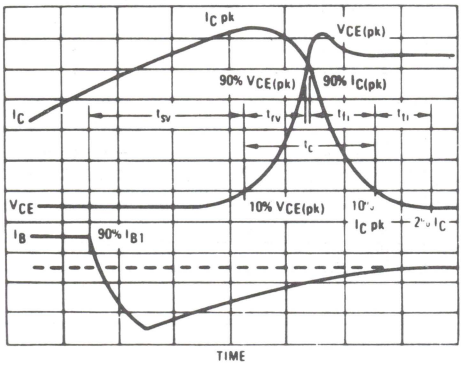

FIGURE 8 – PEAK-REVERSE CURRENT

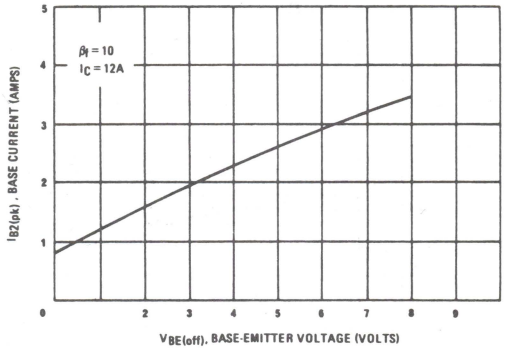

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME, Tsv

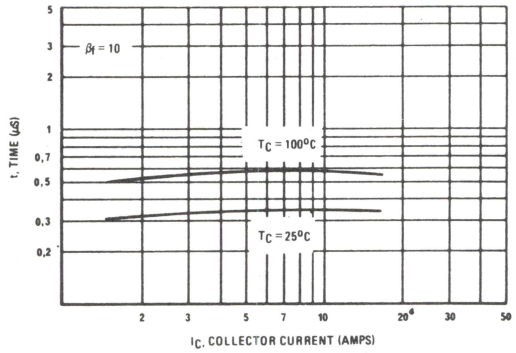

FIGURE 10 – FALL TIMES

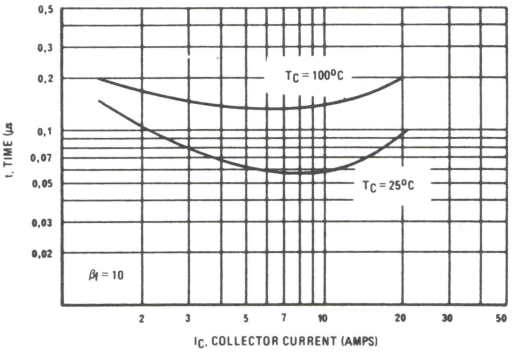

FIGURE 11a – TURN-OFF TIMES vs FORCED GAIN

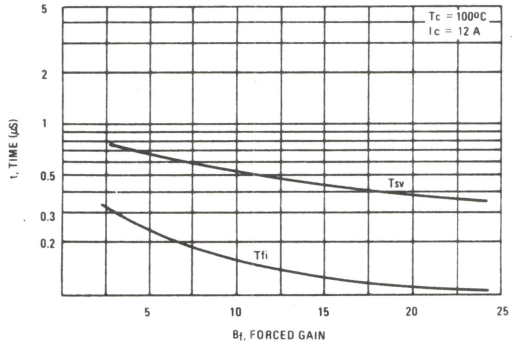

FIGURE 11b – TURN-OFF TIMES vs I_{b2}/I_{b1}

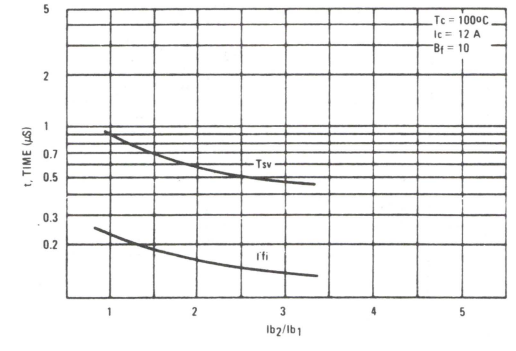

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

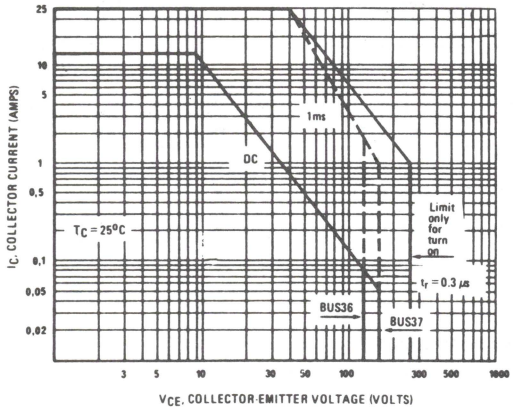

FIGURE 13 – REVERSE BIAS SAFE OPERATING AREA

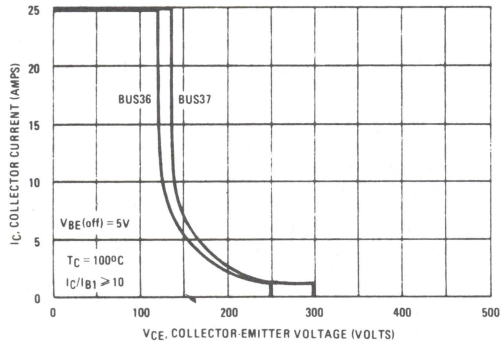

FIGURE 14 – POWER DERATING

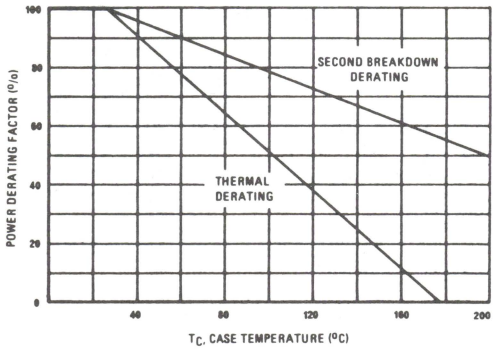

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by seve l means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped condition so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

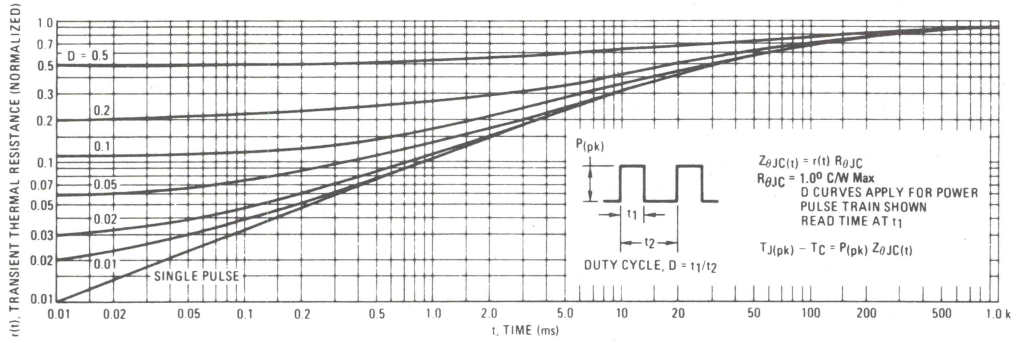

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

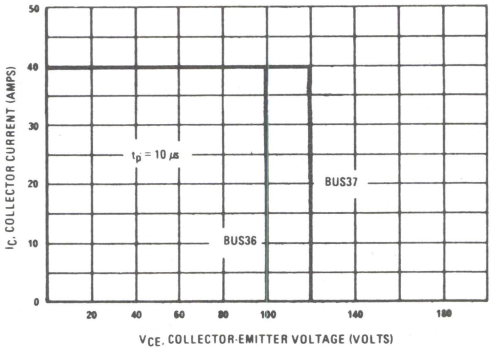

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 17) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 17 – OVERLOAD SOA TEST CIRCUIT

Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p



BUS45P

SWITCHMODE II SERIES
NPN SILICON POWER TRANSISTORS

The BUS 45P transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line-operated switchmode applications such as:



- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
- 100 ns Inductive Fall Time – 25°C (Typ)
- 150 ns Inductive Crossover Time – 25°C (Typ)
- 400 ns Inductive Storage Time – 25°C (Typ)

Operating Temperature Range – 65 to +150°C

100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

MAXIMUM RATINGS

Rating	Symbol	BUS 45P	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	6	Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	3 5	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	1.5 3	Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	75	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.67	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3 AMPERES

NPN SILICON POWER TRANSISTORS

450 VOLTS
75 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.





DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.19	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = 850 V, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 V, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100° C)	I_{CEV}	– –	– –	0.5 2.5	mAdc
Collector Cutoff Current (V_{CE} = 850 V, R_{BE} = 50 Ω, T_C = 100° C)	I_{CER}	–	–	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	–	–	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 2 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	6	–	–	–
Collector-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 0.5 Adc) (I_C = 3 Adc, I_B = 0.75 Adc) (I_C = 2 Adc, I_B = 0.5 Adc, T_C = 100° C)	$V_{CE(sat)}$	– – –	– – –	1.0 3.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 0.5 Adc) (I_C = 2 Adc, I_B = 0.5 Adc, T_C = 100° C)	$V_{BE(sat)}$	– –	– –	1.5 1.5	Vdc

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)

Delay Time	(V_{CC} = 250 Adc, I_C = 2 A, I_{B1} = 0.5 Adc, t_p = 30 μs, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5.0 Vdc)	t_d	–	0.03	0.05	μs
Rise Time		t_r	–	0.10	0.40	
Storage Time		t_s	–	0.40	1.50	
Fall Time		t_f	–	0.175	0.50	

Inductive Load, Clamped (Table 1)

Storage Time	($I_{C(pk)}$ = 2 A, I_{B1} = 0.5 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V)	(T_J = 100° C)	t_{sv}	–	0.70	2.0	μs
Crossover Time			t_c	–	0.28	0.50	
Fall Time			t_{fi}	–	0.15	0.35	
Storage Time		(T_J = 25° C)	t_{sv}	–	0.40	–	
Crossover Time			t_c	–	0.15	–	
Fall Time			t_{fi}	–	0.10	–	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

$$\beta_f = \frac{I_C}{I_B}$$

BUS46P

SWITCHMODE II SERIES
NPN SILICON POWER TRANSISTORS

The BUS 46P transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line-operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
- 100 ns Inductive Fall Time—25°C (Typ)
- 150 ns Inductive Crossover Time—25°C (Typ)
- 400 ns Inductive Storage Time—25°C (Typ)

Operating Temperature Range −65 to +150°C

100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

5 AMPERES

NPN SILICON POWER TRANSISTORS

450 VOLTS
80 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUS 46P	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	6	Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	5 8	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	2 4	Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	80	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = 850 V, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 V, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	– –	0.5 2.5	mAdc
Collector Cutoff Current (V_{CE} = 850 V, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	–	–	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$		See Figure 12		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 13		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 3.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	7.0	–	–	–
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) (I_C = 5.0 Adc, I_B = 1.0 Adc) (I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)	$V_{CE(sat)}$	– – –	– – –	1.0 3.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) (I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)	$V_{BE(sat)}$	– –	– –	1.5 1.5	Vdc
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 Khz)	C_{ob}	–	–	250	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)

Delay Time	(V_{CC} = 250 Adc, I_C = 3.0 Adc, I_{B1} = 0.4 Adc, t_p = 30 μs, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5.0 Vdc)	t_d	–	0.03	0.05	μs
Rise Time		t_r	–	0.10	0.40	
Storage Time		t_s	–	0.40	1.50	
Fall Time		t_f	–	0.175	0.50	

Inductive Load, Clamped (Table 1)

Storage Time	($I_{C(pk)}$ = 3.0 A, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V)	(T_J = 100°C)	t_{sv}	–	0.70	2.0	μs
Crossover Time			t_c	–	0.28	0.50	
Fall Time			t_{fi}	–	0.15	0.30	
Storage Time		(T_J = 25°C)	t_{sv}	–	0.40	–	
Crossover Time			t_c	–	0.15	–	
Fall Time			t_{fi}	–	0.10	–	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

$$\beta_f = \frac{I_C}{I_B}$$

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

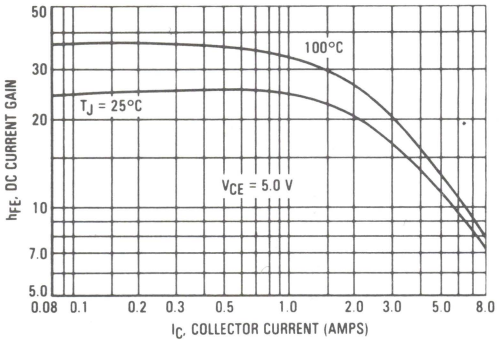

FIGURE 2 — COLLECTOR SATURATION REGION

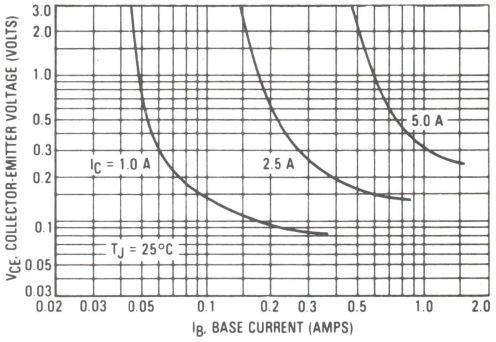

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

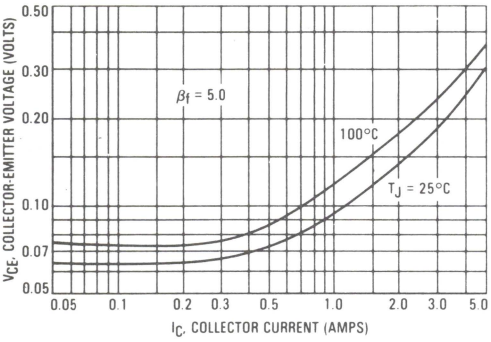

FIGURE 4 — BASE-EMITTER VOLTAGE

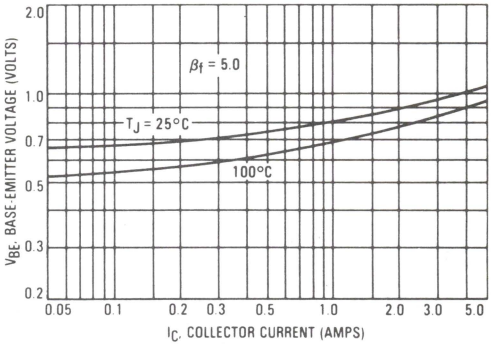

FIGURE 5 — COLLECTOR CUTOFF REGION

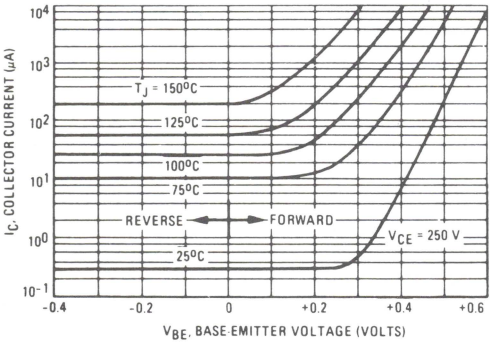

FIGURE 6 — CAPACITANCE

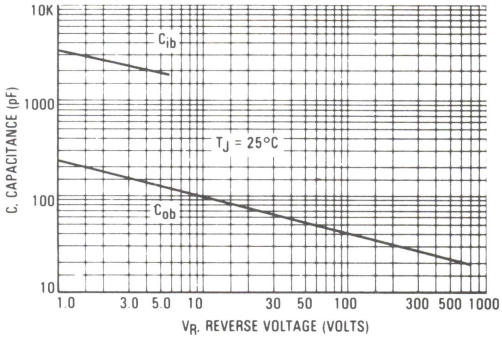

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	 PW Varied to Attain I_C = 100 mA	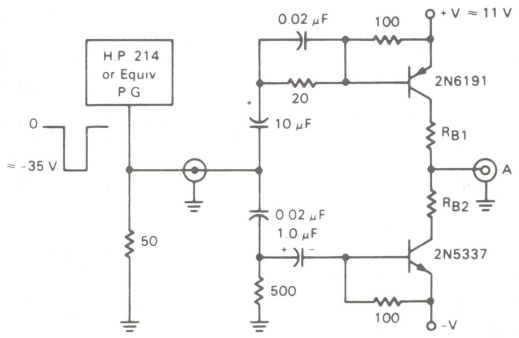 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $BV_{CEO(sus)}$, R2 = ∞	 I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT  See Above for Detailed Conditions OUTPUT WAVEFORMS  t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 

3

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

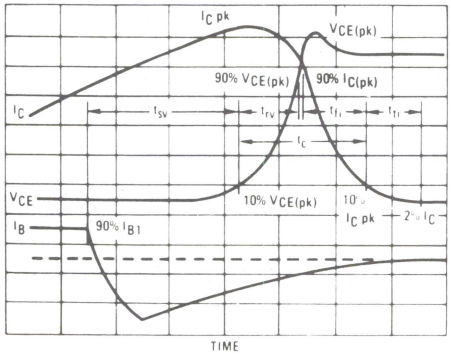

FIGURE 8 — PEAK REVERSE CURRENT

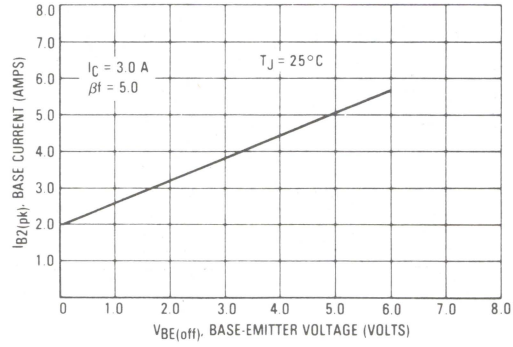

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 — STORAGE TIME

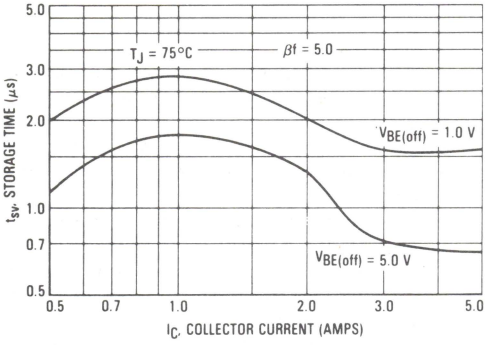

FIGURE 10 — CROSSOVER AND FALL TIMES

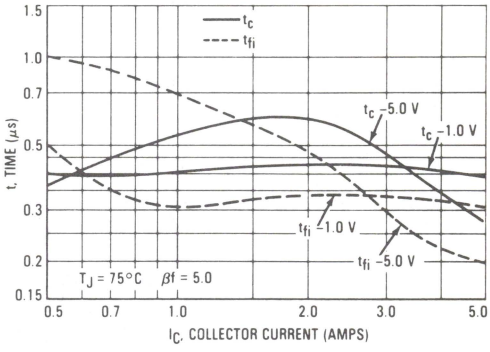

FIGURE 11 — THERMAL RESPONSE

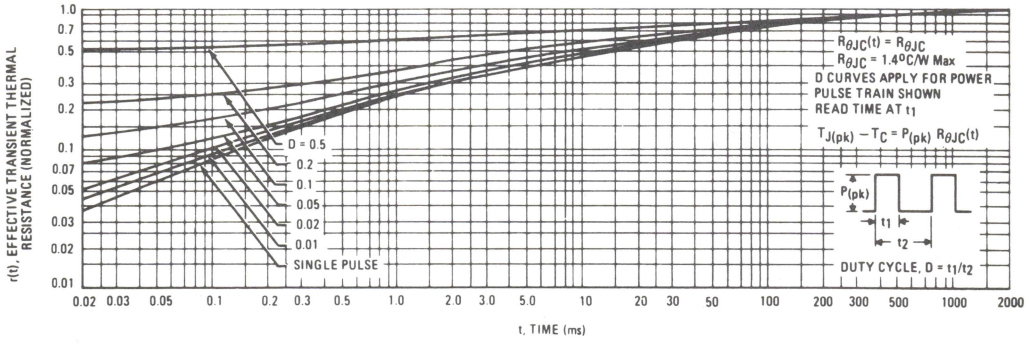

3

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

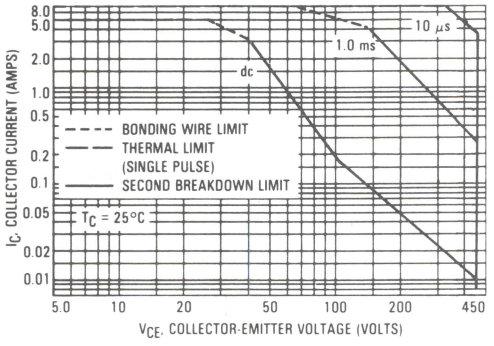

FIGURE 13 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

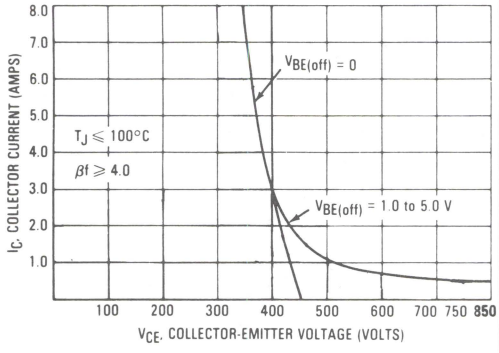

FIGURE 14 — POWER DERATING

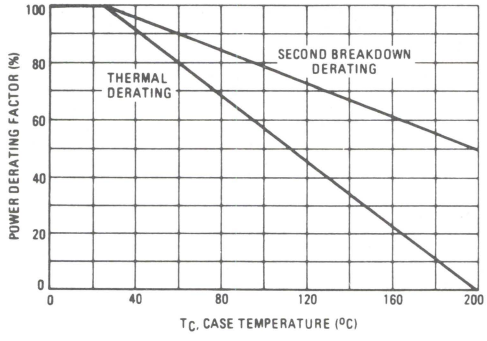

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

BUS47
BUS47A

SWITCHMODE II▲ SERIES
NPN SILICON POWER TRANSISTORS

The BUS 47 and BUS 47A transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:



- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
60 ns Inductive Fall Time—25°C (Typ)
120 ns Inductive Crossover Time—25°C (Typ)

Operating Temperature Range −65 to +200°C
100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

9 AMPERES
NPN SILICON POWER TRANSISTORS
400 AND 450 VOLTS (BVCEO)
150 WATTS
850 – 1000 V (BVCES)

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BUS 47	BUS 47A	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	450	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	1000	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current – Continuous – Peak (1) – Overload	I_C I_{CM} I_{OI}	9 18 36		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	5 10		Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	150 85.5 0.86		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

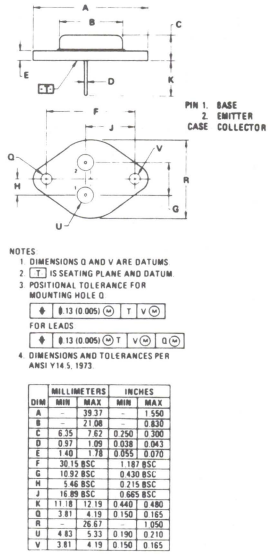

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ | 0.13 (0.005) M | T | V M
FOR LEADS
⌖ | 0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3 TYPE

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 200 mA, I_B = 0) L = 25 mH	BUS47 BUS47A	$V_{CEO(sus)}$	400 450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)		I_{CEV}	– –	– –	0.15 1.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 10 Ω)	T_C = 25°C T_C = 125°C	I_{CER}	–	–	0.4 3.0	mAdc
Emitter Cutoff Current (V_{EB} = 5 Vdc, I_C = 0)		I_{EBO}	–	–	0.1	mAdc
Emitter-base breakdown Voltage (I_E = 50 mA - I_C = 0)		B_{VEBO}	7.0	–	–	Vdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 6 Adc, V_{CE} = 5 Vdc) (I_C = 5 Adc, V_{CE} = 5 V)	BUS47 BUS47A	h_{FE}	7	–	–	
Collector-Emitter Saturation Voltage (I_C = 6 Adc, I_B = 1.2 Adc) (I_C = 9 Adc, I_B = 1.8 Adc) (I_C = 6 Adc, I_B = 1.2 Adc, T_C = 100°C) (I_C = 5 Adc, I_B = 1 Adc) (I_C = 8 Adc, I_B = 1.6 Adc) (I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)	 BUS47 BUS47A 	$V_{CE(sat)}$	 – – – – – –	 – – – – – –	 1.5 5.0 2.5 1.5 5.0 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 6 Adc, I_B = 1.2 Adc) (I_C = 6 Adc, I_B = 1.2 Adc, T_C = 100°C) (I_C = 5 Adc, I_B = 1 Adc) (I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)	 BUS47 BUS47A	$V_{BE(sat)}$	 – – – –	 – – – –	 1.6 1.6 1.6 1.6	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 Khz)		C_{ob}	–	–	300	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)

Delay Time	(V_{CC} = 250 Vdc, I_C = 6 A, I_{B1} = 1.2 A, t_p = 30 μs, Duty Cycle ≤ 2 %, $V_{BE(off)}$ = 5 V)	t_d	–	0.05	0.2	μs
Rise Time		t_r	–	0.5	0.8	
Storage Time		t_s	–	1	2.0	
Fall Time		t_f	–	0.2	0.4	

Inductive Load, Clamped (Table 1)

Storage Time	($I_{C(pk)}$ = 6 A, I_{B1} = 1.2 A, $V_{BE(off)}$ = 5 V, $V_{CE(c1)}$ = 250 V)	BUS47	(T_C = 25°C)	t_{sv}	–	0.9	–	μs
Fall Time				t_{fi}	–	0.06	–	
Storage Time		BUS47A	(T_C = 100°C)	t_{sv}	–	1.0	2.5	
Crossover Time	$I_{C(pk)}$ = 5 A, I_{B1} = 1 A			t_c	–	0.2	0.5	
Fall Time				t_{fi}	–	0.1	0.3	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

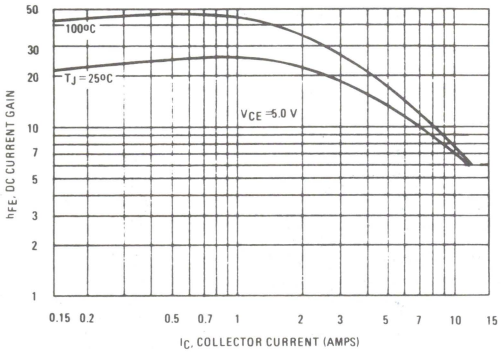

FIGURE 2 – COLLECTOR SATURATION REGION

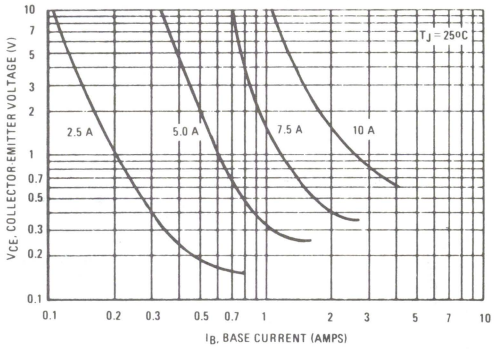

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

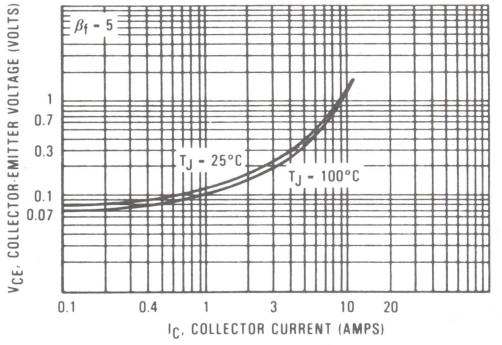

FIGURE 4 – BASE-EMITTER VOLTAGE

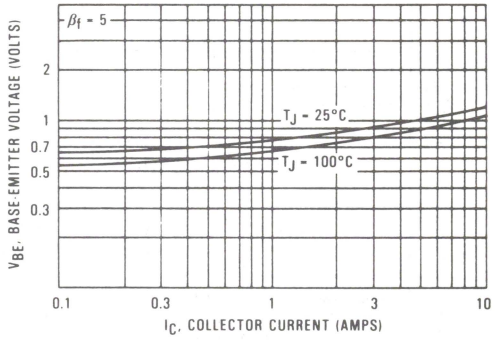

FIGURE 5 – COLLECTOR CUTOFF REGION

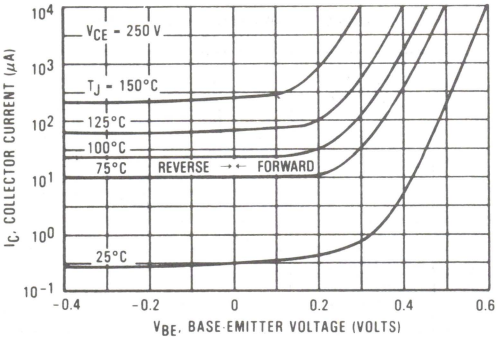

FIGURE 6 – CAPACITANCE

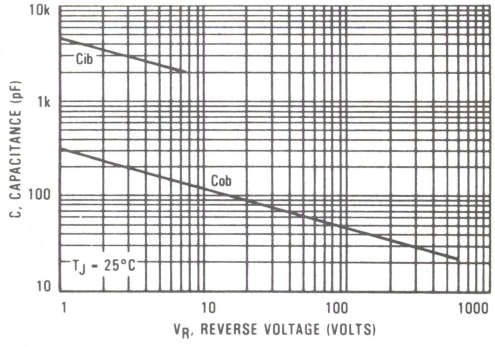

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+10 V, 33 2w, D1, 22uF, 2N6438, MR854, 160, 680pF, 2N5859, 220, 100, D1, D2, D3, D4, 1N4934, 1uF, I_{b1} Adjust, I_{b2} Adjust, $\frac{di_b}{dt}$ Adjust, 2N3763, 680pF, 680 pF, 22, D4, MR854, 160, 33 2w, D3, 22uF, 2N6339, Vcc pulses ≈ 3%	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} 180 μH R_{coil} 0.05 Ω V_{CC} 20 V V_{clamp} 250 V R_B adjusted to attain desired I_{B1}	V_{CC} 250 V R_L 83 Ω Pulse Width 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 2, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_1 Clamped, t_1, t_f, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

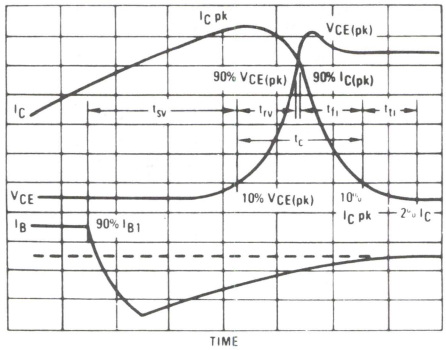

FIGURE 8 – PEAK-REVERSE CURRENT

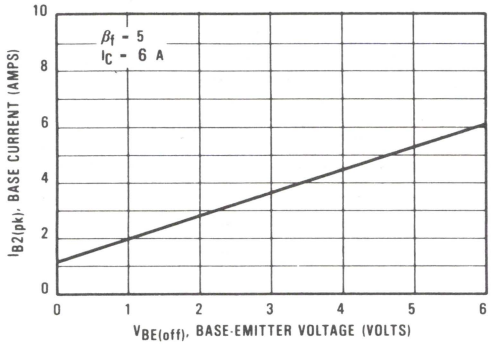

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10−90% V_{clamp}
t_{fi} = Current Fall Time, 90−10% I_C
t_{ti} = Current Tail, 10−2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME

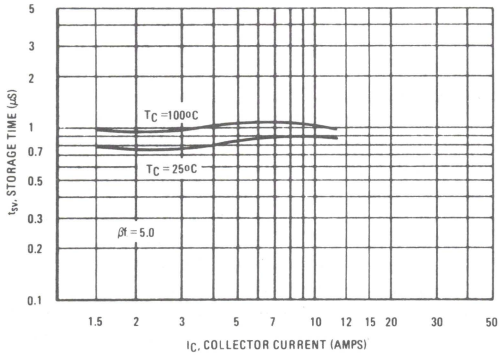

FIGURE 10 – CROSSOVER AND FALL TIMES

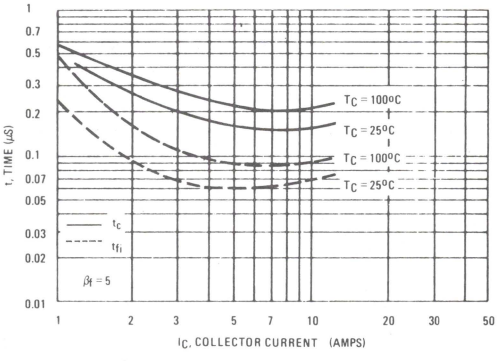

FIGURE 11a – TURN-OFF TIMES vs FORCED GAIN

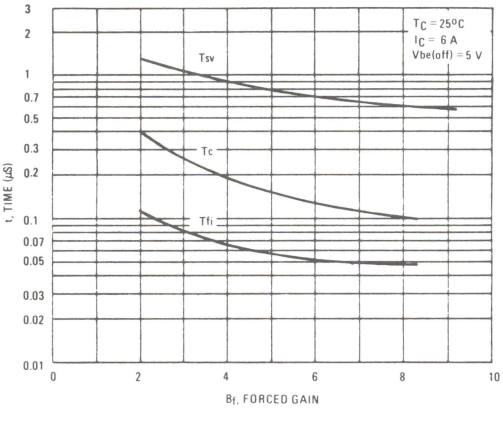

FIGURE 11b – TURN-OFF TIMES vs I_{b2}/I_{b1}

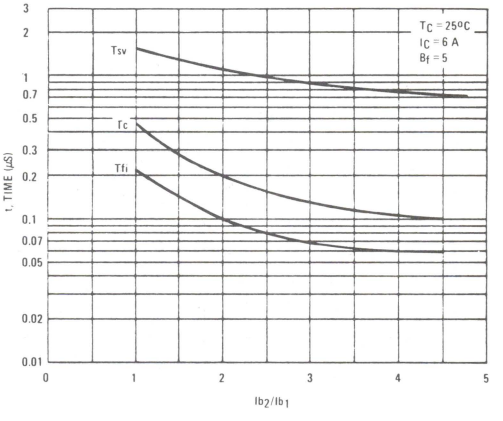

3

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

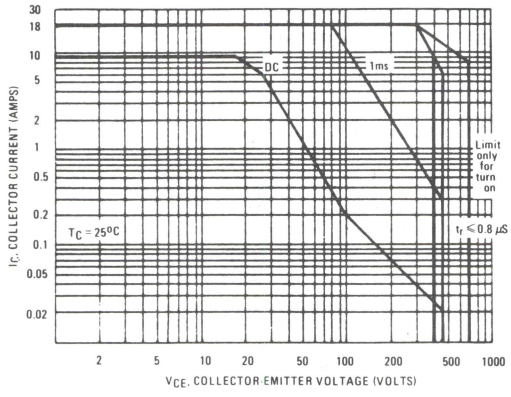

FIGURE 13 – REVERSE BIAS SAFE OPERATING AREA

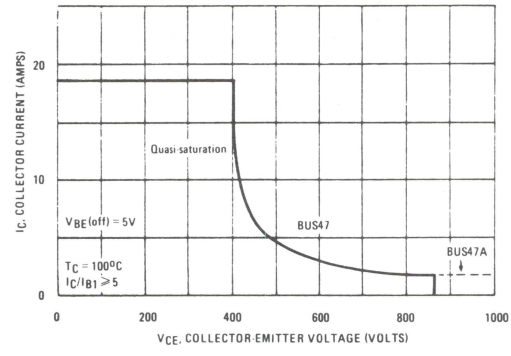

FIGURE 14 – POWER DERATING

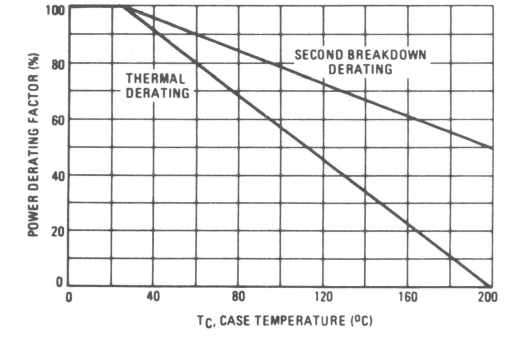

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

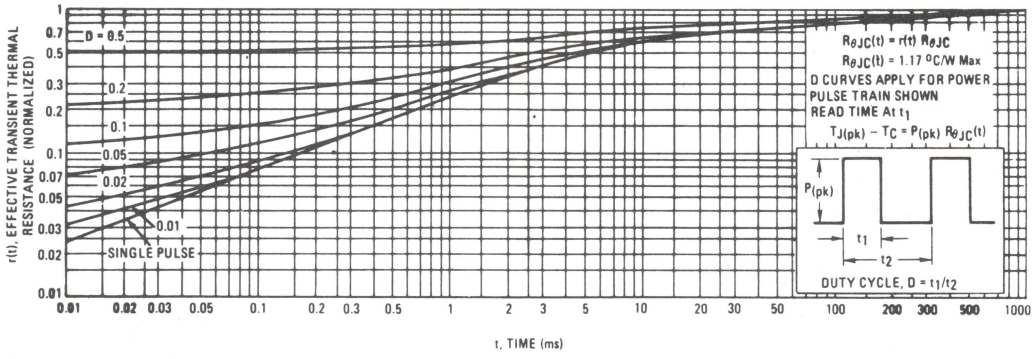

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

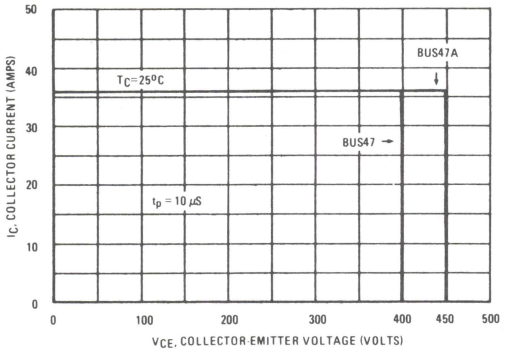

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 17) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 17 -- OVERLOAD SOA TEST CIRCUIT



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

3

BUS47P
BUS47AP

SWITCHMODE II▲ SERIES
NPN SILICON POWER TRANSISTORS

The BUS 47P/BUS 47AP transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
60 ns Inductive Fall Time—25°C (Typ)
120 ns Inductive Crossover Time—25°C (Typ)

Operating Temperature Range −65 to +175°C
100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

9 AMPERES
NPN SILICON POWER TRANSISTORS
400 AND 450 VOLTS (BVCEO)
128 WATTS
850 – 1000 V (BVCES)



MAXIMUM RATINGS

Rating	Symbol	BUS 47P	BUS 47AP	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	1000	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current — Continuous — Peak (1) — Overload	I_C I_{CM}	9 18 36		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	5 10		Adc
Total Power Dissipation — T_C = 25°C — T_C = 100°C Derate above 25°C	P_D	128 64.5 0.86		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	3.94	4.19	0.155	0.165

CASE 340-01
TO-218AC

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) ($I_C = 200$ mA, $I_B = 0$) L = 25 mH	BUS47P BUS47AP	$V_{CEO(sus)}$	400 450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)} = 1.5$ Vdc) (V_{CEV} = Rated Value, $V_{BE(off)} = 1.5$ Vdc, $T_C = 125°C$)		I_{CEV}	– –	– –	0.15 1.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, $R_{BE} = 10\ \Omega$)	$T_C = 25°C$ $T_C = 125°C$	I_{CER}	– –	– –	0.4 3.0	mAdc
Emitter Cutoff Current ($V_{EB} = 5$ Vdc, $I_C = 0$)		I_{EBO}	–	–	0.1	mAdc
Emitter-base breakdown Voltage ($I_E = 50$ mA - $I_C = 0$)		B_{VEBO}	7.0	–	–	Vdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain ($I_C = 6$ Adc, $V_{CE} = 5$ Vdc) ($I_C = 5$ Adc, $V_{CE} = 5$ V)	BUS47P BUS47AP	h_{FE}	7	–	–	
Collector-Emitter Saturation Voltage ($I_C = 6$ Adc, $I_B = 1.2$ Adc) ($I_C = 9$ Adc, $I_B = 1.8$ Adc) ($I_C = 6$ Adc, $I_B = 1.2$ Adc, $T_C = 100°C$) ($I_C = 5$ Adc, $I_B = 1$ Adc) ($I_C = 8$ Adc, $I_B = 1.6$ Adc) ($I_C = 5$ Adc, $I_B = 1$ Adc, $T_C = 100°C$)	 BUS47P BUS47AP 	$V_{CE(sat)}$	 – – – – – –	 – – – – – –	 1.5 5.0 2.5 1.5 5.0 2.5	Vdc
Base-Emitter Saturation Voltage ($I_C = 6$ Adc, $I_B = 1.2$ Adc) ($I_C = 6$ Adc, $I_B = 1.2$ Adc, $T_C = 100°C$) ($I_C = 5$ Adc, $I_B = 1$ Adc) ($I_C = 5$ Adc, $I_B = 1$ Adc, $T_C = 100°C$)	 BUS47P BUS47AP	$V_{BE(sat)}$	 – – – –	 – – – –	 1.6 1.6 1.6 1.6	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance ($V_{CB} = 10$ Vdc, $I_E = 0$, $f_{test} = 100$ Khz)		C_{ob}	–	–	300	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	($V_{CC} = 250$ Vdc, $I_C = 6$ A, $I_{B1} = 1.2$ A, $t_p \approx 30\ \mu s$, Duty Cycle $\leq 2\%$, $V_{BE(off)} = 5$ V)	t_d	–	0.05	0.2	μs
Rise Time		t_r	–	0.5	0.8	
Storage Time		t_s	–	1	2.0	
Fall Time		t_f	–	0.2	0.4	
Inductive Load, Clamped (Table 1)						
Storage Time	($I_{C(pk)} = 6$ A, $I_{B1} = 1.2$ A, $V_{BE(off)} = 5$ V, $V_{CE(c1)} = 250$ V) $I_{C(pk)} = 5$ A, $I_{B1} = 1$ A	t_{sv}	–	0.9	–	μs
Fall Time	BUS47P ($T_C = 25°C$)	t_{fi}	–	0.06	–	
Storage Time	BUS47AP ($T_C = 100°C$)	t_{sv}	–	1.0	2.5	
Crossover Time		t_c	–	0.2	0.5	
Fall Time		t_{fi}	–	0.1	0.3	

(1) Pulse Test: PW = 300 μs, Duty Cycle $\leq 2\%$.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

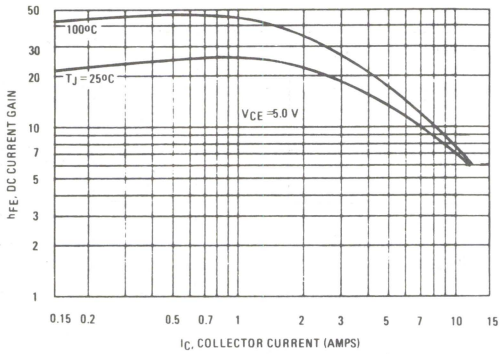

FIGURE 2 – COLLECTOR SATURATION REGION

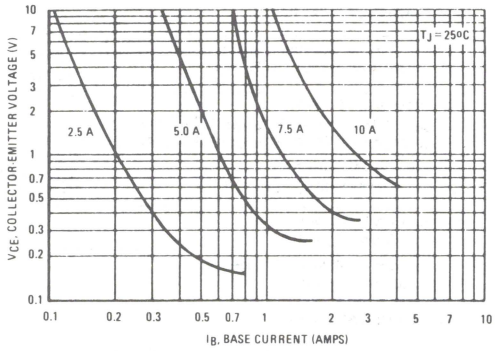

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

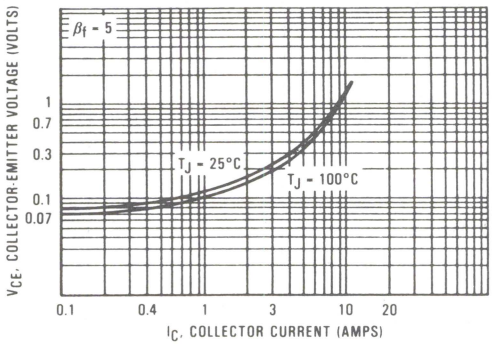

FIGURE 4 – BASE-EMITTER VOLTAGE

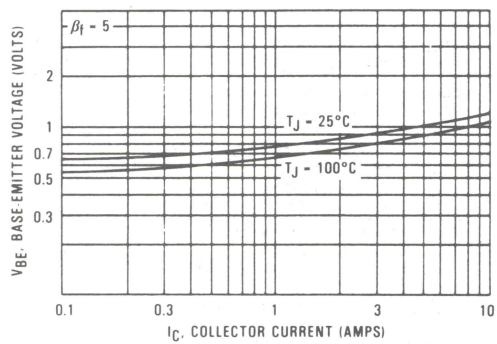

FIGURE 5 – COLLECTOR CUTOFF REGION

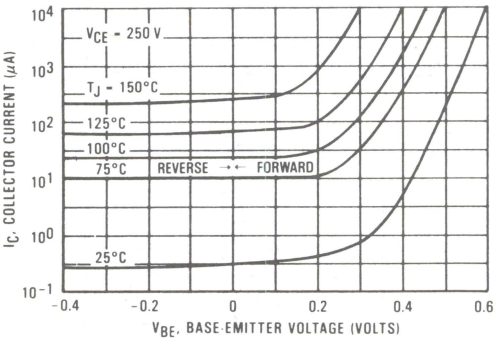

FIGURE 6 – CAPACITANCE

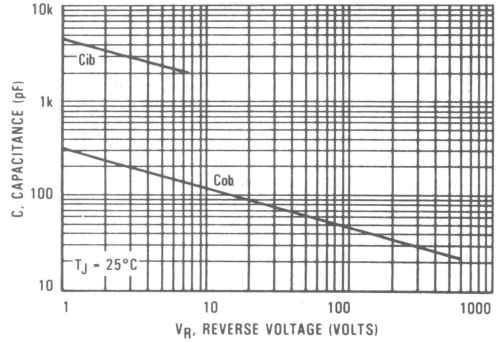

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	pulses, δ = 3% 220, 100, 680 pF, 2N5859, 2N3763 D1, D2, D3, D4, 1N4934 33 2w, 160, 680pF, 22, 22uF, D1, D3, D4 2N6438, MR854, 2N6339 1uF, I_{b1} Adjust, I_{b2} Adjust, dTb Adjust, dt +10 V, Vcc	TURN ON TIME I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, See Above for Detailed Conditions, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t V_{CE}, V_{CE} or V_{clamp}, Time, t_2, t t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

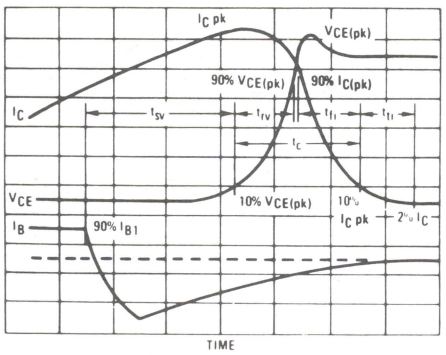

FIGURE 8 – PEAK-REVERSE CURRENT

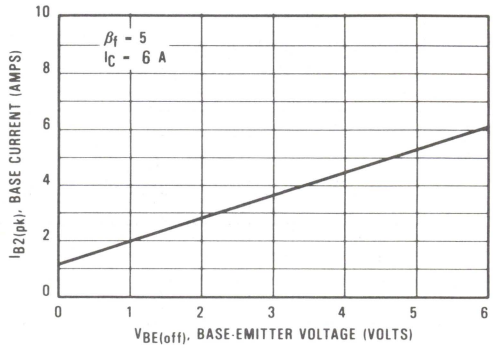

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME

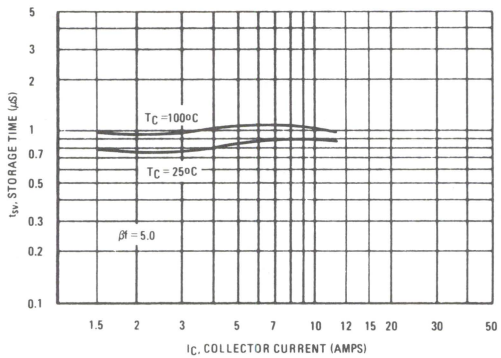

FIGURE 10 – CROSSOVER AND FALL TIMES

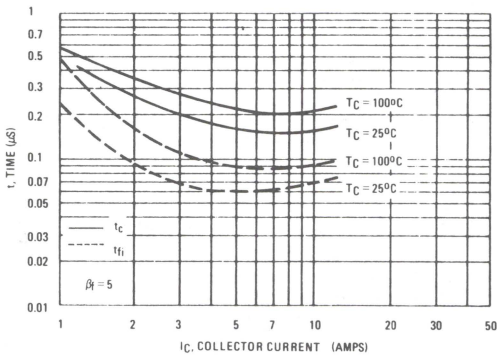

FIGURE 11a – TURN-OFF TIMES vs FORCED GAIN

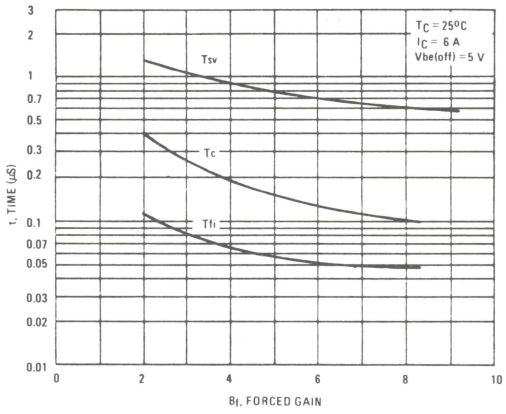

FIGURE 11b – TURN-OFF TIMES vs I_{b2}/I_{b1}

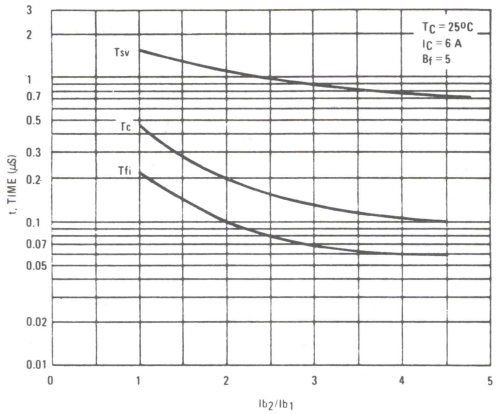

SAFE OPERATING AREA INFORMATION

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

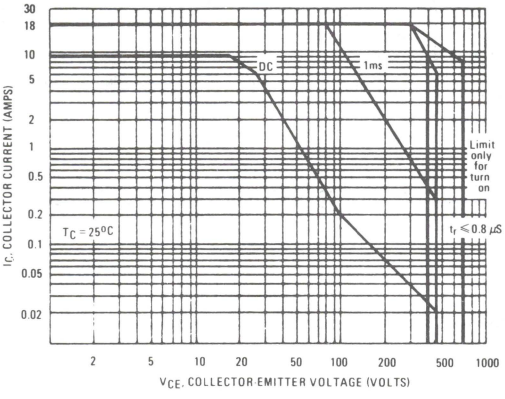

FIGURE 13 – REVERSE BIAS SAFE OPERATING AREA

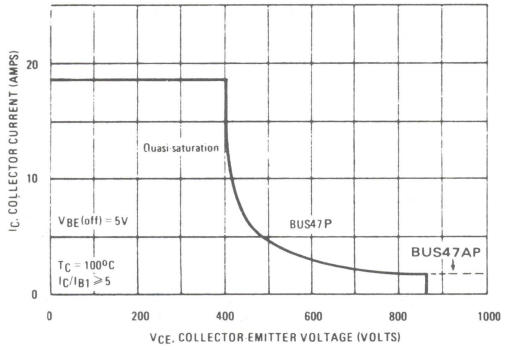

FIGURE 14 – POWER DERATING

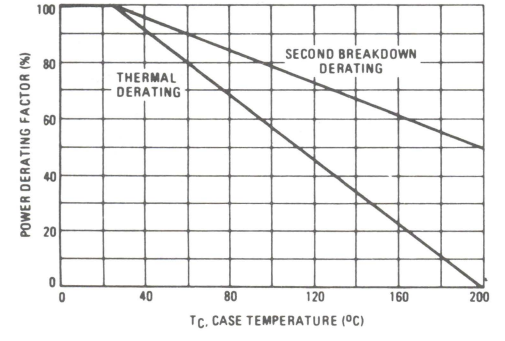

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

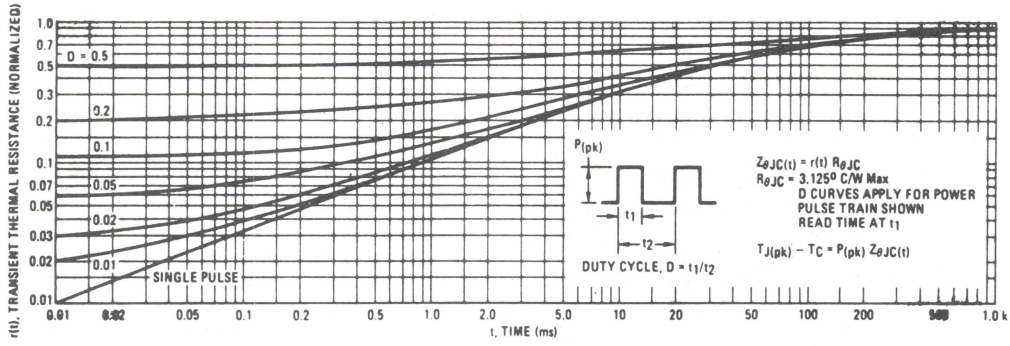

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

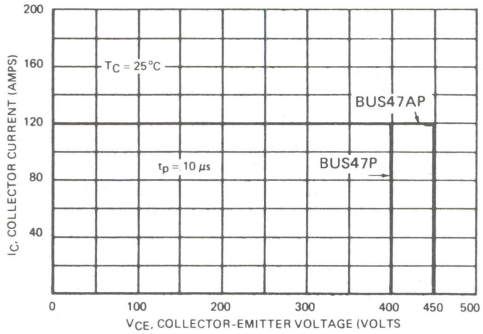

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 17) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 17 – OVERLOAD SOA TEST CIRCUIT



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

3

BUS48
BUS48A

SWITCHMODE II▲ SERIES
NPN SILICON POWER TRANSISTORS

The BUS 48 and BUS 48A transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
60 ns Inductive Fall Time – 25°C (Typ)
120 ns Inductive Crossover Time – 25°C (Typ)

Operating Temperature Range –65 to +200°C
100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

15 AMPERES
NPN SILICON
POWER TRANSISTORS
400 and 450 VOLTS (BVCEO)
850 – 1000 VOLTS (BVCES)
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BUS 48	BUS 48A	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	1000	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current – Continuous – Peak(1) – Overload	I_C I_{CM} I_{OL}	15 30 60		Adc
Base Current – Continuous – Peak(1)	I_B I_{BM}	5 20		Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	175 100 1.0		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES
1 DIMENSIONS Q AND V ARE DATUMS
2 T IS SEATING PLANE AND DATUM
3 POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ Ø 13 (0.005) M T V M
FOR LEADS
⌖ Ø 13 (0.005) M T V M Q M
4 DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 200 mA, I_B = 0) L = 25 mH	BUS48 BUS48A	$V_{CEO(sus)}$	400 450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)		I_{CEV}	– –	– –	0.2 2.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 10 Ω)	T_C = 25°C T_C = 125°C	I_{CER}	–	–	0.5 3.0	mAdc
Emitter Cutoff Current (V_{EB} = 5 Vdc, I_C = 0)		I_{EBO}	–	–	0.1	mAdc
Emitter-base breakdown Voltage (I_E = 50 mA - I_C = 0)		B_{VEBO}	7.0	–	–	Vdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased Clamped Inductive SOA with Base Reverse Biased		$I_{S/b}$ RBSOA	See Figure 12 See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 10 Adc, V_{CE} = 5 Vdc) (I_C = 8 Adc, V_{CE} = 5 V)	BUS48 BUS48A	h_{FE}	8	–	–	
Collector-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 2 Adc) (I_C = 15 Adc, I_B = 3 Adc) (I_C = 10 Adc, I_B = 2 Adc, T_C = 100°C) (I_C = 8 Adc, I_B = 1.6 Adc) (I_C = 12 Adc, I_B = 2.4 Adc) (I_C = 8 Adc, I_B = 1.6 Adc, T_C = 100°C)	 BUS48 BUS48A 	$V_{CE(sat)}$	 – – – – – –	 – – – – – –	 1.5 5.0 2.0 1.5 5.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 2 Adc) (I_C = 10 Adc, I_B = 2 Adc, T_C = 100°C) (I_C = 8 Adc, I_B = 1.6 Adc) (I_C = 8 Adc, I_B = 1.6 Adc, T_C = 100°C)	 BUS48 BUS48A	$V_{BE(sat)}$	 – – – –	 – – – –	 1.6 1.6 1.6 1.6	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 Khz)		C_{ob}	–	–	350	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 2.0 A, t_p = 30 μs, Duty Cycle ≤ 2% , $V_{BE(off)}$ = 5 V)	t_d	–	0.1	0.2	μs
Rise Time		t_r	–	0.4	0.7	
Storage Time		t_s	–	1.3	2.0	
Fall Time		t_f	–	0.2	0.4	
Inductive Load, Clamped (Table 1)						
Storage Time	($I_{C(pk)}$ = 10 A, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5 V, $V_{CE(c1)}$ = 250 V)	(T_C = 25°C)	t_{sv}	–	1.3	–	μs
Fall Time			t_{fi}	–	0.06	–	
Storage Time		(T_C = 100°C)	t_{sv}	–	1.5	2.5	
Crossover Time			t_c	–	0.3	0.6	
Fall Time			t_{fi}	–	0.17	0.35	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

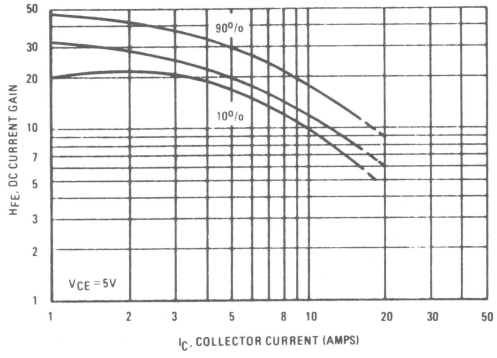

FIGURE 2 – COLLECTOR SATURATION REGION

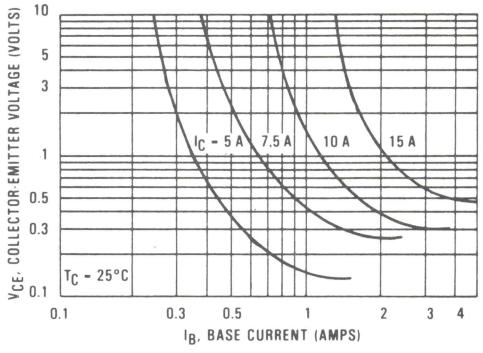

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

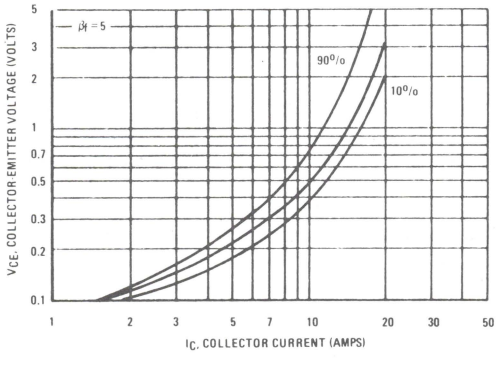

FIGURE 4 – BASE-EMITTER VOLTAGE

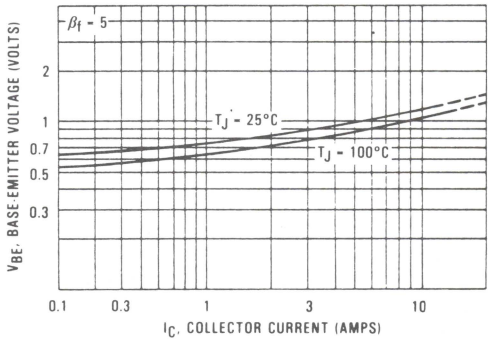

FIGURE 5 – COLLECTOR CUTOFF REGION

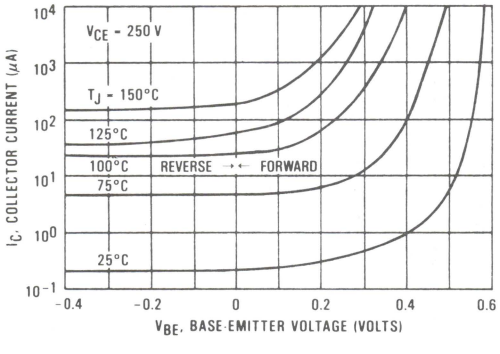

FIGURE 6 – CAPACITANCE

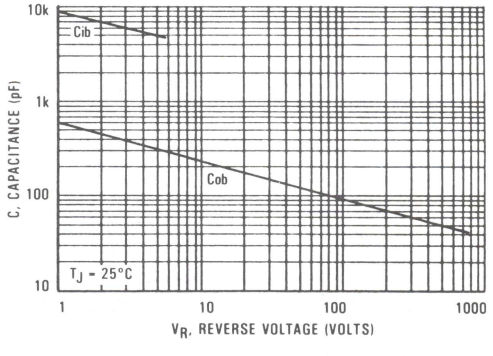

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+10 V, 33 2w, D1, 22uF, 2N6438, MRB54, 160, 680pF, 22, D3, 220, 100, 2N5859, D1 D2 D3 D4 1N4934, 1uF, I_{b1} Adjust, I_{b2} Adjust, dTb Adjust dt, 680pF, 2N3763, 100, 680 pF, pulses, D4, MRB54, 2N6339, D3, 22uF, Vcc	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, See Above for Detailed Conditions, V_{clamp}, R_{coil}, L_{coil}, V_{CC}, 2, R_S = 0.1 Ω OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t, t_1, t_f, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

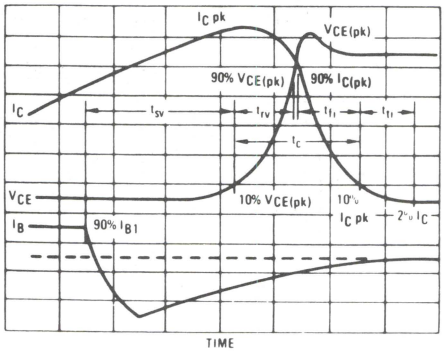

FIGURE 8 – PEAK-REVERSE CURRENT

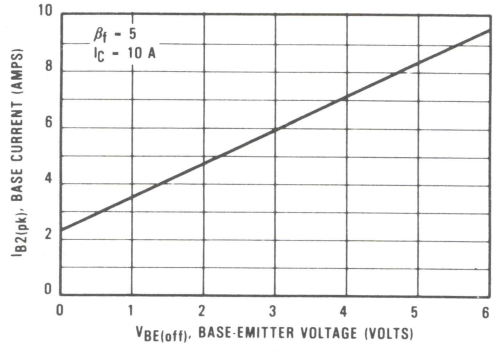

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME, Tsv

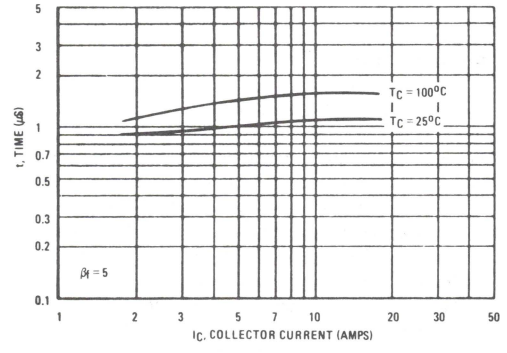

FIGURE 10 – CROSSOVER AND FALL TIMES

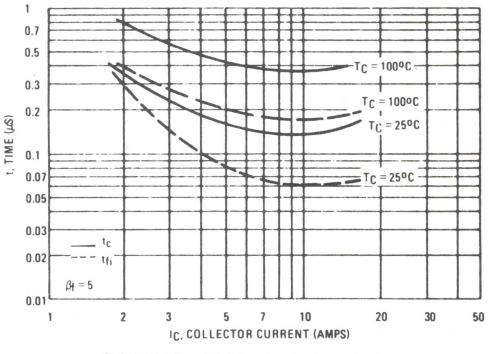

FIGURE 11a – TURN-OFF TIMES vs FORCED GAIN

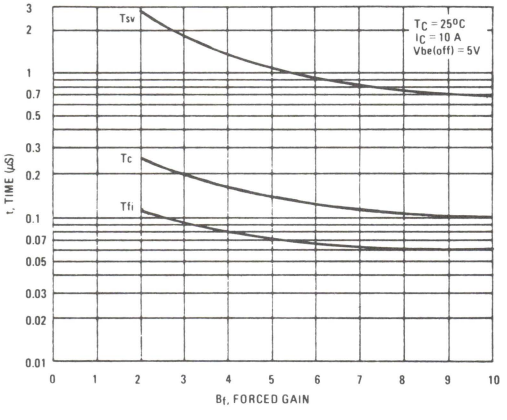

FIGURE 11b – TURN-OFF TIMES vs I_{b2}/I_{b1}

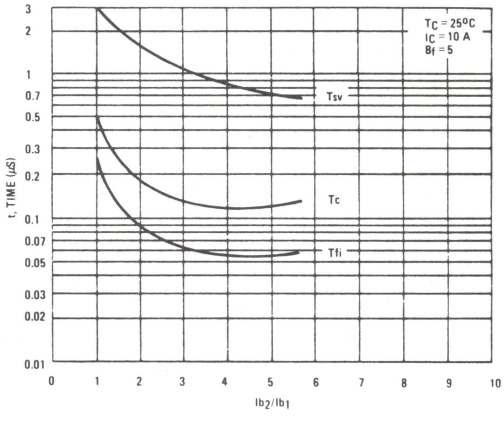

3

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

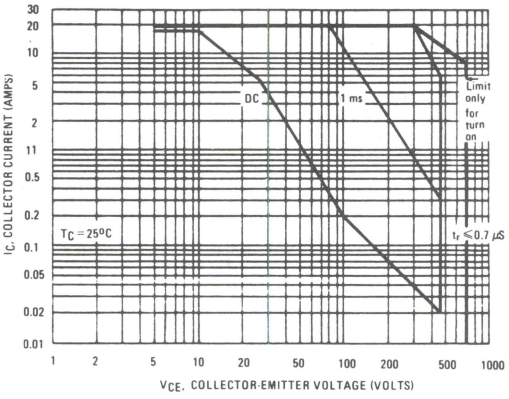

FIGURE 13 – REVERSE BIAS SAFE OPERATING AREA

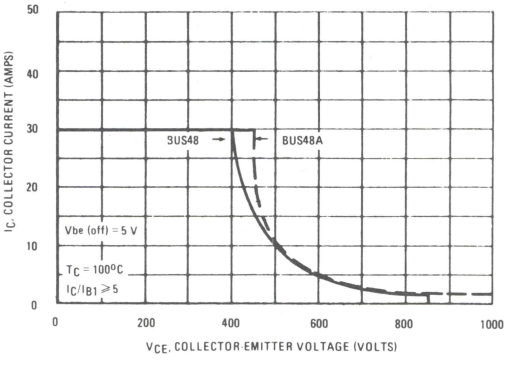

FIGURE 14 – POWER DERATING

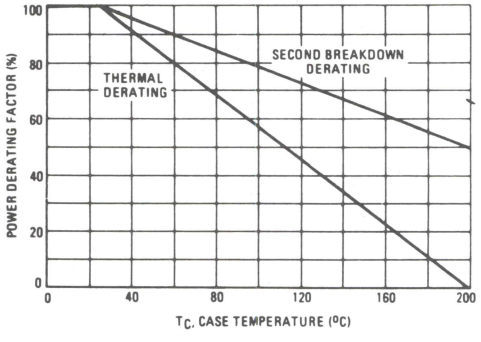

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

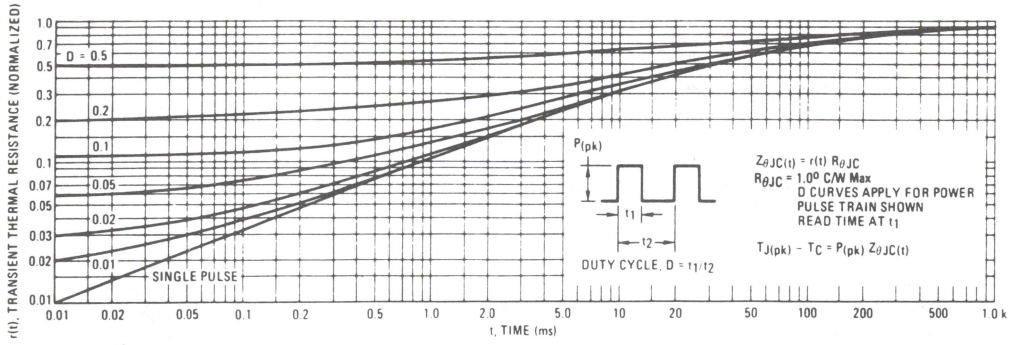

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

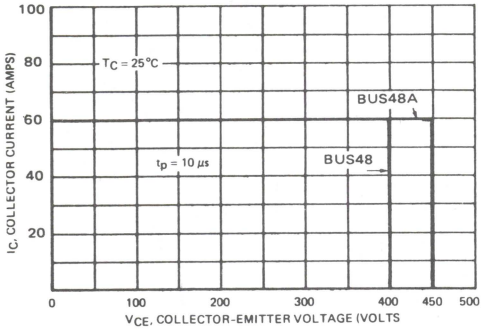

FIGURE 17 – I_C = f(dV/dt)

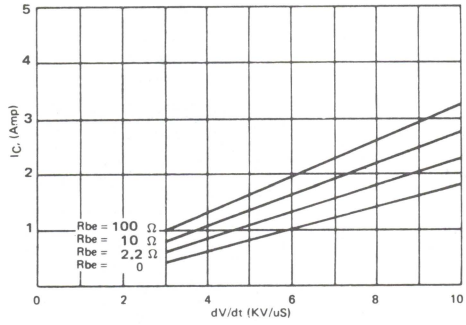

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 18) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 18 – OVERLOAD SOA TEST CIRCUIT



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

3

BUS48P
BUS48AP

SWITCHMODE II▲ SERIES
NPN SILICON POWER TRANSISTORS

The BUS 48P/BUS 48AP transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
60 ns Inductive Fall Time—25°C (Typ)
120 ns Inductive Crossover Time—25°C (Typ)

Operating Temperature Range −65 to +175°C
100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

15 AMPERES
NPN SILICON POWER TRANSISTORS
400 and 450 VOLTS (BVCEO)
850 – 1000 VOLTS (BVCES)
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	BUS 48P	BUS 48AP	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	1000	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current — Continuous — Peak(1) — Overload	I_C I_{CM} I_{O1}	15 30 60		Adc
Base Current — Continuous — Peak(1)	I_B I_{BM}	5 20		Adc
Total Power Dissipation — T_C = 25°C — T_C = 100°C Derate above 25°C	P_D	150 75 1.0		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	3.94	4.19	0.155	0.165

CASE 340-01
TO-218AC

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) ($I_C = 200$ mA, $I_B = 0$) L = 25 mH	BUS48P BUS48AP	$V_{CEO(sus)}$	400 450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)} = 1.5$ Vdc) (V_{CEV} = Rated Value, $V_{BE(off)} = 1.5$ Vdc, $T_C = 125°C$)		I_{CEV}	– –	– –	0.2 2.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, $R_{BE} = 10\ \Omega$)	$T_C = 25°C$ $T_C = 125°C$	I_{CER}	–	–	0.5 3.0	mAdc
Emitter Cutoff Current ($V_{EB} = 5$ Vdc, $I_C = 0$)		I_{EBO}	–	–	0.1	mAdc
Emitter-base breakdown Voltage ($I_E = 50$ mA - $I_C = 0$)		B_{VEBO}	7.0	–	–	Vdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain ($I_C = 10$ Adc, $V_{CE} = 5$ Vdc) ($I_C = 8$ Adc, $V_{CE} = 5$ V)	BUS48 BUS48A	h_{FE}	8	–	–	
Collector-Emitter Saturation Voltage ($I_C = 10$ Adc, $I_B = 2$ Adc) ($I_C = 15$ Adc, $I_B = 3$ Adc) ($I_C = 10$ Adc, $I_B = 2$ Adc, $T_C = 100°C$) ($I_C = 8$ Adc, $I_B = 1.6$ Adc) ($I_C = 12$ Adc, $I_B = 2.4$ Adc) ($I_C = 8$ Adc, $I_B = 1.6$ Adc, $T_C = 100°C$)	 BUS48P BUS48AP 	$V_{CE(sat)}$	 – – – – – –	 – – – – – –	 1.5 5.0 2.0 1.5 5.0 2.0	Vdc
Base-Emitter Saturation Voltage ($I_C = 10$ Adc, $I_B = 2$ Adc) ($I_C = 10$ Adc, $I_B = 2$ Adc, $T_C = 100°C$) ($I_C = 8$ Adc, $I_B = 1.6$ Adc) ($I_C = 8$ Adc, $I_B = 1.6$ Adc, $T_C = 100°C$)	 BUS48P BUS48AP	$V_{BE(sat)}$	 – – – –	 – – – –	 1.6 1.6 1.6 1.6	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance ($V_{CB} = 10$ Vdc, $I_E = 0$, $f_{test} = 100$ Khz)		C_{ob}	–	–	350	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	($V_{CC} = 250$ Vdc, $I_C = 10$ A, $I_{B1} = 2.0$ A, $t_p = 30\ \mu s$, Duty Cycle 2 , $V_{BE(off)} = 5$ V)	t_d	–	0.1	0.2	μs
Rise Time		t_r	–	0.4	0.7	
Storage Time		t_s	–	1.3	2.0	
Fall Time		t_f	–	0.2	0.4	
Inductive Load, Clamped (Table 1)						
Storage Time	($I_{C(pk)} = 10$ A, $I_{B1} = 2.0$ A, $V_{BE(off)} = 5$ V, $V_{CE(c1)} = 250$ V)	($T_C = 25°C$)	t_{sv}	–	1.3	–	μs
Fall Time			t_{fi}	–	0.06	–	
Storage Time		($T_C = 100°C$)	t_{sv}	–	1.5	2.5	
Crossover Time			t_c	–	0.3	0.6	
Fall Time			t_{fi}	–	0.17	0.35	

(1) Pulse Test: PW = 300 μs, Duty Cycle $\leq$ 2%.

3

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

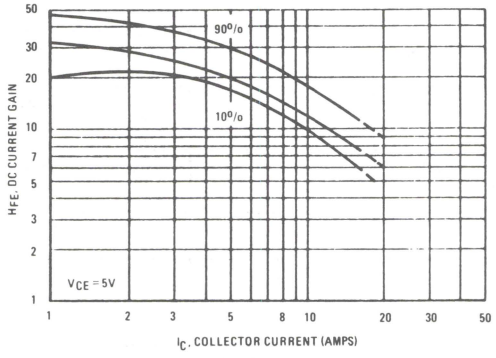

FIGURE 2 – COLLECTOR SATURATION REGION

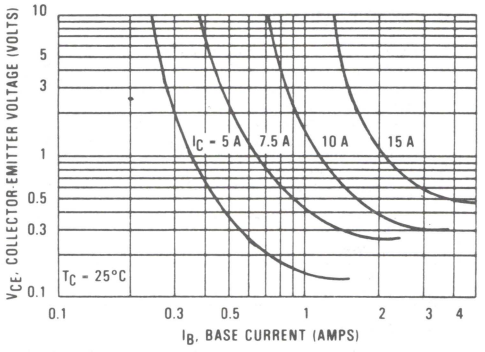

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

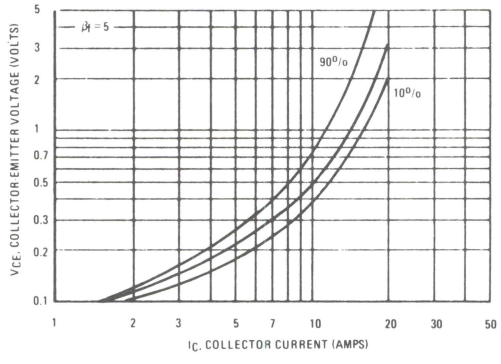

FIGURE 4 – BASE-EMITTER VOLTAGE

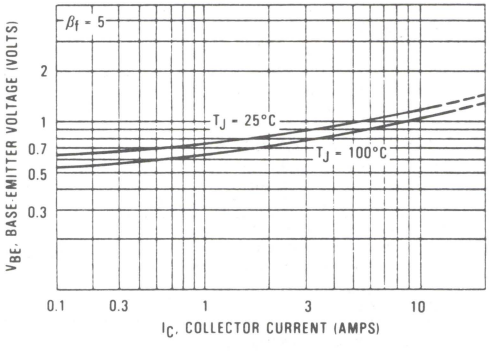

FIGURE 5 – COLLECTOR CUTOFF REGION

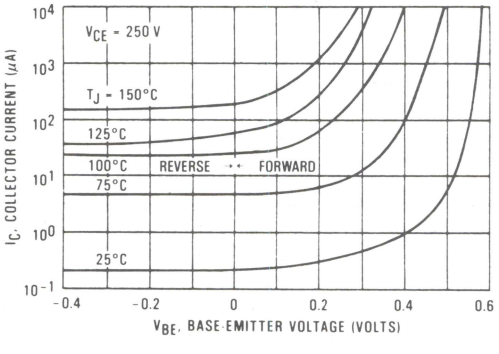

FIGURE 6 – CAPACITANCE

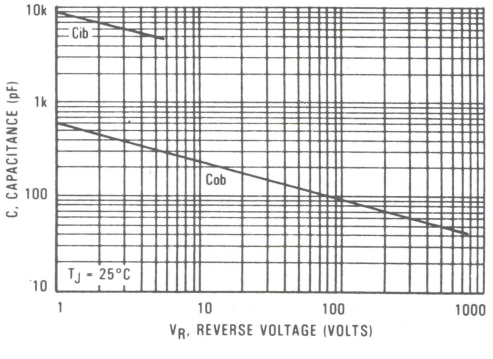

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+10 V, 33 2w, D1, 22uF, 2N6438, MR854, 160, 680pF, 2N5859, 220, 100, D1, D2, D3, D4 1N4934, D3, 22, 1uF, Ib1 Adjust, Ib2 Adjust, dTb Adjust dt, 680pF, 2N3763, 680 pF, 100, D4, 22, MR854, 160, 33 2w, D3, 22uF, 2N6339, Vcc pulses δ = 3%	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0 05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, See Above for Detailed Conditions, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

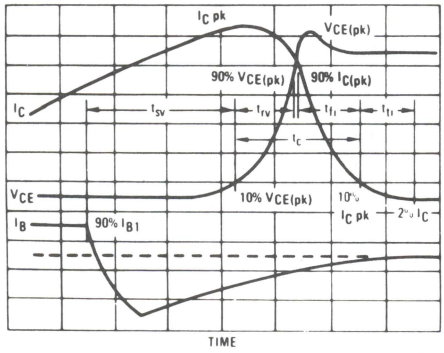

FIGURE 8 – PEAK-REVERSE CURRENT

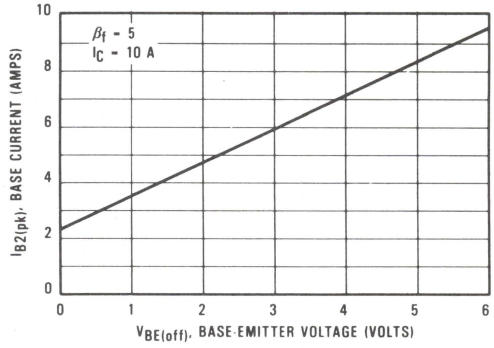

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME, Tsv

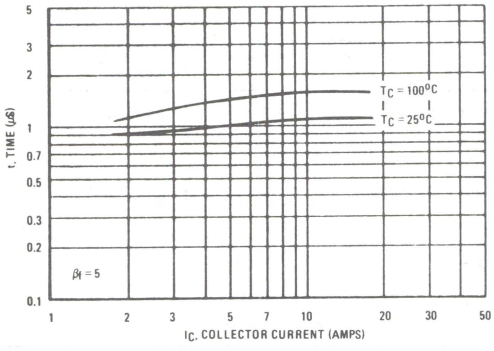

FIGURE 10 – CROSSOVER AND FALL TIMES

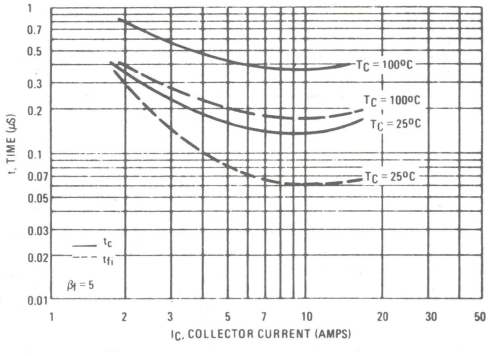

FIGURE 11a– TURN-OFF TIMES vs FORCED GAIN

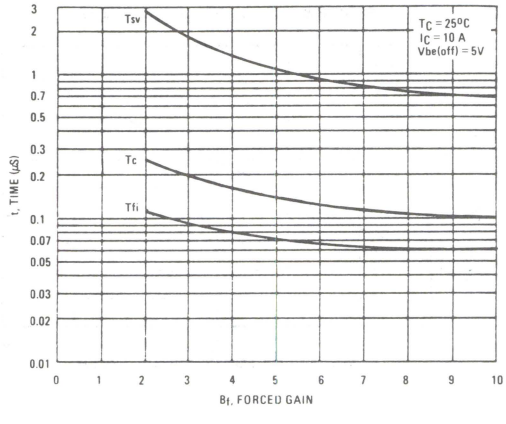

FIGURE 11b – TURN-OFF TIMES vs Ib_2/Ib_1

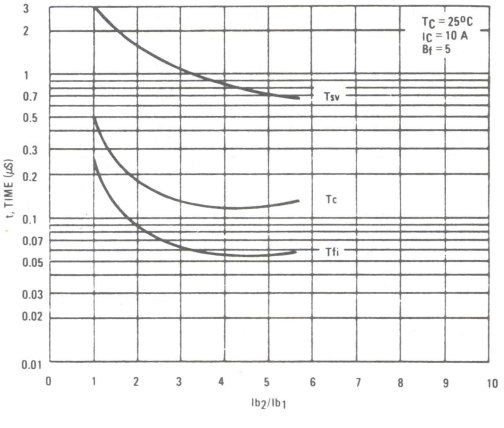

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

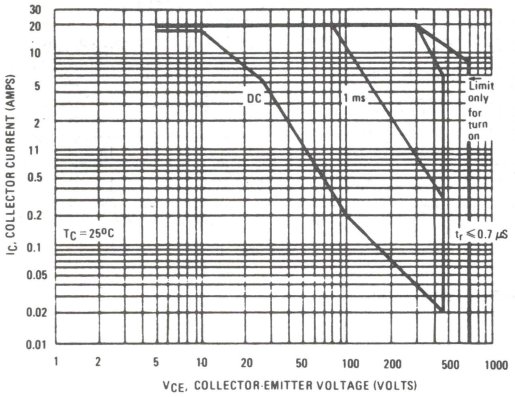

FIGURE 13 – REVERSE BIAS SAFE OPERATING AREA

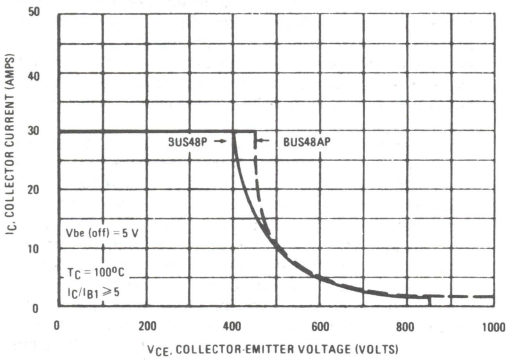

FIGURE 14 – POWER DERATING

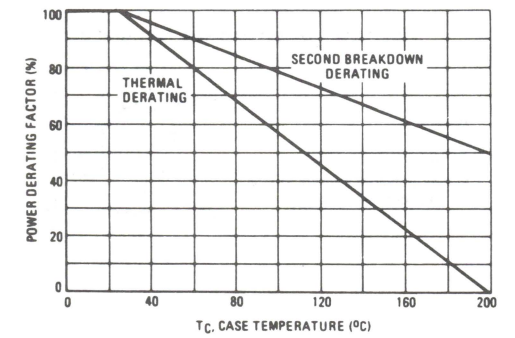

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

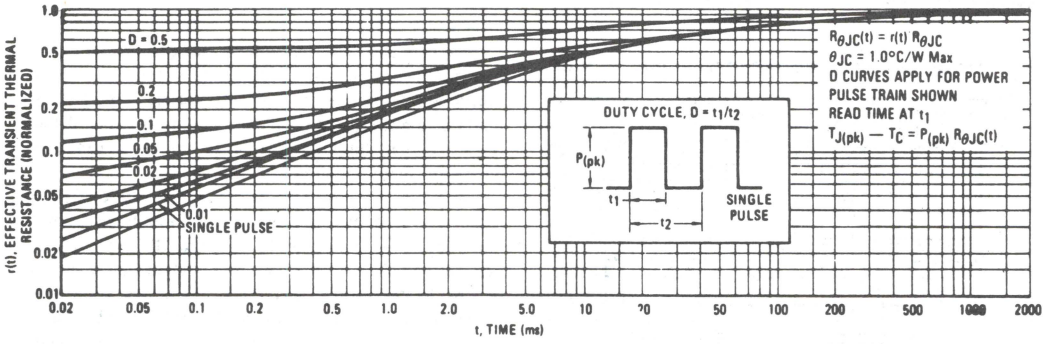

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

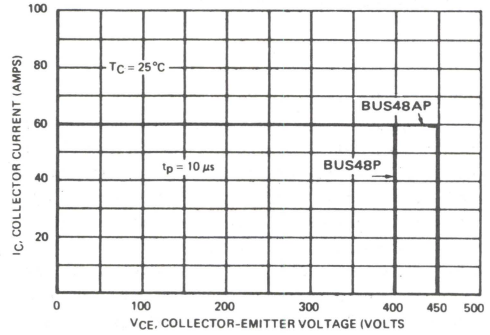

FIGURE 17 – $I_C = f(dV/dt)$

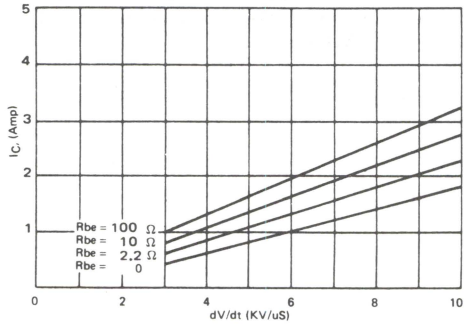

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 18) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 18 – OVERLOAD SOA TEST CIRCUIT



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

BUS50

ADVANCED INFORMATION
SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The BUS50 transistor is designed for low voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for battery switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls



Fast Turn-Off Times
300 ns Inductive Fall Time –25°C (Typ)

Operating Temperature Range –65 to +200°C
100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

70 AMPERES
NPN SILICON
POWER TRANSISTORS
125 VOLTS (BVCEO)
350 WATTS
200 V (BVCES)

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUS50	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	125	Vdc
Collector-Emitter Voltage	V_{CEV}	200	Vdc
Emitter Base Voltage	V_{EB}	7	Vdc
Collector Current – Continuous – Peak (1) – Overload	I_C I_{CM} I_{ol}	70 140	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	20	Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	350 200 2	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≦ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
⌀ ⌀13 (0.005) M T V M
FOR LEADS.
⌀ ⌀13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 1-05 TO-3 TYPE

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit.
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	125		Vdc
Collector Cutoff Current at Reverse Bias: (V_{CE} = 200 V, V_{BE} = −1.5 V) (V_{CE} = 200 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		.2 2	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 125 V)	I_{CEO}		1	mAdc
Emitter Cutoff Current (V_{EB} = 7 V)	I_{EBO}		.2	mAdc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 5 A, V_{CE} = 4 V) (I_C = 50 A, V_{CE} = 4 V)	h_{FE}	20 15		
Collector-Emitter Saturation Voltage (I_C = 35 A, I_B = 2 A) (I_C = 70 A, I_B = 7 A)	$V_{CE(sat)}$		1 1.2	V_{dc}
Base-Emitter Saturation Voltage (I_C = 35 A, I_B = 2 A) (I_C = 70 A, I_B = 7 A)	$V_{BE(sat)}$		1.8 2	V_{dc}

SWITCHING CHARACTERISTICS (Resistive Load) t_{on} and (Inductive Load) t_{sv}, t_{fi}

Turn-on Time	I_C = 70 A, I_{B1} = 7 A VBEoff = −5 V (V_{CC} = 125 V)	t_{on}		1.2	μs
Storage Time		t_{sv}		1.5	
Fall Time		t_{fi}		.3	

[1] Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BUS51
BUS52

ADVANCED INFORMATION
SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The BUS51 and BUS52 transistors are designed for low voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for battery switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls



Fast Turn-Off Times
300 ns Inductive Fall Time –25°C (Typ)

Operating Temperature Range –65 to +200°C

100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

50 & 40 AMPERES
NPN SILICON
POWER TRANSISTORS
200 and 250 VOLTS (BVCEO)
350 WATTS
300-350 (BVCES)

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUS51	BUS52	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	200	250	Vdc
Collector-Emitter Voltage	V_{CEV}	300	350	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current – Continuous – Peak (1) – Overload	I_C I_{CM} I_{ol}	50 100	40 80	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	10	16	Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	350 200 2		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.5	°C/W
Maximum Lead Temperature for Soldering Purposes: ⅛" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≦ 10%.

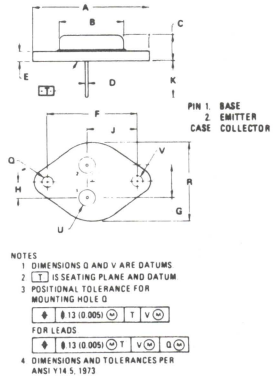

NOTES
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ ⌀ 13 (0.005) M T V M
FOR LEADS
⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS[1]						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 200 mA, I_B = 0, L = 25 mH)	BUS51 BUS52	$V_{CEO(sus)}$	 200 250			Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)		I_{CEV}			 0.2 2.0	mAdc
Collector Cutoff Current (V_{CEO} = Rated Value)		I_{CEO}			 1	mA
Emitter Cutoff Current (V_{EB} = 7 Vdc, I_C = 0)		I_{EBO}			 2	mAdc

ON CHARACTERISTICS[1]

DC Current Gain (I_C = 5 Adc, V_{CE} = 4 Vdc) (I_C = 50 Adc, V_{CE} = 4 V)	BUS51	h_{FE}	 20 15			
DC Current Gain (I_C = 5 Adc, V_{CE} = 4 Vdc) (I_C = 40 Adc, V_{CE} = 4 V)	BUS52	h_{FE}	 20 15			
Collector-Emitter Saturation Voltage (I_C = 30 Adc, I_B = 2 Adc) (I_C = 50 Adc, I_B = 5 Adc) (I_C = 25 Adc, I_B = 2 Adc) (I_C = 40 Adc, I_B = 4 Adc)	 BUS51 BUS52	$V_{CE(sat)}$			 1 1.5 1 1.5	V_{dc}
Base-Emitter Saturation Voltage (I_C = 30 Adc, I_B = 2 Adc) (I_C = 50 Adc, I_B = 5 Adc) (I_C = 25 Adc, I_B = 2 Adc) (I_C = 40 Adc, I_B = 4 Adc)	 BUS51 BUS52	$V_{BE(sat)}$			 1.8 2 1.8 2	V_{dc}

SWITCHING CHARACTERISTICS
Resistive Load (Table 1)

Turn-on Time	$I_{C(pk)}$ = 50 A I_{b1} = 5 A $V_{BE(off)}$ = 5 V $V_{CE(c1)}$ = 150 V	BUS51	(T_C = 25°C)	t_{on}			1	µs
			(T_C = 100°C)					
	$I_{C(pk)}$ = 40 A I_{B1} = 4 A	BUS52						

Inductive Load, Clamped (Table 1)

Storage Time	$I_{C(pk)}$ = 50 A I_{b1} = 5 A $V_{BE(off)}$ = 5 V $V_{CE(c1)}$ = 150 V	BUS51	(T_C = 25°C)	t_{sv}			2	µs
Fall Time				t_{fi}			.3	
Storage Time			(T_C = 100°C)	t_{sv}				
Crossover Time	$I_{C(pk)}$ = 40 A I_{B1} = 4 A	BUS52		t_c				
Fall Time				t_{fi}				

[1] Pulse Test: PW = 300 µs, Duty Cycle ≤ 2%.

BUS97
BUS97A

SWITCHMODE II▲ SERIES
NPN SILICON POWER TRANSISTORS

The BUS97 and BUS97A transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:



- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
60 ns Inductive Fall Time—25°C (Typ)
120 ns Inductive Crossover Time—25°C (Typ)

Operating Temperature Range −65 to +200°C
100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

18 AMPERES
NPN SILICON
POWER TRANSISTORS
450 VOLTS

175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUS97	BUS97A	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	1000	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current – Continuous – Peak(1) – Overload	I_C I_{CM} I_{OL}	18 30 60		Adc
Base Current – Continuous – Peak(1)	I_B I_{BM}	5 20		Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	175 100 1.0		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES
1 DIMENSIONS Q AND V ARE DATUMS
2 T IS SEATING PLANE AND DATUM
3 POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ 0.13 (0.005) M T V M
FOR LEADS
⌖ 0.13 (0.005) M T V M Q M
4 DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 200 mA, I_B = 0) L = 25 mH	BUS97 BUS97A	$V_{CEO(sus)}$	400 450	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)		I_{CEV}	– –	– –	0.2 2.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 10 Ω)	T_C = 25°C T_C = 125°C	I_{CER}	– –	– –	0.5 3.0	mAdc
Emitter Cutoff Current (V_{EB} = 5 Vdc, I_C = 0)		I_{EBO}	–	–	0.1	mAdc
Emitter-base breakdown Voltage (I_E = 50 mA - I_C = 0)			7			Vdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 12Adc, V_{CE} = 5Vdc) (I_C = 10A, V_{CE} = 5V)	BUS97 BUS97A	h_{FE}	7	–	–	
Collector-Emitter Saturation Voltage (I_C = 12A, I_B = 2.4A) (I_C = 18A, I_B = 6A) (I_C = 12A, I_B = 2.4A, T_C = 100°C) (I_C = 10A, I_B = 2A) (I_C = 15A, I_B = 3A) (I_C = 10A, I_B = 2A, T_C = 100°C)	BUS97 BUS97 BUS97 BUS97A BUS97A BUS97A	$V_{CE(sat)}$	– – – – – –	– – – – – –	1.5 3 2.5 1.5 5.0 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 12Adc, I_B = 2.4Adc) (I_C = 12Adc, I_B = 2.4Adc, T_C = 100°C) (I_C = 10A, I_B = 2Adc) (I_C = 10A, I_B = 2Adc, T_C = 100°C)	BUS97 BUS97 BUS97A BUS97A	$V_{BE(sat)}$	– –	– –	1.6 1.6 1.6 1.6	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 Khz)		C_{ob}	–	–	350	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)

Delay Time	(V_{CC} = 250 Vdc, I_C = 12A, I_{B1} = 2.4A, t_p = 30 ès, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5 V)	t_d	–	0.1	0.2	μs
Rise Time		t_r	–	0.4	0.7	
Storage Time		t_s	–	1.3	2.0	
Fall Time		t_f	–	0.2	0.4	

Inductive Load, Clamped (Table 1)

Storage Time	($I_{C(pk)}$ = 12A, I_{B1} = 2.4A, $V_{BE(off)}$ = 5 V, $V_{CE(C1)}$ = 250 V) BUS97	(T_C = 25°C)	t_{sv}	–	1.3	–	μs
Fall Time			t_{fi}	–	0.06	–	
Storage Time		(T_C = 100°C)	t_{sv}	–	1.5	2.5	
Crossover Time	($I_{C(PK)}$ = 10A, I_{B1} = 2A) BUS97A		t_c	–	0.3	0.6	
Fall Time			t_{fi}	–	0.17	0.35	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

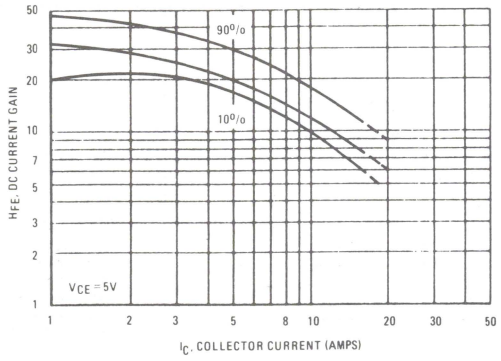

FIGURE 2 – COLLECTOR SATURATION REGION

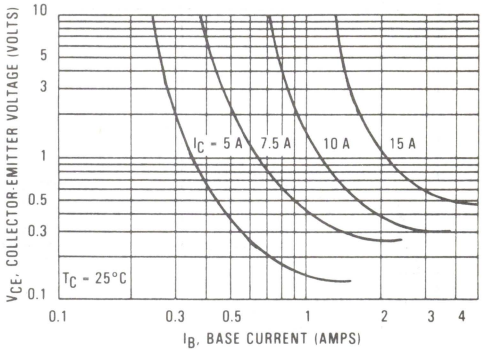

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

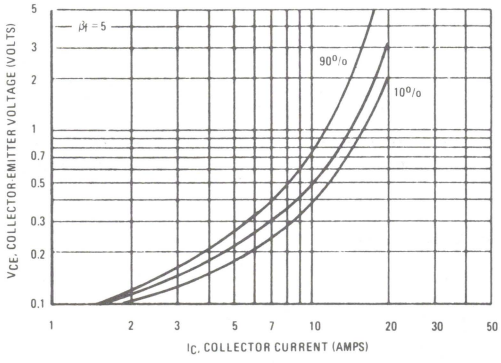

FIGURE 4 – BASE-EMITTER VOLTAGE

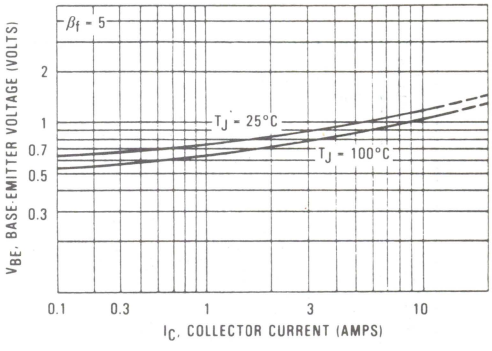

FIGURE 5 – COLLECTOR CUTOFF-REGION

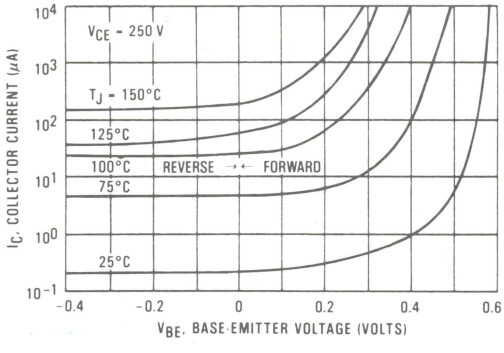

FIGURE 6 – CAPACITANCE

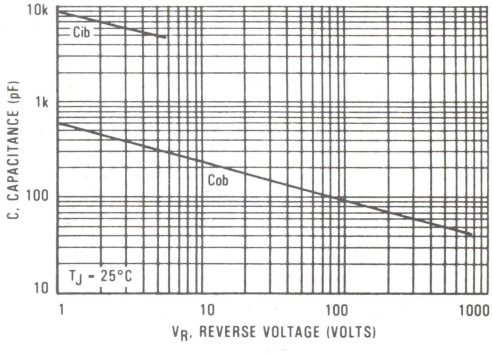

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+10 V, 33 2w, D1, 22 F, 2N6438, MR854, 220, 100, 2N5859, 680pF, 150, D1 D2 D3 D4 1N4934, 1μF, I_{b1} Adjust, I_{b2} Adjust, ηT_b Adjust, 2N3763, 680pF, 22, 100, 880 pF, 33 2w, D3, 22uF, 2N6339, Vcc	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, See Above for Detailed Conditions, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent		RESISTIVE TEST CIRCUIT 1, TUT, 2, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

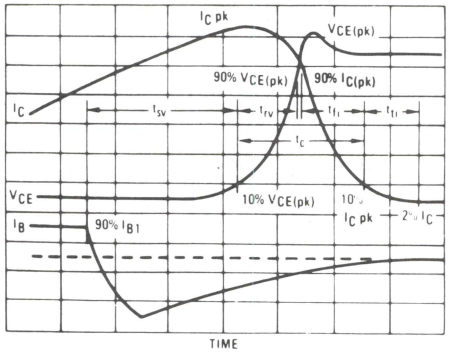

FIGURE 8 – PEAK-REVERSE CURRENT

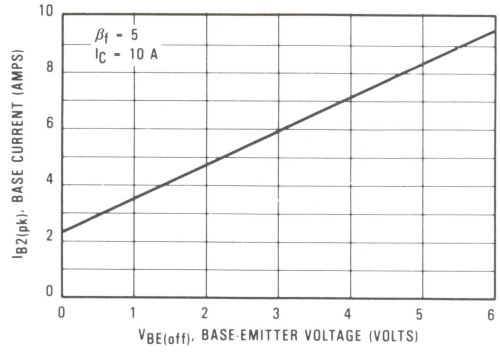

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME, Tsv

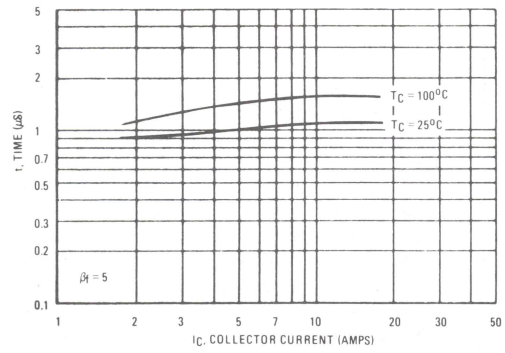

FIGURE 10 – CROSSOVER AND FALL TIMES

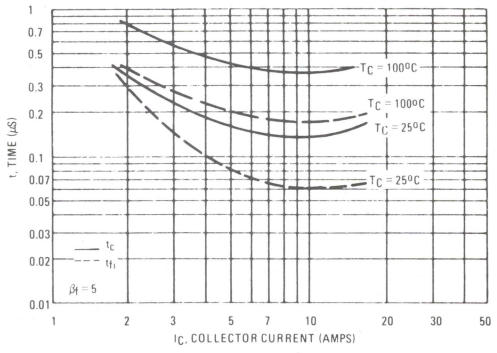

FIGURE 11a – TURN-OFF TIMES vs FORCED GAIN

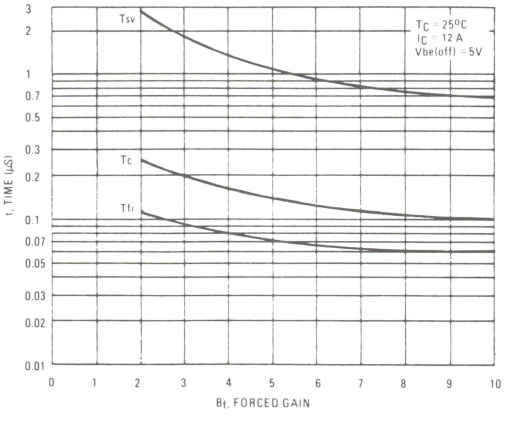

FIGURE 11b – TURN-OFF TIMES vs Ib_2/Ib_1

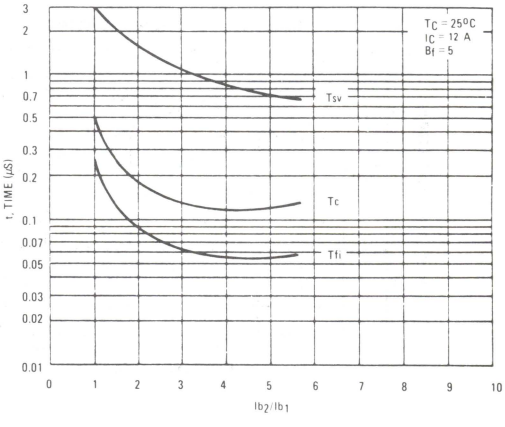

3

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

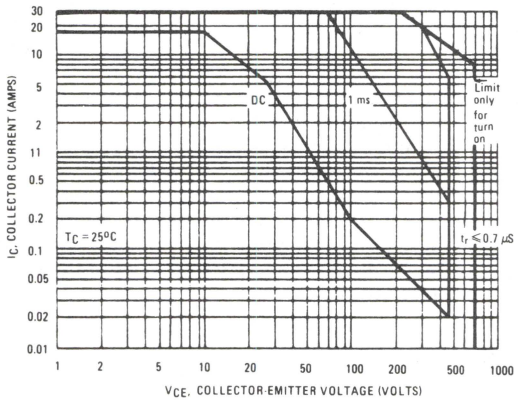

FIGURE 13 – REVERSE BIAS SAFE OPERATING AREA

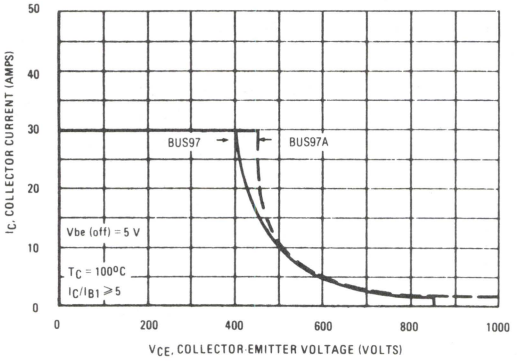

FIGURE 14 – POWER DERATING

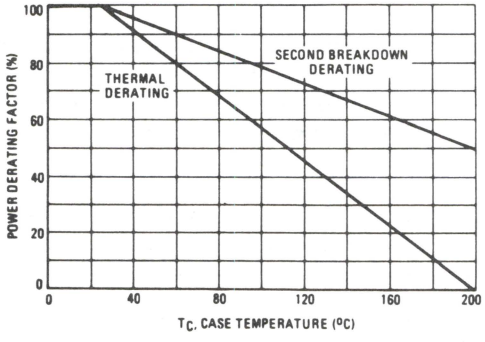

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

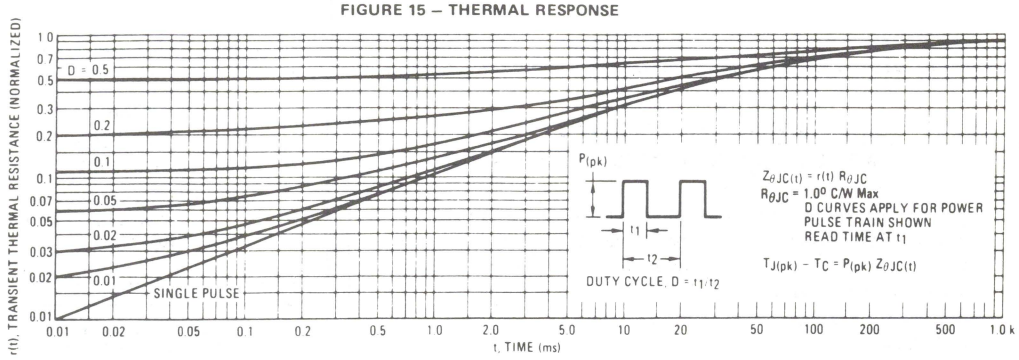

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

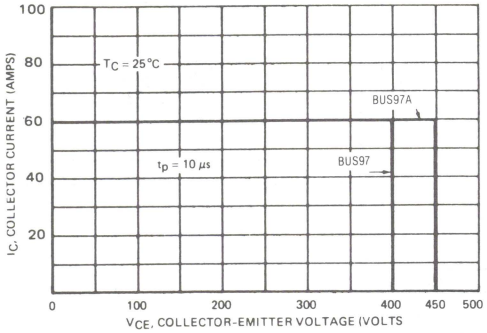

FIGURE 17 – $I_C = f(dV/dt)$

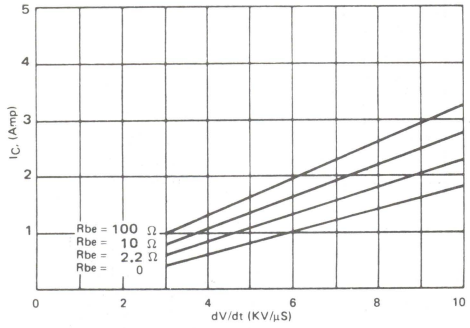

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 18) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 18 – OVERLOAD SOA TEST CIRCUIT



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

3

BUS98
BUS98A

SWITCHMODE II SERIES
NPN SILICON POWER TRANSISTORS

The BUS 98 and BUS 98A transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
60 ns Inductive Fall Time – 25°C (Typ)
120 ns Inductive Crossover Time – 25°C (Typ)

Operating Temperature Range – 65 to + 200°C

100°C Performance Specified for :
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents (125°C)

30 AMPERES
NPN SILICON
POWER TRANSISTORS
400 AND 450 VOLTS (BVCEO)
250 WATTS
850 – 1000 V (BVCES)

Designer's Data for "Worst Case" Conditions

The Designers▲ Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUS 98	BUS98A	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	1000	Vdc
Emitter Base Voltage	V_{EB}	7		Vdc
Collector Current – Continuous – Peak (1) – Overload	I_C I_{CM} I_{ol}	30 60 120		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	10 30		Adc
Total Power Dissipation – T_C = 25°C – T_C = 100°C Derate above 25°C	P_D	250 142 1.42		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to + 200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
⌖ ⌀ 13 (0.005) M T V M
FOR LEADS
⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO 3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 200 mA, I_B = 0) L = 25 mH	BUS98 BUS98A	$V_{CEO(sus)}$	400 450	– –	– –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)		I_{CEV}	– –	– –	0.4 4.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 10 Ω)	T_C = 25°C T_C = 125°C	I_{CER}	– –	– –	1.0 6.0	mAdc
Emitter Cutoff Current (V_{EB} = 7 Vdc, I_C = 0)		I_{EBO}			0.2	mAdc
Emitter-base breakdown Voltage (I_E = 100 mA - I_C = 0)		V_{EBO}	7.0			Vdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$		See Figure 12		
Clamped Inductive SOA with Base Reverse Biased		RBSOA		See Figure 13		
ON CHARACTERISTICS(1)						
DC Current Gain (I_C = 20 Adc, V_{CE} = 5 Vdc) (I_C = 16 Adc, V_{CE} = 5 V)	BUS98 BUS98A	hFE	8	–	–	–
Collector-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 4 Adc) (I_C = 30 Adc, I_B = 8 Adc) (I_C = 20 Adc, I_B = 4 Adc, T_c = 100°C) (I_C = 16 Adc, I_B = 3.2 Adc) (I_C = 24 Adc, I_B = 5 Adc) (I_C = 16 Adc, I_B = 3.2 Adc, T_c = 100°C)	BUS98 BUS98A	$V_{CE(sat)}$	– – – – – –	– – – – – –	1.5 3.5 2.0 1.5 5.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 4 Adc) (I_C = 20 Adc, I_B = 4 Adc, T_c = 100°C) (I_C = 16 Adc, I_B = 3.2 Adc) (I_C = 16 Adc, I_B = 3.2 Adc, T_c = 100°C)	BUS98 BUS98A 	$V_{BE(sat)}$	– – – –	– – – –	1.6 1.6 1.6 1.6	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 khz)		C_{ob}	–	–	700	pF

SWITCHING CHARACTERISTICS
Resistive Load (Table 1)

Delay Time	(V_{CC} = 250 Vdc, I_C = 20A, I_{B1} = 4.0 A, tp = 30 μs, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5 V) (for BUS98A : I_C = 16A, Ib_1 = 3.2A)	t_d	–	0.1	0.2	μs
Rise Time		t_r	–	0.4	0.7	
Storage Time		t_s	–	1.55	2.3	
Fall Time		t_f	–	0.2	0.4	

Inductive Load, Clamped (Table 1)

Storage Time	$I_{C(pk)}$ = 20A] (BUS98) I_{b1} = 4A $V_{BE(off)}$ = 5 V, $V_{CE(c1)}$ = 250 V) $I_{C(pk)}$ = 16A] (BUS98A) IB_1 = 3.2A	(T_C = 25°C)	t_{sv}	–	1.55	–	μs
Fall Time			t_{fi}	–	0.06	–	
Storage Time		(T_C = 100°C)	t_{sv}	–	1.8	2.8	
Crossover Time			t_c	–	0.3	0.6	
Fall Time			t_{fi}	–	0.17	0.35	

(1) Pulse Test : PW = 300 μs, Duty Cycle ≤ 2%.

3

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

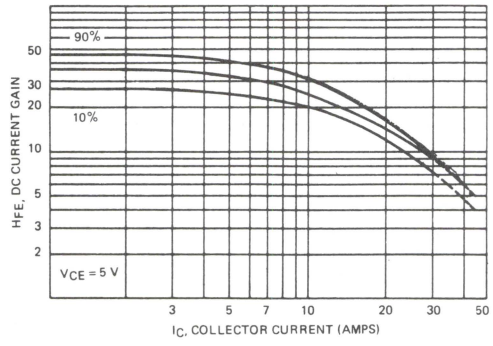

FIGURE 2 – COLLECTOR SATURATION REGION

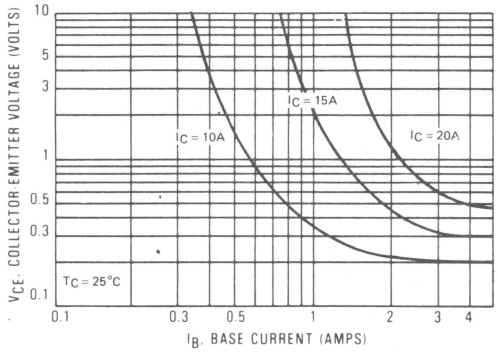

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

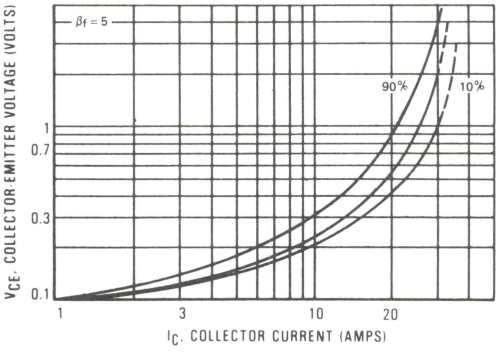

FIGURE 4 – BASE-EMITTER VOLTAGE

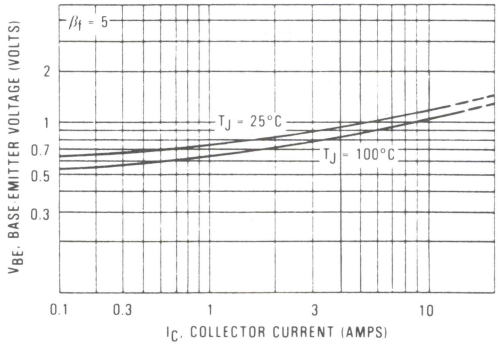

3

FIGURE 5 – COLLECTOR CUTOFF REGION

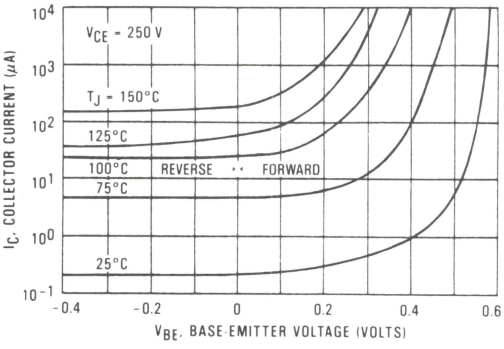

FIGURE 6 – CAPACITANCE

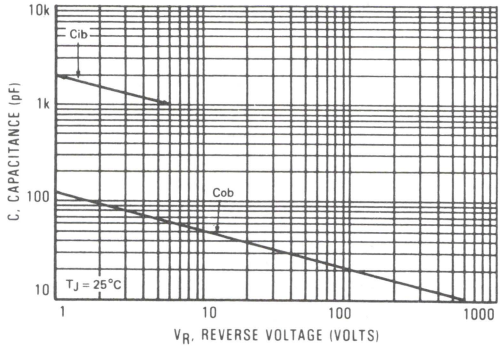

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+10V, −10V, BD361A, BUV20, BD362A, BUV20, $-V_{C1}$, ADJUST V_{C1} TO OBTAIN DESIRED I_{B1}, 0,1µf, 50µf, 1µf, 50µf, ADJUST V_{C2} TO OBTAIN DESIRED I_{B2}	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 25 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} 180 µH R_{coil} 0.05 Ω V_{CC} 20 V V_{clamp} 250 V	V_{CC} 250 V Pulse Width 10 µs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, V_{clamp}, R_{coil}, L_{coil}, V_{CC}, 2 See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t V_{CE}, V_{CE} or V_{clamp}, Time, t_2, t t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

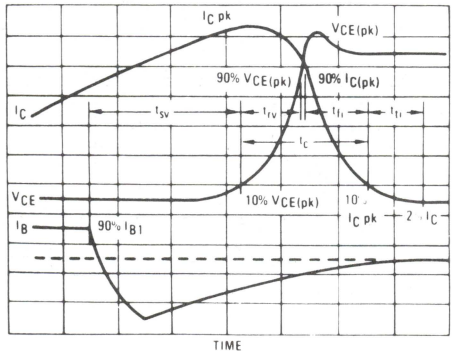

FIGURE 8 – PEAK-REVERSE CURRENT

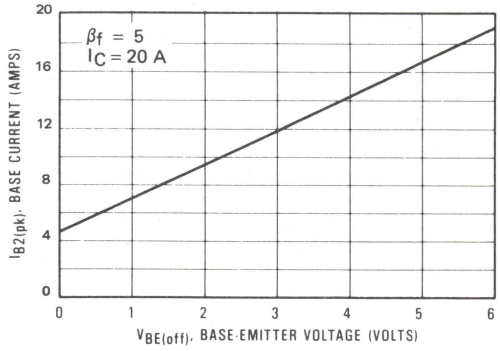

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10−90% V_{clamp}

t_{fi} = Current Fall Time, 90−10% I_C

t_{ti} = Current Tail, 10−2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 – STORAGE TIME, Tsv

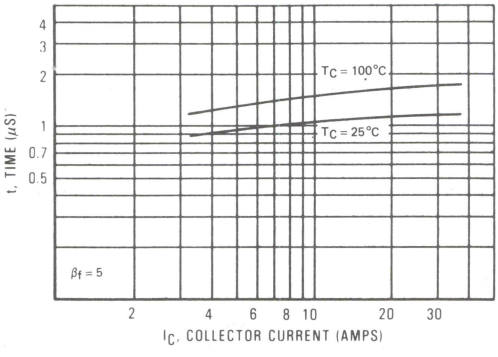

FIGURE 10 – CROSSOVER AND FALL TIMES

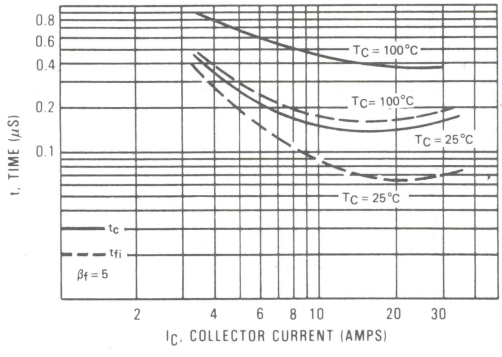

3

FIGURE 11a – TURN-OFF TIMES vs FORCED GAIN

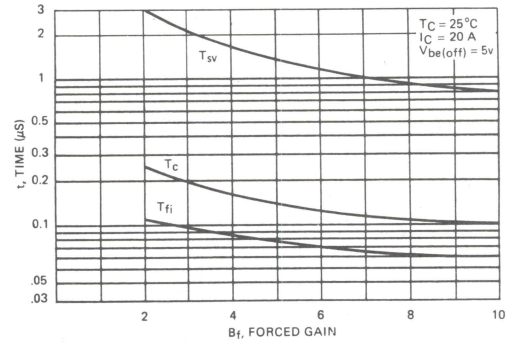

FIGURE 11b – TURN-OFF TM TIMES vs Ib_2/Ib_1

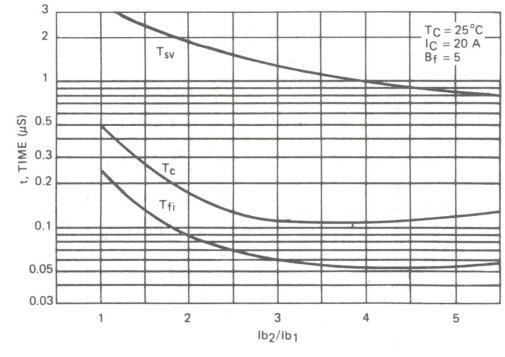

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 — FORWARD BIAS SAFE OPERATING AREA

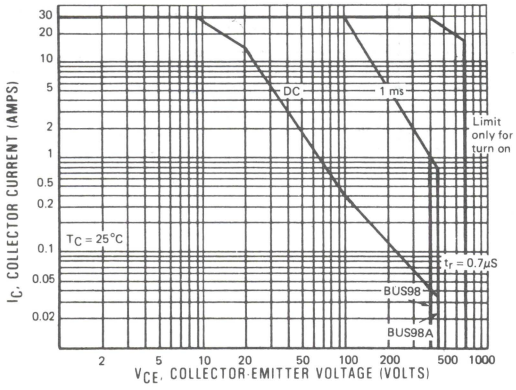

FIGURE 13 — REVERSE BIAS SAFE OPERATING AREA

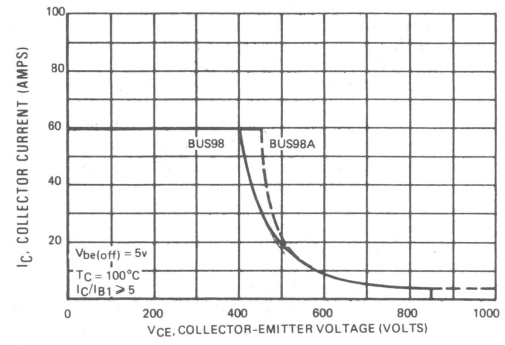

FIGURE 14 — POWER DERATING

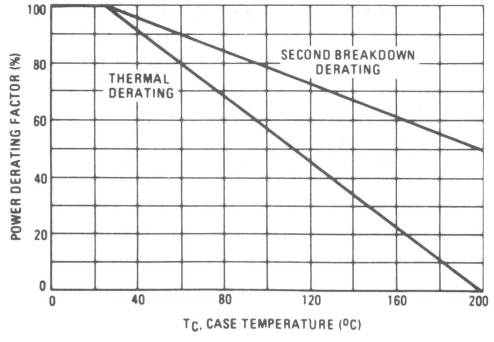

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

3

FIGURE 15 – THERMAL RESPONSE

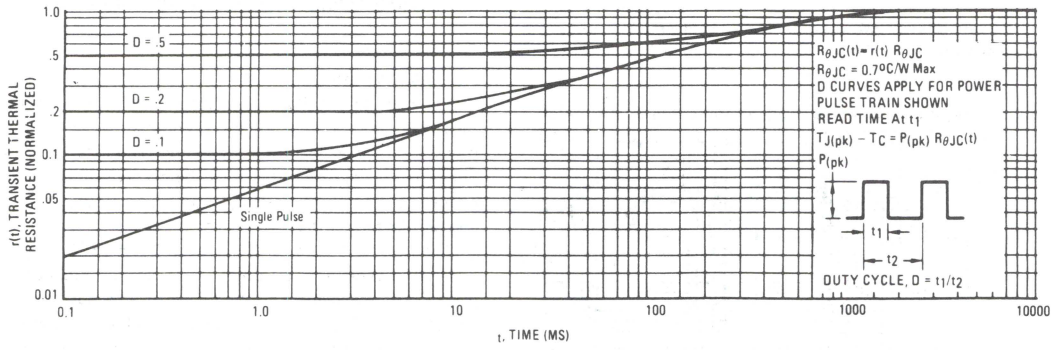

OVERLOAD CHARACTERISTICS

FIGURE 16 – RATED OVERLOAD SAFE OPERATING AREA (OLSOA)

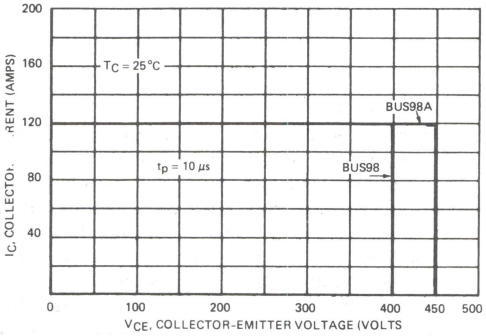

FIGURE 17 – $I_C = f(dV/dt)$

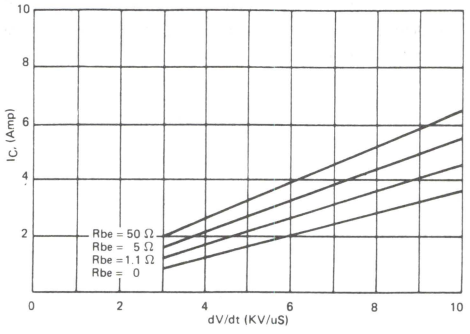

OLSOA

OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known.

Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, Figure 16 defines the maximum time which can be allowed for fault detection and shutdown of base drive.

OLSOA is measured in a common-base circuit (Figure 18) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

FIGURE 18 - OVERLOAD SOA TEST CIRCUIT



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BUT13

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT13 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  300 nS Inductive Fall Time at 25°C (Typ)
  1.1 μS Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range – 65 to 200°C



28 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
600 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUT13	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 28 35	Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 6 7.5	Adc
Free Wheel Diode: Forward current – Continuous – Peak	 I_F I_{FM}	 28 35	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to + 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test. Pulse Width = 5 ms, Duty Cycle ≦ 10%.



NOTES
1 DIMENSIONS Q AND V ARE DATUMS
2 T IS SEATING PLANE AND DATUM
3 POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ ⌀ 13 (0.005) M T V M
FOR LEADS
⌖ ⌀ 13 (0.005) M T V M Q M
4 DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	400	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100 °C	I_{CEV}	– –	– –	0.1 2.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 10 A, V_{CE} = 5 V) (I_C = 18 A, V_{CE} = 5 V)	h_{FE}	30 20	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 10 A, I_B = 0.5 A) (I_C = 18 A, I_B = 1.8 A) (I_C = 22 A, I_B = 2.2 A) (I_C = 28 A, I_B = 5.6 A)	$V_{CE(sat)}$	– – – –	– – – –	2.0 2.5 3.0 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 10 A, I_B = 0.5 A) (I_C = 18 A, I_B = 1.8 A) (I_C = 22 A, I_B = 2.2 A)	$V_{BE(sat)}$	– – –	– – –	2.5 3.0 3.3	Vdc
Diode Forward Voltage (I_F = 22 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1	t_s	–	1.1	2.6	μs
Fall Time		I_C = 18 A	t_f	–	0.3	0.8	μs
Storage Time	T_C = 100°C	I_{B1} = 1.8 A	t_s	–	1.4	–	μs
Fall Time		$V_{BE(off)}$ = 5 V	t_f	–	0.33	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

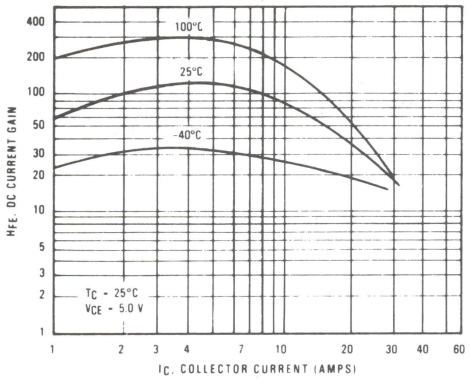

FIGURE 2 – COLLECTOR SATURATION REGION

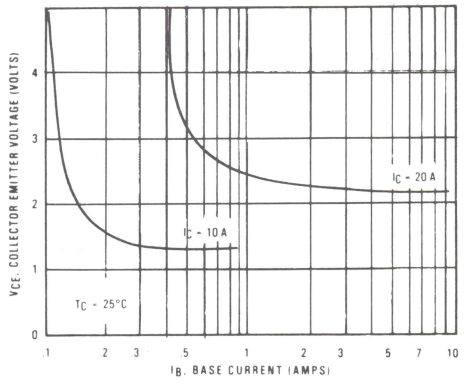

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

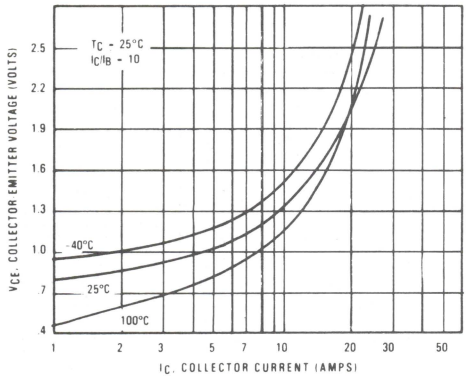

FIGURE 4 – BASE-EMITTER VOLTAGE

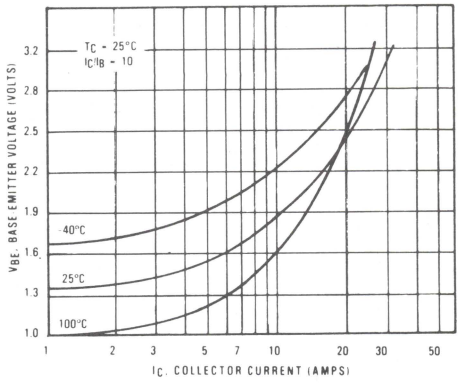

FIGURE 5 – THERMAL RESPONSE

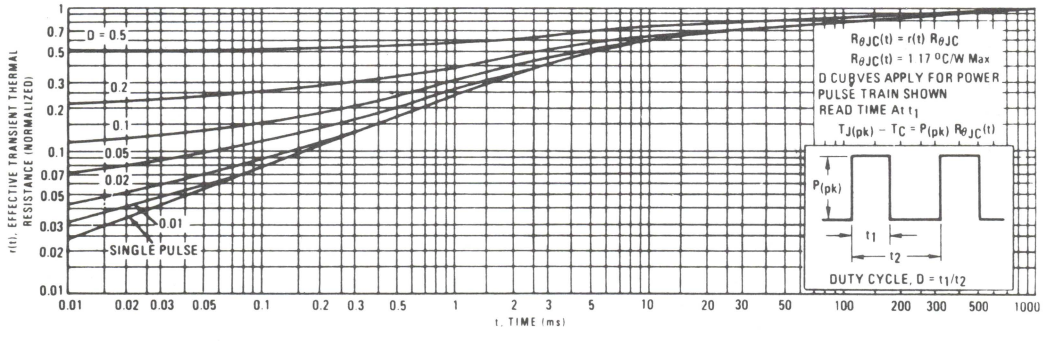

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	PW Varied to Attain I_C = 100mA		
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT OUTPUT WAVEFORMS t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent		

FIGURE 6 – FALL TIME vs IB2/IB1

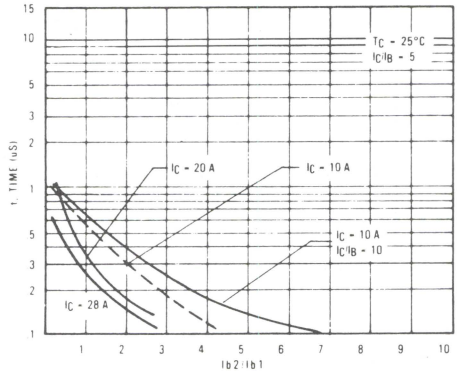

FIGURE 7 – TURN-OFF TIME vs Ic

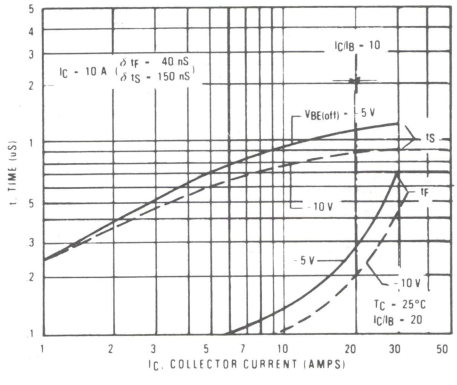

FIGURE 8 – STORAGE TIME vs FORCED GAIN

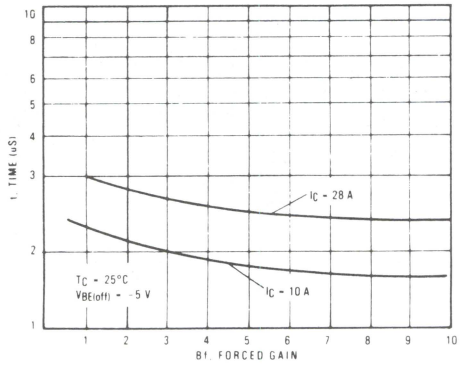

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

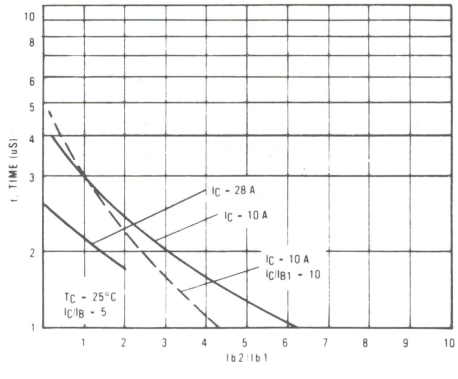

3

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

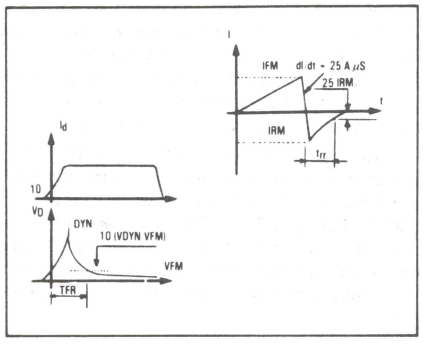

FIGURE 11 – FORWARD VOLTAGE

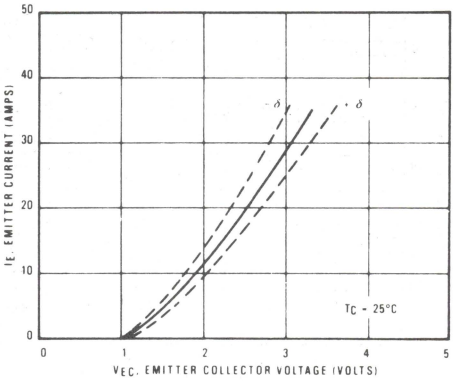

FIGURE 12 – FORWARD MODULATION VOLTAGE

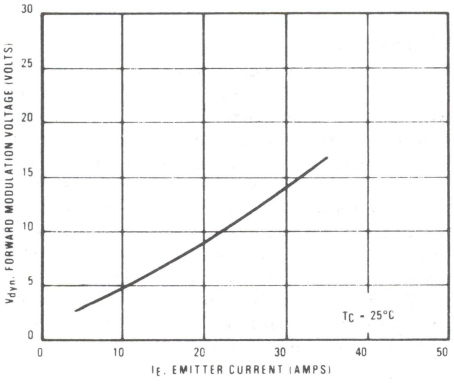

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

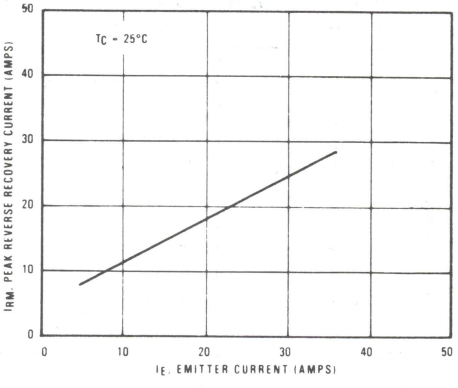

FIGURE 14 – FORWARD RECOVERY TIME

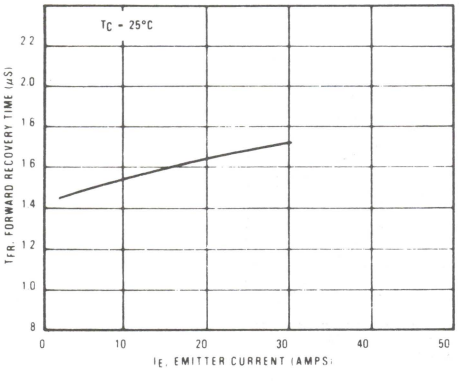

FIGURE 15 – REVERSE RECOVERY TIME

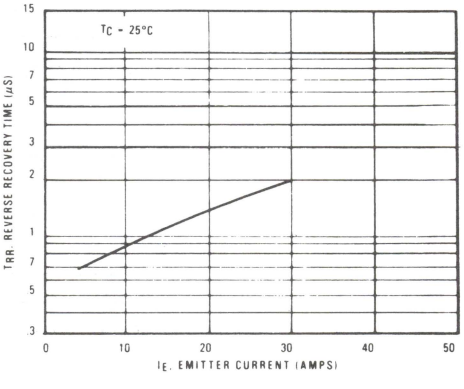

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

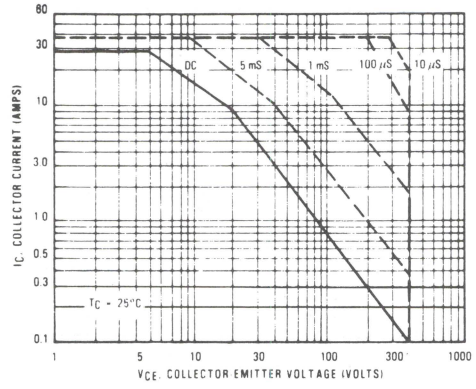

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

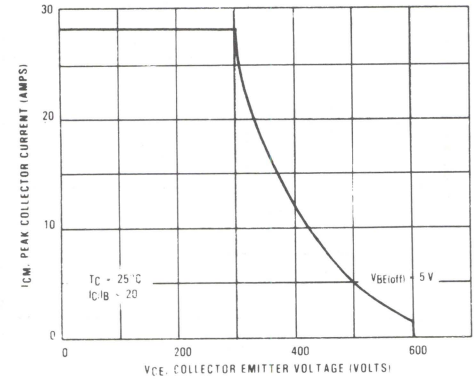

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

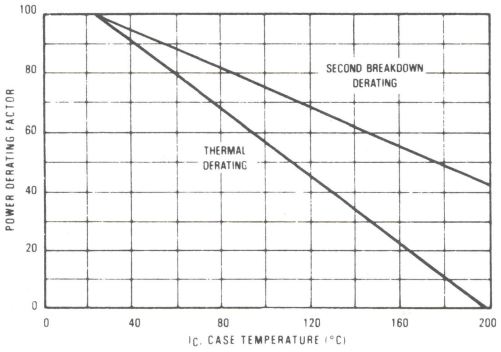

BUT14

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT14 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  300 nS Inductive Fall Time at 25°C (Typ)
  1.3 μS Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range −65 to 200°C



25 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
850 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUT14	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	500	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 25 35	Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 5 7.5	Adc
Free Wheel Diode: Forward current – Continuous – Peak	 I_F I_{FM}	 25 35	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.





NOTES
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ ⌀ 13 (0.005) M T V M
   FOR LEADS
   ⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A		39.37		1.550
B		21.08		0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E		3.43		0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R		26.67		1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	500	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C	I_{CEV}	– –	– –	0.2 2.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 8 A, V_{CE} = 5 V) (I_C = 16 A, V_{CE} = 5 V)	h_{FE}	30 15	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 8 A, I_B = 0.4 A) (I_C = 16 A, I_B = 1.6 A) (I_C = 20 A, I_B = 2.0 A) (I_C = 25 A, I_B = 5 A)	$V_{CE(sat)}$	– – – –	– – – –	2.0 3.0 3.5 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 8 A, I_B = 0.4 A) (I_C = 16 A, I_B = 1.6 A) (I_C = 20 A, I_B = 2 A)	$V_{BE(sat)}$	– – –	– – –	2.5 2.9 3.3	Vdc
Diode Forward Voltage (I_F = 20 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1	t_s	–	1.3	2.8	μs
Fall Time		I_C = 16 A	t_f	–	0.3	0.8	μs
Storage Time	T_C = 100°C	I_{B1} = 1.6 A	t_s	–	1.5	–	μs
Fall Time		$V_{BE(off)}$ = 5 V	t_f	–	0.35	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

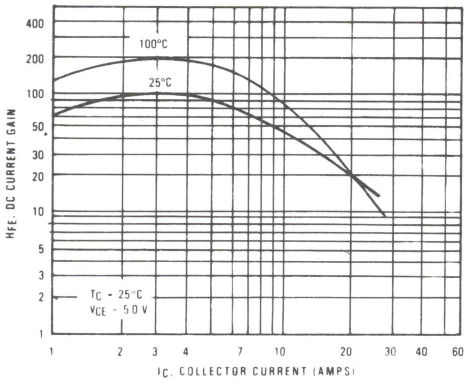

FIGURE 2 – COLLECTOR SATURATION REGION

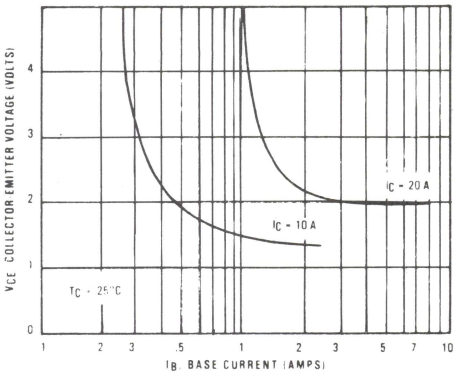

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

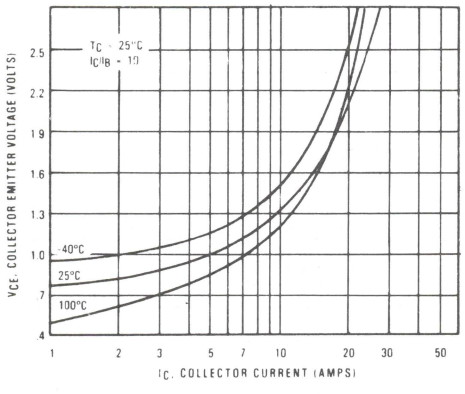

FIGURE 4 – BASE-EMITTER VOLTAGE

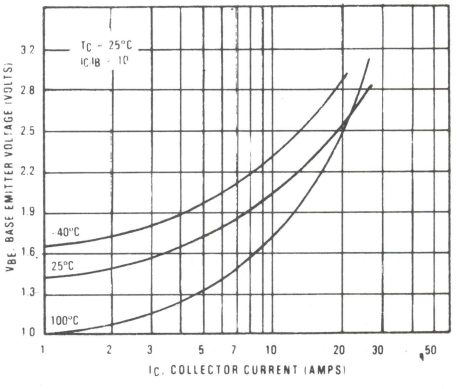

FIGURE 5 – THERMAL RESPONSE

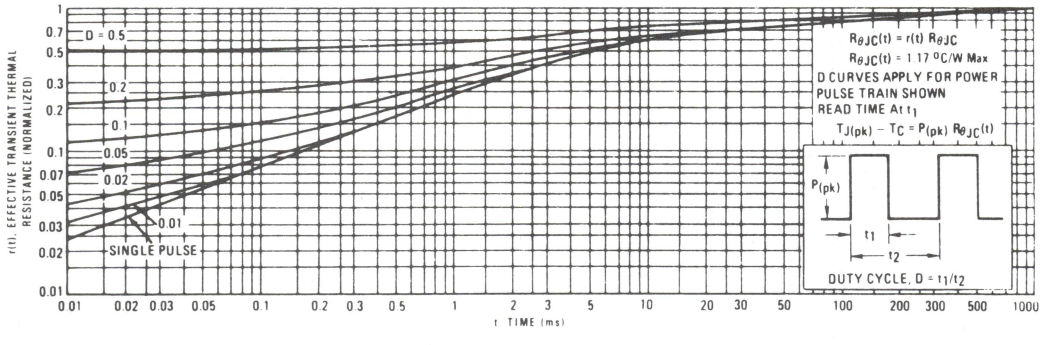

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	PW Varied to Attain I_C = 100mA		
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT See Above for Detailed Conditions	OUTPUT WAVEFORMS t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	

FIGURE 6 – FALL TIME vs IB2/IB1

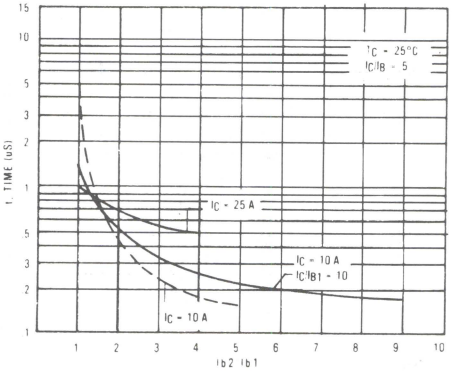

FIGURE 7 – TURN-OFF TIME vs Ic

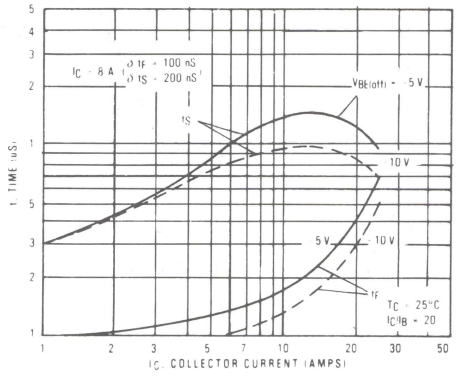

FIGURE 8 – STORAGE TIME vs FORCED GAIN

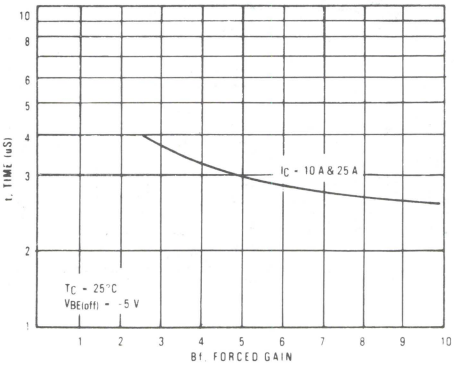

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

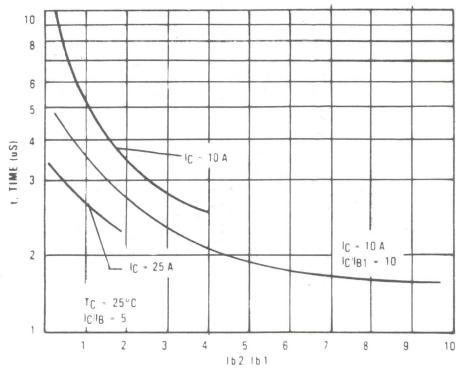

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

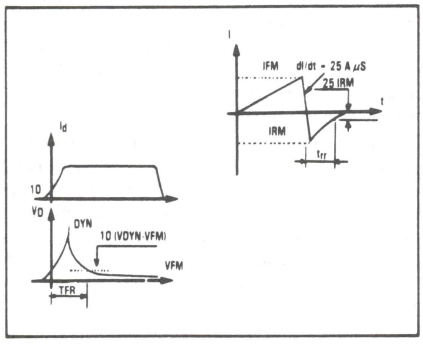

FIGURE 11 – FORWARD VOLTAGE

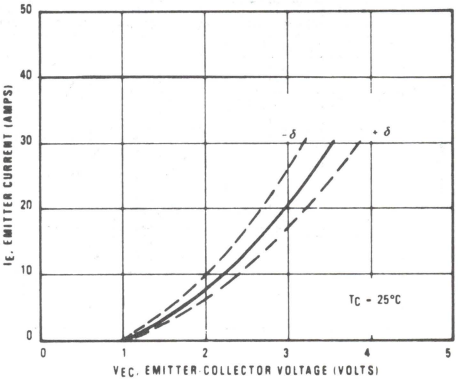

FIGURE 12 – FORWARD MODULATION VOLTAGE

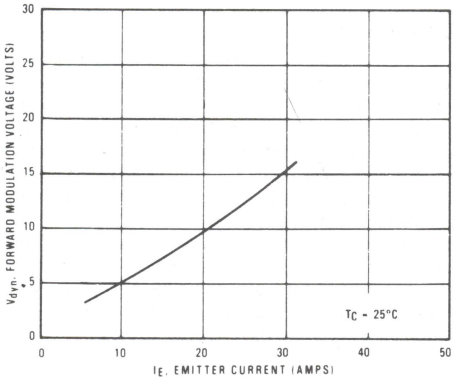

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

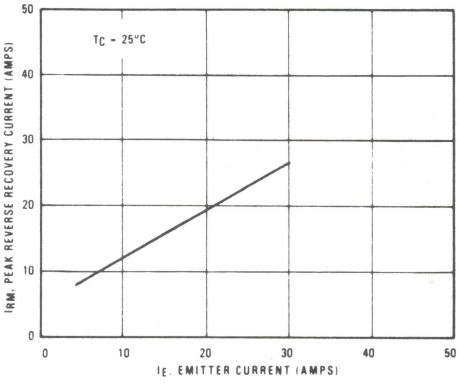

FIGURE 14 – FORWARD RECOVERY TIME

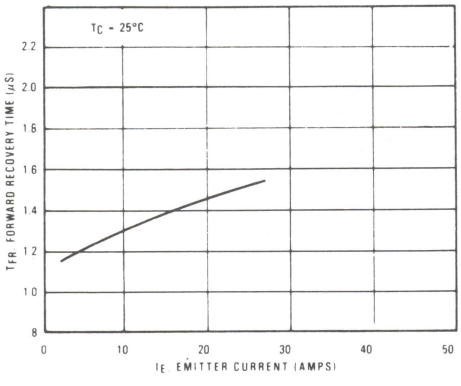

FIGURE 15 – REVERSE RECOVERY TIME

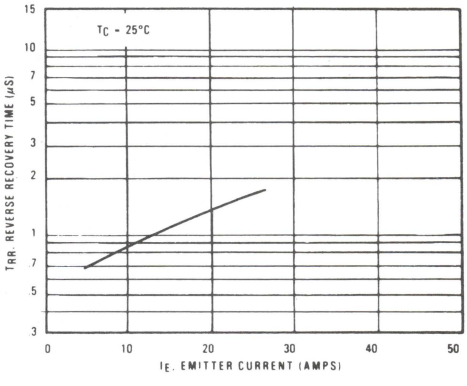

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

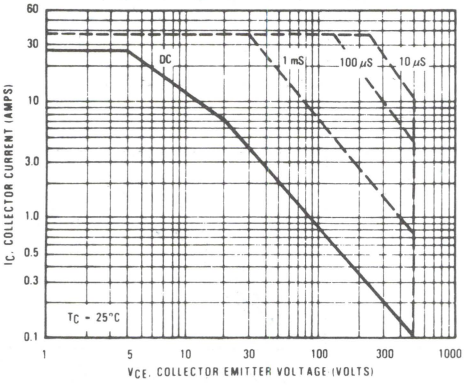

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

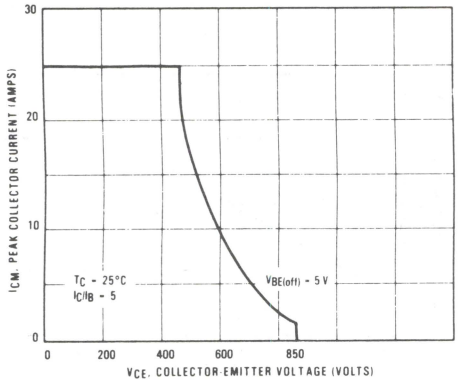

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

3

FIGURE 18 – POWER DERATING

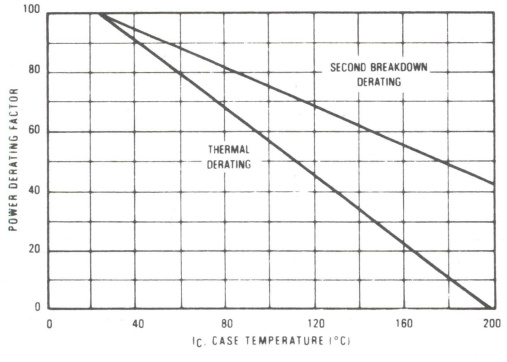

BUT15

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT15 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  - 300 nS Inductive Fall Time at 25°C (Typ)
  - 1.2 μS Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range – 65 to 200°C



20 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
1000 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUT15	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	Vdc
Collector-Emitter Voltage	V_{CEV}	1000	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 20 25	Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 5 10	Adc
Free Wheel Diode: Forward current – Continuous – Peak	 I_F I_{FM}	 20 25	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test. Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES
1 DIMENSIONS Q AND V ARE DATUMS
2 T IS SEATING PLANE AND DATUM
3 POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
⌖ ⌀ 13 (0.005) M T V M
FOR LEADS
⌖ ⌀ 13 (0.005) M T V M Q M
4 DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	700	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100 °C)	I_{CEV}	– –	– –	0.1 2.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 6 A, V_{CE} = 5 V) (I_C = 12 A, V_{CE} = 5 V)	h_{FE}	30 15	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 6 A, I_B = 0.3 A) (I_C = 12 A, I_B = 1.2 A) (I_C = 16 A, I_B = 1.6 A) (I_C = 20 A, I_B = 4 A)	$V_{CE(sat)}$	– – – –	– – – –	2.0 3.0 3.5 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 6 A, I_B = 0.3 A) (I_C = 12 A, I_B = 1.2 A) (I_C = 16 A, I_B = 1.6 A)	$V_{BE(sat)}$	– – –	– – –	2.5 2.9 3.3	Vdc
Diode Forward Voltage (I_F = 16 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1 I_C = 12 A	t_s	–	1.2	2.5	μs
Fall Time			t_f	–	0.3	0.8	μs
Storage Time	T_C = 100°C	I_{B1} = 1.2 A $V_{BE(off)}$ = 5 V	t_s	–	1.4	–	μs
Fall Time			t_f	–	0.35	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

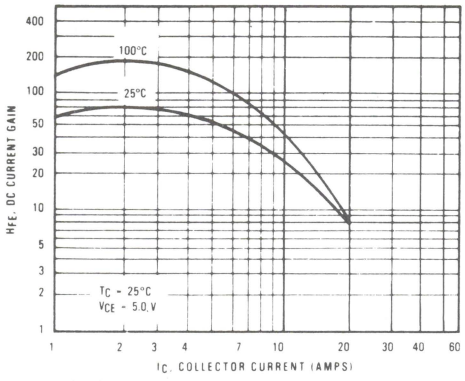

FIGURE 2 – COLLECTOR SATURATION REGION

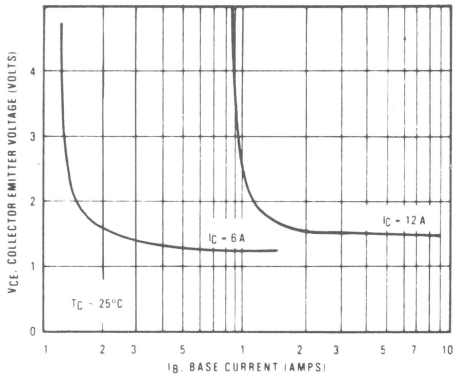

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

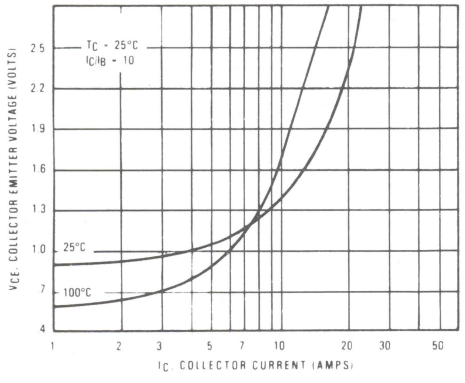

FIGURE 4 – BASE-EMITTER VOLTAGE

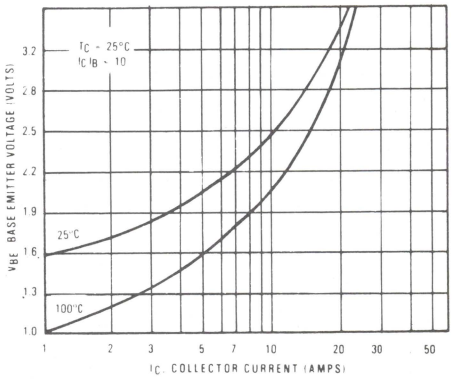

FIGURE 5 – THERMAL RESPONSE

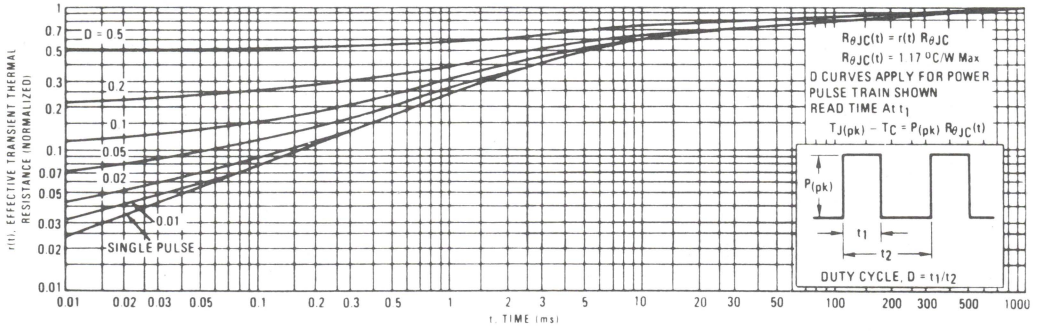

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS			
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT OUTPUT WAVEFORMS t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope - Tektronix 475 or Equivalent		

FIGURE 6 – FALL TIME vs IB2/IB1

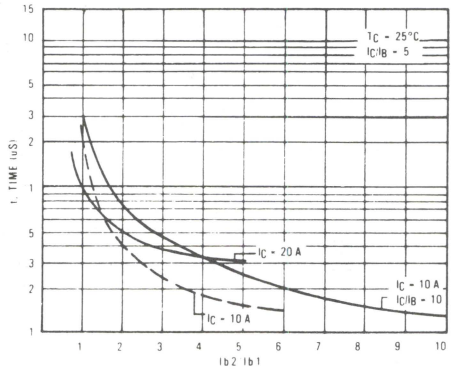

FIGURE 7 – TURN-OFF TIME vs Ic

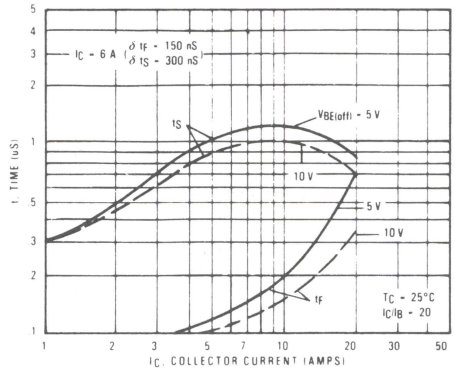

FIGURE 8 – STORAGE TIME vs FORCED GAIN

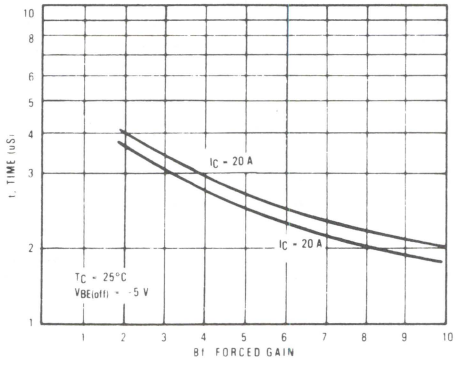

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

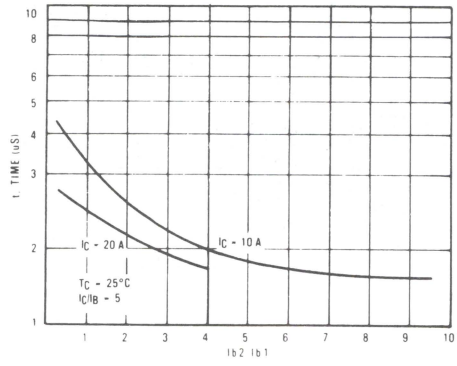

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

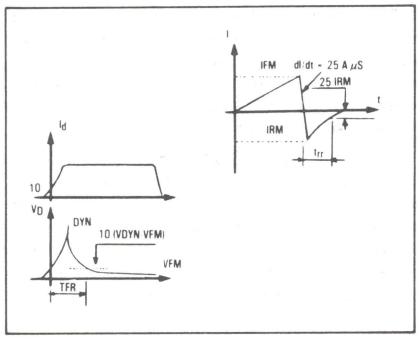

FIGURE 11 – FORWARD VOLTAGE

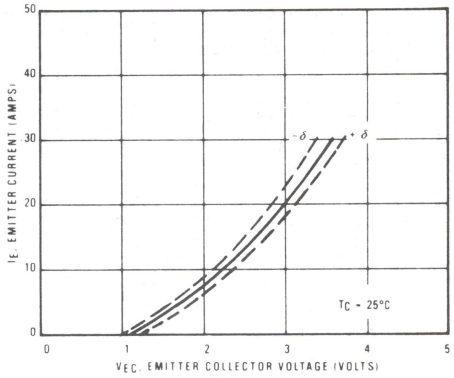

FIGURE 12 – FORWARD MODULATION VOLTAGE

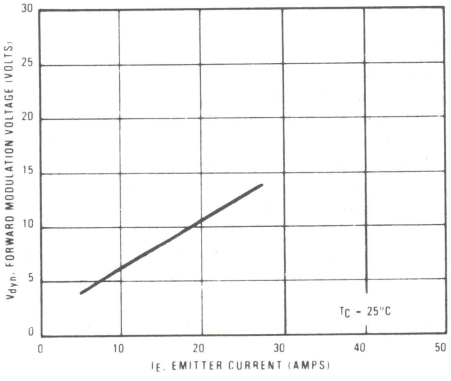

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

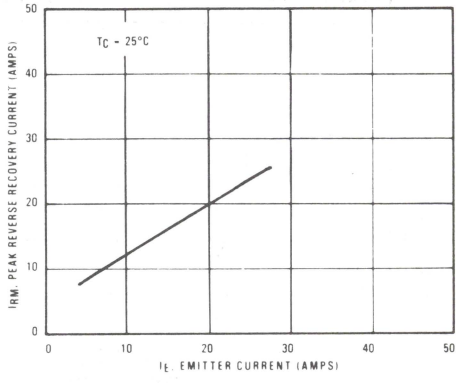

FIGURE 14 – FORWARD RECOVERY TIME

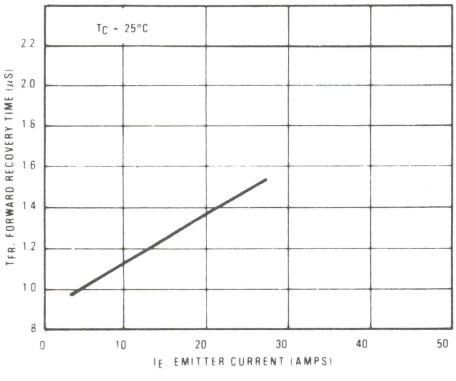

FIGURE 15 – REVERSE RECOVERY TIME

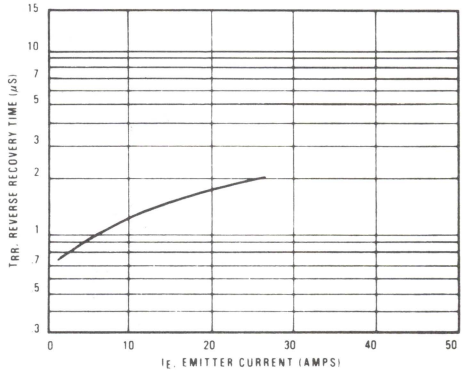

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

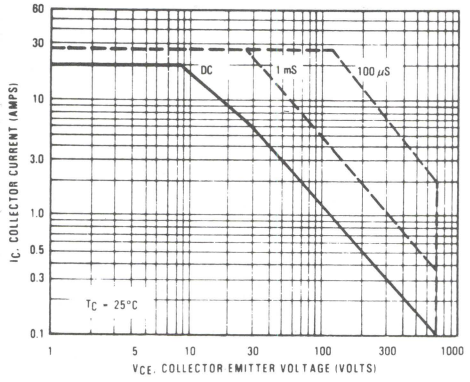

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

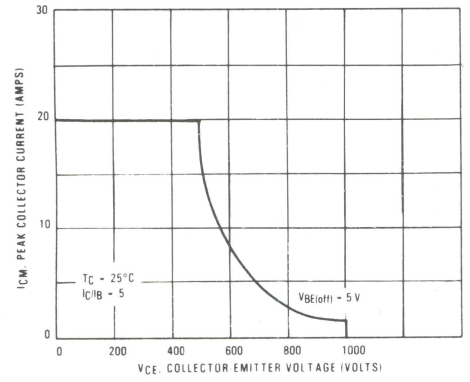

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

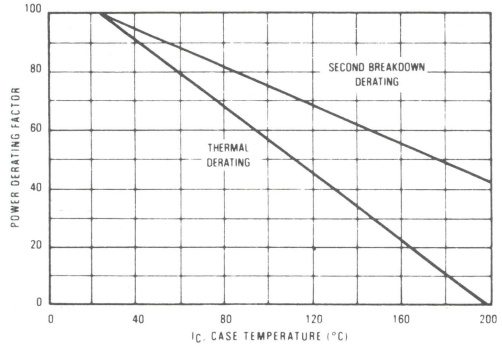

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BUT16

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT16 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  2.0 uS Inductive Fall Time at 100°C (Typ)
  0.8 uS Inductive Storage Time at 100°C (Typ)
- Operating Temperature Range – 65 to 175°C



12 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
1400 VOLTS
150 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	BUT16	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	1000	Vdc
Collector-Emitter Voltage	V_{CEV}	1400	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak(1)	 I_C I_{CM}	 12 20	Adc
Base Current – Continuous – Peak(1)	 I_B I_{BM}	 8 10	Adc
Free Wheel Diode: Forward current – Continuous – Peak	 I_F I_{FM}	 12 20	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 75	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to +175	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\Theta_{JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test. Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES
1. DIMENSIONS Q AND V ARE DATUMS
2. T IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ ⌀13 (0.005) M T V M
   FOR LEADS
   ⌖ ⌀13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	1000	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	– –	0.1 2.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 4 A, V_{CE} = 5 V) (I_C = 8 A, V_{CE} = 5 V)	h_{FE}	20 5	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 12 A, I_B = 6 A)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 8 A, I_B = 1.6 A)	$V_{BE(sat)}$	–	–	3.3	Vdc
Diode Forward Voltage (I_F = 12 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1	t_s	–	–	3.3	μs
Fall Time		I_C = 8 A	t_f	–	–	1.5	μs
Storage Time	T_C = 100°C	I_{B1} = 1.6 A	t_s	–	2.0	–	μs
Fall Time		$V_{BE(off)}$ = 5 V	t_f	–	0.8	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

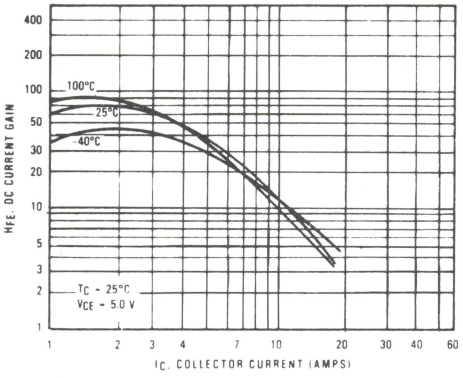

FIGURE 2 — COLLECTOR SATURATION REGION

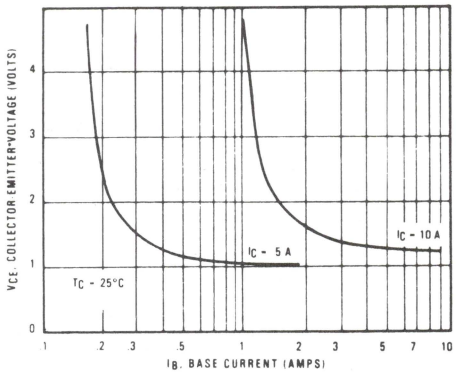

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

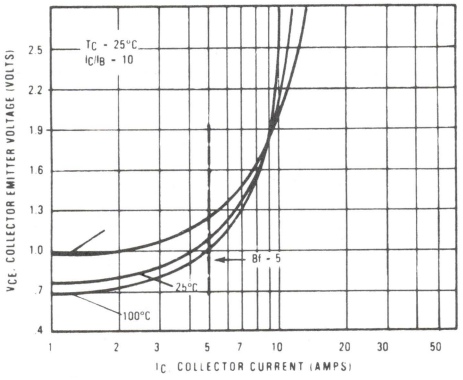

FIGURE 4 — BASE-EMITTER VOLTAGE

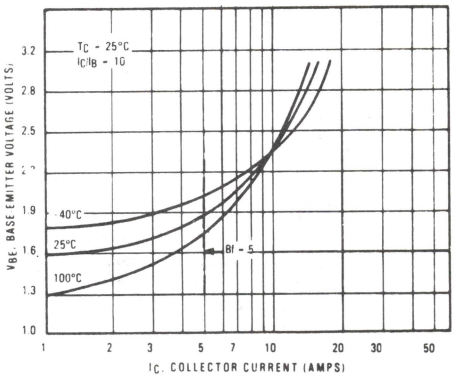

FIGURE 5 — THERMAL RESPONSE

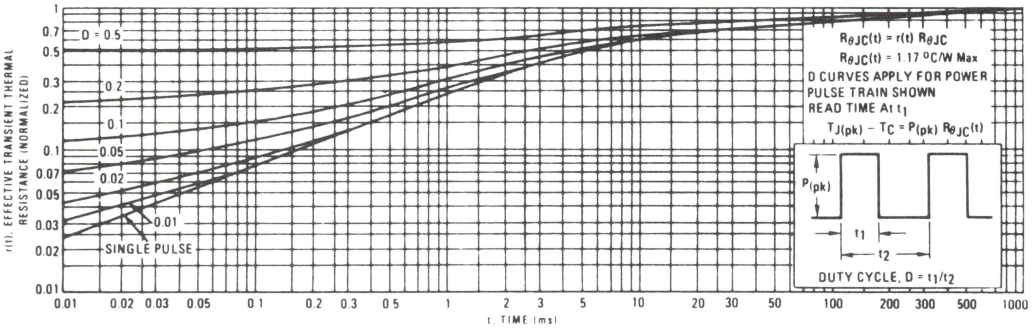

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	20 Ω, 5 V, PW Varied to Attain I_C = 100mA	33 Ω 2 W, 100 Ω, 220, 100, 680 pF, 680 µF, 100, 1N4934, 1 µF, 2N6438, MR854, tp1 Adjust, tp2 Adjust, dt Adjust, 2N6339, 22 µF, 10 V, Vcc	DRIVER, VD, ID
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 µH R_{coil} = 0.05 Ω V_{CC} = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, Input, See Above for Detailed Conditions, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, RS 0.1 Ω	OUTPUT WAVEFORMS: I_C, I_{CM}, tf Clamped, t1, tf, V_{CE}, VCEM, V_{clamp}, Time, t2	t1 Adjusted to Obtain I_C $t_1 = \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 = \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent

FIGURE 6 – FALL TIME vs IB2/IB1

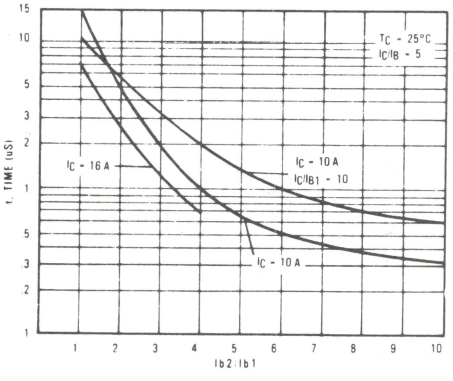

FIGURE 7 – TURN-OFF TIME vs Ic

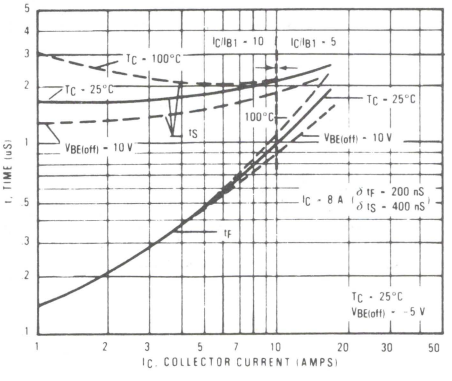

FIGURE 8 – STORAGE TIME vs FORCED GAIN

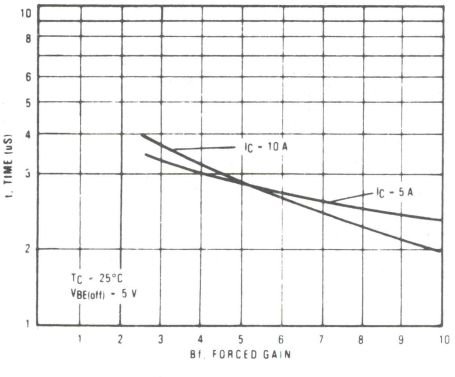

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

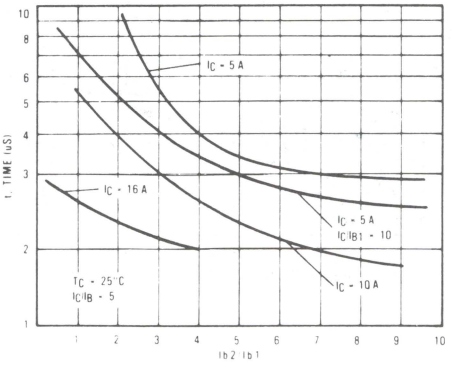

3

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

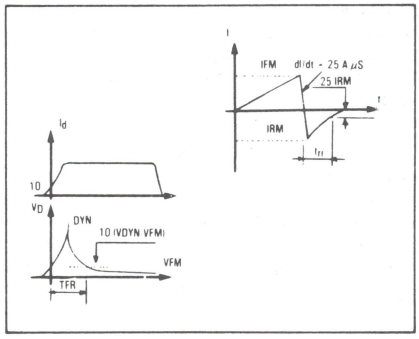

FIGURE 11 – FORWARD VOLTAGE

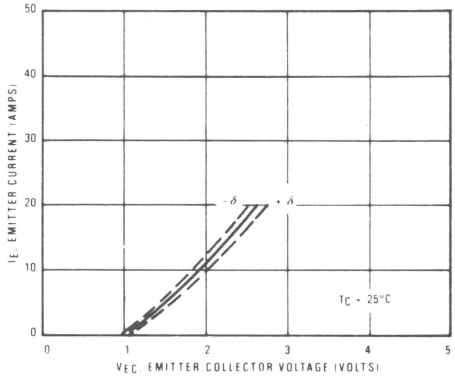

FIGURE 12 – FORWARD MODULATION VOLTAGE

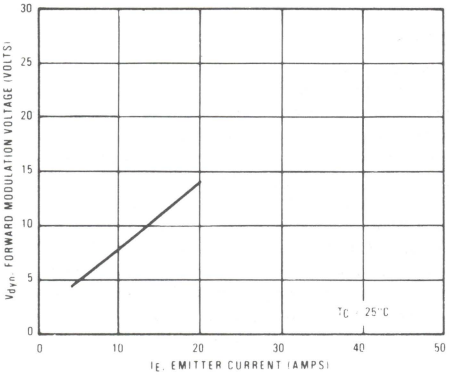

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

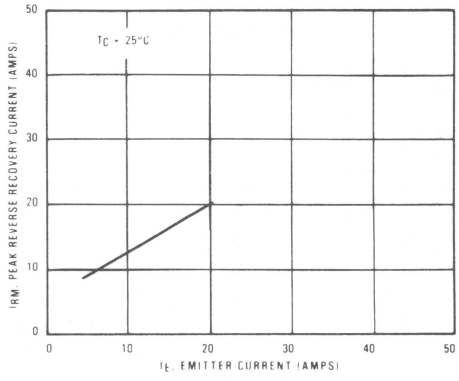

FIGURE 14 – FORWARD RECOVERY TIME

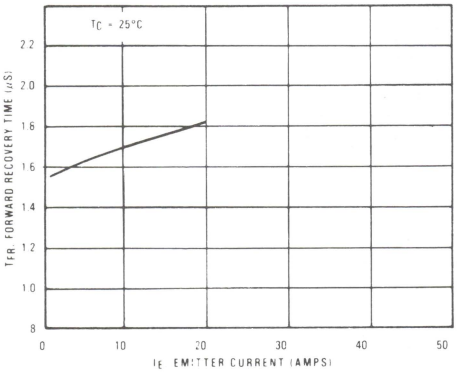

FIGURE 15 – REVERSE RECOVERY TIME

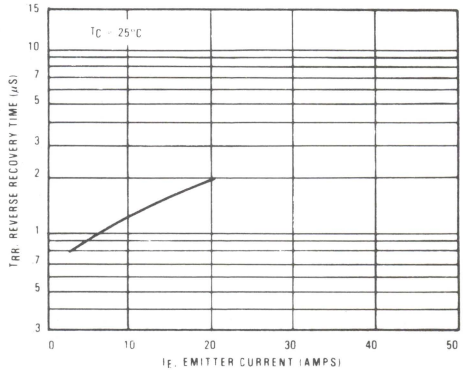

3

The Safe Operating Area figures shown in Figures 16 and 17 are specified for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

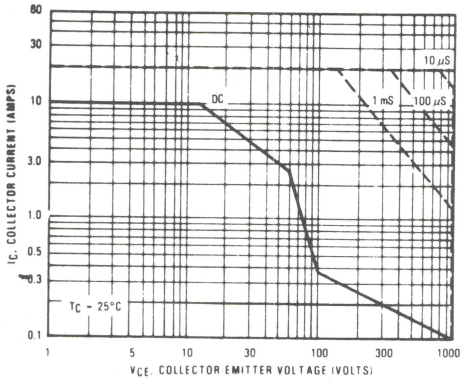

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

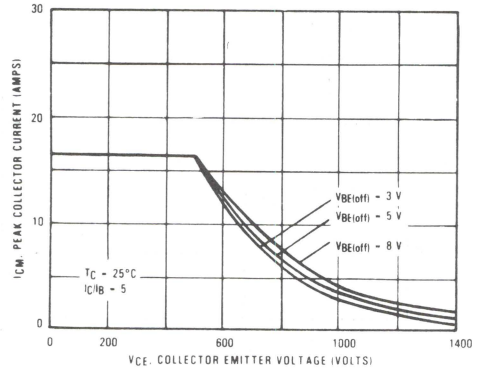

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

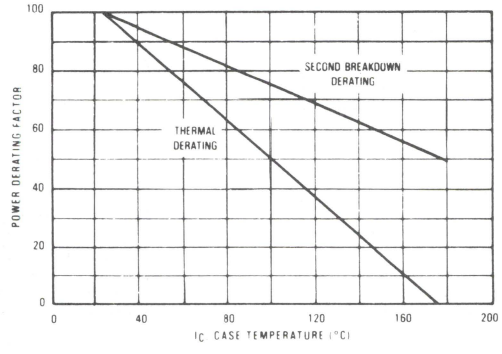

BUT33

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT33 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  - 800 nS Inductive Fall Time at 25°C (Typ)
  - 2.0 μS Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range – 65 to 200°C



56 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
600 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BUT33	Unit
Collector Emitter Voltage	$V_{CEO(sus)}$	400	Vdc
Collector Emitter Voltage	V_{CEV}	600	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current Continuous Peak (1)	 I_C I_{CM}	 56 75	Adc
Base Current Continuous Peak (1)	 I_B I_{BM}	 12 15	Adc
Free Wheel Diode Forward current Continuous Peak	 I_F I_{FM}	 56 75	Adc
Total Power Dissipation @ T_C 25°C @ T_C 100°C Derate above 25°C	P_D	250 140	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to + 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purpose 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.19	0.151	0.165
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	400	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	– –	0.2 4.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	350	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 20 A, V_{CE} = 5 V) (I_C = 36 A, V_{CE} = 5 V)	h_{FE}	30 20	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 20 A, I_B = 1 A) (I_C = 36 A, I_B = 3.6 A) (I_C = 44 A, I_B = 4.4 A) (I_C = 56 A, I_B = 11.2 A)	$V_{CE(sat)}$	– – – –	– – – –	2.0 2.5 3.0 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 20 A, I_B = 1 A) (I_C = 36 A, I_B = 3.6 A) (I_C = 44 A, I_B = 4.4 A)	$V_{BE(sat)}$	– – –	– – –	2.5 2.9 3.3	Vdc
Diode Forward Voltage (I_F = 44 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	I_C = 36 A	t_s	–	2.0	3.3	μs
Fall Time	See Table 1	I_B = 3.6 A	t_f	–	0.8	1.6	μs
Storage Time	T_C = 100°C	$V_{BE(off)}$ = 5 V	t_s	–	2.2	–	μs
Fall Time			t_f	–	0.8	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

*TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

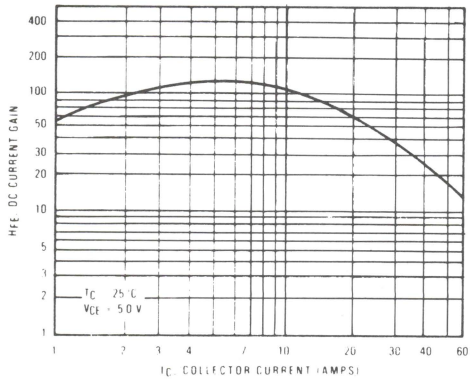

FIGURE 2 – COLLECTOR SATURATION REGION

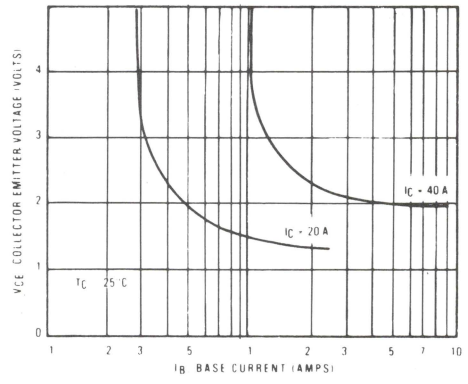

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

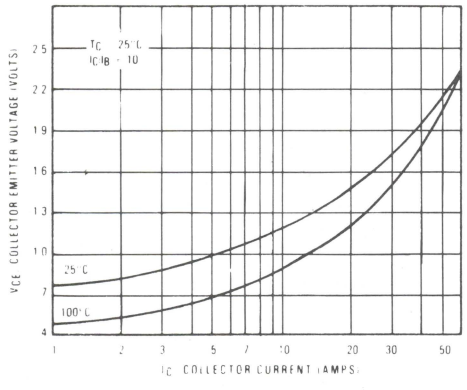

FIGURE 4 – BASE-EMITTER VOLTAGE

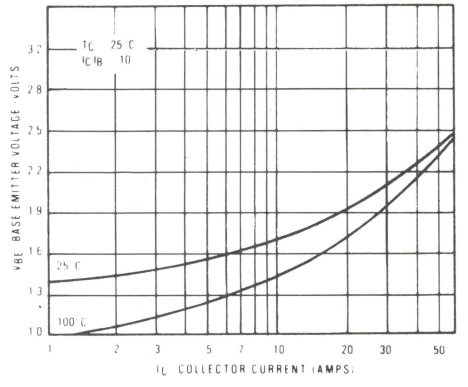

FIGURE 5 – THERMAL RESPONSE

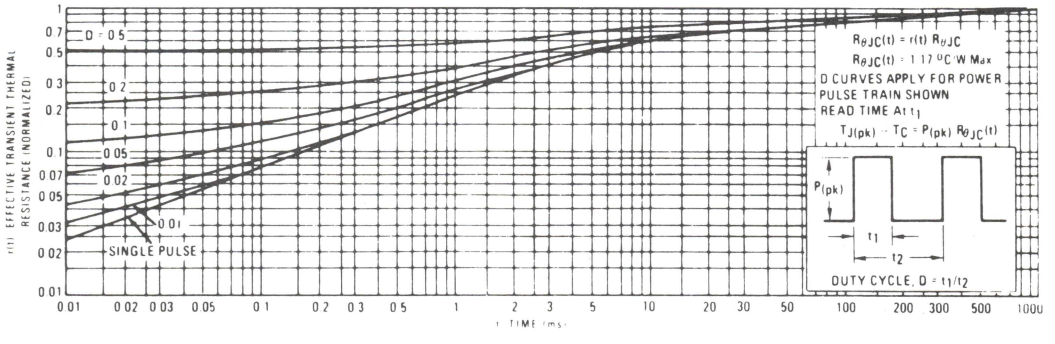

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	20 Ω, 5 V, PW Varied to Attain I_C = 100 mA	+ 10 V, 33 Ω 2 W, D1, 22 µF, 2N6438, MR854, 160, 680 pF, 220, 100, 2N5885, 22, Ib1 Adjust, 1 µF, D1 D2 D3 D4 1N4934, Ib2 Adjust, dt b Adjust dt, 2N6339	DRIVER, VD, tD
CIRCUIT VALUES	L_{coil} = 10 mH VCC = 10V, R_{coil} = 0.7 Ω, V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 µH, R_{coil} = 0.05 Ω, VCC = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1 Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, VCC, V_{clamp}, RS 0.1 Ω, 2; See Above for Detailed Conditions	OUTPUT WAVEFORMS: I_C, I_{CM}, tf Clamped, t1, tf, t, V_{CE}, VCEM, V_{clamp}, Time, t2	t1 Adjusted to Obtain I_C; $t1 \approx \frac{L_{coil}(I_{CM})}{VCC}$; $t2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$; Test Equipment Scope Tektronix 475 or Equivalent

FIGURE 6 – FALL TIME vs IB2/IB1

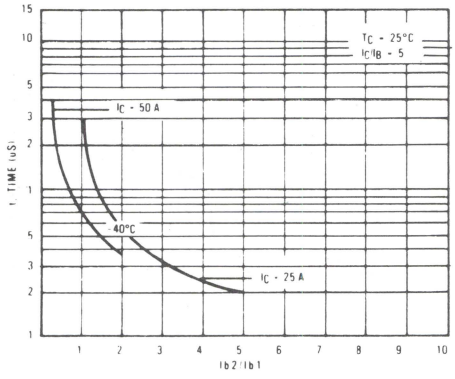

FIGURE 7 – TURN-OFF TIME vs Ic

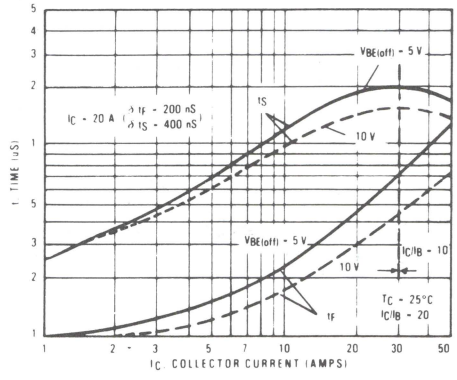

FIGURE 8 – STORAGE TIME vs FORCED GAIN

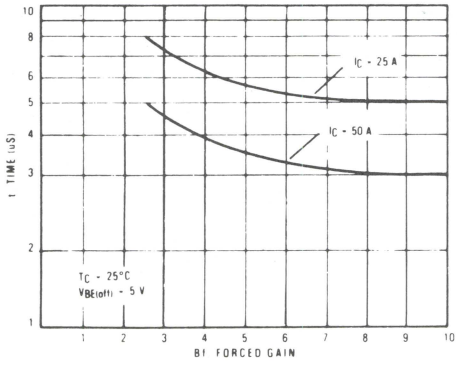

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

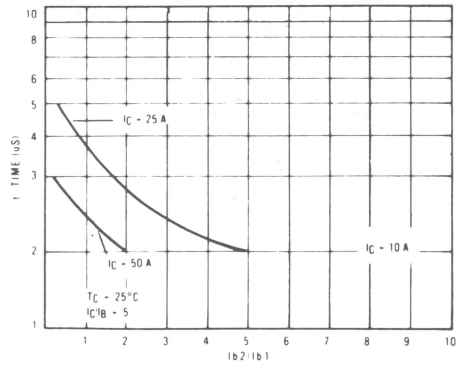

3

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

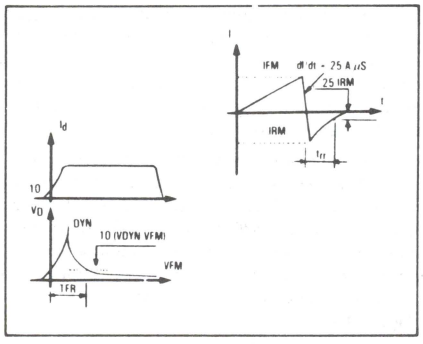

FIGURE 11 – FORWARD VOLTAGE

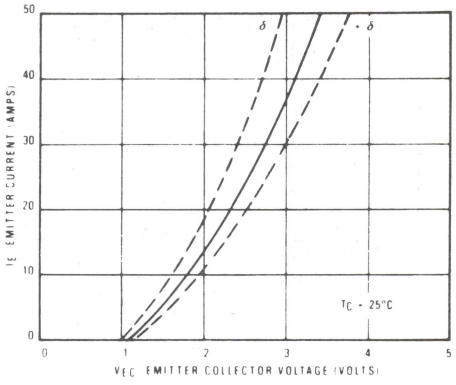

FIGURE 12 – FORWARD MODULATION VOLTAGE

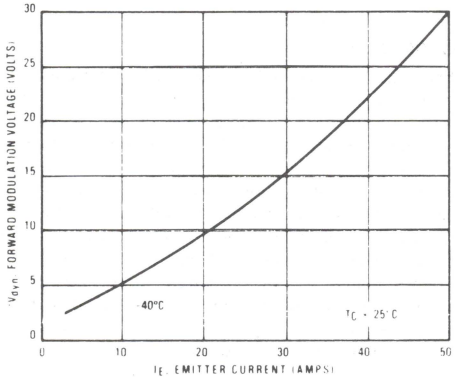

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

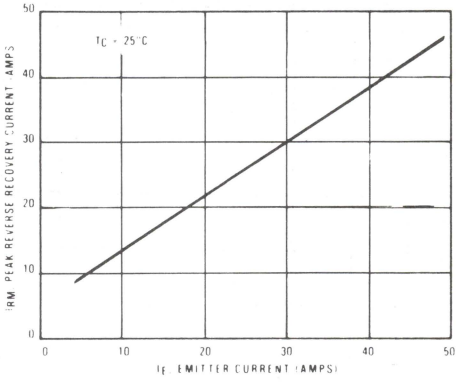

FIGURE 14 – FORWARD RECOVERY TIME

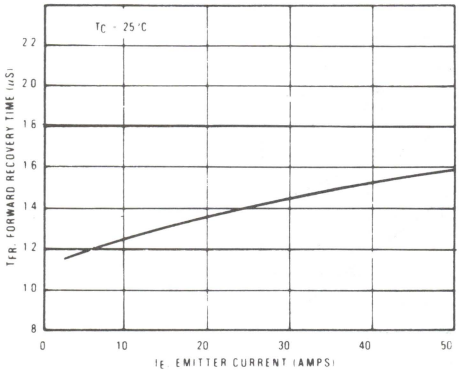

FIGURE 15 – REVERSE RECOVERY TIME

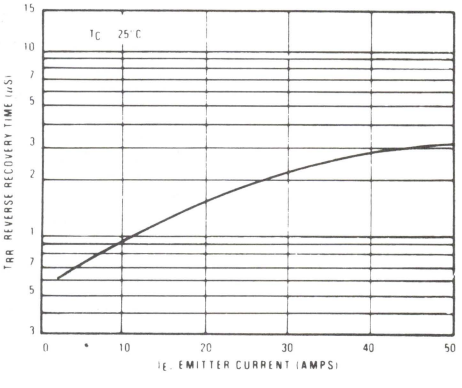

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

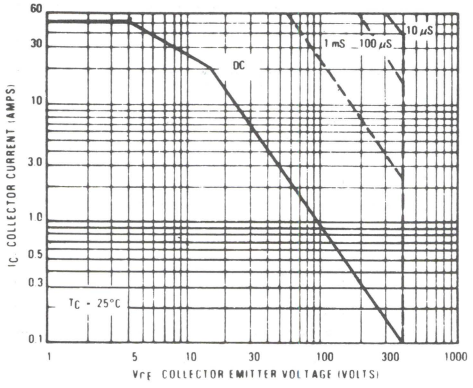

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

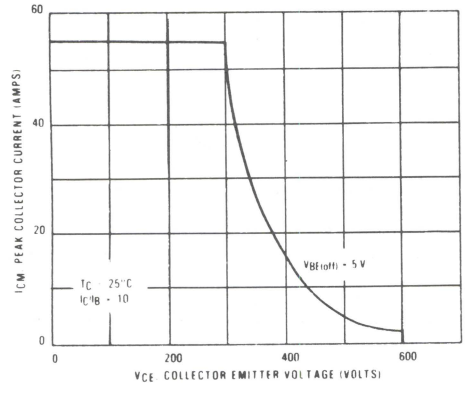

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

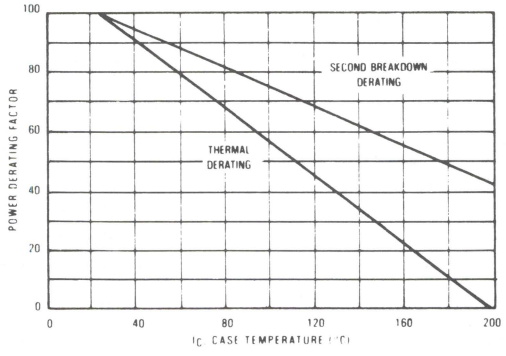

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BUT34

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT34 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  0.7 uS Inductive Fall Time at 25°C (Typ)
  1.8 uS Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range – 65 to 200°C



50 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
850 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BUT34	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	500	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 50 75	Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 10 15	Adc
Free Wheel Diode: Forward current – Continuous – Peak	 I_F I_{FM}	 50 75	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 140	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test. Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1
PIN 1 BASE
2 EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

CASE 197-01
MODIFIED TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	500	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	– –	0.2 4.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	350	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 16 A, V_{CE} = 5 V) (I_C = 32 A, V_{CE} = 5 V)	h_{FE}	30 15	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 16 A, I_B = 0.8 A) (I_C = 32 A, I_B = 3.2 A) (I_C = 40 A, I_B = 4 A) (I_C = 50 A, I_B = 10 A)	$V_{CE(sat)}$	– – – –	– – – –	2.0 3.0 3.5 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 16 A, I_B = 0.8 A) (I_C = 32 A, I_B = 3.2 A) (I_C = 40 A, I_B = 4 A)	$V_{BE(sat)}$	– – –	– – –	2.5 2.9 3.3	Vdc
Diode Forward Voltage (I_F = 40 A)	V_f	–	–	4.0	Vdc

40°C

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1	t_s	–	1.8	3.0	μs
Fall Time		I_C = 32 A	t_f	–	0.7	1.5	μs
Storage Time	T_C = 100°C	I_{B1} = 3.2 A	t_s	–	2.2	–	μs
Fall Time		$V_{BE(off)}$ = 5 V	t_f	–	0.8	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

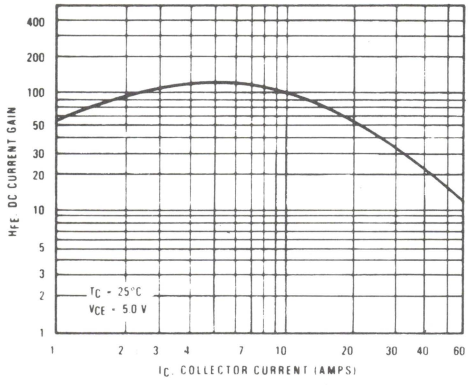

FIGURE 2 – COLLECTOR SATURATION REGION

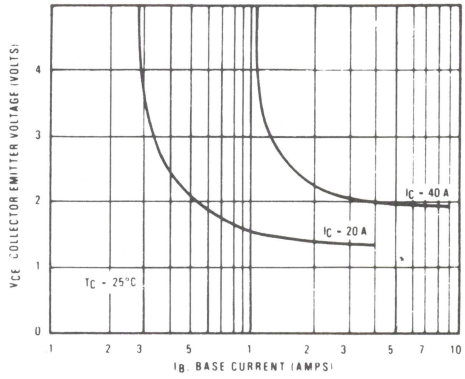

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

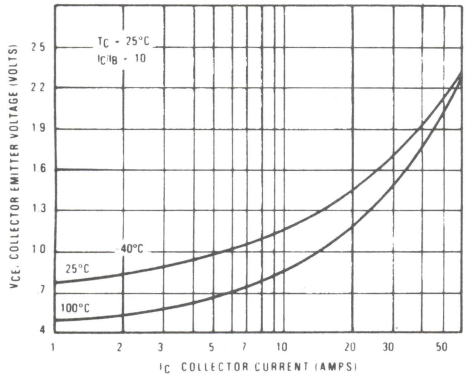

FIGURE 4 – BASE-EMITTER VOLTAGE

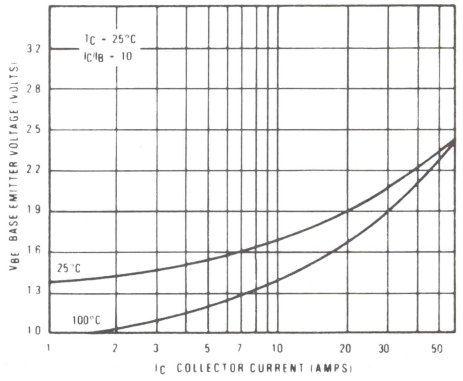

FIGURE 5 – THERMAL RESPONSE

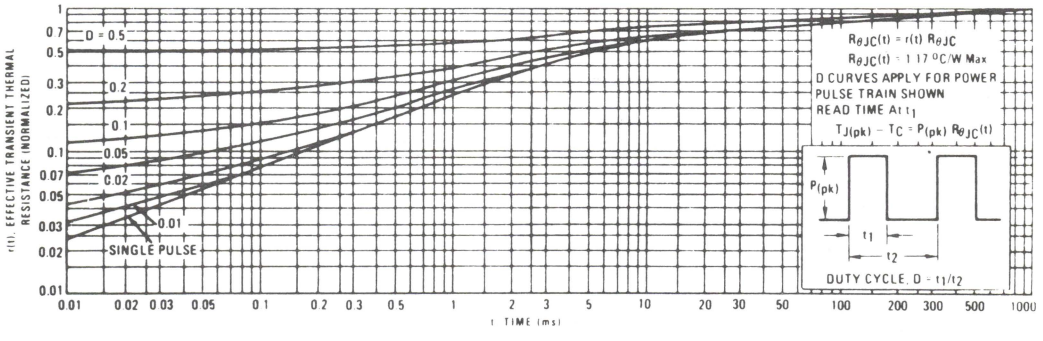

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	20 Ω, 5 V, PW Varied to Attain I_C = 100mA	10 V, 33 2W, D1, 22uF, 2N6438, MR854, 160, 680pF, 22, 2N5859, 220, 100, D1 D2 D3 D4 1N4934, 1uF, Ib1 Adjust, Ib2 Adjust, dTb Adjust dt, 680pF, 2N3763, 680pF, 100, 160, D3, D4, 22uF, 2N6339, Vcc	DRIVER, TUT, VD, Ip
CIRCUIT VALUES	L_{coil} = 10 mH VCC = 10V R_{coil} = 0.7 Ω Vclamp = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω VCC = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, VCC, Vclamp, Rs 0.1 Ω, See Above for Detailed Conditions	OUTPUT WAVEFORMS: IC, ICM, tf Clamped, t1, tf, VCE, VCEM, Vclamp, Time, t2	t1 Adjusted to Obtain IC $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope Tektronix 475 or Equivalent

FIGURE 6 – FALL TIME vs IB2/IB1

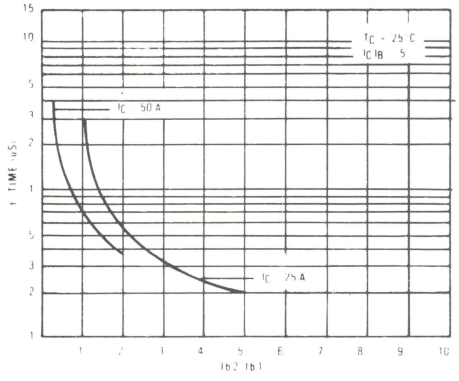

FIGURE 7 – TURN-OFF TIME vs Ic

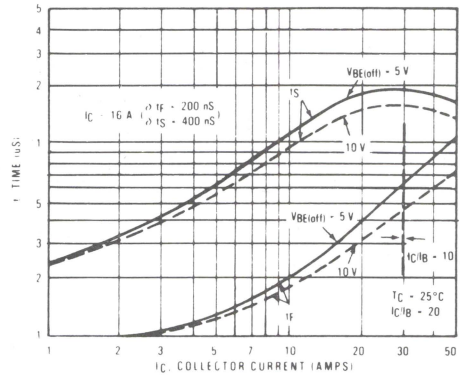

FIGURE 8 – STORAGE TIME vs FORCED GAIN

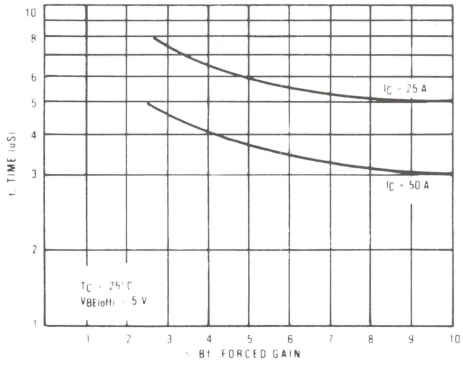

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

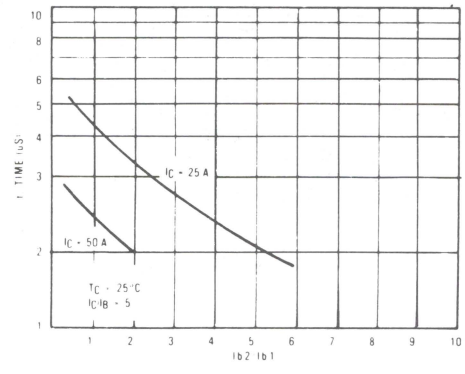

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

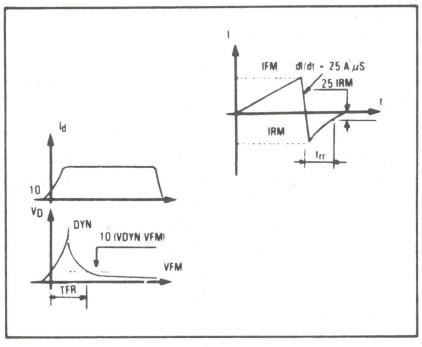

FIGURE 11 – FORWARD VOLTAGE

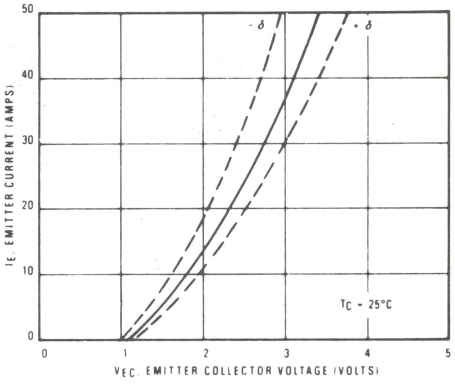

FIGURE 12 – FORWARD MODULATION VOLTAGE

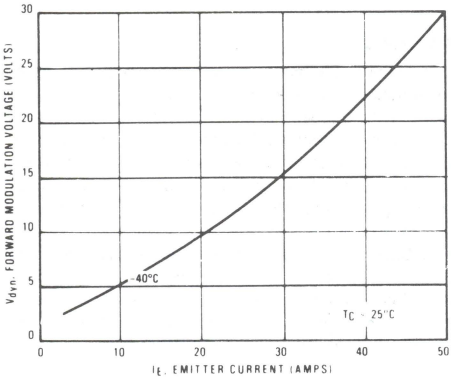

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

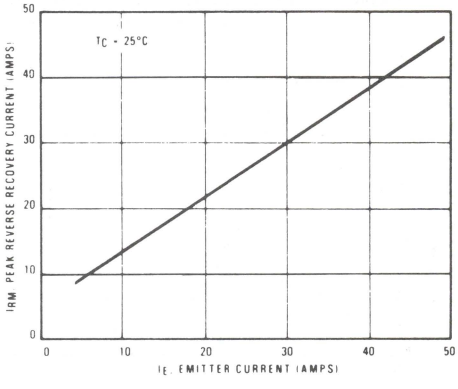

FIGURE 14 – FORWARD RECOVERY TIME

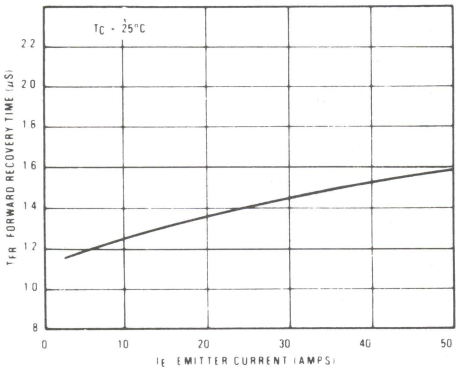

FIGURE 15 – REVERSE RECOVERY TIME

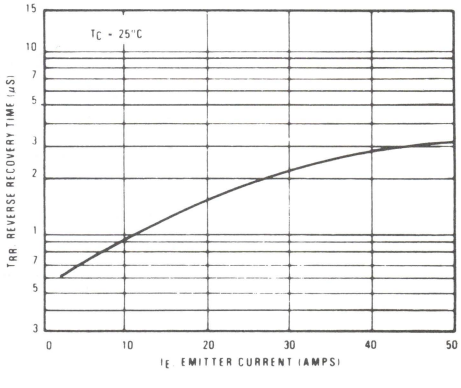

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

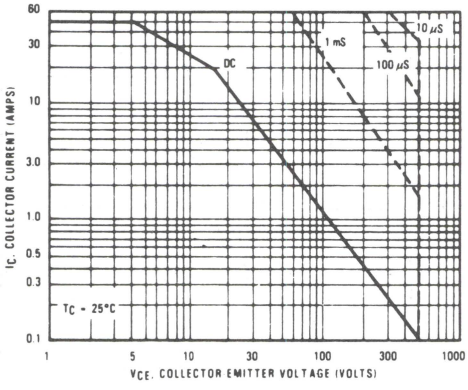

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

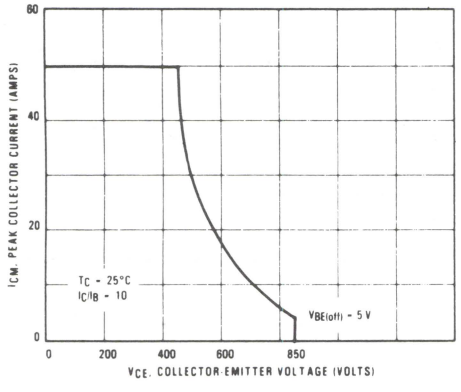

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq$ 25°C. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

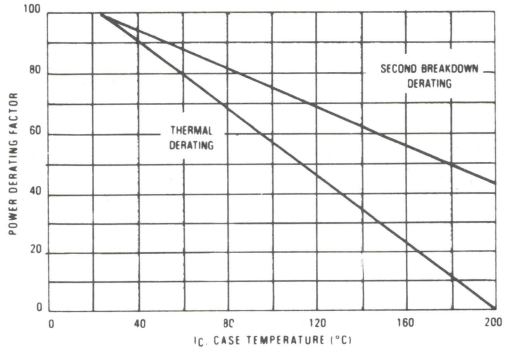

BUT35

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT35 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  550 nS Inductive Fall Time at 25°C (Typ)
  2.5 uS Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range −65 to 200°C



40 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
1000 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BUT35	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	Vdc
Collector-Emitter Voltage @ 40°C	V_{CEV}	1000	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 40 50	Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 10 20	Adc
Free Wheel Diode: Forward current Continuous Peak	 I_F I_{FM}	 40 50	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 140	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1
PIN 1 BASE
2 EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	—	26.67	—	1.050

CASE 197-01
MODIFIED TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	700	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	– –	0.2 4.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	350	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 12 A, V_{CE} = 5 V) (I_C = 24 A, V_{CE} = 5 V)	h_{FE}	30 15	– –	– –	
Collector Emitter Saturation Voltage (I_C = 12 A, I_B = 0.6 A) (I_C = 24 A, I_B = 2.4 A) (I_C = 32 A, I_B = 3.2 A) (I_C = 40 A, I_B = 8 A)	$V_{CE(sat)}$	– – – –	– – – –	2.0 3.0 3.5 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 12 A, I_B = 0.6 A) (I_C = 24 A, I_B = 2.4 A) (I_C = 32 A, I_B = 3.2 A)	$V_{BE(sat)}$	– – –	– – –	2.5 2.9 3.3	Vdc
Diode Forward Voltage (I_F = 32 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1	t_s	–	–	4.0	μs
Fall Time		I_C = 24 A	t_f	–	–	1.2	μs
Storage Time	T_C = 100°C	I_{B1} = 2.4 A	t_s	–	2.8	–	μs
Fall Time		$V_{BE(off)}$ = 5 V	t_f	–	0.65	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

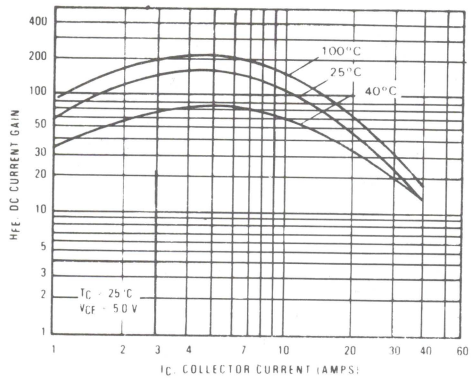

FIGURE 2 – COLLECTOR SATURATION REGION

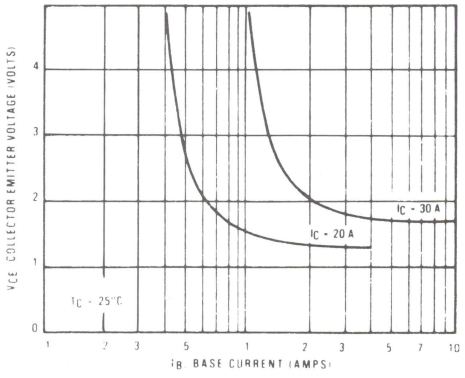

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

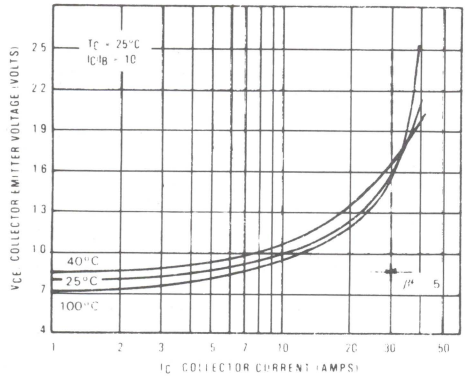

FIGURE 4 – BASE-EMITTER VOLTAGE

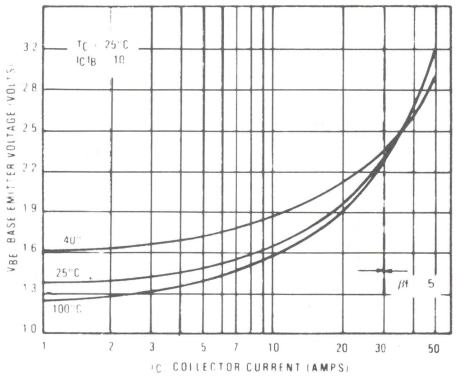

FIGURE 5 – THERMAL RESPONSE

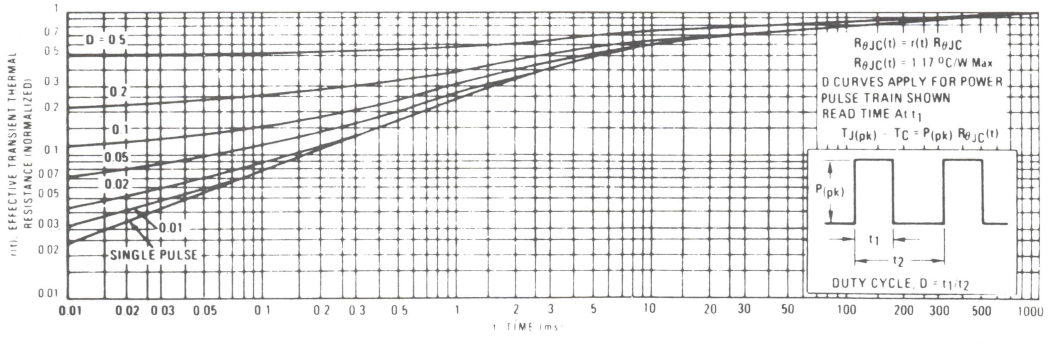

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	20 Ω, 5 V, 0, PW Varied to Attain I_C = 100mA	+10 V, 33 2W, 160, 680pF, 220, 100, 2N5859, 2N3781, 680pF, 680pF, 100, 33 2W, 160, D1 D2 D3 D4 1N4934, 22μF, 22μF, 2N6438, MR854, MR854, 2N6339, 1μF, Ib1 Adjust, Ib2 Adjust, dt b Adjust, dt, Vcc, Pulses	DRIVER, VD, ID
CIRCUIT VALUES	L_{coil} = 10 mH VCC = 10V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω VCC = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, VCC, V_{clamp}, RS 0.1 Ω, See Above for Detailed Conditions OUTPUT WAVEFORMS: I_C, I_{CM}, tf Clamped, t1, tf, VCE, VCEM, V_{clamp}, Time, t2 t1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{VCC}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	AV, VD, 510, ID, CRONE TICS PG138

FIGURE 6 – FALL TIME vs IB2/IB1

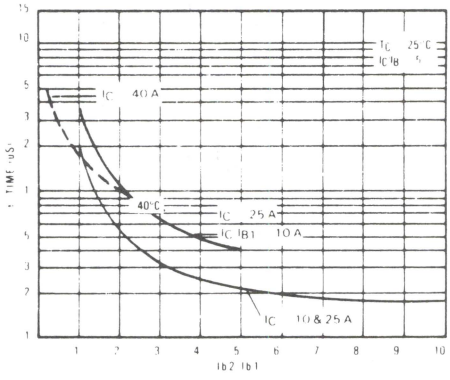

FIGURE 7 – TURN-OFF TIME vs Ic

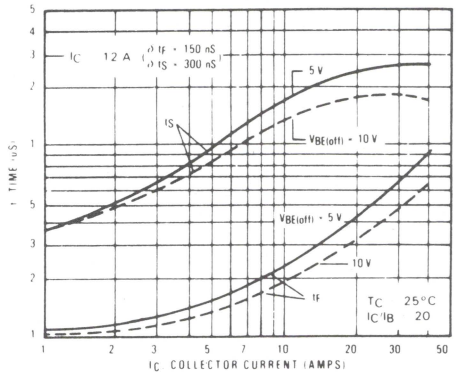

FIGURE 8 – STORAGE TIME vs FORCED GAIN

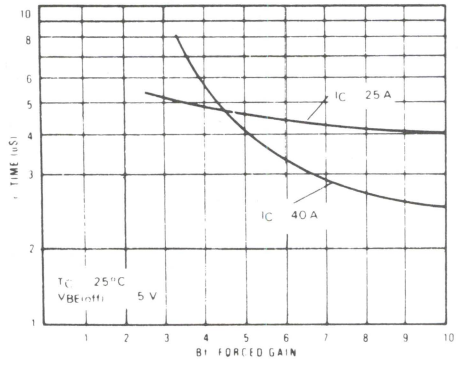

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

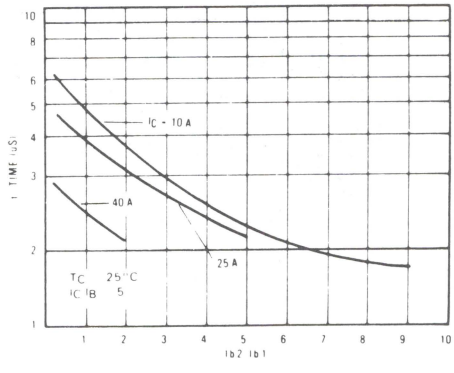

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

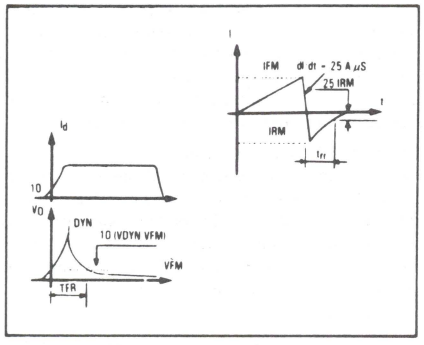

FIGURE 11 – FORWARD VOLTAGE

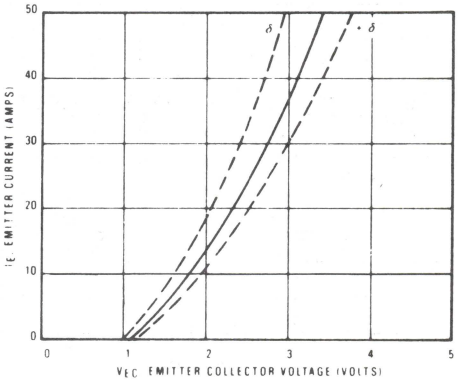

FIGURE 12 – FORWARD MODULATION VOLTAGE

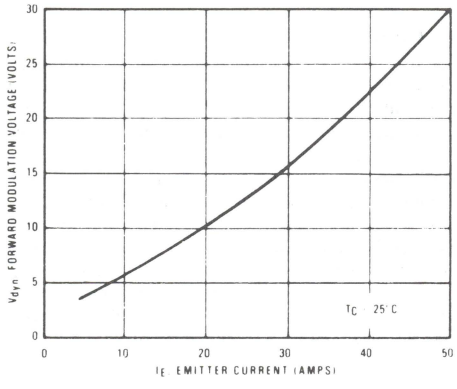

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

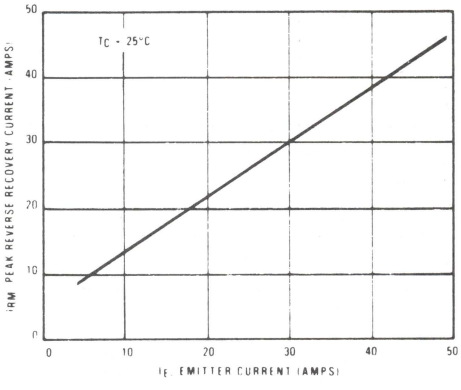

FIGURE 14 – FORWARD RECOVERY TIME

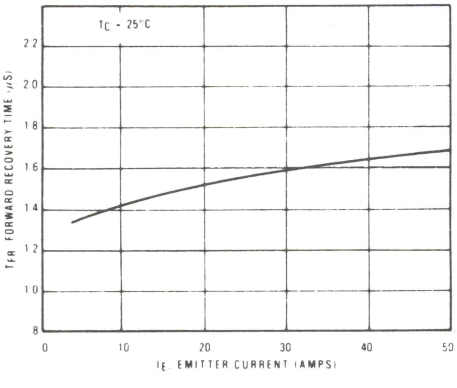

FIGURE 15 – REVERSE RECOVERY TIME

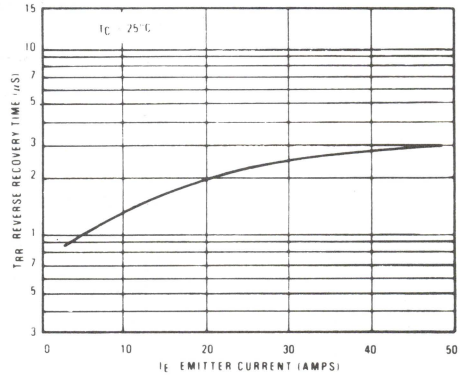

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

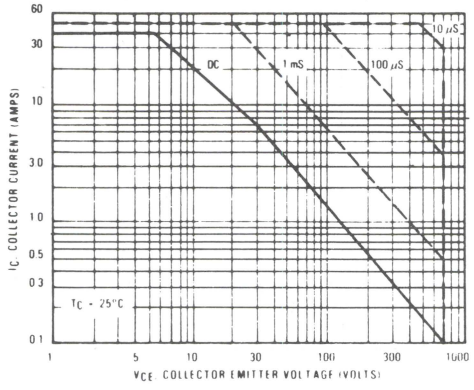

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

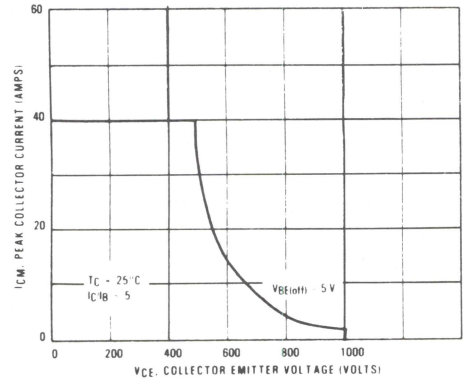

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geqq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

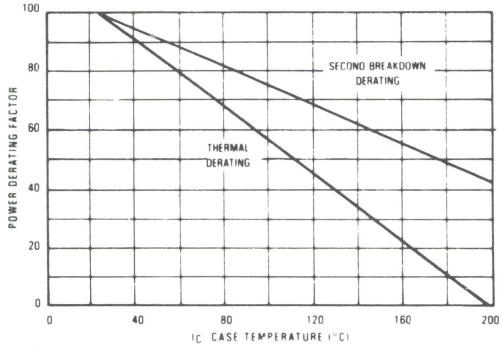

BUT36

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The BUT36 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  - 1.7 uS Inductive Fall Time at 100°C (Typ)
  - 4.5 uS Inductive Storage Time at 100°C (Typ)
- Operating Temperature Range – 65 to 175°C



24 AMPERES
NPN SILICON POWER DARLINGTON TRANSISTORS
1400 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	BUT36	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	1000	Vdc
Collector-Emitter Voltage	V_{CEV}	1400	Vdc
Emitter Base Voltage	V_{EB}	10	Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 24 40	Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 15 20	Adc
Free Wheel Diode: Forward current – Continuous – Peak	 I_F I_{FM}	 24 40	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 125	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +175	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	0.6	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test. Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1
PIN 1 BASE
2 EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

CASE 197-01
MODIFIED TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	1000	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	– –	– –	0.2 4.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)	I_{EBO}	–	–	350	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$		See Figure 16		
Clamped Inductive SOA with Base Reverse Biased	RBSOA		See Figure 17		
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 8 A, V_{CE} = 5 V) (I_C = 16 A, V_{CE} = 5 V)	h_{FE}	20 5	– –	– –	
Collector-Emitter Saturation Voltage (I_C = 24 A, I_B = 12 A)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 16 A, I_B = 3.2 A)	$V_{BE(sat)}$	–	–	3.3	Vdc
Diode Forward Voltage (I_F = 24 A)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped (Table 1)

Storage Time	T_C = 25°C	See Table 1	t_s	–	–	6.0	μs
Fall Time		I_C = 16 A	t_f	–	–	2.5	μs
Storage Time	T_C = 100°C	I_{B1} = 3.2 A	t_s	–	4.5	–	μs
Fall Time		$V_{BE(off)}$ = 5 V	t_f	–	1.7	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

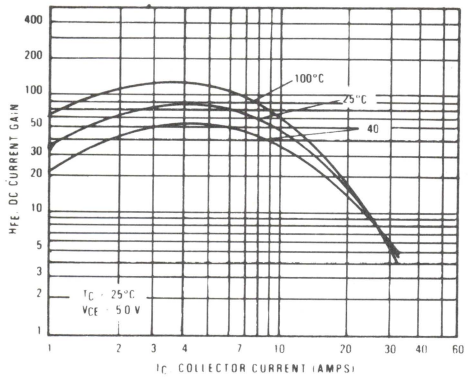

FIGURE 2 – COLLECTOR SATURATION REGION

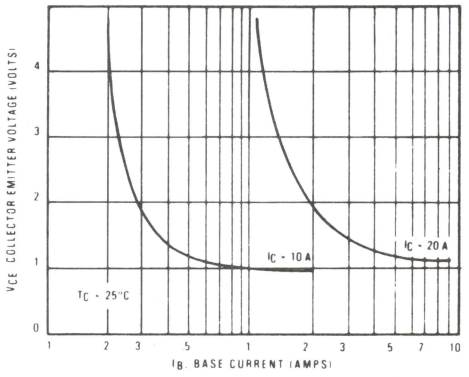

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

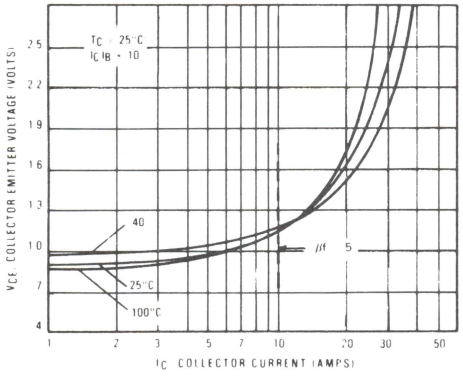

FIGURE 4 – BASE-EMITTER VOLTAGE

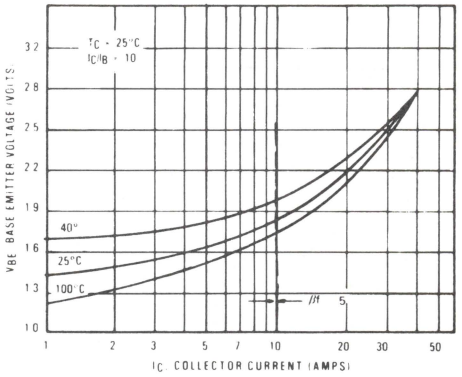

FIGURE 5 – THERMAL RESPONSE

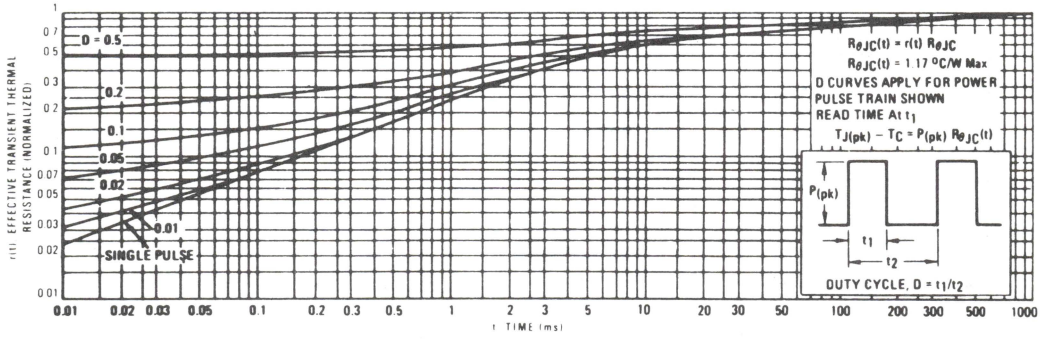

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	TEST CIRCUIT for FREE-WHEEL DIODE
INPUT CONDITIONS	20 Ω, 5 V, PW Varied to Attain I_C = 100 mA	+ 10 V, 33 2W, D1, 22 µF, 2N6438, 160, D3, MR854, 220, 100, 2N5889, 680 pF, 22, Ib1 Adjust, D1 D2 D3 D4 1N4934, 1 µF, Ib2 Adjust, dIb Adjust dt, 2N3781, 680 pF, 100, 160, D4, 2N6339, 22 µF, Vcc	DRIVER, VD, ID
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 µH R_{coil} = 0.05 Ω V_{CC} = 10 V	
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{CC}, V_{clamp}, Rs 0.1 Ω, See Above for Detailed Conditions OUTPUT WAVEFORMS: I_C, I_{CM}, tf Clamped, t1, tf, V_{CE}, V_{CEM}, V_{clamp}, Time, t2	t1 Adjusted to Obtain I_C $t1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	AV, CROMETICS PG138, 510, VD, ID

FIGURE 6 – FALL TIME vs IB2/IB1

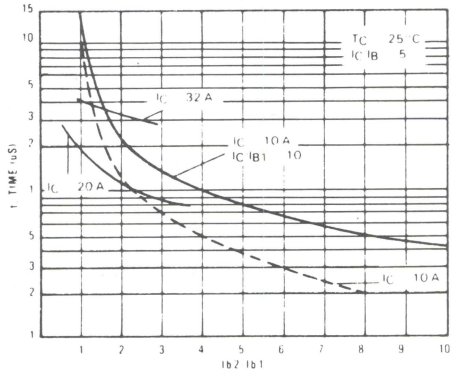

FIGURE 7 – TURN-OFF TIME vs Ic

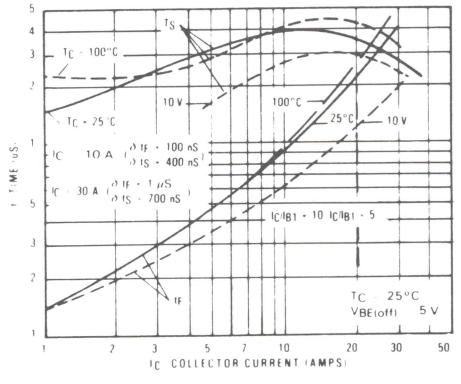

FIGURE 8 – STORAGE TIME vs FORCED GAIN

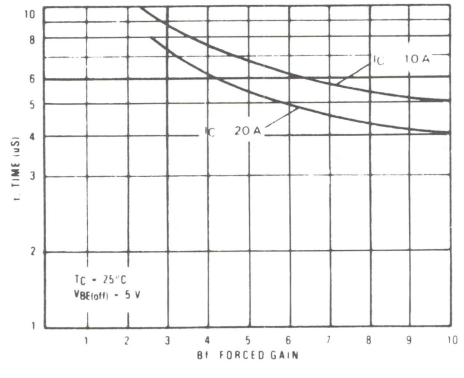

FIGURE 9 – STORAGE TIME vs Ib2/Ib1

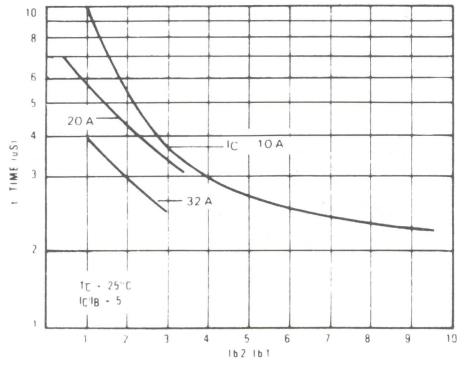

FREE-WHEEL DIODE CHARACTERISTICS

FIGURE 10 – FREE WHEEL DIODE MEASUREMENTS

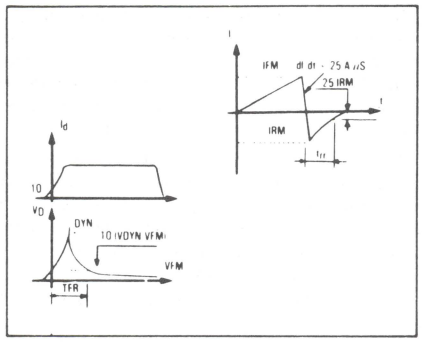

FIGURE 11 – FORWARD VOLTAGE

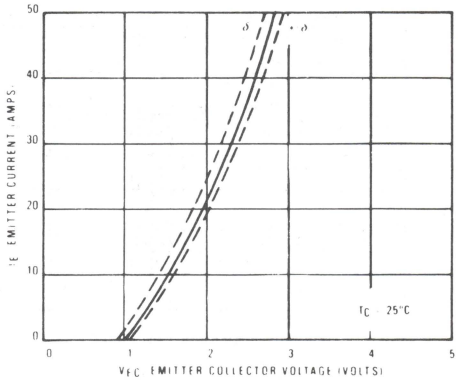

FIGURE 12 – FORWARD MODULATION VOLTAGE

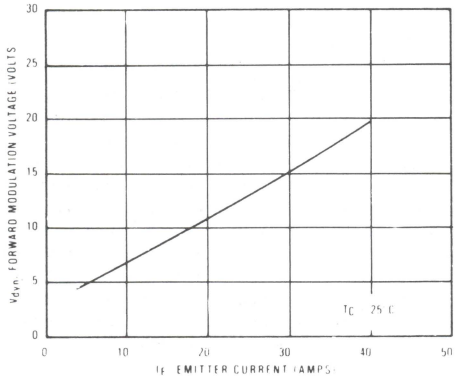

FIGURE 13 – PEAK REVERSE RECOVERY CURRENT

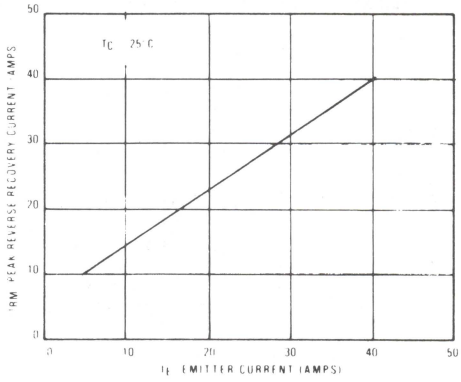

FIGURE 14 – FORWARD RECOVERY TIME

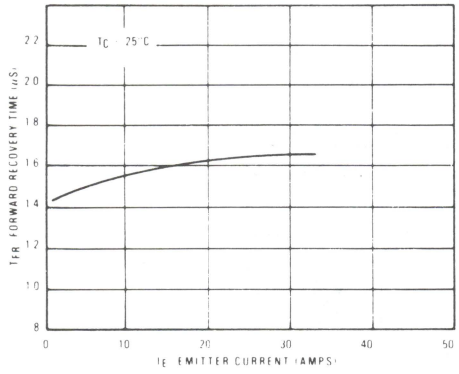

FIGURE 15 – REVERSE RECOVERY TIME

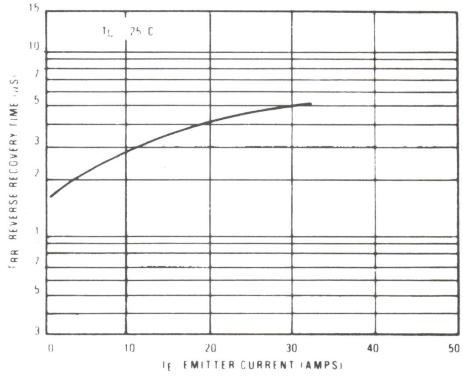

3

The Safe Operating Area figures shown in Figures 16 and 17 are specifed for these devices under the test conditions shown.

FIGURE 16 – SAFE OPERATING AREA

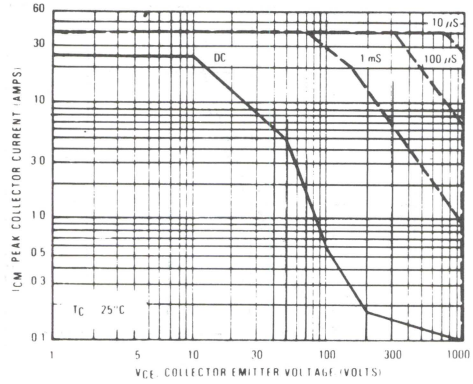

FIGURE 17 – REVERSE BIAS SAFE OPERATING AREA

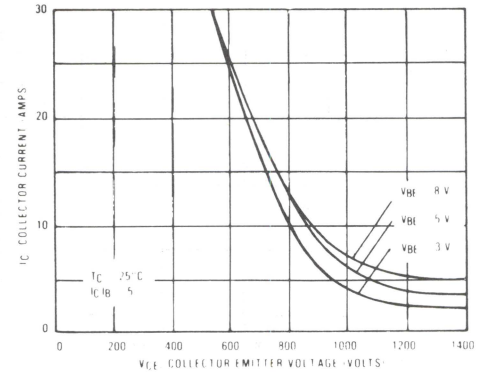

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subject to grater dissipation than the curves indicate.

The data of Figure 16 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 16 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 17 gives the RBSOA characteristics.

FIGURE 18 – POWER DERATING

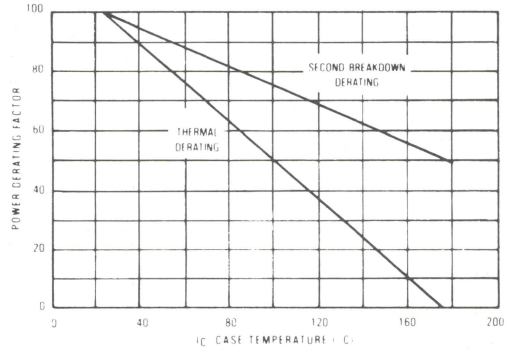

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BUT50P

ADVANCE INFORMATION

SWITCHMODE▲ SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS

The BUT50P darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line operated switch-mode applications such as :

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



8 AMPERES
NPN SILICON
POWER DARLINGTON
TRANSISTORS

500 VOLTS-Vceo(sus)
100 WATTS
850 VOLTS-Vces



MAXIMUM RATINGS

Rating	Symbol	BUT50P	Unit
Collector-Emiter Voltage	$V_{CEO(sus)}$	500	Vdc
Collector-Emitter Voltage	$V_{CEX(sus)}$	850	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	8	Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	8 16	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	2 4	Adc
Free Wheel Diode : Forward Current – continous – peak	 I_F I_{FM}	 8 16	Adc
Total Power Dissipation @ T_C=25°C @ T_C=100°C Derate above 25°C	P_D	100 40 .8	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to + 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	20.32	21.08	.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	3.94	4.19	0.155	0.165

Case 340-01
TO-218AC

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	500	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)	I_{CEV}	–	–	0.25	mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C		–	–	2.5	
Emitter Cutoff Current (V_{EB} = 8.0 V, I_C = 0)	I_{EBO}	–	–	175	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 2 Adc, V_{ce} = 5 V)	h_{FE}	30	–	–	–
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 5 Adc, I_b = 0.25 Adc)		–	–	2.0	
(I_C = 8 Adc, I_b = 1 Adc)		–	–	3.0	
(I_C = 5 Adc, I_b = 0.25 Adc, T_C = 100°C)		–	–	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$				Vdc
(I_C = 5 Adc, I_b = 0.25 Adc)		–	–	2.5	
(I_C = 5 Adc, I_b = 0.25 Adc, T_C = 100°C)		–	–	2.5	
Diode Forward Voltage (I_F = 5 Adc)	V_f	–	–	4.0	Vdc

SWITCHING CHARACTERISTICS
Inductive Load, Clamped

Storage Time	(I_C = 5 A, Ib_1 = 0.25 A, Vbe(off) = 5 V)	t_s	–	0.75	–	μs
Fall Time		t_f	–	0.10	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%

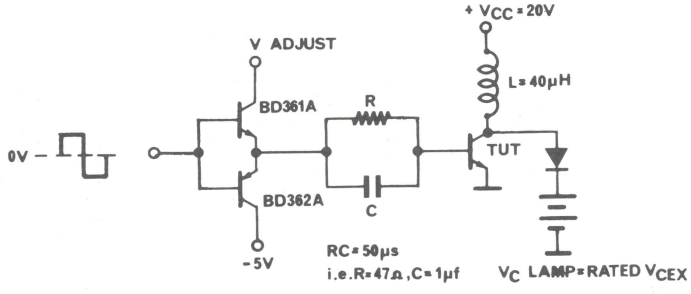

SWITCHING TIMES TEST CIRCUIT

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

BUT51P

ADVANCE INFORMATION

SWITCHMODE▲ SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS

The BUT51P darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line operated switch-mode applications such as :

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



15 AMPERES
NPN SILICON
POWER DARLINGTON TRANSISTORS
500 VOLTS-Vceo(sus)
100 WATTS
850 VOLTS—Vces



MAXIMUM RATINGS

Rating	Symbol	BUT51P	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	500	Vdc
Collector-Emitter Voltage	$V_{CEX(sus)}$	850	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	8	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	15 25	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2.5 5	Adc
Free Wheel Diode : Forward Current — continous — peak	 I_F I_{FM}	 15 25	Adc
Total Power Dissipation @ T_C=25°C @ T_C=100°C Derate above 25°C	P_D	125 50 1	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to + 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta JC$	1	°C/W

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1.
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.84	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	3.94	4.19	0.155	0.165

Case 340-01
TO-218AC

3

BUV10N

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high current, high speed, high power applications.

- HFe min.: 20 at Ic = 10 A
- T_F max. = 0.45 μs at Ic = 15 A
- Equivalent to BDY58

25 AMPERES

NPN SILICON POWER METAL TRANSISTOR

125 VOLTS
175 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	125	Vdc
Collector-Base Voltage	V_{CBO}	160	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −1.5 V)	V_{CEX}	160	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	140	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	25 30	Adc Apk
Base-Current continuous	I_B	6	Adc
Total Power Dissipation @ T_C = 25°C	P_D	175	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.0	°C/W



STYLE 1
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	—	22.23	—	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	—	0.312	—
Q	3.84	4.09	0.151	0.161
S	—	13.34	—	0.525
T	—	4.78	—	0.188

All JEDEC dimensions and notes apply

CASE 1-03
(TO-3)

FIGURE 1 – POWER DERATING

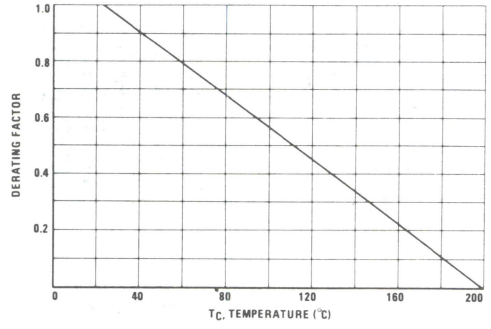

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage ($I_C = 200$ mA, $I_B = 0$, L = 25 mH)	$V_{CEO(sus)}$	125		Vdc
Collector Cutoff Current at Reverse Biais: ($V_{CE} = 160$ V, $V_{BE} = -1.5$ V) ($V_{CE} = 160$ V, $V_{BE} = -1.5$ V, $T_C = 125°C$)	I_{CEX}		1.5 6	mAdc
Collector-Emitter Cutoff Current ($V_{CE} = 100$ V)	I_{CEO}		1.5	mAdc
Emitter-Base Reverse Voltage ($I_E = 50$ mA)	V_{EBO}	7		V
Emitter-Cutoff Current ($V_{EB} = 5$ V)	I_{EBO}		0.5	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased ($V_{CE} = 20$ V, t = 0.5 s) ($V_{CE} = 48$ V, t = 0.5 s)	$I_{S/b}$	8.75 1.0		Adc
ON CHARACTERISTICS[1]				
DC Current Gain ($I_C = 10$ A, $V_{CE} = 4$ V) ($I_C = 20$ A, $V_{CE} = 4$ V)	h_{FE}	20 10	60	
Collector-Emitter Saturation Voltage ($I_C = 10$ A, $I_B = 1$ A) ($I_C = 20$ A, $I_B = 2$ A)	$V_{CE(sat)}$		1 2.0	Vdc
Base-Emitter Saturation Voltage ($I_C = 10$ A, $I_B = 1$ A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product ($V_{CE} = 15$ V, $I_C = 1$ A, f = 4 MHz)	f_T	10.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	$I_C = 15$ A, $I_{B1} = I_{B2} = 1.5$ A, ($V_{CC} = 75$ V, RC = 5 Ω)	t_{on}		1.0	μs
Storage Time		t_s		1.55	
Fall Time		t_f		0.45	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

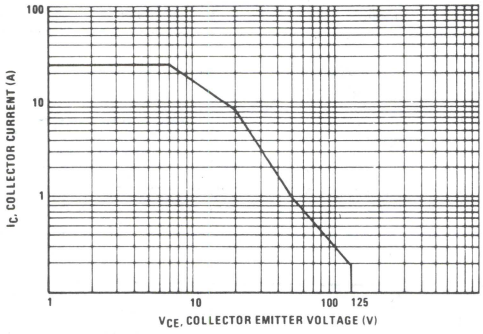

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on $T_C = 25°C$; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

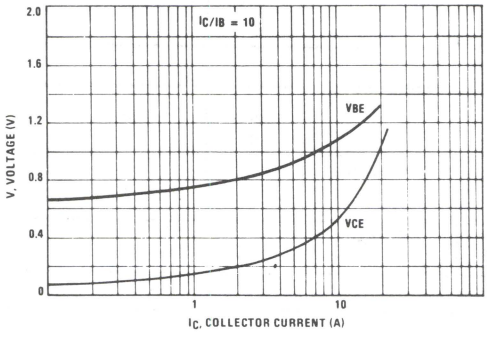

FIGURE 4 – DC CURRENT GAIN

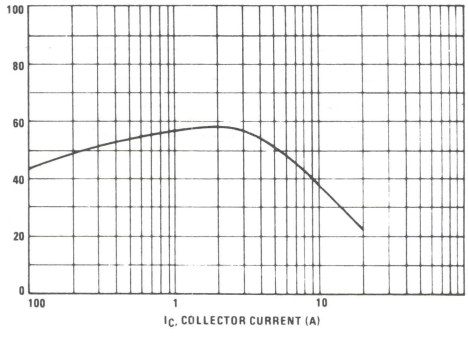

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

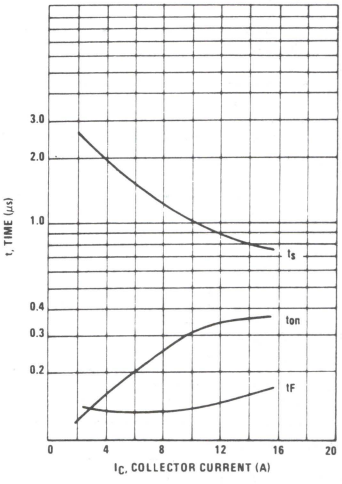

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



3

BUV11

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high current, high speed, high power applications.

- High DC current gain: HFE min. = 20 at Ic = 6 A
- Low $V_{CE(sat)}$, $V_{CE(sat)}$ max. = 0.6 V at Ic = 6 A
- Very fast switching times:
  T_F max. = 0.8 μs at Ic = 12 A

20 AMPERES

NPN SILICON POWER METAL TRANSISTOR

200 VOLTS
150 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	200	Vdc
Collector-Base Voltage	V_{CBO}	250	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = –1.5 V)	V_{CEX}	250	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	240	Vdc
Collector-Current – continuous – peak (pw ≤ 10 ms)	I_C I_{CM}	20 25	Adc Apk
Base-Current continuous	I_B	4	Adc
Total Power Dissipation @ T_C = 25°C	P_D	150	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

FIGURE 1 – POWER DERATING

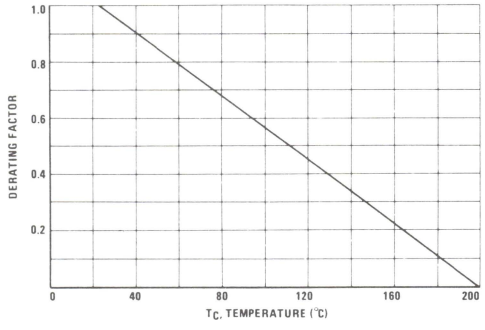



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE: EMITTER

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	–	22.23	–	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	–	0.312	–
Q	3.84	4.09	0.151	0.161
S	–	13.34	–	0.525
T	–	4.78	–	0.188

All JEDEC dimensions and notes apply.

CASE 1-03
(TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	200		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 250 V, V_{BE} = −1.5 V)	I_{CEX}		1.5	mAdc
(V_{CE} = 250 V, V_{BE} = −1.5 V, T_C = 125°C)			6	
Collector-Emitter Cutoff Current (V_{CE} = 160 V)	I_{CEO}		1.5	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s)	$I_{S/b}$	5.0		Adc
(V_{CE} = 140 V, t = 1 s)		0.15		
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 6 A, V_{CE} = 2 V)	h_{FE}	20	60	
(I_C = 12 A, V_{CE} = 4 V)		10		
Collector-Emitter Saturation Voltage (I_C = 6 A, I_B = 0.6 A)	$V_{CE(sat)}$		0.6	Vdc
(I_C = 12 A, I_B = 1.5 A)			1.5	
Base-Emitter Saturation Voltage (I_C = 12 A, I_B = 1.5 A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 12 A, I_{B1} = I_{B2} = 1.5 A, (V_{CC} = 150 V, RC = 12.5 Ω)	t_{on}		0.8	μs
Storage Time		t_s		1.8	
Fall Time		t_f		0.4	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIG'IRE 2 – ACTIVE REGION SAFE OPERATING AREA

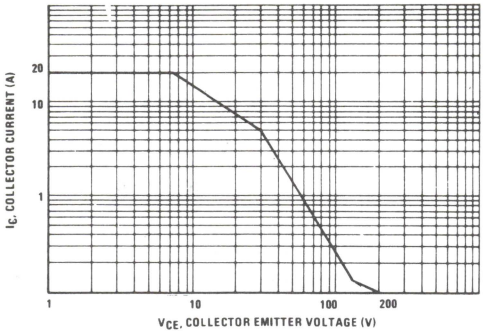

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

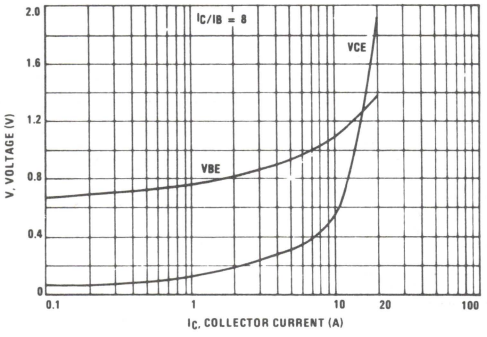

FIGURE 4 – DC CURRENT GAIN

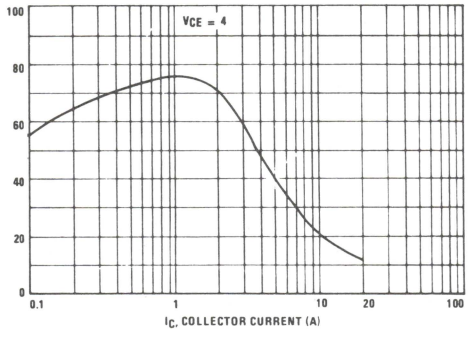

FIGURE 5 – SWITCHING TIMES VERSUS COLLECTOR CURRENT

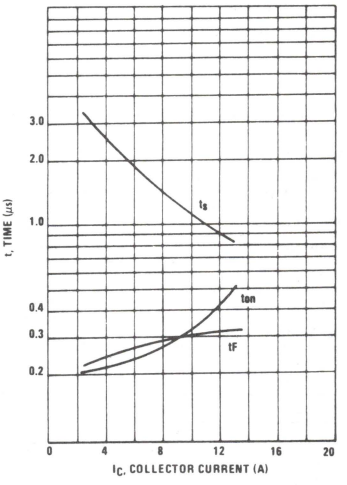

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



3

BUV11N

NPN SILICON POWER METAL TRANSISTOR

. . . designed for high speed, high current, high power applications.

- High DC Current gain – H_{FE} min 20 @ I_C = 8 A
- Very fast switching times
  t_F max. = 0.25 μs @ I_C = 15 A
- Low $V_{CE(sat)}$: $V_{CE(sat)}$ max. = 0.6 V, @ I_C = 8A
- High V_{CEO}: 160 V.

NPN SILICON POWER METAL TRANSISTOR

20 AMPERES



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	160	Vdc
Collector-Base Voltage	V_{CBO}	220	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = -1.5 V)	V_{CEX}	220	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	200	Vdc
Collector-Current – continuous – peak (pw ≤ 10 ms)	I_C I_{CM}	20 25	Adc Apk
Base-Current continuous	I_B	5	Adc
Total Power Dissipation @ T_C = 25 °C	P_D	150	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE: EMITTER

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
B	—	22.23	–	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	–	0.312	–
Q	3.84	4.09	0.151	0.161
S	–	13.34	–	0.525
T	–	4.78	–	0.188

All JEDEC dimensions and notes apply.

CASE 1-03
(TO-3)

FIGURE 1 – POWER DERATING

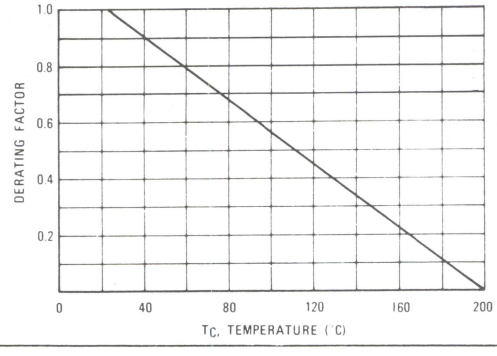

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	160		Vdc
Collector Cutoff Current at Reverse Bias: (V_{CE} = 220 V, V_{BE} = −1.5 V) (V_{CE} = 220 V, V_{BE} = −1.5 V, T_C = 125 °C)	I_{CEX}		1.5 6.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 130 V)	I_{CEO}		1.5	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s) (V_{CE} = 140 V, t = 1 s)	$I_{S/b}$	5 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 8 A, V_{CE} = 2 V) (I_C = 15 A, V_{CE} = 4 V)	h_{FE}	20 10	60	
Collector-Emitter Saturation Voltage (I_C = 8 A, I_B = 0.8 A) (I_C = 15 A, I_B = 1.88 A)	$V_{CE(sat)}$		0.6 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 15 A, I_B = 1.88 A)	$V_{BE(sat)}$		1.8	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain — Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	(I_C = 15 A, I_{B1} = I_{B2} = 1.88 A, V_{CC} = 30 V, RL ≃ 2 Ω)	t_{on}		1.2	μs
Storage Time		t_s		1.2	
Fall Time		t_f		0.25	

[1] Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤2%.

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

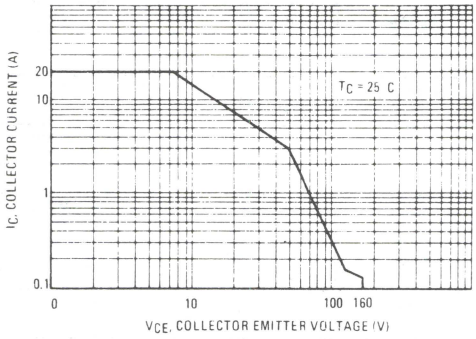

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25 °C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

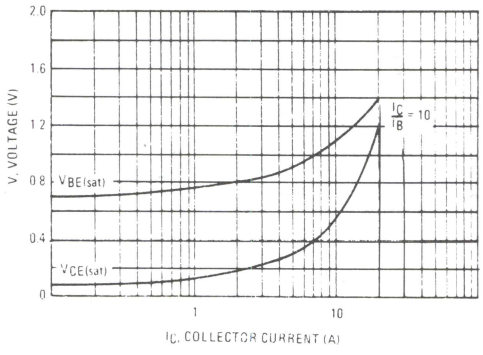

FIGURE 4 – DC CURRENT GAIN

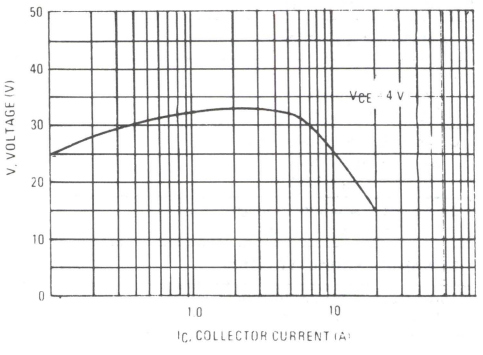

3

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

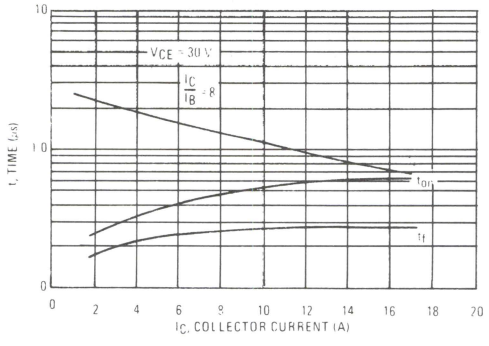

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C R_B Non-inductive resistances

BUV12

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high voltage, high power applications.

- High DC current gain:
  HFE min. = 20 at Ic = 5 A
- Very fast switching times:
  T_S max. = 1.5 μs at Ic = 10 A
  T_F max. = 0.5 μs at Ic = 10 A

20 AMPERES

NPN SILICON POWER METAL TRANSISTOR

250 VOLTS
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	250	Vdc
Collector-Base Voltage	V_{CBO}	300	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −1.5 V)	V_{CEX}	300	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	290	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	20 25	Adc Apk
Base-Current continuous	I_B	4	Adc
Total Power Dissipation @ T_C = 25°C	P_D	150	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

FIGURE 1 – POWER DERATING

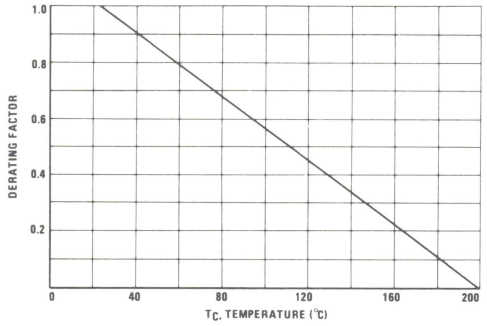



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE: EMITTER

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	—	22.23	—	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E		3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	—	0.312	
Q	3.84	4.09	0.151	0.161
S	—	13.34	—	0.525
T	—	4.78	—	0.188

All JEDEC dimensions and notes apply

CASE 1-03
(TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	250		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 300 V, V_{BE} = −1.5 V) (V_{CE} = 300 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		1.5 6	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 200 V)	I_{CEO}		1.5	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s) (V_{CE} = 140 V, t = 1 s)	$I_{S/b}$	5.0 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 5 A, V_{CE} = 4 V) (I_C = 10 A, V_{CE} = 4 V)	h_{FE}	20 10	60	
Collector-Emitter Saturation Voltage (I_C = 5 A, I_B = 0.5 A) (I_C = 10 A, I_B = 1.25 A)	$V_{CE(sat)}$		1.0 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 10 A, I_B = 1.25 A),	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 10 A, I_{B1} = I_{B2} = 1.25 A, (V_{CC} = 150 V, RC = 15 Ω)	t_{on}		0.7	μs
Storage Time		t_s		1.5	
Fall Time		t_f		0.5	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

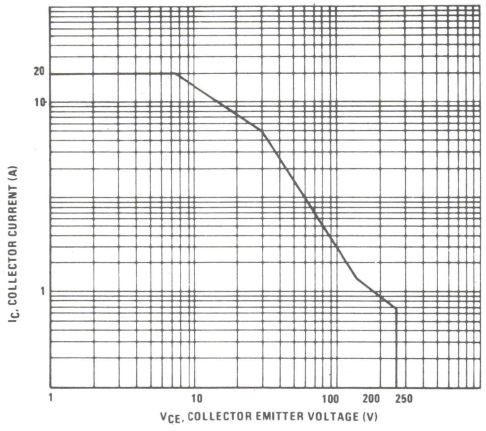

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

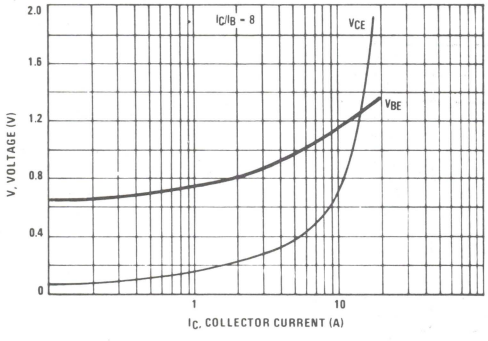

FIGURE 4 – DC CURRENT GAIN

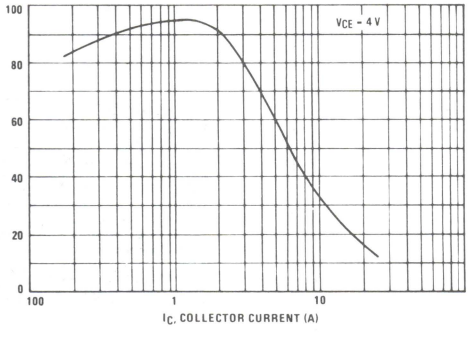

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

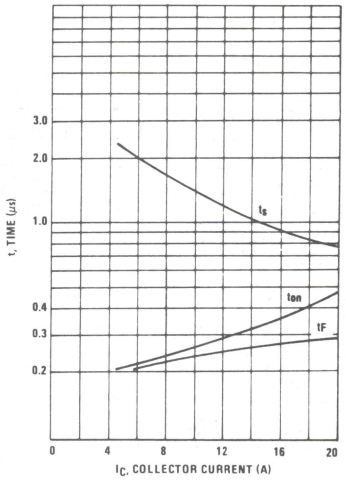

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

3

BUV20

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high current, high power applications.

- High DC current gain:
  HFE min. = 20 at Ic = 25 A
  = 10 at Ic = 50 A
- Low $V_{CE(sat)}$:
  $V_{CE(sat)}$ max. = 0.6 V at Ic = 25 A
  = 1.2 V at Ic = 50 A
- Very fast switching times:
  T_F = 0.25 μs at Ic = 50 A

50 AMPERES

NPN SILICON POWER METAL TRANSISTOR

125 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	125	Vdc
Collector-Base Voltage	V_{CBO}	160	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −1.5 V)	V_{CEX}	160	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	150	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	50 60	Adc Apk
Base-Current continuous	I_B	10	Adc
Total Power Dissipation @ T_C = 25°C	P_D	250	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO 3

FIGURE 1 – POWER DERATING

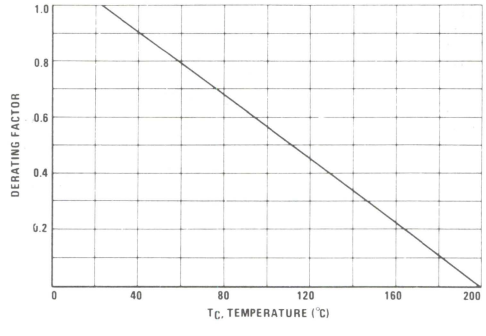

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	125		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 140 V, V_{BE} = −1.5 V) (V_{CE} = 140 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		3.0 12	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 100 V)	I_{CEO}		3.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 20 V, t = 1 s) (V_{CE} = 40 V, t = 1 s)	$I_{S/b}$	12 1.5		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 25 A, V_{CE} = 2 V) (I_C = 50 A, V_{CE} = 4 V)	h_{FE}	20 10	60	
Collector-Emitter Saturation Voltage (I_C = 25 A, I_B = 2.5 A) (I_C = 50 A, I_B = 5 A)	$V_{CE(sat)}$		0.6 1.2	Vdc
Base-Emitter Saturation Voltage (I_C = 50 A, I_B = 5 A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 2 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 50 A, I_{B1} = I_{B2} = 5 A, (V_{CC} = 30 V, RC = 0.6 Ω)	t_{on}		1.5	μs
Storage Time		t_s		1.2	
Fall Time		t_f		0.25	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

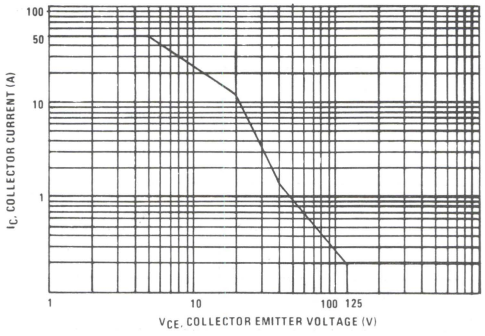

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25 C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

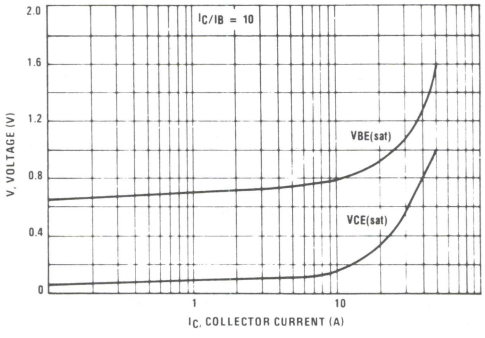

FIGURE 4 – DC CURRENT GAIN

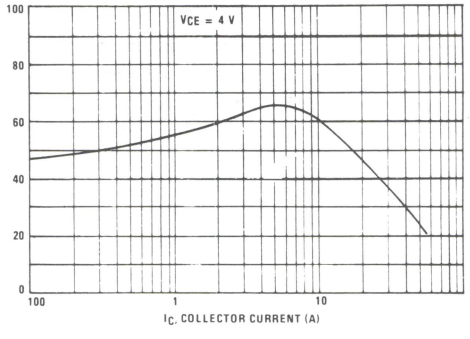

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

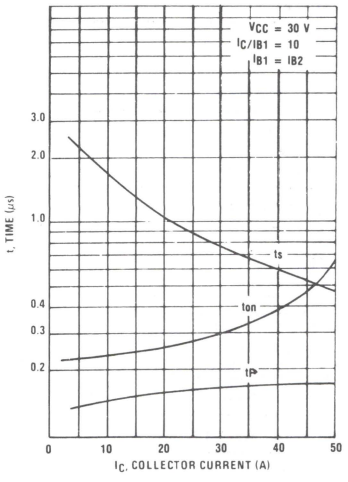

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – Non inductive resistance

BUV21

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high current, high power applications.

- High DC current gain:
  HFE min. = 20 at Ic = 12 A
- Low $V_{CE(sat)}$, $V_{CE(sat)}$ max. = 0.6 V at Ic = 8 A
- Very fast switching times:
  T_F max. = 0.4 μs at Ic = 25 A

40 AMPERES

NPN SILICON POWER METAL TRANSISTOR

200 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	200	Vdc
Collector-Base Voltage	V_{CBO}	250	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = –1.5 V)	V_{CEX}	250	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	240	Vdc
Collector-Current – continuous – peak (pw ≤ 10 ms)	I_C I_{CM}	40 50	Adc Apk
Base-Current continuous	I_B	8	Adc
Total Power Dissipation @ T_C = 25°C	P_D	150	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W

FIGURE 1 – POWER DERATING

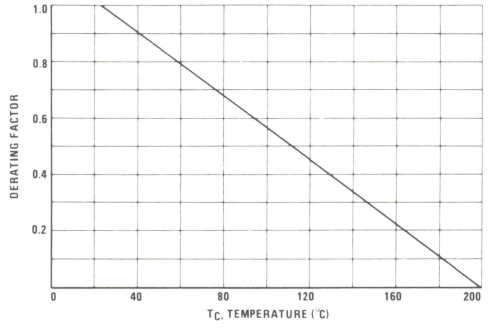



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO 3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	200		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 250 V, V_{BE} = −1.5 V)	I_{CEX}		3.0	mAdc
(V_{CE} = 250 V, V_{BE} = −1.5 V, T_C = 125°C)			12.0	
Collector-Emitter Cutoff Current (V_{CE} = 160 V)	I_{CEO}		3.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 20 V, t = 1 s)	$I_{S/b}$	12		Adc
(V_{CE} = 140 V, t = 1 s)		0.15		
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 12 A, V_{CE} = 2 V)	h_{FE}	20	60	
(I_C = 25 A, V_{CE} = 4 V)		10		
Collector-Emitter Saturation Voltage (I_C = 12 A, I_B = 1,2 A)	$V_{CE(sat)}$		0.6	Vdc
(I_C = 25 A, I_B = 3 A)			1.5	
Base-Emitter Saturation Voltage (I_C = 25 A, I_B = 3 A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 2 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 25 A, I_{B1} = I_{B2} = 3 A, (V_{CC} = 100 V, RC = 4 Ω)	t_{on}		1.0	μs
Storage Time		t_s		1.8	
Fall Time		t_f		0.4	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

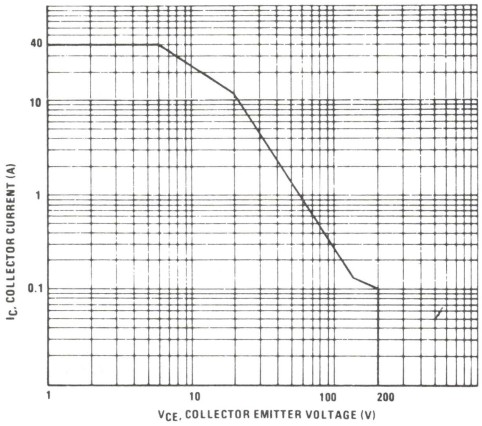

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25 C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

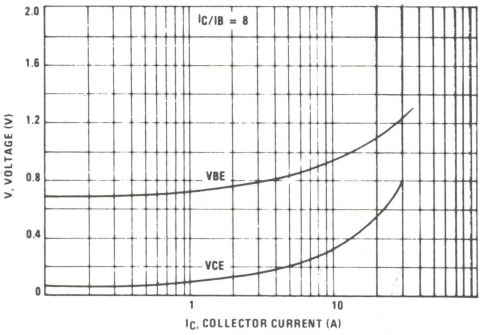

FIGURE 4 – DC CURRENT GAIN

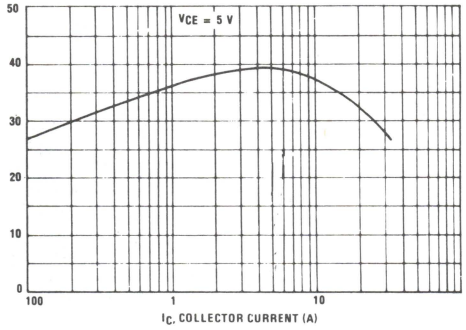

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

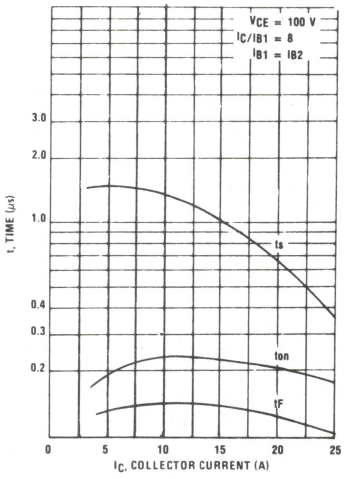

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

3

BUV21N

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high current, high power and low cost applications.

- High DC current gain: HFE min. = 15 at Ic = 20 A
- Low $V_{CE(sat)}$: $V_{CE(sat)}$ max. = 1.0 V at Ic = 20 A
  = 1.8 V at Ic = 40 A
- Very fast switching times:
  T_F max. = 0.2 μs at Ic = 40 A

40 AMPERES

NPN SILICON POWER METAL TRANSISTOR

160 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	160	Vdc
Collector-Base Voltage	V_{CBO}	220	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = –1.5 V)	V_{CEX}	220	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	200	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	40 50	Adc Apk
Base-Current continuous	I_B	10	Adc
Total Power Dissipation @ T_C = 25°C	P_D	250	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO 3

FIGURE 1 – POWER DERATING

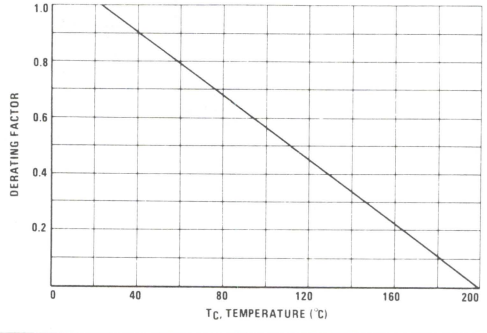

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	160		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 220 V, V_{BE} = −1.5 V) (V_{CE} = 220 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		3.0 12.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 130 V)	I_{CEO}		3.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 25 V, t = 0.5 s) (V_{CE} = 140 V, t = 0.5 s)	$I_{S/b}$	10 0.3		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 20 A, V_{CE} = 4 V) (I_C = 40 A, V_{CE} = 4 V)	h_{FE}	15 10	60	
Collector-Emitter Saturation Voltage (I_C = 20 A, I_B = 2 A) (I_C = 40 A, I_B = 5 A)	$V_{CE(sat)}$		1.0 1.8	Vdc
Base-Emitter Saturation Voltage (I_C = 40 A, I_B = 5 A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 2 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 40 A, I_{B1} = I_{B2} = 5 A, (V_{CC} = 30 V, RC = 0.75 Ω)	t_{on}		1.2	μs
Storage Time		t_s		1.0	
Fall Time		t_f		0.2	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

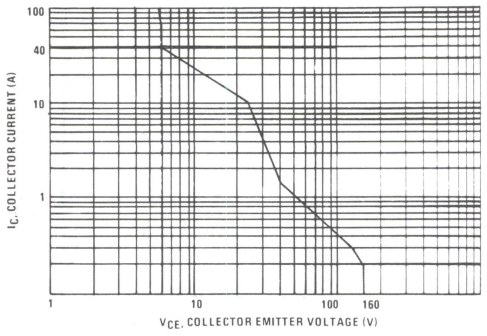

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25 C, $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

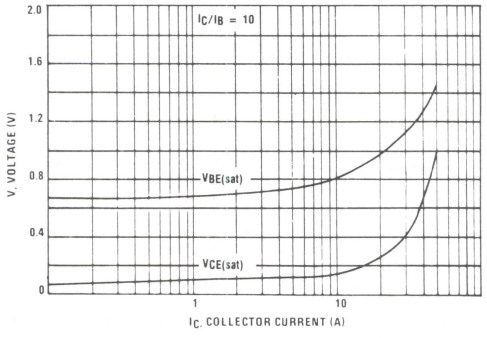

FIGURE 4 – DC CURRENT GAIN

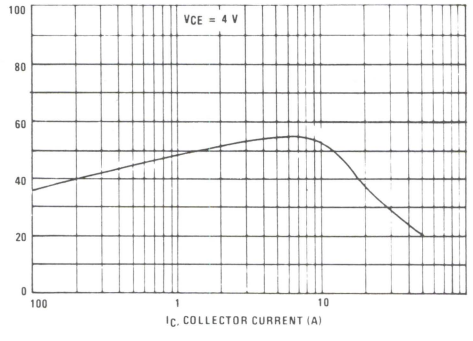

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

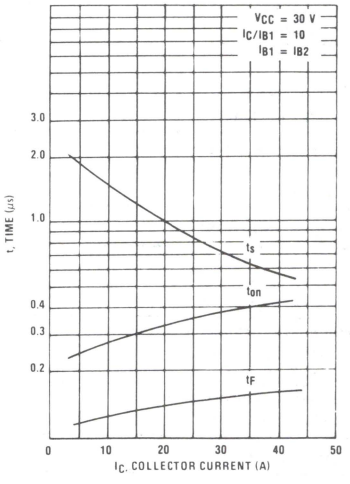

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C: Non inductive resistance

3

BUV22

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high current, high speed, high power applications.

- High DC current gain: HFE min. = 20 at Ic = 10 A
- Low $V_{CE(sat)}$: $V_{CE(sat)}$ max. = 1.0 V at Ic = 10 A
- Very fast switching times:
  T_F max. = 0.35 μs at Ic = 20 A

40 AMPERES

NPN SILICON POWER METAL TRANSISTOR

250 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	125	Vdc
Collector-Base Voltage	V_{CBO}	300	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −1.5 V)	V_{CEX}	300	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	290	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	40 50	Adc Apk
Base-Current continuous	I_B	8	Adc
Total Power Dissipation @ T_C = 25°C	P_D	250	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W

FIGURE 1 – POWER DERATING

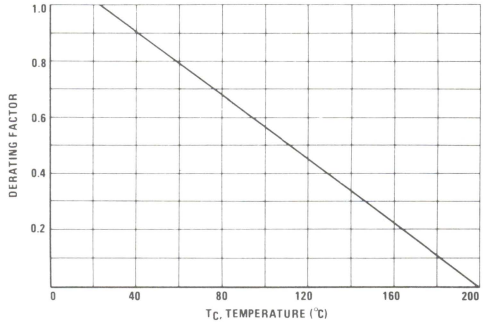



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO 3

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage ($I_C = 200$ mA, $I_B = 0$, L = 25 mH)	$V_{CEO(sus)}$	250		Vdc
Collector Cutoff Current at Reverse Biais: ($V_{CE} = 300$ V, $V_{BE} = -1.5$ V) ($V_{CE} = 300$ V, $V_{BE} = -1.5$ V, $T_C = 125°C$)	I_{CEX}		3.0 12.0	mAdc
Collector-Emitter Cutoff Current ($V_{CE} = 200$ V)	I_{CEO}		3.0	mAdc
Emitter-Base Reverse Voltage ($I_E = 50$ mA)	V_{EBO}	7		V
Emitter-Cutoff Current ($V_{EB} = 5$ V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased ($V_{CE} = 20$ V, t = 1 s) ($V_{CE} = 140$ V, t = 1 s)	$I_{S/b}$	12 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain ($I_C = 10$ A, $V_{CE} = 4$ V) ($I_C = 20$ A, $V_{CE} = 4$ V)	h_{FE}	20 10	60	
Collector-Emitter Saturation Voltage ($I_C = 10$ A, $I_B = 1$ A) ($I_C = 20$ A, $I_B = 2.5$ A)	$V_{CE(sat)}$		1.0 1.5	Vdc
Base-Emitter Saturation Voltage ($I_C = 40$ A, $I_B = 4$ A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product ($V_{CE} = 15$ V, $I_C = 2$ A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	$I_C = 20$ A, $I_{B1} = I_{B2} = 2.5$ A, ($V_{CC} = 100$ V, RC = 5 Ω)	t_{on}		0.8	μs
Storage Time		t_s		1.1	
Fall Time		t_f		0.35	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

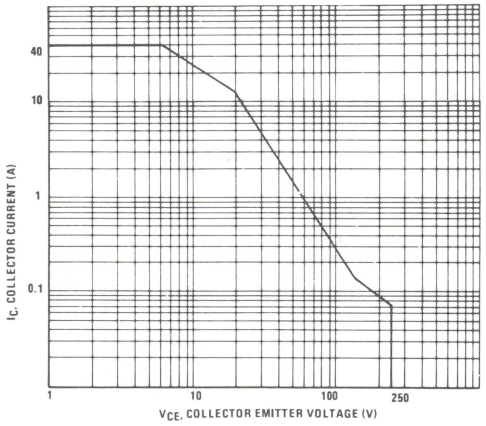

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on $T_C = 25°C$; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

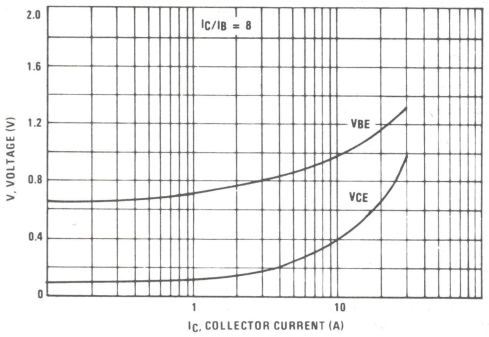

FIGURE 4 – DC CURRENT GAIN

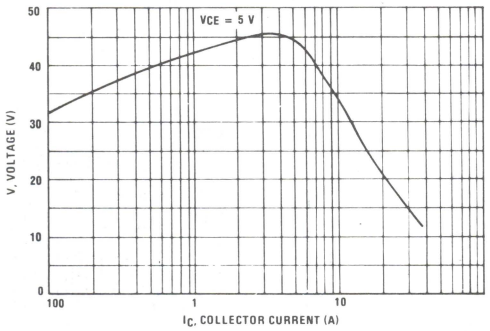

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

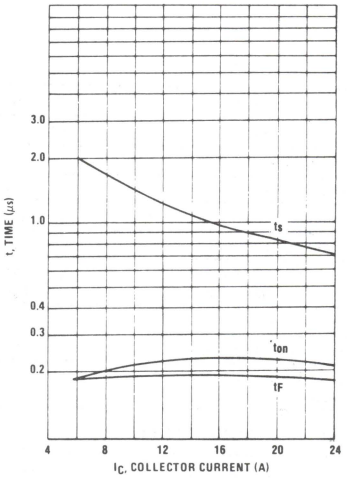

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

3

BUV23

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high current, high speed, high power applications.

- High DC current gain: HFE min. = 15 at Ic = 8 A
- Low $V_{CE(sat)}$, $V_{CE(sat)}$ max. = 0.8 V at Ic = 8 A
- Very fast switching times:
  T_F = 0.4 μs at Ic = 16 A

30 AMPERES

NPN SILICON POWER METAL TRANSISTOR

325 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	325	Vdc
Collector-Base Voltage	V_{CBO}	400	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −1.5 V)	V_{CEX}	400	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	390	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	30 40	Adc Apk
Base-Current continuous	I_B	6	Adc
Total Power Dissipation @ T_C = 25°C	P_D	250	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01
MODIFIED TO 3

FIGURE 1 – POWER DERATING

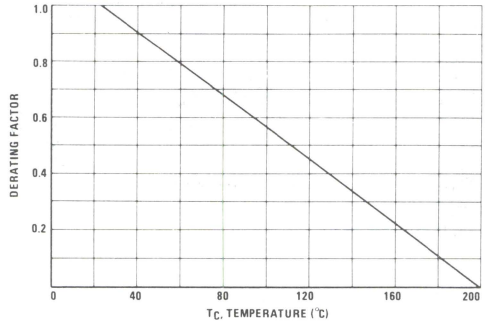

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage ($I_C = 200$ mA, $I_B = 0$, L = 25 mH)	$V_{CEO(sus)}$	325		Vdc
Collector Cutoff Current at Reverse Biais: ($V_{CE} = 400$ V, $V_{BE} = -1.5$ V) ($V_{CE} = 400$ V, $V_{BE} = -1.5$ V, $T_C = 125°C$)	I_{CEX}		3.0 12	mAdc
Collector-Emitter Cutoff Current ($V_{CE} = 260$ V)	I_{CEO}		3.0	mAdc
Emitter-Base Reverse Voltage ($I_E = 50$ mA)	V_{EBO}	7		V
Emitter-Cutoff Current ($V_{EB} = 5$ V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased ($V_{CE} = 20$ V, t = 1 s) ($V_{CE} = 140$ V, t = 1 s)	$I_{S/b}$	12 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain ($I_C = 8$ A, $V_{CE} = 4$ V) ($I_C = 16$ A, $V_{CE} = 4$ V)	h_{FE}	15 8	60	
Collector-Emitter Saturation Voltage ($I_C = 8$ A, $I_B = 1.6$ A) ($I_C = 16$ A, $I_B = 3.2$ A)	$V_{CE(sat)}$		0.8 1.0	Vdc
Base-Emitter Saturation Voltage ($I_C = 16$ A, $I_B = 3.2$ A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product ($V_{CE} = 15$ V, $I_C = 2$ A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	$I_C = 16$ A, $I_{B1} = I_{B2} = 3.2$ A, ($V_{CC} = 100$ V, RC = 6.25 Ω)	t_{on}		0.8	μs
Storage Time		t_s		1.8	
Fall Time		t_f		0.4	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

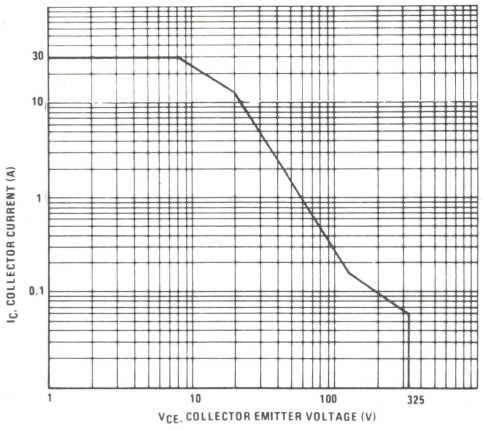

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

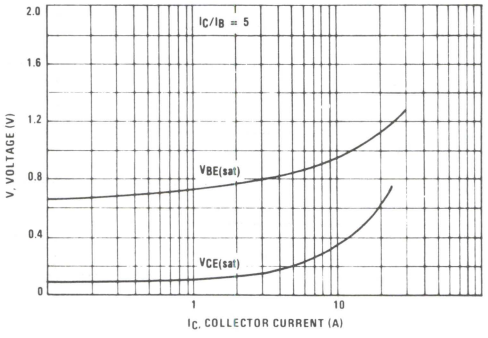

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

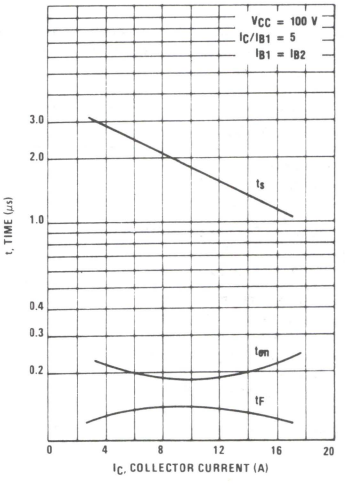

FIGURE 4 – DC CURRENT GAIN

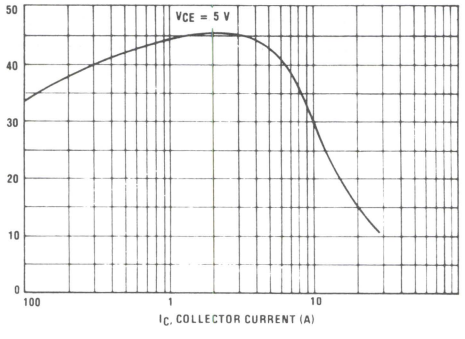

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

BUV24

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high current, high speed, high power applications.

- Low $V_{CE(sat)}$, $V_{CE(sat)}$ max. = 1.0 V at Ic = 12 A
- Very fast switching times:
  T_F max. = 0.9 μs at Ic = 12 A

20 AMPERES

NPN SILICON POWER METAL TRANSISTOR

400 VOLTS
250 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	Vdc
Collector-Base Voltage	V_{CBO}	450	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −1.5 V)	V_{CEX}	450	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	440	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	20 30	Adc Apk
Base-Current continuous	I_B	4	Adc
Total Power Dissipation @ T_C = 25°C	P_D	250	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.7	°C/W

FIGURE 1 — POWER DERATING

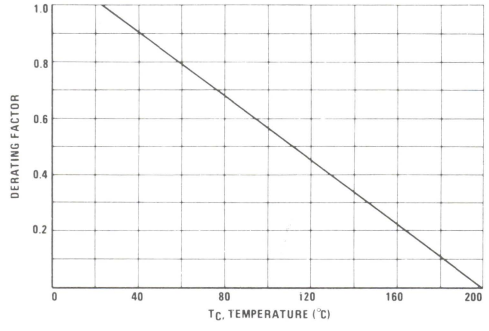



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS
2. T IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ ⌀ 13 (0.005) M T V M
   FOR LEADS
   ⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A		39.37		1.550
B		21.08		0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E		3.43		0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R		26.67		1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage ($I_C = 200$ mA, $I_B = 0$, L = 25 mH)	$V_{CEO(sus)}$	400		Vdc
Collector Cutoff Current at Reverse Biais: ($V_{CE} = 450$ V, $V_{BE} = -1.5$ V) ($V_{CE} = 450$ V, $V_{BE} = -1.5$ V, $T_C = 125°C$)	I_{CEX}		3.0 12.0	mAdc
Collector-Emitter Cutoff Current ($V_{CE} = 320$ V)	I_{CEO}		30	mAdc
Emitter-Base Reverse Voltage ($I_E = 50$ mA)	V_{EBO}	7		V
Emitter-Cutoff Current ($V_{EB} = 5$ V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased ($V_{CE} = 20$ V, t = 1 s) ($V_{CE} = 140$ V, t = 1 s)	$I_{S/b}$	12 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain ($I_C = 6$ A, $V_{CE} = 4$ V) ($I_C = 12$ A, $V_{CE} = 4$ V)	h_{FE}	15 8	60	
Collector-Emitter Saturation Voltage ($I_C = 6$ A, $I_B = 1.2$ A) ($I_C = 12$ A, $I_B = 2.4$ A)	$V_{CE(sat)}$		0.6 1.0	Vdc
Base-Emitter Saturation Voltage ($I_C = 12$ A, $I_B = 2.4$ A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product ($V_{CE} = 15$ V, $I_C = 2$ A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	$I_C = 12$ A, $I_{B1} = I_{B2} = 2.4$ A, ($V_{CC} = 120$ V, RC = 8.3 Ω)	t_{on}		1.6	μs
Storage Time		t_s		3.0	
Fall Time		t_f		0.9	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

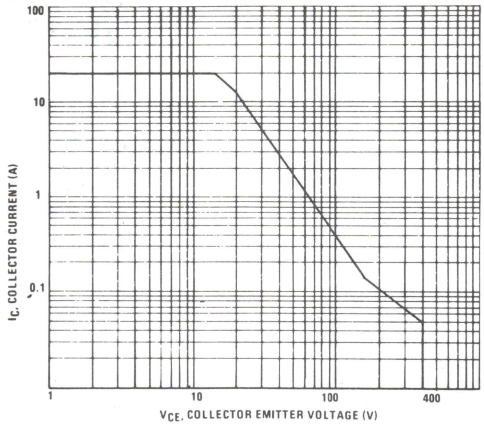

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C, $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

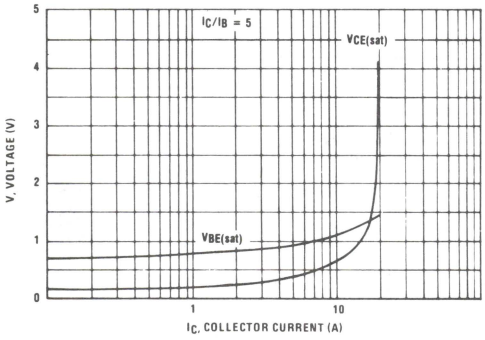

FIGURE 4 – DC CURRENT GAIN

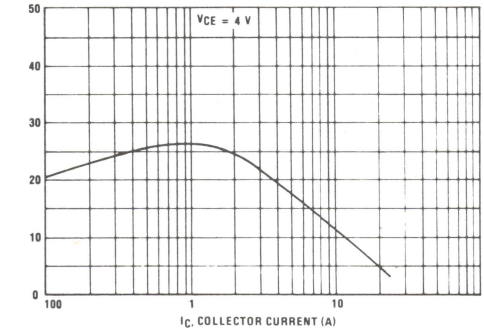

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

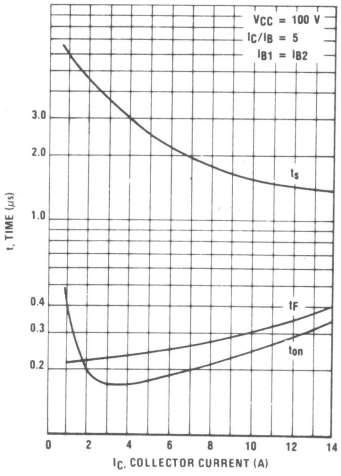

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

3

BUW11,A
BUW12,A

Designer's Data Sheet

NPN Silicon Power Transistors
Switchmode Series

POWER TRANSISTORS
5 and 8 AMPERES
400 and 450 VOLTS
125 WATTS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits

Features:
- Collector-Emitter Voltage — V_{CEV} = 850 and 1000
- Fast Turn-Off Times
  - 140 ns Inductive Fall Time – 100°C (Typ)
  - 170 & 250 ns Inductive Crossover Time – 100°C (Typ)
  - 1200 & 1800 ns Inductive Storage Time – 100°C (Typ)
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Load
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents
- Extremely High RBSOA Capability



MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Collector-Emitter Voltage	BUW11/12 BUW11A/12A	$V_{CEO(sus)}$	400 450	Vdc
Collector-Emitter Voltage	BUW11/12 BUW11A/12A	V_{CEV}	850 1000	Vdc
Emitter-Base Voltage		V_{EB}	10	Vdc
Collector Current — Continuous	BUW11/11A BUW12/12A	I_C	5 8	Adc
— Peak (1)	BUW11/11A BUW12/12A	I_{CM}	10 20	
Base Current — Continuous	BUW11/11A BUW12/12A	I_B	2 4	Adc
— Peak (1)	BUW11/11A BUW12/12A	I_{BM}	4 8	
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above T_C = 25°C		P_D	125 50 1	Watts W/°C
Operating and Storage Junction Temperature Range		T_J, T_{stg}	– 55 to + 150	°C



CASE 340-01
TO-218AC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS(1)							
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)		BUW11/12 BUW11A/12A	$V_{CEO(sus)}$	400 450	— —	— —	Vdc
Collector Cutoff Current (V_{CEV} = Rated V_{CEV}, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated V_{CEV}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			I_{CEV}	— —	— —	0.1 1	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)			I_{CER}	—	—	1	mAdc
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)			I_{EBO}	—	—	0.1	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with Base Forward Biased			$I_{S/b}$	See Figures 8 and 9			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figures 10 and 11			
BUW11 **ON CHARACTERISTICS(1)**							
Collector-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.2 Adc) (I_C = 3 Adc, I_B = 0.6 Adc) (I_C = 3 Adc, I_B = 0.6 Adc, T_C = 100°C)			$V_{CE(sat)}$	— — —	— — —	1 1.5 2	Vdc
Base-Emitter Saturation Voltage (I_C = 3 Adc, I_B = 0.6 Adc) (I_C = 3 Adc, I_B = 0.6 Adc, T_C = 100°C)			$V_{BE(sat)}$	— —	— —	1.4 1.4	Vdc
DC Current Gain (I_C = 3 Adc, V_{CE} = 5 Vdc)			h_{FE}	6	—	—	—
DYNAMIC CHARACTERISTICS							
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)			C_{ob}	—	125	—	pF
SWITCHING CHARACTERISTICS							
Inductive Load (Table 1)							
Storage Time	(I_C = 3 Adc, I_{B1} = 0.6 Adc, $V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 300 Vdc)	(T_J = 100°C)	t_{sv}	—	1.2	1.5	μs
Fall Time			t_{fi}	—	0.14	0.3	
Crossover Time			t_c	—	0.25	0.5	
Resistive Load (Table 2)							
Delay Time	(I_C = 3 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.6 Adc, PW = 20 μs, Duty Cycle ≤ 2%)	(I_{B2} = 0.6 Adc, R_{B2} = 4 Ω)	t_d	—	—	0.1	μs
Rise Time			t_r	—	—	0.8	
Storage Time			t_s	—	—	4	
Fall Time			t_f	—	—	0.8	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
BUW11A					
ON CHARACTERISTICS(1)					
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 1 Adc, I_B = 0.2 Adc)		—	—	1	
(I_C = 2.5 Adc, I_B = 0.5 Adc)		—	—	1.5	
(I_C = 2.5 Adc, I_B = 0.5 Adc, T_C = 100°C)		—	—	2	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 0.5 Adc)		—	—	1.4	
(I_C = 2.5 Adc, I_B = 0.5 Adc, T_C = 100°C)		—	—	1.4	
DC Current Gain	h_{FE}				—
(I_C = 2.5 Adc, V_{CE} = 5 Vdc)		6	—	—	
DYNAMIC CHARACTERISTICS					
Output Capacitance	C_{ob}				pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)		—	125	—	
SWITCHING CHARACTERISTICS					
Inductive Load (Table 1)					
Storage Time			t_{sv}	—	1.2	1.5	μs
Fall Time	(I_C = 2.5 Adc, I_{B1} = 0.5 Adc, $V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 300 Vdc)	(T_J = 100°C)	t_{fi}	—	0.14	0.3	
Crossover Time			t_c	—	0.25	0.5	
Resistive Load (Table 2)							
Delay Time			t_d	—	—	0.1	μs
Rise Time	(I_C = 2.5 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.5 Adc, PW = 20 μs, Duty Cycle ≤ 2%)	(I_{B2} = 0.5 Adc, R_{B2} = 4 Ω)	t_r	—	—	0.8	
Storage Time			t_s	—	—	4	
Fall Time			t_f	—	—	0.8	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
BUW12							
ON CHARACTERISTICS(1)							
Collector-Emitter Saturation Voltage			$V_{CE(sat)}$				Vdc
(I_C = 3 Adc, I_B = 0.6 Adc)				—	—	1	
(I_C = 6 Adc, I_B = 1.2 Adc)				—	—	1.5	
(I_C = 6 Adc, I_B = 1.2 Adc, T_C = 100°C)				—	—	2	
Base-Emitter Saturation Voltage			$V_{BE(sat)}$				Vdc
(I_C = 6 Adc, I_B = 1.2 Adc)				—	—	1.5	
(I_C = 6 Adc, I_B = 1.2 Adc, T_C = 100°C)				—	—	1.5	
DC Current Gain			h_{FE}	6	—	—	—
(I_C = 6 Adc, V_{CE} = 5 Vdc)							
DYNAMIC CHARACTERISTICS							
Output Capacitance			C_{ob}	—	125	—	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)							
SWITCHING CHARACTERISTICS							
Inductive Load (Table 1)							
Storage Time	(I_C = 6 Adc,		t_{sv}	—	1.8	2.3	μs
Fall Time	I_{B1} = 1.2 Adc,	(T_J = 100°C)	t_{fi}	—	0.14	0.3	
Crossover Time	$V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 300 Vdc)		t_c	—	0.17	0.5	
Resistive Load (Table 2)							
Delay Time	(I_C = 6 Adc,		t_d	—	—	0.1	μs
Rise Time	V_{CC} = 250 Vdc,	(I_{B2} = 1.2 Adc,	t_r	—	—	0.8	
Storage Time	I_{B1} = 1.2 Adc, PW = 20 μs,	R_{B2} = 4 Ω)	t_s	—	—	4	
Fall Time	Duty Cycle ≤ 2%)		t_f	—	—	0.8	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Characteristic			Symbol	Min	Typ	Max	Unit
BUW12A							
ON CHARACTERISTICS(1)							
Collector-Emitter Saturation Voltage			$V_{CE(sat)}$				Vdc
(I_C = 3 Adc, I_B = 0.6 Adc)				—	—	1	
(I_C = 5 Adc, I_B = 1 Adc)				—	—	1.5	
(I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)				—	—	2	
Base-Emitter Saturation Voltage			$V_{BE(sat)}$				Vdc
(I_C = 5 Adc, I_B = 1 Adc)				—	—	1.5	
(I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)				—	—	1.5	
DC Current Gain			h_{FE}	6	—	—	—
(I_C = 5 Adc, V_{CE} = 5 Vdc)							
DYNAMIC CHARACTERISTICS							
Output Capacitance			C_{ob}	—	125	—	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)							
SWITCHING CHARACTERISTICS							
Inductive Load (Table 1)							
Storage Time	(I_C = 5 Adc,		t_{sv}	—	1.8	2.3	μs
Fall Time	I_{B1} = 1 Adc,	(T_J = 100°C)	t_{fi}	—	0.14	0.3	
Crossover Time	$V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 300 Vdc)		t_c	—	0.17	0.5	
Resistive Load (Table 2)							
Delay Time	(I_C = 5 Adc,		t_d	—	—	0.1	μs
Rise Time	V_{CC} = 250 Vdc,	(I_{B2} = 1 Adc,	t_r	—	—	0.8	
Storage Time	I_{B1} = 1 Adc, PW = 20 μs,	R_{B2} = 4 Ω)	t_s	—	—	4	
Fall Time	Duty Cycle ≤ 2%)		t_f	—	—	0.8	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL STATIC CHARACTERISTICS

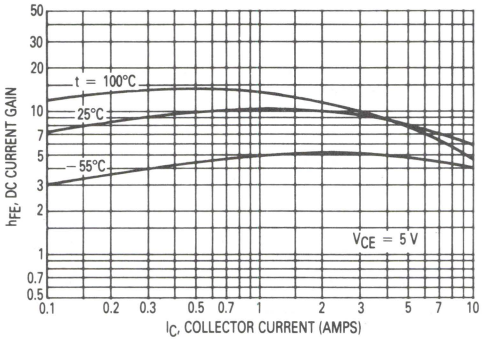

Figure 1. Typical DC Current Gain

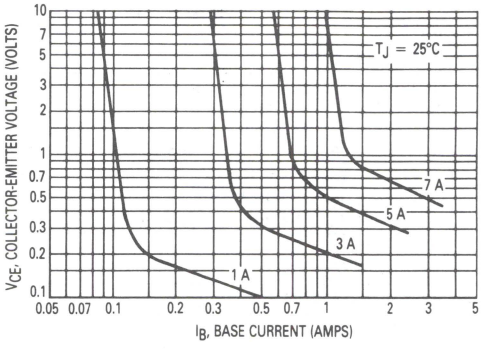

Figure 2. Typical Collector Saturation Region

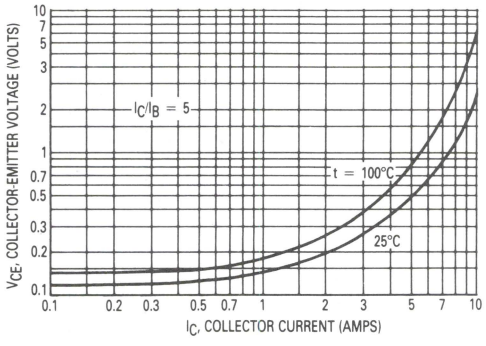

Figure 3. Typical Collector Saturation Region

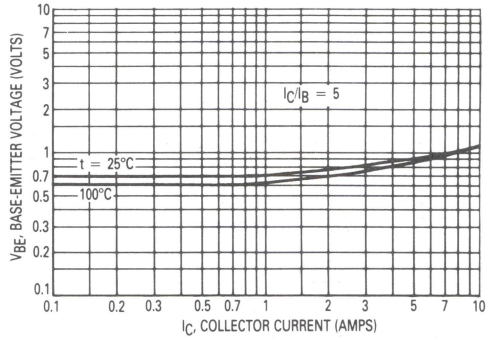

Figure 4. Typical Base-Emitter Voltage

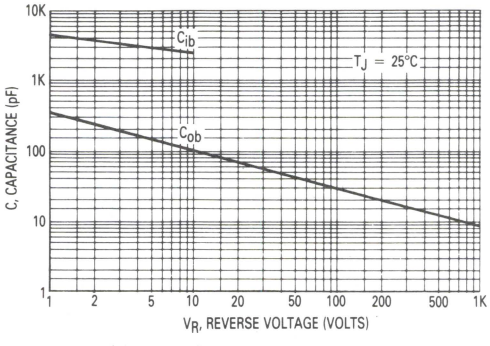

Figure 5. Typical Capacitance

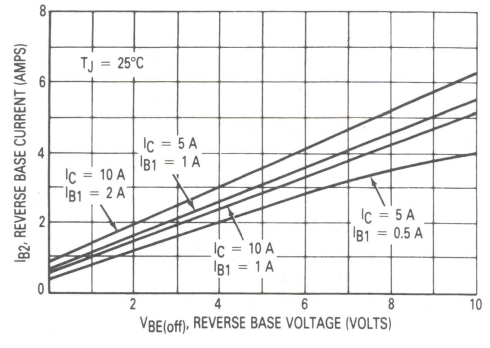

Figure 6. Peak Reverse Base Current

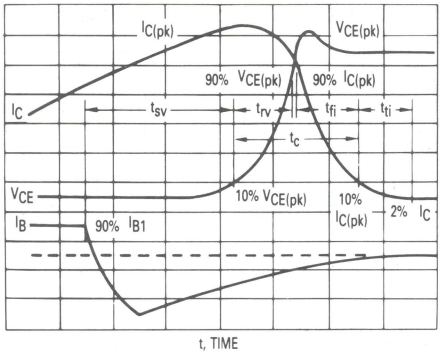

Figure 7. Inductive Switching Measurements

Table 1. Inductive Load Switching

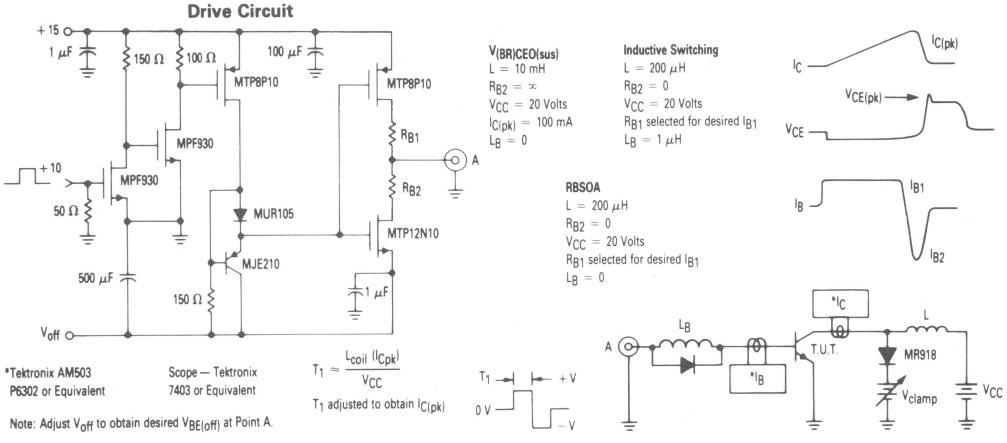

Table 2. Resistive Load Switching

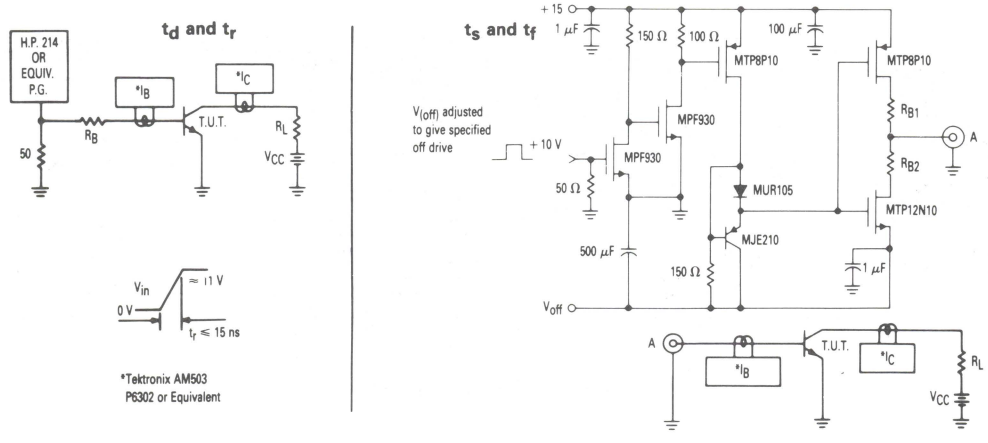

MAXIMUM FORWARD BIAS SAFE OPERATING AREA

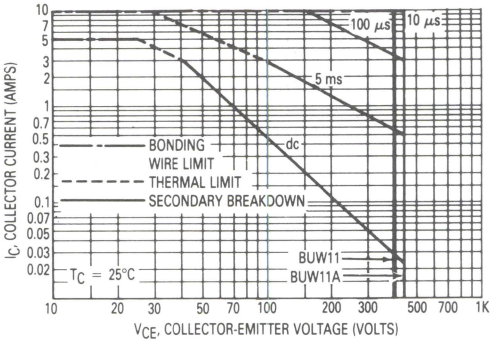

Figure 8. BUW11,A

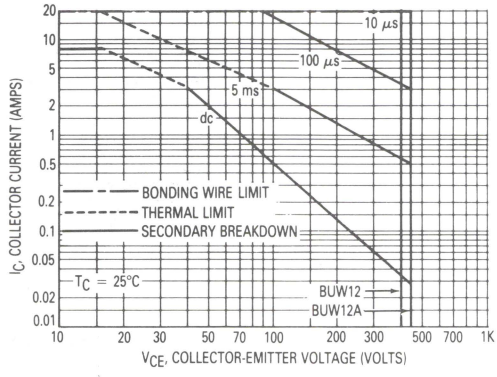

Figure 9. BUW12,A

MAXIMUM REVERSE BIAS SAFE OPERATING AREA

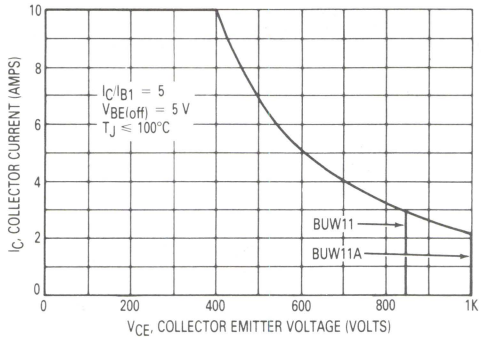

Figure 10. BUW11,A

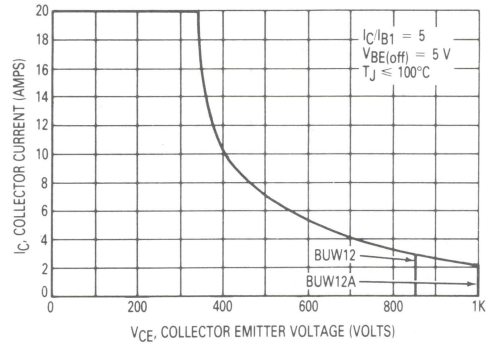

Figure 11. BUW12,A

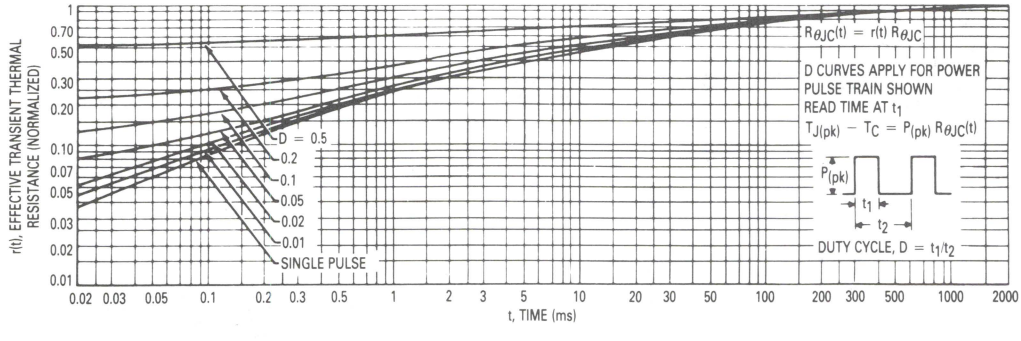

Figure 12. Thermal Response

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 8 and 9 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 8 and 9 may be found at any case temperature by using the appropriate curve on Figure 13.

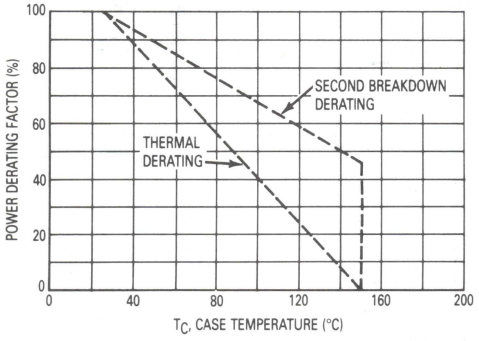

Figure 13. Power Derating

$T_{J(pk)}$ may be calculated from the data in Figure 12. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Biased Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figures 10 and 11 gives the RBSOA characteristics.

OUTLINE DIMENSIONS



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 340-01
TO-218AC

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

BUX13

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high voltage, high power applications.

- Low $V_{CE(sat)}$, $V_{CE(sat)}$ max. = 1.5 V at Ic = 8 A
- Very fast switching times:
  T_F max. = 0.8 μs at Ic = 8 A

15 AMPERES

NPN SILICON POWER METAL TRANSISTOR

325 VOLTS
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	325	Vdc
Collector-Base Voltage	V_{CBO}	400	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −2.5 V)	V_{CEX}	400	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	390	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	15 20	Adc Apk
Base-Current continuous	I_B	3	Adc
Total Power Dissipation @ T_C = 25°C	P_D	150	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

FIGURE 1 – POWER DERATING

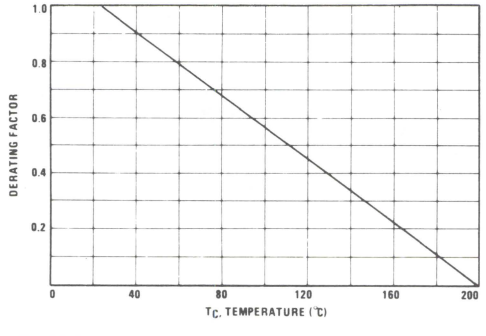



NOTES
1. DIMENSIONS Q AND V ARE DATUMS
2. [T] IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ | ⌀13 (0.005) Ⓜ | T | V Ⓜ
   FOR LEADS
   ⌖ | ⌀13 (0.005) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	—	3.43	—	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	325		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 400 V, V_{BE} = −1.5 V) (V_{CE} = 400 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		1.5 6.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 260 V)	I_{CEO}		1.5	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s) (V_{CE} = 140 V, t = 1 s)	$I_{S/b}$	5 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 4 A, V_{CE} = 4 V) (I_C = 8 A, V_{CE} = 4 V)	h_{FE}	15 8	60	
Collector-Emitter Saturation Voltage (I_C = 4 A, I_B = 0.8 A) (I_C = 8 A, I_B = 1.6 A)	$V_{CE(sat)}$		0.8 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 8 A, I_B = 1.6 A)	$V_{BE(sat)}$		1.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 8 A, I_{B1} = I_{B2} = 1.6 A, (V_{CC} = 150 V, RC = 18.7 Ω)	t_{on}		1.2	μs
Storage Time		t_s		2.5	
Fall Time		t_f		0.8	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

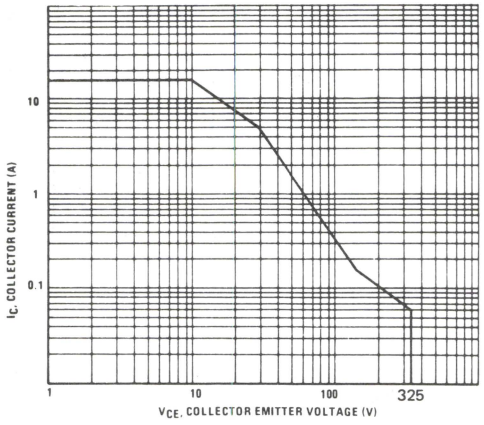

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations.

At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

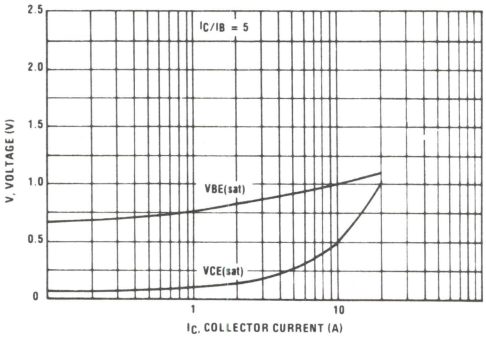

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

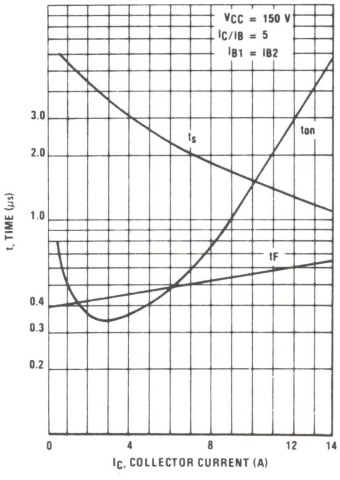

FIGURE 4 – DC CURRENT GAIN

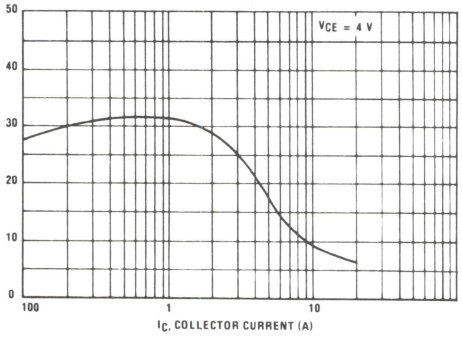

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



RC – RB: Non inductive resistances

BUX39

NPN SILICON POWER METAL TRANSISTOR

. . . designed for high speed, high current, high power application.

- High current gain – bandwidth product Ft min. = 8.0 MHz
- High DC current gain H_{FE} min. 15 @ I_C = 12 A.
  Very fast switching times
  t_F max. = 0.25 μs @ I_C = 20 A

NPN SILICON POWER METAL TRANSISTOR

30 AMPERES

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	90	Vdc
Collector-Base Voltage	V_{CBO}	120	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = -1.5 V)	V_{CEX}	120	Vdc
Collector-Emitter Voltage (R_{BE} = 100Ω)	V_{CER}	110	Vdc
Collector-Current – continuous – peak (pw ≤ 10 ms)	I_C I_{CM}	30 40	Adc Apk
Base-Current continuous	I_B	6	Adc
Total Power Dissipation @ T_C = 25°C	P_D	120	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.46	°C/W

FIGURE 1 – POWER DERATING

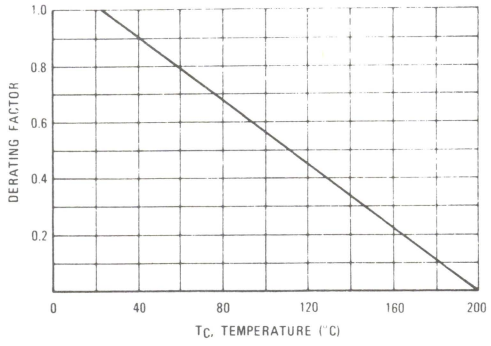



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE-COLLECTOR

STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE-EMITTER

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	–	22.23	–	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	–	0.312	–
Q	3.84	4.09	0.151	0.161
S	–	13.34	–	0.525
T	–	4.78	–	0.188

All JEDEC dimensions and notes apply

CASE 1-03
(TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	90		Vdc
Collector-Emitter Cutoff Current at Reverse Bias Voltage (V_{CE} = 120 V, V_{BE} = −1.5 V) (V_{CE} = 120 V, V_{BE} = −1.5 V, T_C = 125 °C)			1 5	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 70 V)	I_{CEO}		1	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 45 V, t = 1 s) (V_{CE} = 30 V, t = 1 s)	$I_{S/b}$	1 4		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 12 A, V_{CE} = 4 V) (I_C = 20 A, V_{CE} = 4 V)	h_{FE}	15 8	45	
Collector-Emitter Saturation Voltage (I_C = 12 A, I_B = 1.2 A) (I_C = 20 A, I_B = 2.5 A)	$V_{CE(sat)}$		1.2 1.6	Vdc
Base-Emitter Saturation Voltage (I_C = 20 A, I_B = 2.5 A)	$V_{BE(sat)}$		2.5	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 20 A, I_{B1} = I_{B2} = 2.5 A, V_{CE} = 30 V, RC = 1.5 Ω)	t_{on}		1.2	μs
Storage Time		t_s		1.0	
Fall Time		t_f		0.25	

[1] Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

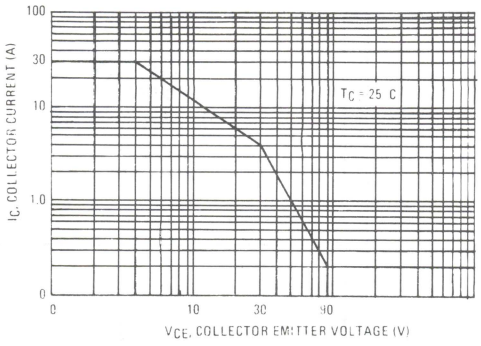

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25 °C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

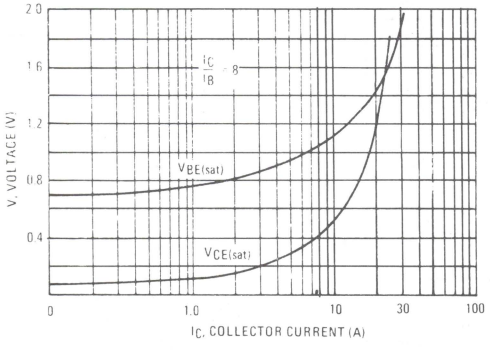

FIGURE 4 – DC CURRENT GAIN

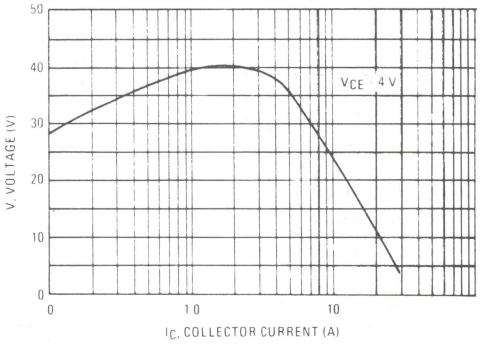

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

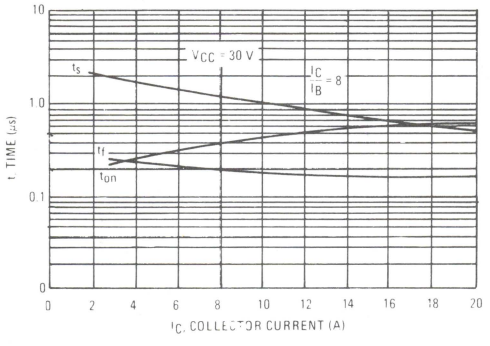

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B Non inductive resistances

3

BUX40

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high current, high power applications.

- High D.C. current gain:
  HFE min.: 15 at Ic = 10 A
- Very fast switching times:
  T_F max. = 0.25 μs at Ic = 15 A

20 AMPERES

NPN SILICON POWER METAL TRANSISTOR

125 VOLTS
120 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	125	Vdc
Collector-Base Voltage	V_{CBO}	160	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −2.5 V)	V_{CEX}	160	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	150	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	20 28	Adc Apk
Base-Current continuous	I_B	4	Adc
Total Power Dissipation @ T_C = 25°C	P_D	120	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.46	°C/W



STYLE 1
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	—	22.23	—	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	—	0.312	—
Q	3.84	4.09	0.151	0.161
S	—	13.34	—	0.525
T	—	4.78	—	0.188

All JEDEC dimensions and notes apply

CASE 1-03
(TO-3)

FIGURE 1 – POWER DERATING

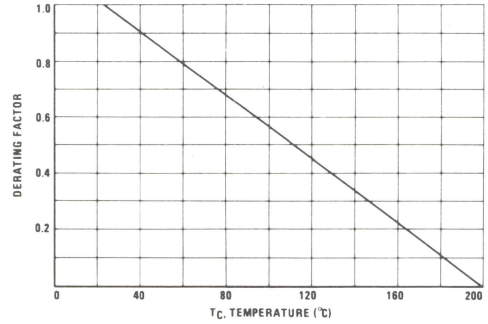

3

ELECTRICAL CHARACTERISTICS ($T_C = 25°C$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage ($I_C = 200$ mA, $I_B = 0$, L = 25 mH)	$V_{CEO(sus)}$	125		Vdc
Collector Cutoff Current at Reverse Biais: ($V_{CE} = 160$ V, $V_{BE} = -1.5$ V)	I_{CEX}		1.0	mAdc
($V_{CE} = 160$ V, $V_{BE} = -1.5$ V, $T_C = 125°C$)			5.0	
Collector-Emitter Cutoff Current ($V_{CE} = 100$ V)	I_{CEO}		1.0	mAdc
Emitter-Base Reverse Voltage ($I_E = 50$ mA)	V_{EBO}	7		V
Emitter-Cutoff Current ($V_{EB} = 5$ V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased ($V_{CE} = 30$ V, t = 1 s)	$I_{S/b}$	4.0		Adc
($V_{CE} = 50$ V, t = 1 s)		1.0		
ON CHARACTERISTICS[1]				
DC Current Gain ($I_C = 10$ A, $V_{CE} = 4$ V)	h_{FE}	15	45	
($I_C = 15$ A, $V_{CE} = 4$ V)		8		
Collector-Emitter Saturation Voltage ($I_C = 10$ A, $I_B = 1$ A)	$V_{CE(sat)}$		1.2	Vdc
($I_C = 15$ A, $I_B = 1.88$ A)			1.6	
Base-Emitter Saturation Voltage ($I_C = 15$ A, $I_B = 1.88$ A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product ($V_{CE} = 15$ V, $I_C = 1$ A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	$I_C = 15$ A, $I_{B1} = I_{B2} = 1.88$ A, ($V_{CC} = 30$ V, RC = 2 Ω)	t_{on}		1.2	μs
Storage Time		t_s		1.0	
Fall Time		t_f		0.25	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

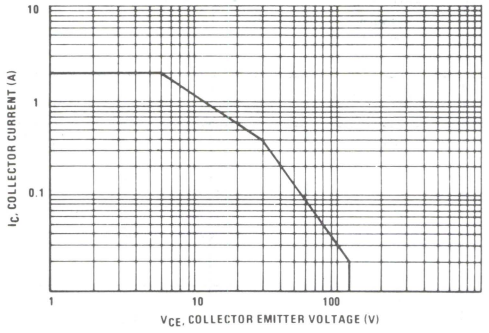

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25° C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

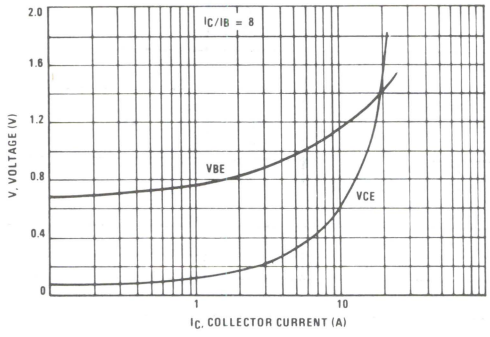

FIGURE 4 – DC CURRENT GAIN

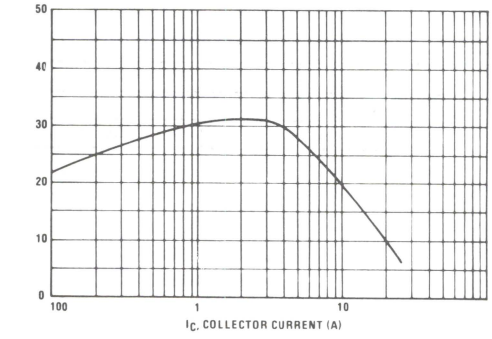

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

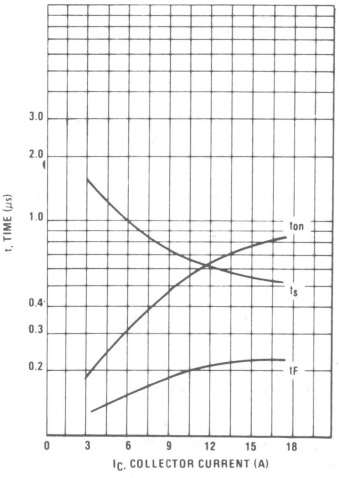

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

BUX41

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high current, high power applications.

- Very fast switching times:
  T_F max. = 0.4 μs at Ic = 8 A

15 AMPERES

NPN SILICON POWER METAL TRANSISTOR

200 VOLTS
120 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	200	Vdc
Collector-Base Voltage	V_{CBO}	250	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −2.5 V)	V_{CEX}	250	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	240	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	15 20	Adc Apk
Base-Current continuous	I_B	3	Adc
Total Power Dissipation @ T_C = 25°C	P_D	120	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.46	°C/W

FIGURE 1 – POWER DERATING

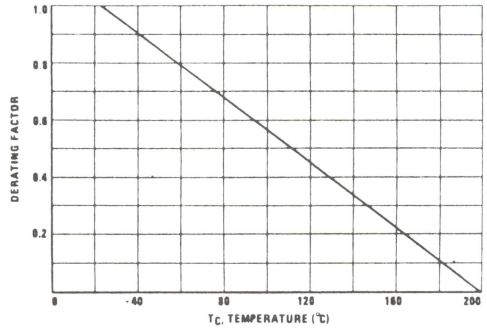





STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR
STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE EMITTER

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	–	22.23	–	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	–	0.312	–
Q	3.84	4.09	0.151	0.161
S	–	13.34	–	0.525
T	–	4.78	–	0.188

All JEDEC dimensions and notes apply

CASE 1-03
(TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	200		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 250 V, V_{BE} = −1.5 V)	I_{CEX}		1.0	mAdc
(V_{CE} = 250 V, V_{BE} = −1.5 V, T_C = 125°C)			5.0	
Collector-Emitter Cutoff Current (V_{CE} = 160 V)	I_{CEO}		1.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s)	$I_{S/b}$	4.0		Adc
(V_{CE} = 135 V, t = 1 s)		0.15		
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 5 A, V_{CE} = 4 V)	h_{FE}	15	45	
(I_C = 8 A, V_{CE} = 4 V)		8		
Collector-Emitter Saturation Voltage (I_C = 5 A, I_B = 0.5 A)	$V_{CE(sat)}$		1.2	Vdc
(I_C = 8 A, I_B = 1 A)			1.6	
Base-Emitter Saturation Voltage (I_C = 8 A, I_B = 1 A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 8 A, I_{B1} = I_{B2} = 1 A, (V_{CC} = 150 V, RC = 18.75 Ω)	t_{on}		0.6	μs
Storage Time		t_s		1.5	
Fall Time		t_f		0.4	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

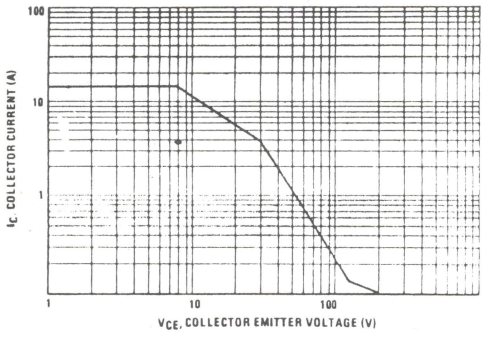

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

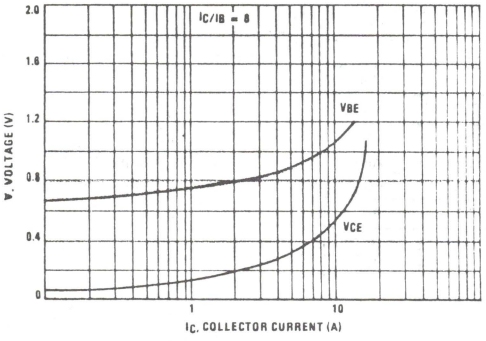

FIGURE 4 – DC CURRENT GAIN

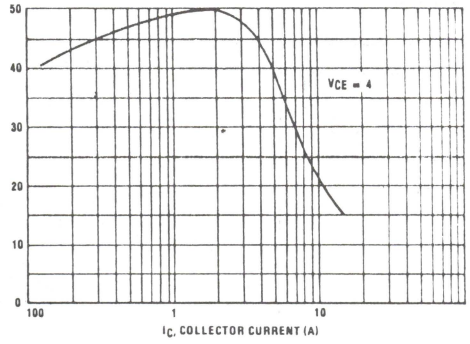

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

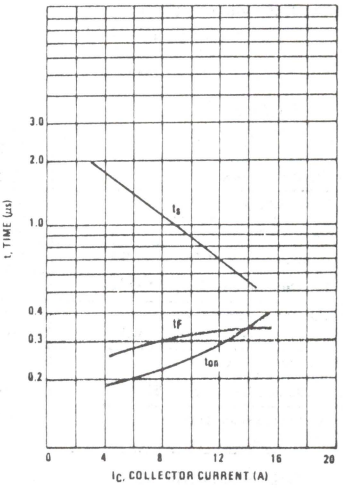

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

3

BUX41N

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high current, high power applications.

- High DC current gain:
  HFE min. = 15 at Ic = 8 A
- Very fast switching times:
  T_F max. = 0.25 μs at Ic = 12 A

18 AMPERES

NPN SILICON
POWER
METAL TRANSISTOR

160 VOLTS
120 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	160	Vdc
Collector-Base Voltage	V_{CBO}	220	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −2.5 V)	V_{CEX}	220	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	200	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	18 25	Adc Apk
Base-Current continuous	I_B	-3.6	Adc
Total Power Dissipation @ T_C = 25°C	P_D	120	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.46	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE: EMITTER

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B	—	22.23	—	0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E	—	3.43	—	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92	—	0.312	—
Q	3.84	4.09	0.151	0.161
S	—	13.34	—	0.525
T	—	4.78	—	0.188

All JEDEC dimensions and notes apply

CASE 1-03
(TO-3)

FIGURE 1 – POWER DERATING

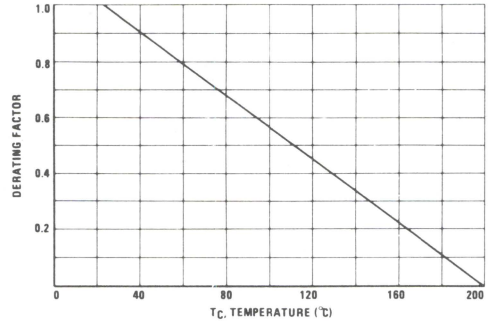

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	160		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 220 V, V_{BE} = −1.5 V) (V_{CE} = 220 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		1.0 5.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 130 V)	I_{CEO}		1.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s) (V_{CE} = 100 V, t = 1 s)	$I_{S/b}$	4 0.27		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 8 A, V_{CE} = 4 V) (I_C = 12 A, V_{CE} = 4 V)	h_{FE}	15 8	45	
Collector-Emitter Saturation Voltage (I_C = 8 A, I_B = 0.8 A) (I_C = 12 A, I_B = 1.5 A)	$V_{CE(sat)}$		1.2 1.6	Vdc
Base-Emitter Saturation Voltage (I_C = 12 A, I_B = 1.5 A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 12 A, I_{B1} = I_{B2} = 1.5 A, (V_{CC} = 30 V, RC = 2.5 Ω)	t_{on}		1.2	μs
Storage Time		t_s		1.2	
Fall Time		t_f		0.25	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

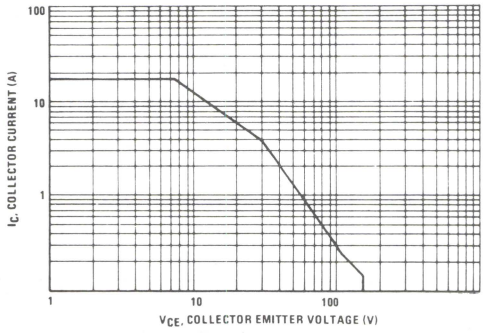

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

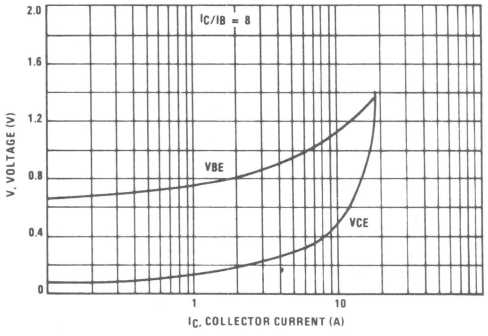

FIGURE 4 – DC CURRENT GAIN

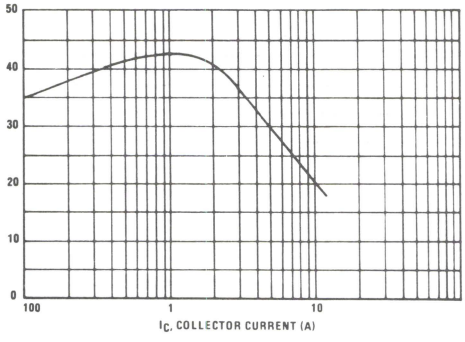

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

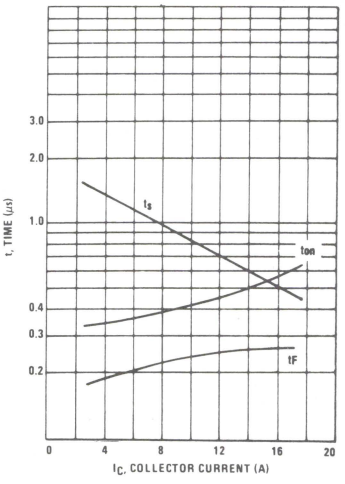

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B: Non inductive resistances

BUX42

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high voltage, high power applications.

- Low $V_{CE(sat)}$, $V_{CE(sat)}$ max. = 1.2 V at Ic = 4 A
- Very fast switching times:
  T_F max. = 0.4 μs at Ic = 6 A

12 AMPERES

NPN SILICON POWER METAL TRANSISTOR

250 VOLTS
120 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	250	Vdc
Collector-Base Voltage	V_{CBO}	300	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = –2.5 V)	V_{CEX}	300	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	290	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	12 15	Adc Apk
Base-Current continuous	I_B	2.4	Adc
Total Power Dissipation @ T_C = 25°C	P_D	120	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.46	°C/W

FIGURE 1 – POWER DERATING

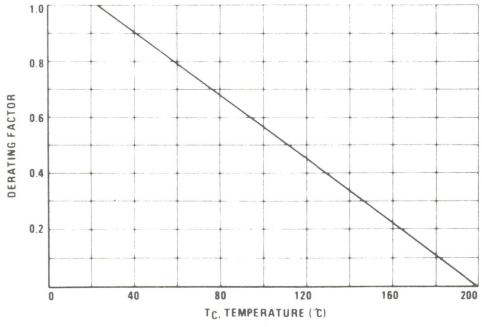



STYLE 1
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
B		22.23		0.875
C	6.35	11.43	0.250	0.450
D	0.97	1.09	0.038	0.043
E		3.43		0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	7.92		0.312	
Q	3.84	4.09	0.151	0.161
S		13.34		0.525
T		4.78		0.188

All JEDEC dimensions and notes apply.

CASE 1-03
(TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	250		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 300 V, V_{BE} = −1.5 V) (V_{CE} = 300 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		1.0 5.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 200 V)	I_{CEO}		1.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s) (V_{CE} = 135 V, t = 1 s)	$I_{S/b}$	4.0 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 4 A, V_{CE} = 4 V) (I_C = 6 A, V_{CE} = 4 V)	h_{FE}	15 8	45	
Collector-Emitter Saturation Voltage (I_C = 4 A, I_B = 0.4 A) (I_C = 6 A, I_B = 0.75 A)	$V_{CE(sat)}$		1.2 1.6	Vdc
Base-Emitter Saturation Voltage (I_C = 6 A, I_B = 0.75 A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 6 A, I_{B1} = I_{B2} = 0.75 A, (V_{CC} = 150 V, RC = 25 Ω)	t_{on}		0.6	μs
Storage Time		t_s		2.0	
Fall Time		t_f		0.4	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

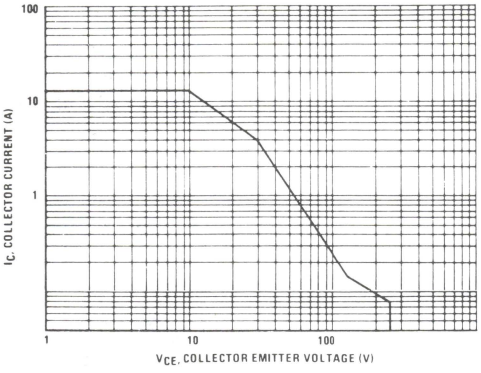

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25 °C; $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations. At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

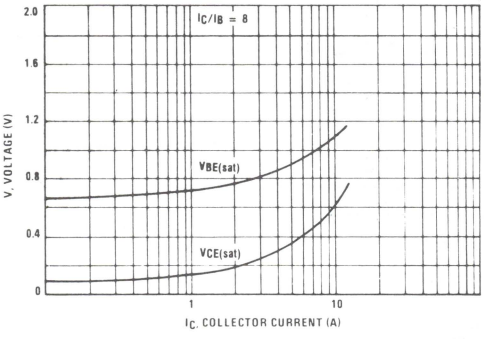

FIGURE 4 – DC CURRENT GAIN

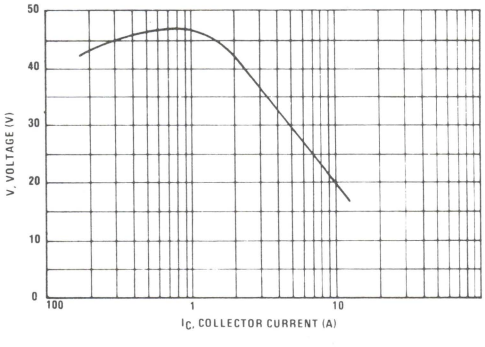

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

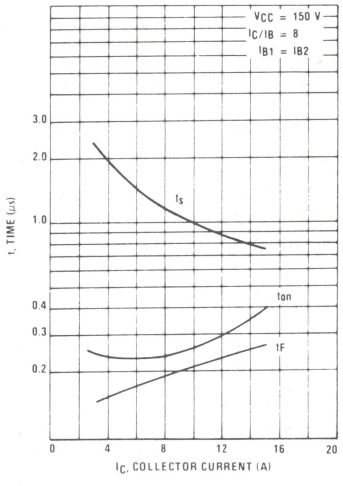

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



R_C – R_B Non inductive resistances

3

BUX43

SWITCHMODE▲ SERIES
NPN SILICON POWER TRANSISTOR

. . . designed for high speed, high voltage, high power applications.

- $V_{CE(sat)}$ max. = 1.6 V at Ic = 6 A
- Very fast switching times:
  T_F max. = 0.90 μs at Ic = 5 A

10 AMPERES

NPN SILICON POWER METAL TRANSISTOR

325 VOLTS
120 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	325	Vdc
Collector-Base Voltage	V_{CBO}	400	Vdc
Emitter-Base Voltage	V_{EBO}	7	Vdc
Collector-Emitter Voltage (V_{BE} = −2.5 V)	V_{CEX}	400	Vdc
Collector-Emitter Voltage (R_{BE} = 100 Ω)	V_{CER}	360	Vdc
Collector-Current — continuous — peak (pw ≤ 10 ms)	I_C I_{CM}	10 12	Adc Apk
Base-Current continuous	I_B	2	Adc
Total Power Dissipation @ T_C = 25°C	P_D	120	Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.46	°C/W



NOTES
1. DIMENSIONS Q AND V ARE DATUMS
2. T IS SEATING PLANE AND DATUM
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q
   ⌖ ⌀ 0.13 (0.005) M T V M
   FOR LEADS
   ⌖ ⌀ 0.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37		1.550
B		21.08		0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E		3.43	—	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05 TO-3

FIGURE 1 – POWER DERATING

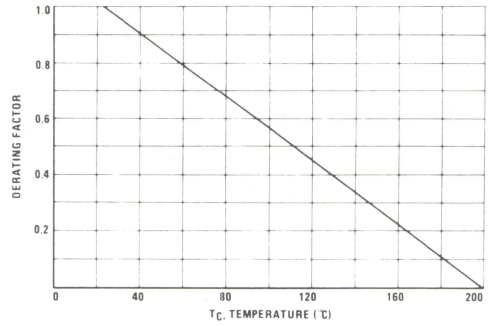

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS[1]				
Collector-Emitter Sustaining Voltage (I_C = 200 mA, I_B = 0, L = 25 mH)	$V_{CEO(sus)}$	325		Vdc
Collector Cutoff Current at Reverse Biais: (V_{CE} = 400 V, V_{BE} = −1.5 V) (V_{CE} = 400 V, V_{BE} = −1.5 V, T_C = 125°C)	I_{CEX}		1.0 5.0	mAdc
Collector-Emitter Cutoff Current (V_{CE} = 260 V)	I_{CEO}		1.0	mAdc
Emitter-Base Reverse Voltage (I_E = 50 mA)	V_{EBO}	7		V
Emitter-Cutoff Current (V_{EB} = 5 V)	I_{EBO}		1.0	mAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with base forward biased (V_{CE} = 30 V, t = 1 s) (V_{CE} = 135 V, t = 1 s)	$I_{S/b}$	4.0 0.15		Adc
ON CHARACTERISTICS[1]				
DC Current Gain (I_C = 3 A, V_{CE} = 4 V) (I_C = 5 A, V_{CE} = 4 V)	h_{FE}	15 8	60	
Collector-Emitter Saturation Voltage (I_C = 3 A, I_B = 0.375 A) (I_C = 5 A, I_B = 1 A)	$V_{CE(sat)}$		1.0 1.6	Vdc
Base-Emitter Saturation Voltage (I_C = 5 A, I_B = 1 A)	$V_{BE(sat)}$		2.0	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (V_{CE} = 15 V, I_C = 1 A, f = 4 MHz)	f_T	8.0		MHz

SWITCHING CHARACTERISTICS (Resistive Load)

Turn on Time	I_C = 5 A, I_{B1} = I_{B2} = 1 A, (V_{CC} = 150 V, RC = 30 Ω)	t_{on}		1.0	μs
Storage Time		t_s		2.2	
Fall Time		t_f		0.9	

[1] Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2%.

3

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

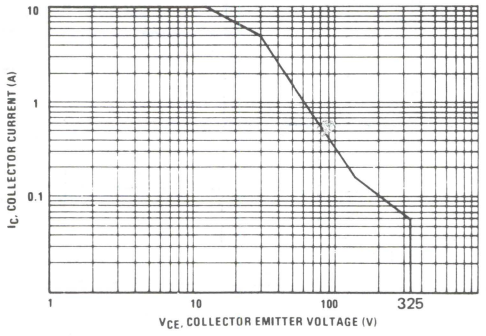

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of figure 2 is based on T_C = 25°C, $T_{J(pk)}$ is variable depending on power level. Second breakdown limitations do not derate the same as thermal limitations.

At high case temperatures, thermal limitations will reduce the power that can handled to values less than the limitations imposed by second breakdown. (See AN415A)

FIGURE 3 – "ON" VOLTAGES

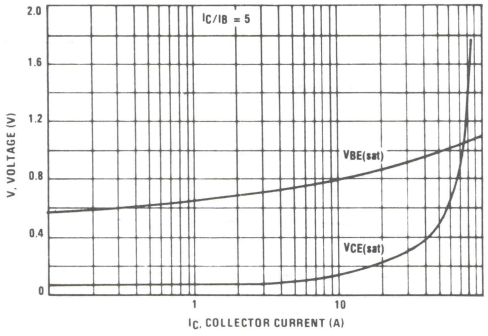

FIGURE 4 – DC CURRENT GAIN

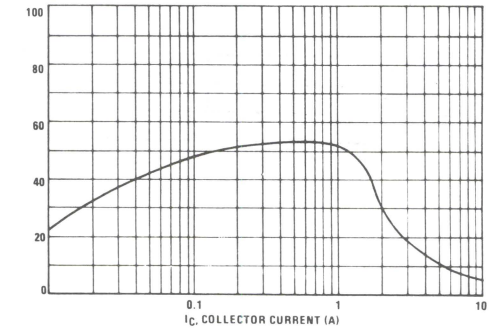

FIGURE 5 – RESISTIVE SWITCHING PERFORMANCE

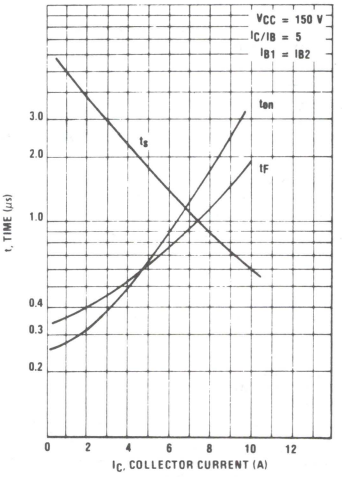

FIGURE 6 – SWITCHING TIMES TEST CIRCUIT



RC – RB : Non inductive resistances

3

BUX84
BUX85

SWITCHMODE
NPN SILICON POWER TRANSISTORS

The BUX 84/85 are designed for high voltage, high speed power switching applications like converters, inverters, switching regulators, motor control systems.

SPECIFICATIONS FEATURES:

- $V_{CEO(sus)}$ { 400 V BUX 84 / 450 V BUX 85
- $V_{CES(sus)}$ { 800 V BUX 84 / 1000 V BUX 85
- Fall time = 0.3 us (typ) at I_C = 1 A
- $V_{CE(sat)}$ = 1 V (max) at I_C = 1 A, I_B = 0.2 A

2 AMPERES
TRIPLE DIFFUSED
POWER TRANSISTORS
NPN SILICON
400 - 450 VOLTS
50 WATTS



MAXIMUM RATINGS

Rating	Symbol	BUX 84	BUX 85	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CES}	800	1000	Vdc
Emitter Base Voltage	V_{EBO}	5		Vdc
Collector Current – Continuous – Peak (1)	 I_C I_{CM}	 2 3.0		Adc
Base Current – Continuous – Peak (1)	 I_B I_{BM}	 0.75 1.0		Adc
Reverse Base Current: – Peak	 I_{BM}	 1		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	50 400		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	2.5	°C/W
Thermal Resistance, Junction to Ambien:	$R\theta_{JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purpose: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test. Pulse Width = 5 ms, Duty Cycle ≤ 10%.

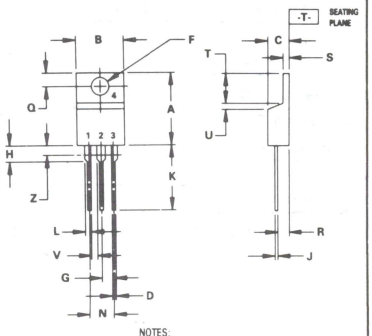

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, (L = 25 mH) See fig. 1	BUX 84	$V_{CEO(sus)}$	400	–	–	Vdc
	BUX 85		450	–	–	
Collector Cutoff Current		I_{CES}				mAdc
(V_{CES} = Rated Value)			–	–	0.2	
(V_{CES} = Rated Value, T_C = 125 °C)			–	–	1.5	
Emitter Cutoff Current (V_{EB} = 5 Vdc, I_C = 0)		I_{EBO}	–	–	1	mAdc
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 0.1 Adc, V_{CE} = 5 V)		h_{FE}	30	50	–	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 0.3 Adc, I_B = 30 mAdc)			–	–	0.8	
(I_C = 1 Adc, I_B = 200 mAdc)			–	–	1	
Base-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.2 Adc)		$V_{BE(sat)}$	–	–	1.1	Vdc
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 1 MHz)		f_T	4	–	–	MHz
SWITCHING CHARACTERISTICS						
Turn-on Time	V_{CC} = 250 Vdc, I_C = 1 A	t_{on}	–	0.3	0.5	μs
Storage Time	I_{B1} = 0.2 A, I_{B2} = 0.4 A	t_s	–	2	3.5	μs
Fall Time	See fig. 2	t_f	–	0.3	–	μs
Fall Time	Same above cond. at T_C = 95°C	t_f	–	–	1.4	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – TEST CIRCUIT FOR $V_{CEO\,sust}$

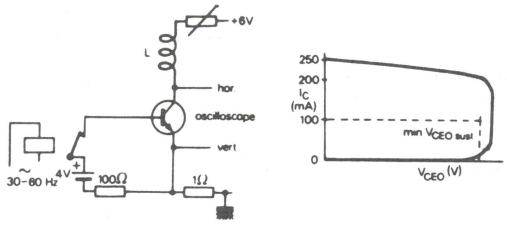

FIGURE 2 – SWITCHING TIMES / TEST CIRCUIT

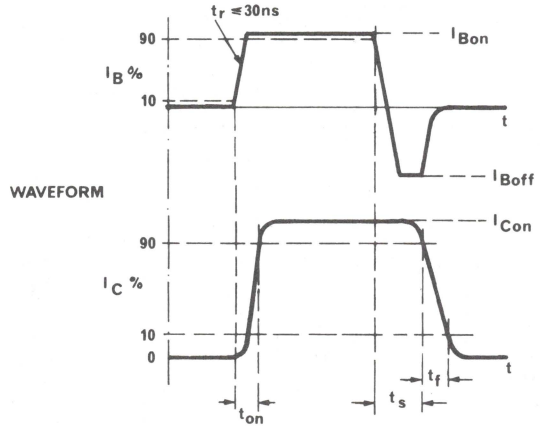

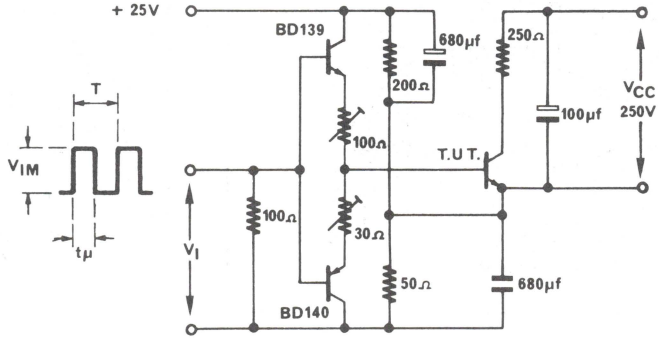

3

NPN
D44E Series
PNP
D45E Series

COMPLEMENTARY SILICON POWER DARLINGTON TRANSISTORS

. . . for general purpose power amplification and switching such as output or driver stages in applications such as switching regulators, converters and power amplifiers.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 2.0 V (Max) @ 10 A
- High DC Current Gain — 1000 (Min) @ 5.0 Adc
- Complementary Pairs Simplifies Designs

DARLINGTON
10 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

40-80 VOLTS
50 WATTS



MAXIMUM RATINGS

Rating	Symbol	D44E or D45E			Unit
		1	2	3	
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Emitter Base Voltage	V_{EB}	7.0			Vdc
Collector Current — Continuous Peak (1)	I_C	10 20			Adc
Total Power Dissipation @ T_C = 25°C @ T_A = 25°C	P_D	50 1.67			Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to 150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	75	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Width ≤ 6.0 ms, Duty Cycle ≤ 50%.

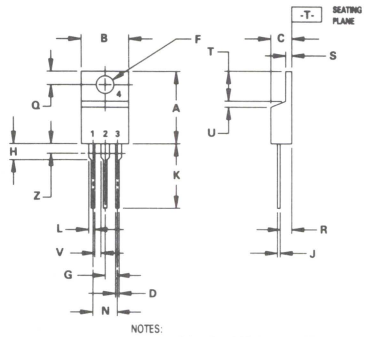

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

FIGURE 1 — TYPICAL DC CURRENT GAIN

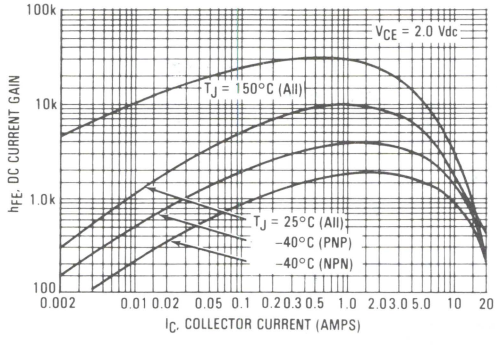

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, V_{BE} = 0)		I_{CES}	—	—	10	μA
Emitter Cutoff Current (V_{EB} = 7.0 Vdc)		I_{EBO}	—	—	1.0	μA
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	1000	—	—	—
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 5.0 Adc, I_B = 10 mAdc)			—	—	1.5	
(I_C = 10 Adc, I_B = 20 mAdc)			—	—	2.0	
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 10 mAdc)		$V_{BE(sat)}$	—	—	2.5	Vdc
DYNAMIC CHARACTERISTICS						
Collector Capacitance (V_{CB} = 10 Vdc, f_{test} = 1.0 MHz)		C_{CBO}				pF
	D44E Series		—	—	130	
	D45E Series		—	—	220	
SWITCHING CHARACTERISTICS						
Delay and Rise Times (I_C = 10 Adc, I_{B1} = 20 mAdc)		$t_d + t_r$	—	0.6	—	μs
Storage Time (I_C = 10 Adc, I_{B1} = I_{B2} = 20 mAdc)		t_s	—	2.0	—	μs
Fall Time (I_C = 10 Adc, I_{B1} = I_{B2} = 20 mAdc)		t_f	—	0.5	—	μs

SAFE OPERATING AREA INFORMATION

FIGURE 2 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA (NPN)

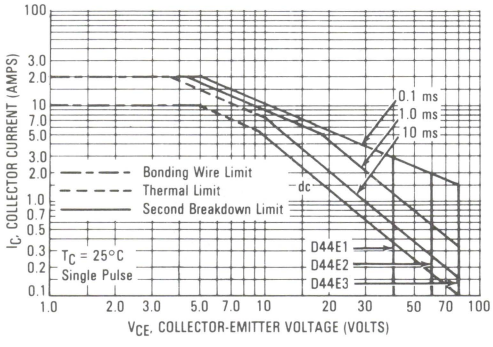

FIGURE 3 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA (PNP)

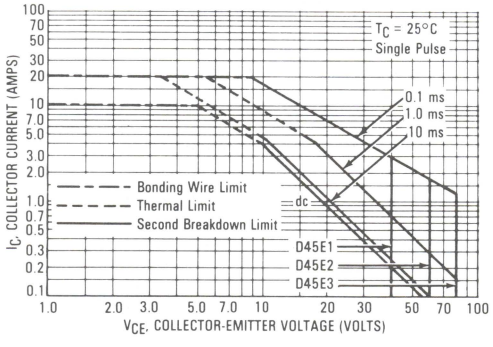

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
D44H Series
PNP
D45H Series

COMPLEMENTARY SILICON POWER TRANSISTORS

. . . for general purpose power amplification and switching such as output or driver stages in applications such as switching regulators, converters and power amplifiers.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.0 V (Max) @ 8.0 A
- Fast Switching Speeds
- Complementary Pairs Simplifies Designs

10 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

30-80 VOLTS



MAXIMUM RATINGS

Rating	Symbol	D44H or D45H				Unit
		1,2	4,5	7,8	10,11	
Collector-Emitter Voltage	V_{CEO}	30	45	60	80	Vdc
Emitter Base Voltage	V_{EB}	5.0				Vdc
Collector Current — Continuous Peak (1)	I_C	10 20				Adc
Total Power Dissipation @ T_C = 25°C @ T_A = 25°C	P_D	50 1.67				Watts
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to 150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	75	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Width ≤ 6.0 ms, Duty Cycle ≤ 50%.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
DC Current Gain (V_{CE} = 1.0 Vdc, I_C = 2.0 Adc)	D44H1,4,7,10 D45H1,4,7,10	h_{FE}	35	—	—
	D44H2,5,8,11 D45H2,5,8,11		60	—	
(V_{CE} = 1.0 Vdc, I_C = 4.0 Adc)	D44H1,4,7,10 D45H1,4,7,10		20	—	
	D44H2,5,8,11 D45H2,5,8,11		40	—	

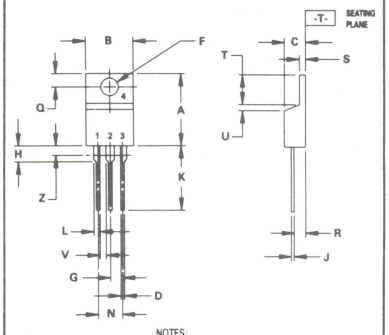

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, V_{BE} = 0)		I_{CES}	—	—	10	μA
Emitter Cutoff Current (V_{EB} = 5.0 Vdc)		I_{EBO}	—	—	100	μA
ON CHARACTERISTICS						
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 8.0 Adc, I_B = 0.4 Adc)	D44H/D45H2,5,8,11		—	—	1.0	
(I_C = 8.0 Adc, I_B = 0.8 Adc)	D44H/D45H1,4,7,10		—	—	1.0	
Base-Emitter Saturation Voltage (I_C = 8.0 Adc, I_B = 0.8 Adc)		$V_{BE(sat)}$	—	—	1.5	Vdc
DYNAMIC CHARACTERISTICS						
Collector Capacitance		C_{cb}				pF
(V_{CB} = 10 Vdc, f_{test} = 1.0 MHz)	D44H Series		—	130	—	
	D45H Series		—	230	—	
Gain Bandwidth Product		f_T				MHz
(I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 20 MHz)	D44H Series		—	50	—	
	D45H Series		—	40	—	
SWITCHING TIMES						
Delay and Rise Times		$t_d + t_r$				ns
(I_C = 5.0 Adc, I_{B1} = 0.5 Adc)	D44H Series		—	300	—	
	D45H Series		—	135	—	
Storage Time		t_s				ns
(I_C = 5.0 Adc, I_{B1} = I_{B2} = 0.5 Adc)	D44H Series		—	500	—	
	D45H Series		—	500	—	
Fall Time		t_f				ns
(I_C = 5.0 Adc, I_{B1} = I_{B2} = 0.5 Adc)	D44H Series		—	140	—	
	D45H Series		—	100	—	

FIGURE 1 — NORMALIZED DC CURRENT GAIN

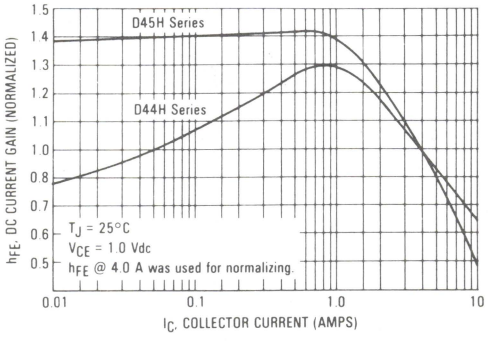

FIGURE 2 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

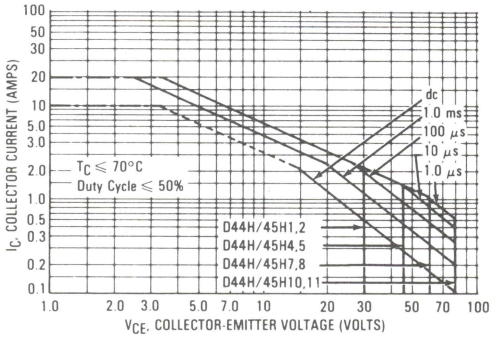

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
D44VH Series
PNP
D45VH Series

COMPLEMENTARY SILICON POWER TRANSISTORS

These complementary silicon power transistors are designed for high-speed switching applications, such as switching regulators and high frequency inverters. The devices are also well-suited for drivers for high power switching circuits.

- Fast Switching — t_f = 90 ns (Max)
- Key Parameters Specified @ 100°C
- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.0 V (Max) @ 8.0 A
- Complementary Pairs Simplify Circuit Designs

15 AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

30, 45, 60 and 80 VOLTS
83 WATTS



MAXIMUM RATINGS

Rating	Symbol	D44VH or D45VH				Unit
		1	4	7	10	
Collector-Emitter Voltage	V_{CEO}	30	45	60	80	Vdc
Collector-Emitter Voltage	V_{CEV}	50	70	80	100	Vdc
Emitter Base Voltage	V_{EB}	7.0				Vdc
Collector Current — Continuous Peak (1)	I_C I_{CM}	15 20				Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	 83 1.67				Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to 150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Width ≤ 6.0 ms, Duty Cycle ≤ 50%.

Note 1: All polarities are shown for NPN transistors. For PNP transistors, reverse polarities.
Note 2: See MJE5220/5230 Series data sheet for characteristic curves.

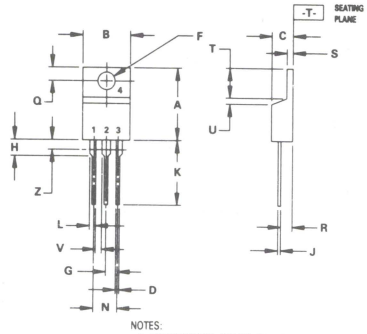

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$				Vdc
(I_C = 25 mAdc, I_B = 0)	D44VH1, D45VH1		30	—	—	
	D44VH4, D45VH4		45	—	—	
	D44VH7, D45VH7		60	—	—	
	D44VH10, D45VH10		80	—	—	
Collector-Emitter Cutoff Current		I_{CEV}				μAdc
(V_{CE} = Rated V_{CEV}, $V_{BE(off)}$ = 4.0 Vdc)			—	—	10	
(V_{CE} = Rated V_{CEV}, $V_{BE(off)}$ = 4.0 Vdc, T_C = 100°C)			—	—	100	
Emitter Base Cutoff Current		I_{EBO}	—	—	10	μAdc
(V_{EB} = 7.0 Vdc, I_C = 0)						
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				—
(I_C = 2.0 Adc, V_{CE} = 1.0 Vdc)			35	—	—	
(I_C = 4.0 Adc, V_{CE} = 1.0 Vdc)			20	—	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 8.0 Adc, I_B = 0.4 Adc)	D44VH Series		—	—	0.4	
(I_C = 8.0 Adc, I_B = 0.8 Adc)	D45VH Series		—	—	1.0	
(I_C = 15 Adc, I_B = 3.0 Adc, T_C = 100°C)	D44VH Series		—	—	0.8	
	D45VH Series		—	—	1.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 8.0 Adc, I_B = 0.4 Adc)	D44VH Series		—	—	1.2	
(I_C = 8.0 Adc, I_B = 0.8 Adc)	D45VH Series		—	—	1.0	
(I_C = 8.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	D44VH Series		—	—	1.1	
(I_C = 8.0 Adc, I_B = 0.8 Adc, T_C = 100°C)	D45VH Series		—	—	1.5	
DYNAMIC CHARACTERISTICS						
Current Gain Bandwidth Product		f_T	—	50	—	MHz
(I_C = 0.1 Adc, V_{CE} = 10 Vdc, f = 20 MHz)						
Output Capacitance		C_{cb}				pF
(V_{CB} = 10 Vdc, I_C = 0, f_{test} = 1.0 MHz)	D44VH Series		—	120	—	
	D45VH Series		—	275	—	
SWITCHING CHARACTERISTICS						
Delay Time	(V_{CC} = 20 Vdc, I_C = 8.0 Adc, I_{B1} = I_{B2} = 0.8 Adc)	t_d	—	—	50	ns
Rise Time		t_r	—	—	250	
Storage Time		t_s	—	—	700	
Fall Time		t_f	—	—	90	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%

3

MJ410
MJ411

HIGH VOLTAGE NPN SILICON TRANSISTORS

. . . designed for medium to high voltage inverters, converters, regulators and switching circuits.

- High Collector-Emitter Voltage –
  V_{CEO} = 200 Volts – MJ410
  300 Volts – MJ411
- DC Current Gain Specified @ 1.0 and 2.5 Adc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.8 Vdc @ I_C = 1.0 Adc

5 AMPERE
POWER TRANSISTORS
NPN SILICON
200–300 VOLTS
100 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ410	MJ411	Unit
Collector-Emitter Voltage	V_{CEO}	200	300	Vdc
Collector-Base Voltage	V_{CB}	200	300	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous Peak	I_C	5.0 10		Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ T_C = 75°C Derate above 75°C	P_D	100 1.33		Watts W/°C
Operating Junction Temperature Range	T_J	-65 to +150		°C
Storage Temperature Range	T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.75	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0)	MJ410 MJ411	$V_{CEO(sus)}$	200 300	– –	Vdc
Collector Cutoff Current (V_{CE} = 200 Vdc, I_B = 0) (V_{CE} = 300 Vdc, I_B = 0)	MJ410 MJ411	I_{CEO}	– –	0.25 0.25	mAdc
Collector Cutoff Current (V_{CE} = 200 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C) (V_{CE} = 300 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	MJ410 MJ411	I_{CEX}	– –	0.5 0.5	mAdc
Emitter Cutoff Current (V_{EB} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	5.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc) (I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	30 10	90 –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	–	0.8	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{BE(sat)}$	–	1.2	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (I_C = 200 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	2.5	–	MHz





STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTE:
1. DIM "Q" IS DIA.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

CASE 11-01
TO-3

3

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

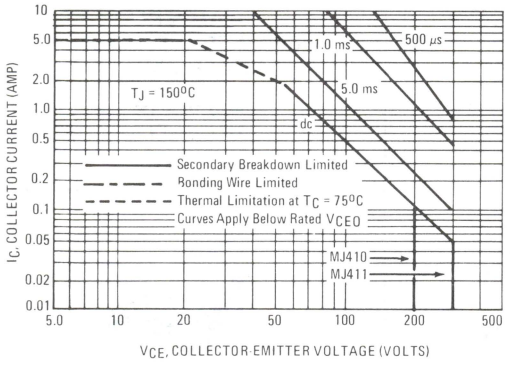

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Pulse curves are valid for duty cycles of 10% provided $T_{J(pk)} \leq$ 150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

FIGURE 2 – DC CURRENT GAIN

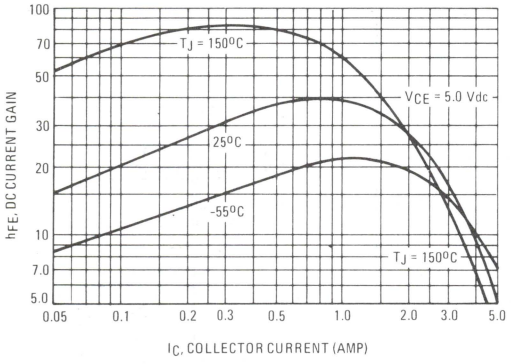

FIGURE 3 – "ON" VOLTAGES

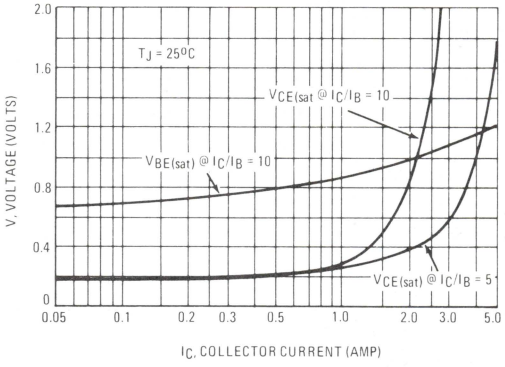

FIGURE 4 – SUSTAINING VOLTAGE TEST LOAD LINE

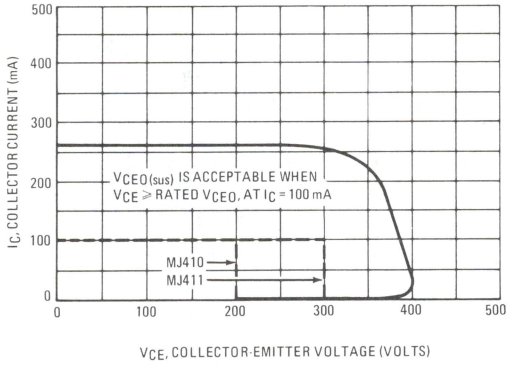

FIGURE 5 – SUSTAINING VOLTAGE TEST CIRCUIT

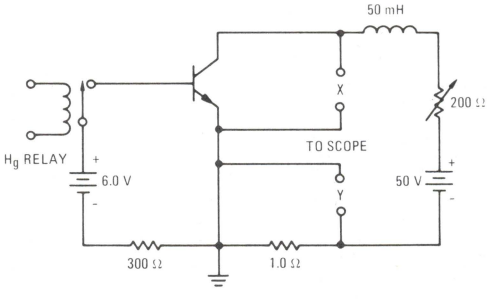

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ413
MJ423
MJ431

HIGH-VOLTAGE NPN SILICON TRANSISTORS

. . . designed for medium-to-high voltage inverters, converters, regulators and switching circuits.

- High Voltage — V_{CEX} = 400 Vdc
- Gain Specified to 3.5 Amp
- High Frequency Response to 2.5 MHz

10 AMPERE
POWER TRANSISTORS
NPN SILICON

400 VOLTS
125 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ413	MJ423	MJ431	Unit
Collector-Emitter Voltage	V_{CEX}	400	400	400	Vdc
Collector-Base Voltage	V_{CB}	400	400	400	Vdc
Emitter-Base Voltage	V_{EB}	5.0	5.0	5.0	Vdc
Collector Current — Continuous	I_C	10	10	10	Adc
Base Current	I_B	2.0	2.0	2.0	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	125 1.0			Watts W/°C
Operation Junction Temperature Range	T_J	-65 to +150			°C
Storage Temperature Range	T_{stg}	-65 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.0	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage* (1) (I_C = 100 mAdc, I_B = 0)		$V_{(BR)CEO(sus)}$	325	—	Vdc
Collector Cutoff Current (V_{CE} = 400 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	MJ413, MJ423 MJ431	I_{CEX}	— —	0.25 2.5	mAdc
(V_{CE} = 400 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 125°C)	MJ413, MJ423 MJ431		— —	0.5 5.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	MJ413, MJ423 MJ431	I_{EBO}	— —	5.0 2.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (1) (I_C = 0.5 Adc, V_{CE} = 5.0 Vdc)	MJ413	h_{FE}	20	80	—
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)			15	—	
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	MJ423		30	90	
(I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)			10	—	
(I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)	MJ431		15	35	
(I_C = 3.5 Adc, V_{CE} = 5.0 Vdc)			10	—	
Collector-Emitter Saturation Voltage (1) (I_C = 0.5 Adc, I_B = 0.05 Adc)	MJ413	$V_{CE(sat)}$	—	0.8	Vdc
(I_C = 1.0 Adc, I_B = 0.10 Adc)	MJ423		—	0.8	
(I_C = 2.5 Adc, I_B = 0.5 Adc)	MJ431		—	0.7	
Base-Emitter Saturation Voltage (1) (I_C = 0.5 Adc, I_B = 0.05 Adc)	MJ413	$V_{BE(sat)}$	—	1.25	Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)	MJ423		—	1.25	
(I_C = 2.5 Adc, I_B = 0.5 Adc)	MJ431		—	1.5	
DYNAMIC CHARACTERISTICS					
Current-Gain — Bandwidth Product (I_C = 200 mAdc, V_{CE} = 10Vdc, f = 1.0 MHz)		f_T	2.5	—	MHz

(1) PW ≤ 300 μs, Duty Cycle ≤ 2.0%



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

CASE 11-01
TO-3

3

FIGURE 1 — ACTIVE-REGION SAFE-OPERATING AREA

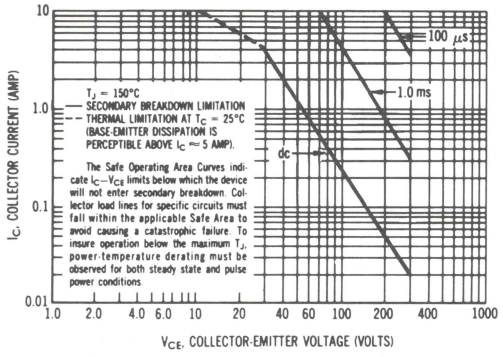

FIGURE 2 — POWER-TEMPERATURE DERATING CURVE

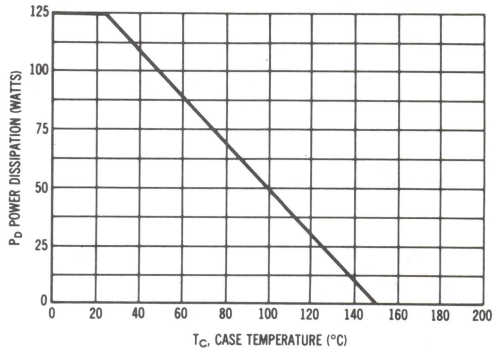

FIGURE 3 — SUSTAINING VOLTAGE TEST LOAD LINE

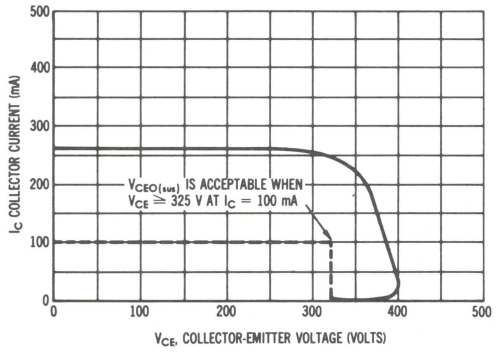

FIGURE 4 — SUSTAINING VOLTAGE TEST CIRCUIT

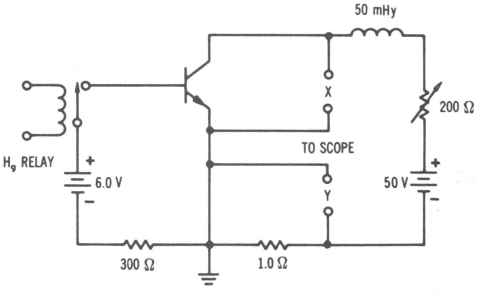

FIGURE 5 — CURRENT GAIN

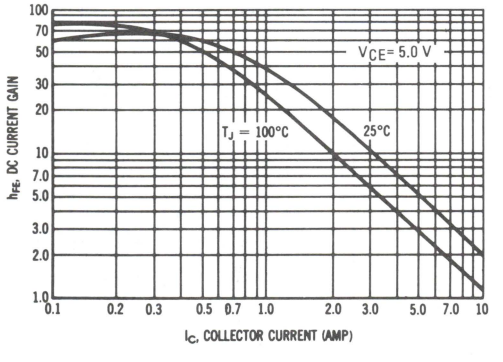

FIGURE 6 — TRANSCONDUCTANCE

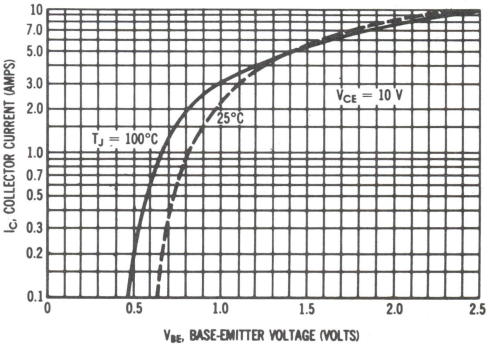

3

MJ802

HIGH-POWER NPN SILICON TRANSISTOR

. . . for use as an output device in complementary audio amplifiers to 100-Watts music power per channel.

- High DC Current Gain – h_{FE} = 25-100 @ I_C = 7.5 A
- Excellent Safe Operating Area
- Complement to the PNP MJ4502

30 AMPERE
POWER TRANSISTOR

NPN SILICON

100 VOLTS
200 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CER}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Collector-Emitter Voltage	V_{CEO}	90	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current	I_C	30	Adc
Base Current	I_B	7.5	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.14	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

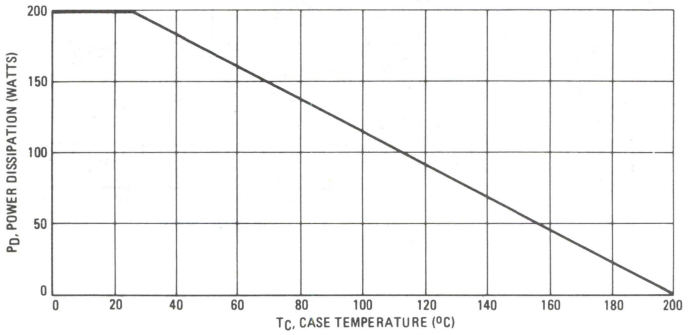

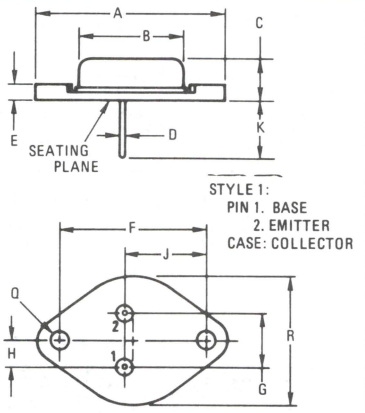

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	--	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

NOTE:
1. DIM "Q" IS DIA.

CASE 11-01
TO-3

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (1) (I_C = 200 mAdc, R_{BE} = 100 Ohms)	BV_{CER}	100	–	Vdc
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc)	$V_{CEO(sus)}$	90	–	Vdc
Collector-Base Cutoff Current (V_{CB} = 100 Vdc, I_E = 0)	I_{CBO}	–	1.0	mAdc
(V_{CB} = 100 Vdc, I_E = 0, T_C = 150°C)		–	5.0	
Emitter-Base Cutoff Current (V_{BE} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (1) (I_C = 7.5 Adc, V_{CE} = 2.0 Vdc)	h_{FE}	25	100	–
Base-Emitter "On" Voltage (I_C = 7.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$	–	1.3	Vdc
Collector-Emitter Saturation Voltage (I_C = 7.5 Adc, I_B = 0.75 Adc)	$V_{CE(sat)}$	–	0.8	Vdc
Base-Emitter Saturation Voltage (I_C = 7.5 Adc, I_B = 0.75 Adc)	$V_{BE(sat)}$	–	1.3	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T	2.0	–	MHz

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

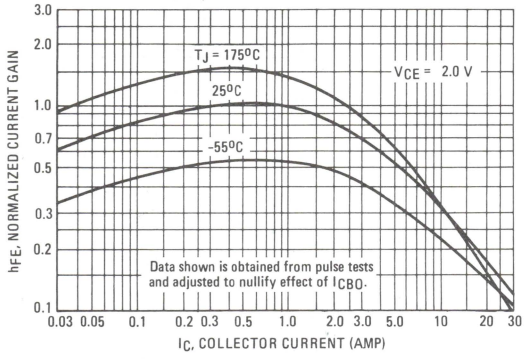

FIGURE 3 – "ON" VOLTAGES

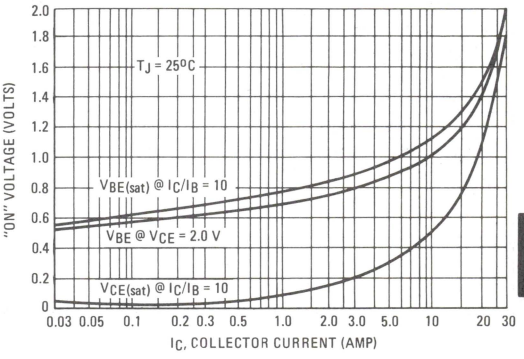

FIGURE 4 – ACTIVE REGION SAFE OPERATING AREA

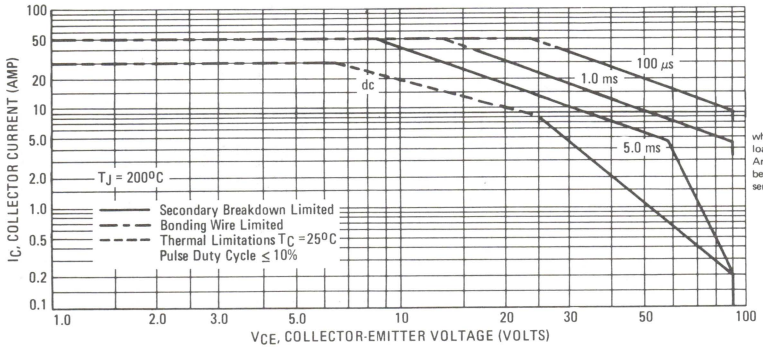

The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

PNP
MJ900, MJ901
NPN
MJ1000, MJ1001

MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . for use as output devices in complementary general purpose amplifier applications.

- High DC Current Gain – h_{FE} = 6000 (Typ) @ I_C = 3.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

8.0 AMPERE DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON

60–80 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ900 MJ1000	MJ901 MJ1001	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current	I_C	8.0		Adc
Base Current	I_B	0.1		Adc
Total Device Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	90 0.515		Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +200		^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.94	$^oC/W$



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTE:
1. DIM "Q" IS DIA.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

Collector connected to case.
CASE 11-01
(TO-3)

FIGURE 1 – DARLINGTON CIRCUIT SCHEMATIC

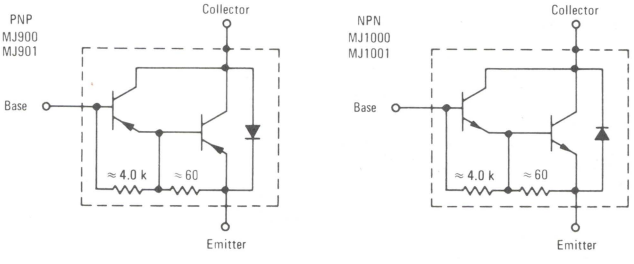

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1)		$V_{(BR)CEO}$			Vdc
(I_C = 100 mAdc, I_B = 0)	MJ900, MJ1000		60	–	
	MJ901, MJ1001		80	–	
Collector Emitter Leakage Current		I_{CER}			mAdc
(V_{CB} = 60 Vdc, R_{BE} = 1.0 k ohm)	MJ900, MJ1000		–	1.0	
(V_{CB} = 80 Vdc, R_{BE} = 1.0 k ohm)	MJ901, MJ1001		–	1.0	
(V_{CB} = 60 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ900, MJ1000		–	5.0	
(V_{CB} = 80 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ901, MJ1001		–	5.0	
Emitter Cutoff Current		I_{EBO}	–	2.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
Collector-Emitter Leakage Current		I_{CEO}			μAdc
(V_{CE} = 30 Vdc, I_B = 0)	MJ900, MJ1000		–	500	
(V_{CE} = 40 Vdc, I_B = 0)	MJ901, MJ1001		–	500	
ON CHARACTERISTICS					
DC Current Gain(1)		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)			1000	–	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)			750	–	
Collector-Emitter Saturation Voltage(1)		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 12 mAdc)			–	2.0	
(I_C = 8.0 Adc, I_B = 40 mAdc)			–	4.0	
Base-Emitter Voltage(1)		V_{BE}	–	2.5	Vdc
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)					

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

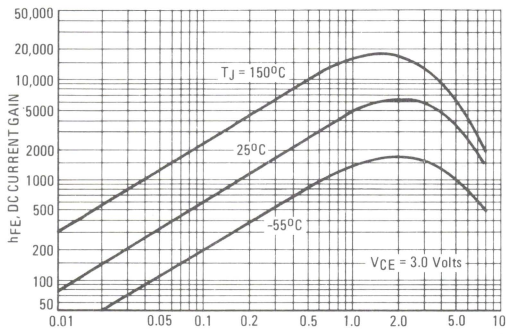

FIGURE 3 – SMALL-SIGNAL CURRENT GAIN

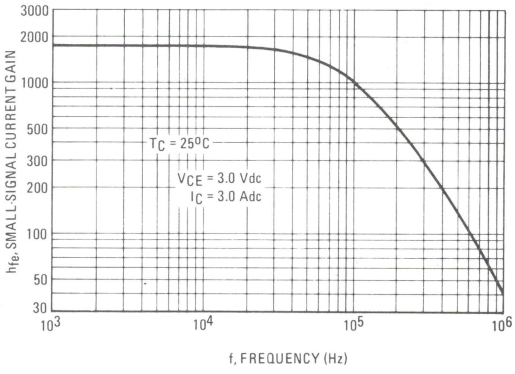

FIGURE 4 – "ON" VOLTAGES

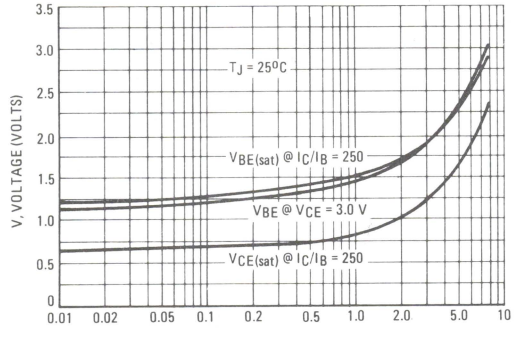

FIGURE 5 – DC SAFE OPERATING AREA

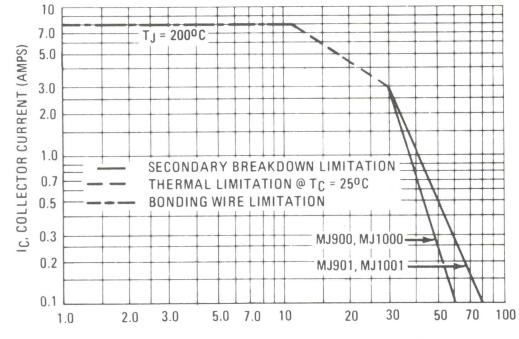

There are two limitations on the power handling ability of a transistor: average junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

PNP
MJ2500, MJ2501
NPN
MJ3000, MJ3001

MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . for use as output devices in complementary general purpose amplifier applications.

- High DC Current Gain – h_{FE} = 4000 (Typ) @ I_C = 5.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

10 AMPERE DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON

60–80 VOLTS
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ2500 MJ3000	MJ2501 MJ3001	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current	I_C	10		Adc
Base Current	I_B	0.2		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	150 0.857		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W

FIGURE 1 – DARLINGTON CIRCUIT SCHEMATIC

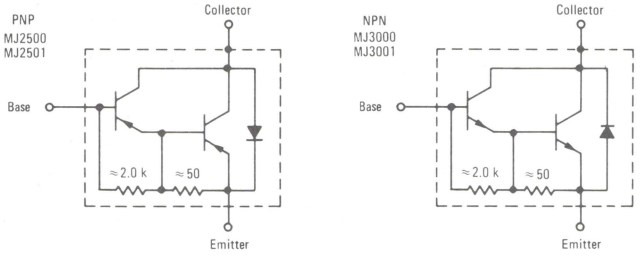

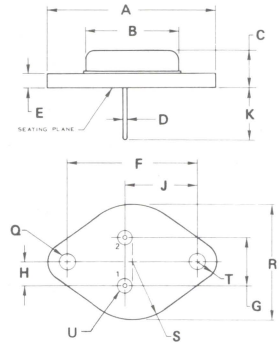

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120

CASE 1–04

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage(1) (I_C = 100 mAdc, I_B = 0)	MJ2500, MJ3000 MJ2501, MJ3001	$V_{(BR)CEO}$	60 80	– –	Vdc
Collector-Emitter Leakage Current		I_{CER}			mAdc
(V_{EB} = 60 Vdc, R_{BE} = 1.0 k ohm)	MJ2500, MJ3000		–	1.0	
(V_{EB} = 80 Vdc, R_{BE} = 1.0 k ohm)	MJ2501, MJ3001		–	1.0	
(V_{EB} = 60 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ2500, MJ3000		–	5.0	
(V_{EB} = 80 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ2501, MJ3001		–	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	2.0	mAdc
Collector-Emitter Leakage Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	MJ2500, MJ3000		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	MJ2501, MJ3001		–	1.0	
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)		h_{FE}	1000	–	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 5.0 Adc, I_B = 20 mAdc)			–	2.0	
(I_C = 10 Adc, I_B = 50 mAdc)			–	4.0	
Base-Emitter Voltage (I_C = 5.0 Adc, V_{CE} = 3.0 Vdc)		V_{BE}	–	3.0	Vdc

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

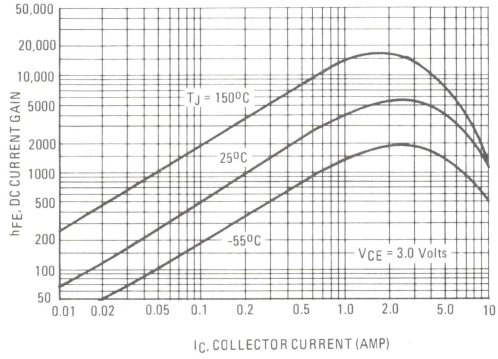

FIGURE 3 – SMALL-SIGNAL CURRENT GAIN

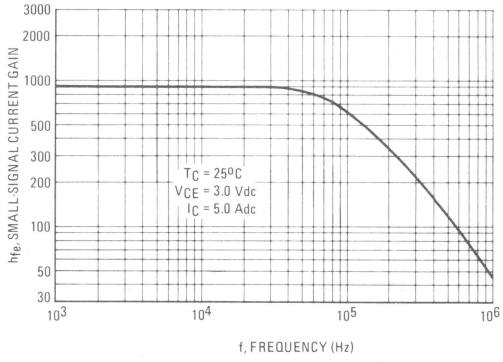

FIGURE 4 – "ON" VOLTAGES

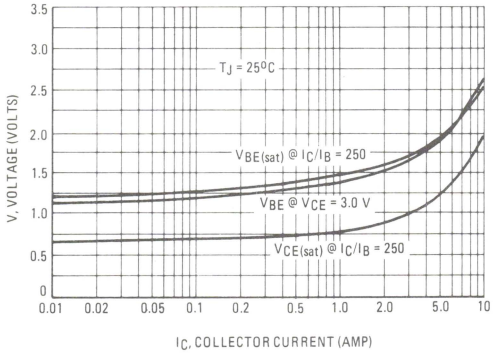

FIGURE 5 – DC SAFE OPERATING AREA

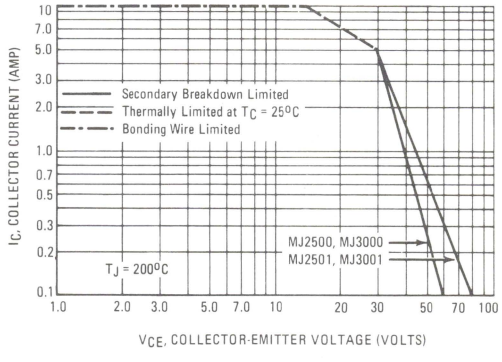

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ2955 — See Pg. 3-6
MJ2955A — See Pg. 3-9

MJ3029

NPN SILICON HIGH-VOLTAGE TRANSISTOR

. . . designed for TV horizontal and vertical deflection amplifier circuits.

- High Collector-Emitter Sustaining Voltage — $V_{CEO(sus)}$ = 250 Vdc (Min) MJ3029
- Fast Fall Time in Horizontal Deflection
- Excellent Gain Linearity for Vertical Deflection — h_{fe} @ 0.4 Adc, h_{fe} @ 0.3 Adc = 0.95 (Min)

5 AMPERE
POWER TRANSISTOR
NPN SILICON
250-325 VOLTS
125 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ3029	Unit
Collector-Emitter Voltage	V_{CEO}	250	Vdc
Collector-Emitter Voltage	V_{CER}	500	Vdc
Collector-Emitter Voltage	V_{CEX}	—	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	5.0	Adc
Base Current	I_B	1.0	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	125 1.0	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.0	°C/W

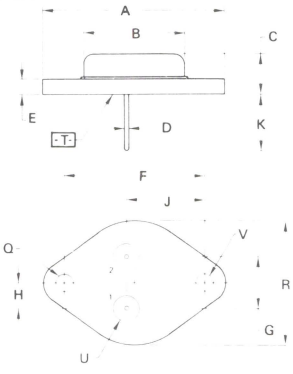

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | Ø0.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | Ø0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

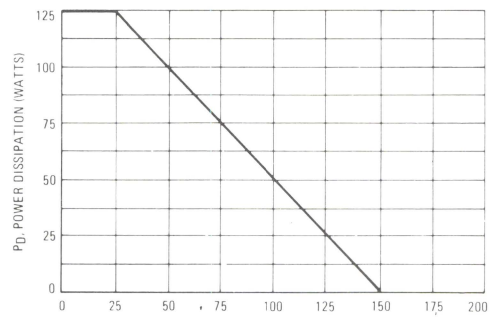

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage(1) (I_C = 0.1 Adc, I_B = 0)	MJ3029	$V_{CEO(sus)}$	250	–	Vdc
Collector Cutoff Current (V_{CE} = 500 Vdc, R_{BE} = 1.5 k Ohms)	MJ3029	I_{CER}	–	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 0.3 Adc, V_{CE} = 5.0 Vdc)(1)		h_{FE1}	25	–	–
(I_C = 0.4 Adc, V_{CE} = 5.0 Vdc)(1)		h_{FE2}	30	–	
Gain Linearity		$\frac{h_{FE2}}{h_{FE1}}$	0.95	–	–

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

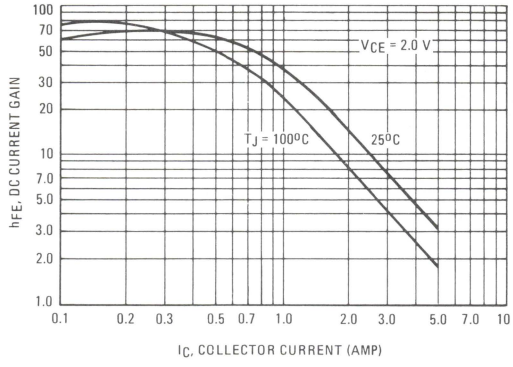

FIGURE 3 – TEST FOR FALL TIME

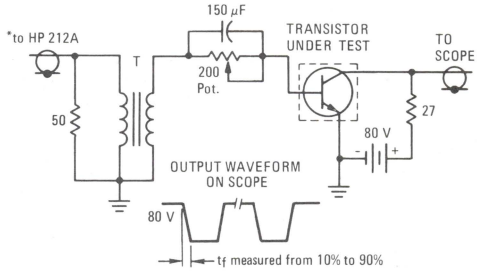

*HP 212A: Set for 10 μs wide pulses at 2000 pulses per sec. (500 μs intervals). Adjust for I_{B1} = 0.8 A.
Bias: Adjust to 1.5 V on a VTVM across the 200 Ω Pot.
T: Pulse Transformer: Motorola Part No. 25D68782A01.

FIGURE 4 – ACTIVE REGION SAFE OPERATING AREA

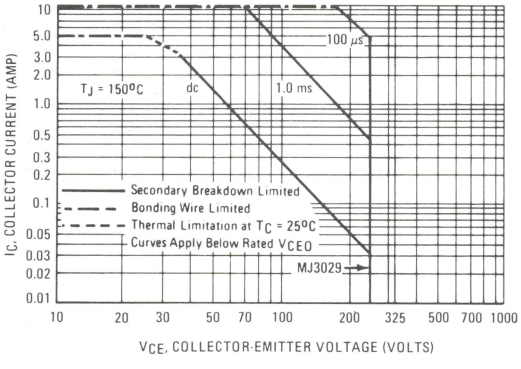

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 4 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ3040
MJ3041
MJ3042

HIGH VOLTAGE SILICON POWER DARLINGTONS

. . . developed for line operated amplifier, series pass and switching regulator applications.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 300 Vdc (Min) – MJ3040, MJ3041
  = 350 Vdc (Min) – MJ3042
- High DC Current Gain –
  h_{FE} = 100 (Min) @ I_C = 2.5 Adc – MJ3040
  = 250 (Min) @ I_C = 2.5 Adc – MJ3041, MJ3042
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 2.2 Vdc (Max) @ I_C = 2.5 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors

DARLINGTON 10 AMPERE POWER TRANSISTORS NPN SILICON

300, 350 VOLTS
175 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ3040	MJ3041	MJ3042	Unit
Collector-Base Voltage	V_{CB}	400	400	500	Vdc
Collector-Emitter Voltage	V_{CEO}	300	300	350	Vdc
Emitter-Base Voltage	V_{EB}	← 8.0 →			Vdc
Collector Current – Continuous	I_C	← 10 →			Adc
– Peak (1)		← 15 →			
Total Device Dissipation @ T_C = 25°C	P_D	← 175 →			Watts
Derate above 25°C		← 1.0 →			W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← −65 to +200 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

(1) Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

DARLINGTON SCHEMATIC



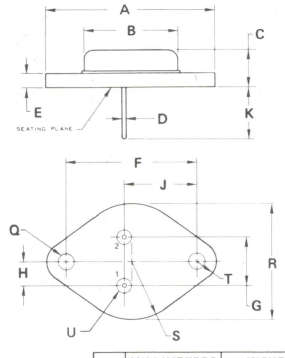

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120

CASE 1–04

NOTES:
1. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-3 OUTLINE SHALL APPLY.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0)	MJ3040, MJ3041	$V_{CEO(sus)}$	300	–	Vdc
	MJ3042		350	–	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 400 Vdc, I_E = 0)	MJ3040, MJ3041		–	1.0	
(V_{CB} = 500 Vdc, I_E = 0)	MJ3042		–	1.0	
(V_{CB} = 400 Vdc, I_E = 0, T_C = 100°C)	MJ3040, MJ3041		–	5.0	
(V_{CB} = 500 Vdc, I_E = 0, T_C = 100°C)	MJ3042		–	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	40	mAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)	MJ3040		100	–	
	MJ3041, MJ3042		250	–	
(I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)	MJ3040		25	–	
	MJ3041, MJ3042		50		
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.5 Adc, I_B = 50 mAdc)			–	2.2	
(I_C = 5.0 Adc, I_B = 400 mAdc)			–	2.5	
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 400 mAdc)		$V_{BE(sat)}$	–	3.0	Vdc
Base-Emitter On Voltage (I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	–	2.5	Vdc

FIGURE 1 – FORWARD BIAS SAFE OPERATING AREA

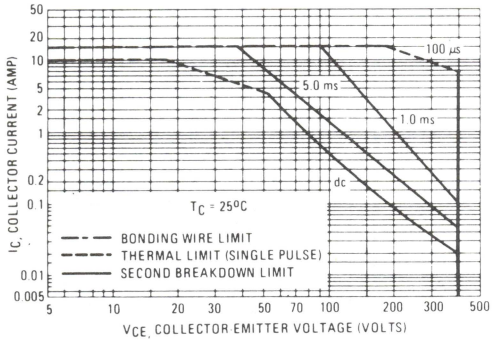

There are two limitations on the power handling ability of a transistor – average junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 2 – DC CURRENT GAIN

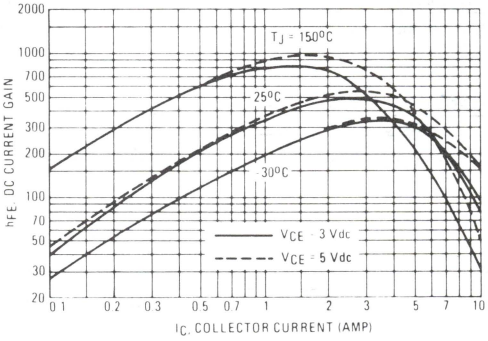

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

PNP	NPN
MJ4030	MJ4033
MJ4031	MJ4034
MJ4032	MJ4035

MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . for use as output devices in complementary general purpose amplifier applications.

- High DC Current Gain – h_{FE} = 3500 (Typ) @ I_C = 10 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor

16 AMPERE DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON

60–100 VOLTS
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ4030 MJ4033	MJ4031 MJ4034	MJ4032 MJ4035	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current	I_C	16			Adc
Base Current	I_B	0.5			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	150 0.857			Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-55 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.17	°C/W



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.151	0.165

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIAMETER V AND SURFACE W ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ | ϕ 0.25 (0.010) Ⓜ | W | V | Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ | ϕ 0.30 (0.012) Ⓜ | W | V | Ⓜ | Q | Ⓜ

CASE 1-04
TO-204AA

FIGURE 1 – DARLINGTON CIRCUIT SCHEMATIC

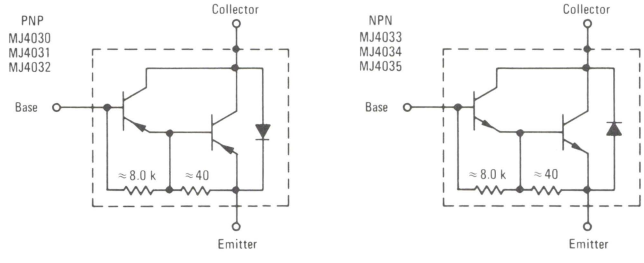

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage(1) (I_C = 100 mAdc, I_B = 0)	MJ4030, MJ4033	$V_{(BR)CEO}$	60	–	Vdc
	MJ4031, MJ4034		80	–	
	MJ4032, MJ4035		100	–	
Collector Emitter Leakage Current		I_{CER}			mAdc
(V_{CB} = 60 Vdc, R_{BE} = 1.0 k ohm)	MJ4030, MJ4033		–	1.0	
(V_{CB} = 80 Vdc, R_{BE} = 1.0 k ohm)	MJ4031, MJ4034		–	1.0	
(V_{CB} = 100 Vdc, R_{BE} = 1.0 k ohm)	MJ4032, MJ4035		–	1.0	
(V_{CB} = 60 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ4030, MJ4033		–	5.0	
(V_{CB} = 80 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ4031, MJ4034		–	5.0	
(V_{CB} = 100 Vdc, R_{BE} = 1.0 k ohm, T_C = 150°C)	MJ4032, MJ4035		–	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	5.0	mAdc
Collector-Emitter Leakage Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	MJ4030, MJ4033		–	3.0	
(V_{CE} = 40 Vdc, I_B = 0)	MJ4031, MJ4034		–	3.0	
(V_{CE} = 50 Vdc, I_B = 0)	MJ4032, MJ4035		–	3.0	
ON CHARACTERISTICS(1)					
DC Current Gain (I_C = 10 Adc, V_{CE} = 3.0 Vdc)		h_{FE}	1000	–	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 40 mAdc)			–	2.5	
(I_C = 16 Adc, I_B = 80 mAdc)			–	4.0	
Base-Emitter Voltage (I_C = 10 Adc, V_{CE} = 3.0 Vdc)		V_{BE}	–	3.0	Vdc

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

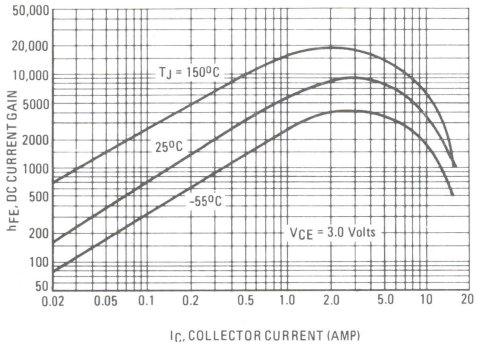

FIGURE 3 – SMALL-SIGNAL CURRENT GAIN

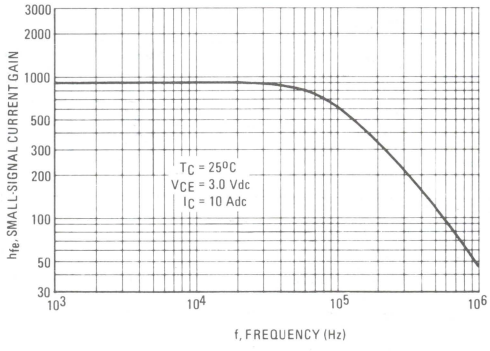

FIGURE 4 – "ON" VOLTAGES

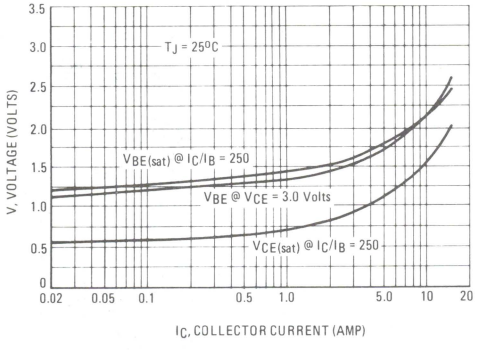

FIGURE 5 – DC SAFE OPERATING AREA

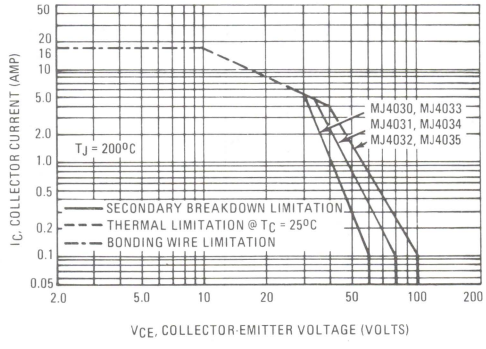

There are two limitations on the power handling ability of a transistor: average junction temperature and secondary breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

MJ4502

HIGH-POWER PNP SILICON TRANSISTOR

. . . for use as an output device in complementary audio amplifiers to 100-Watts music power per channel.

- High DC Current Gain – h_{FE} = 25–100 @ I_C = 7.5 A
- Excellent Safe Operating Area
- Complement to the NPN MJ802

30 AMPERE
POWER TRANSISTOR

PNP SILICON

100 VOLTS
200 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CER}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Collector-Emitter Voltage	V_{CEO}	90	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current	I_C	30	Adc
Base Current	I_B	7.5	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.14	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

3

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	0.875	°C/W

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

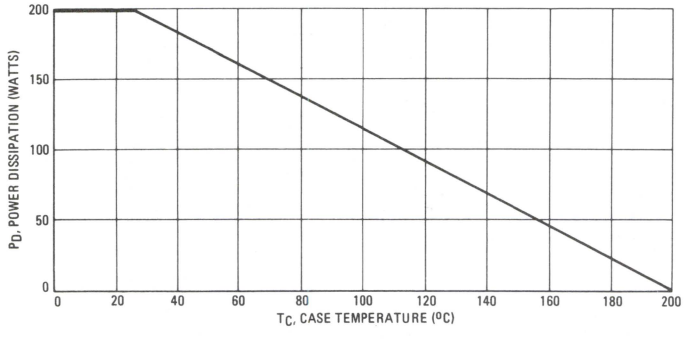

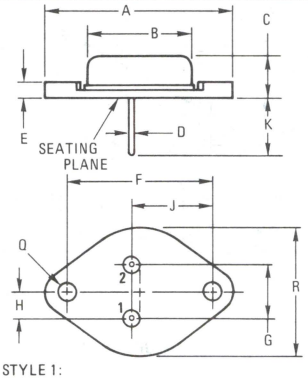

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTE:
1. DIM "Q" IS DIA.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.33	5.59	0.210	0.220
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050

CASE 11-01
TO-204AA

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (1) (I_C = 200 mAdc, R_{BE} = 100 Ohms)	$V_{(BR)CER}$	100	–	Vdc
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc)	$V_{CEO(sus)}$	90	–	Vdc
Collector-Base Cutoff Current (V_{CB} = 100 Vdc, I_E = 0)	I_{CBO}	–	1.0	mAdc
(V_{CB} = 100 Vdc, I_E = 0, T_C = 150°C)		–	5.0	
Emitter-Base Cutoff Current (V_{BE} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 7.5 Adc, V_{CE} = 2.0 Vdc)	h_{FE}	25	100	–
Base-Emitter "On" Voltage (I_C = 7.5 Adc, V_{CE} = 2.0 Vdc)	$V_{BE(on)}$	–	1.3	Vdc
Collector-Emitter Saturation Voltage (I_C = 7.5 Adc, I_B = 0.75 Adc)	$V_{CE(sat)}$	–	0.8	Vdc
Base-Emitter Saturation Voltage (I_C = 7.5 Adc, I_B = 0.75 Adc)	$V_{BE(sat)}$	–	1.3	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain – Bandwidth Product (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T	2.0	–	MHz

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

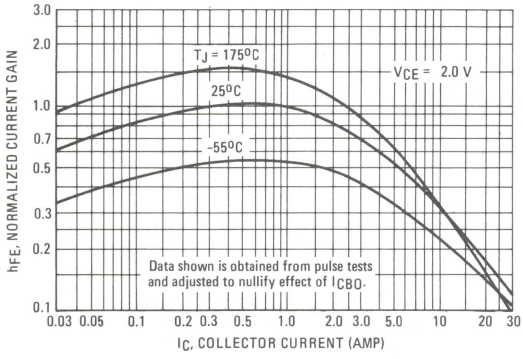

FIGURE 3 – "ON" VOLTAGES

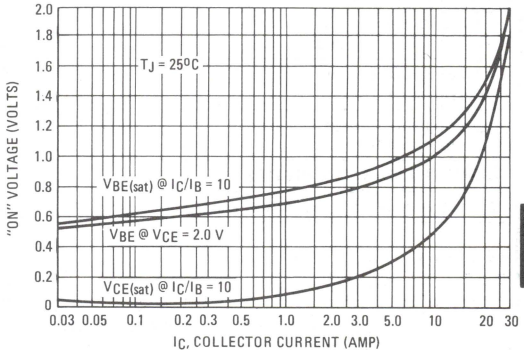

FIGURE 4 – ACTIVE REGION SAFE OPERATING AREA

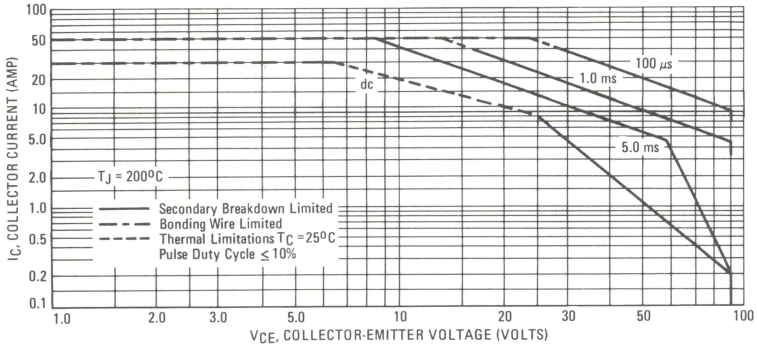

The Safe Operating Area Curves indicate $I_C - V_{CE}$ limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

3

MJ4646
MJ4647

PNP SILICON POWER TRANSISTORS

. . . designed for high-voltage amplifier and saturated switching applications at collector currents to one Ampere. Ideally suited for applications of dc-to-dc converters, relay and hammer drivers, motor controls, and servo and pulse amplifiers. High-voltage ratings permit direct-line operation.

- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = < 1.5 Vdc (Max) @ I_C = 500 mAdc
- High Collector-Emitter Breakdown Voltage — $V_{(BR)CEO}$ = 300 and 400 Vdc (Min)
- DC Current Gain Specified — 10 mAdc to 500 mAdc

1.0 AMPERE
POWER TRANSISTORS
PNP SILICON
200-300-400 VOLTS
5 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ4646	MJ4647	Unit
Collector-Emitter Voltage	V_{CEO}	300	400	Vdc
Collector-Base Voltage	V_{CB}	300	400	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous Peak	I_C	0.5 1.0		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	5.0 28.6		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	θ_{JC}	35	°C/W

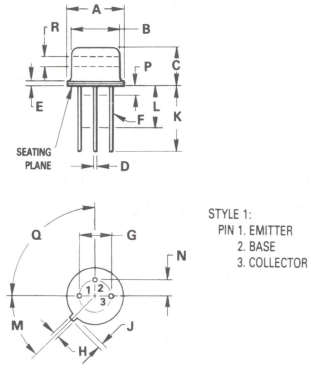

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	8.89	9.40	0.350	0.370
B	8.00	8.51	0.315	0.335
C	6.10	6.60	0.240	0.260
D	0.406	0.533	0.016	0.021
E	0.229	3.18	0.009	0.125
F	0.406	0.483	0.016	0.019
G	4.83	5.33	0.190	0.210
H	0.711	0.864	0.028	0.034
J	0.737	1.02	0.029	0.040
K	12.70	—	0.500	—
L	6.35	—	0.250	—
M	45° NOM		45° NOM	
P	—	1.27	—	0.050
Q	90° NOM		90° NOM	
R	2.54	—	0.100	—

All JEDEC Dimensions and Notes Apply.

CASE 79-02
TO-205AD

FIGURE 1 – POWER DERATING

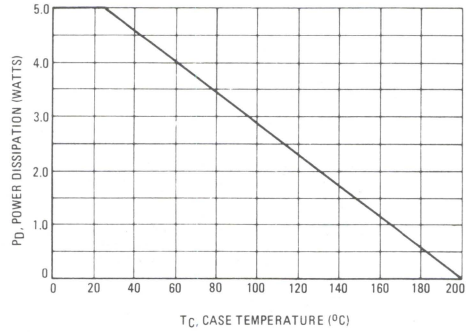

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1) (I_C = 10 mAdc, I_B = 0)	$V_{(BR)CEO}$				Vdc
MJ4646		300	–	–	
MJ4647		400	–	–	
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$				Vdc
MJ4646		300	–	–	
MJ4647		400	–	–	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)	$V_{(BR)EBO}$	5.0	–	–	Vdc
Collector Cutoff Current (V_{CE} = 200 Vdc, $V_{BE(off)}$ = 0.5 Vdc)	I_{CEX}	–	–	10	μAdc
ON CHARACTERISTICS					
DC Current Gain	h_{FE}				–
(I_C = 10 mAdc, V_{CE} = 10 Vdc)		20	–	–	
(I_C = 100 mAdc, V_{CE} = 10 Vdc) (1)		25	–	–	
(I_C = 500 mAdc, V_{CE} = 10 Vdc) (1)		20	–	–	
Collector-Emitter Saturation Voltage (I_C = 500 mAdc, I_B = 100 mAdc)	$V_{CE(sat)}$				Vdc
MJ4646		–	0.6	1.2	
MJ4647		–	0.75	1.5	
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 70 mAdc, V_{CE} = 20 Vdc, f = 20 MHz)	f_T				MHz
MJ4646		40	–	–	
MJ4647		30	–	–	
Output Capacitance (V_{CB} = 20 Vdc, I_E = 0, f = 100 kHz)	C_{ob}				pF
MJ4647		–	–	60	
SWITCHING CHARACTERISTICS					
Delay Time (V_{CC} = 100 Vdc, I_C = 500 mAdc,	t_d	–	–	100	ns
Rise Time I_{B1} = 50 mAdc, $V_{BE(off)}$ = 5.0 Vdc)	t_r	–	–	100	ns
Turn-Off Time (V_{CC} = 100 Vdc, I_C = 500 mAdc, I_{B1} = I_{B2} = 50 mAdc, Pulse Width = 1.0 μs)	t_{off}	–	–	720	ns

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – ACTIVE-REGION SAFE OPERATING AREA

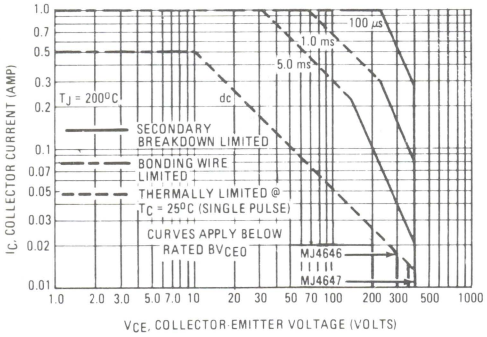

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MJ6503

Designers Data Sheet

SWITCHMODE SERIES
PNP SILICON POWER TRANSISTOR

The MJ6503 transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
100 ns Inductive Fall Time @ 25°C (Typ)
125 ns Inductive Crossover Time @ 25°C (Typ)

Operating Temperature Range −65 to +200°C

100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents



8 AMPERE

PNP SILICON POWER TRANSISTOR

400 VOLTS
125 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

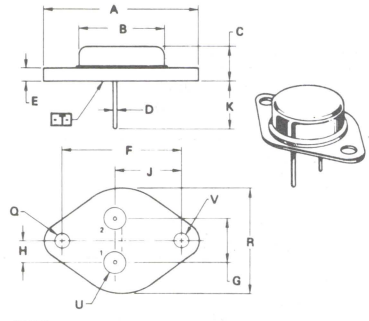

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | Ø.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | Ø.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

STYLE 1
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

CASE 1-05
TO-204AA

MAXIMUM RATINGS

Rating	Symbol	MJ6503	Unit
Collector-Emitter Voltage	V_{CEO}	400	Vdc
Collector-Emitter Voltage	V_{CEV}	450	Vdc
Emitter Base Voltage	V_{EB}	6.0	Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	8.0 16	Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	4.0 8.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	125 71.5 0.714	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 10 mA, I_B = 0) MJ6503		$V_{CEO(sus)}$	 400	–	–	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 – –	 – –	 0.5 2.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 2.0 Adc, V_{CE} = 5 Vdc)		h_{FE}	15	–	–	–
Collector-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 1.0 Adc) (I_C = 8 Adc, I_B = 3.0 Adc) (I_C = 4 Adc, I_B = 1.0 Adc, T_C = 100°C)		$V_{CE(sat)}$	 – – –	 – – –	 1.5 5.0 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 1.0 Adc) (I_C = 4 Adc, I_B = 1.0 Adc, T_C = 100°C)		$V_{BE(sat)}$	 – –	 – –	 1.5 1.5	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	100	–	400	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 4.0 A, I_{B1} = 1.0 A, t_p = 50 μs, Duty Cycle ≤ 2%)	t_d	–	0.025	0.1	μs
Rise Time		t_r	–	0.100	0.5	μs
Storage Time	(V_{CC} = 250 Vdc, I_C = 4.0 A, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%)	t_s	–	0.60	2.0	μs
Fall Time		t_f	–	0.11	0.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 4 A(pk), V_{CE}(pk) = 250 Vdc, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_{sv}	–	0.8	3.0	μs
Crossover Time		t_c	–	0.4	1.5	μs
Fall Time		t_{fi}	–	0.1	–	μs
Storage Time	(I_C = 4 A(pk), V_{CE}(pk) = 250 Vdc, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	0.5	–	μs
Crossover Time		t_c	–	0.125	–	μs
Fall Time		t_{fi}		0.1	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

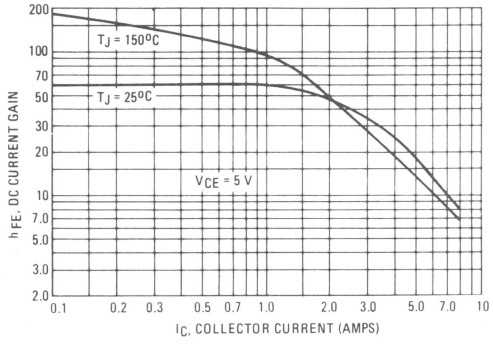

FIGURE 2 – COLLECTOR SATURATION REGION

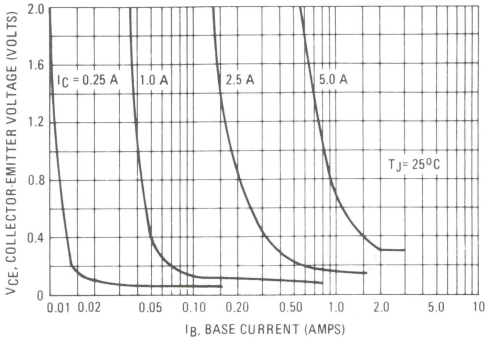

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

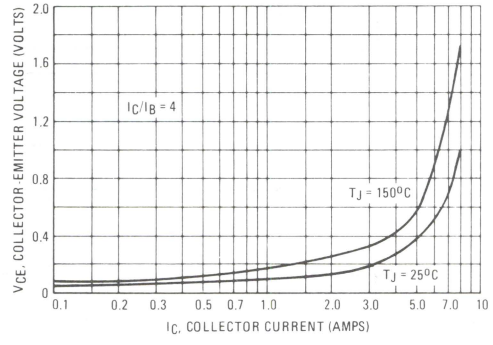

FIGURE 4 – BASE-EMITTER VOLTAGE

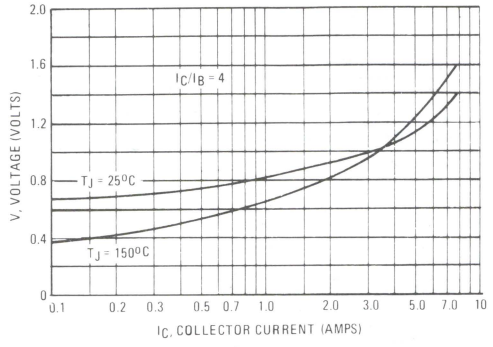

FIGURE 5 – COLLECTOR CUTOFF REGION

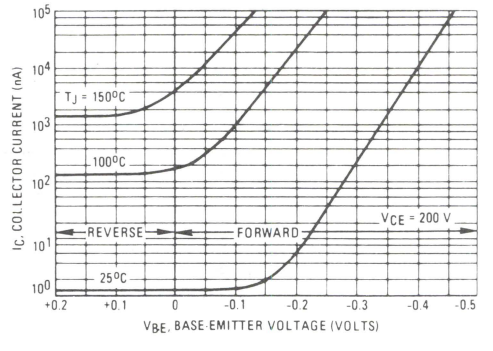

FIGURE 6 – CAPACITANCE

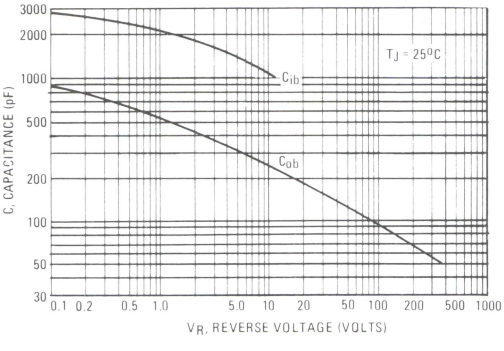

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+V, 50 µF, 0.0025 µF, 0.2 µF, 500 Ω, ½ W, 0.1 µF, MJE15029, 500 Ω ½ W, IN4934, Input, 0.1 µF, 0.0033 µF, 500 Ω ½ W, 1 Ω 2 W, 1, 2, 50 Ω 2 W, MJE15028, 0.2 µF, 500 Ω ½ W, 0.1µF, 50 µF, −V −V adjusted to obtain desired I_{B1} +V adjusted to obtain desired $V_{BE(off)}$	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 µH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain I_{B1}	V_{CC} = 250 V R_L = 62 Ω Pulse Width = 10 µs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, See above for Detailed Conditions, V_{clamp}, V_{CC}, R_S = 0.1Ω	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, V_{CE}, V_{CE} or V_{clamp}, Time, t_2, t t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT TUT, 1, 2, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

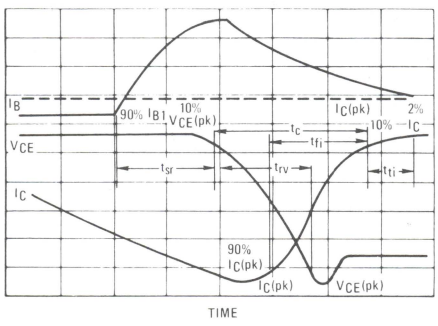

FIGURE 8 – INDUCTIVE SWITCHING TIMES

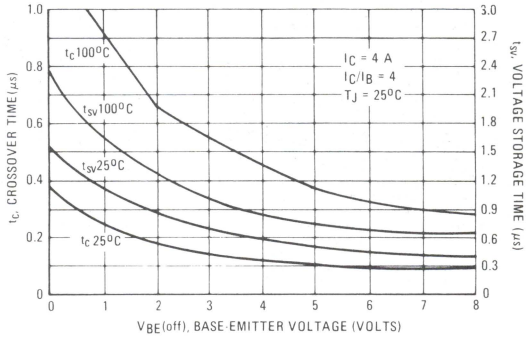

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% $V_{CE}(pk)$
t_{rv} = Voltage Rise Time, 10–90% $V_{CE}(pk)$
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% $V_{CE}(pk)$ to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

FIGURE 9 – TURN-ON SWITCHING TIMES

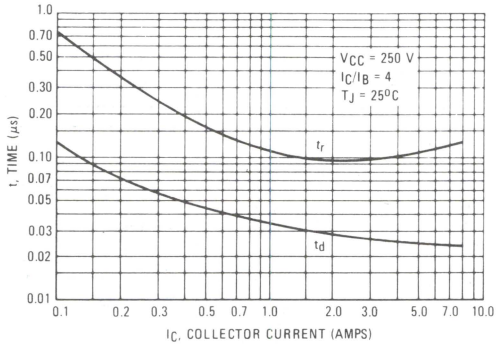

FIGURE 10 – TURN-OFF SWITCHING TIMES

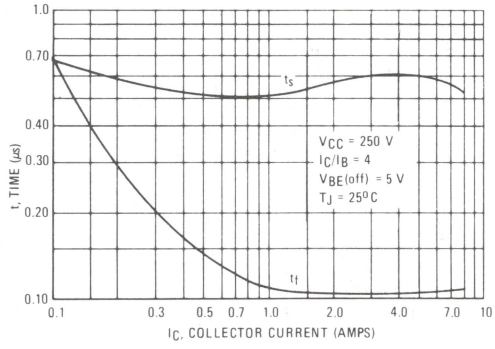

FIGURE 11 – THERMAL RESPONSE

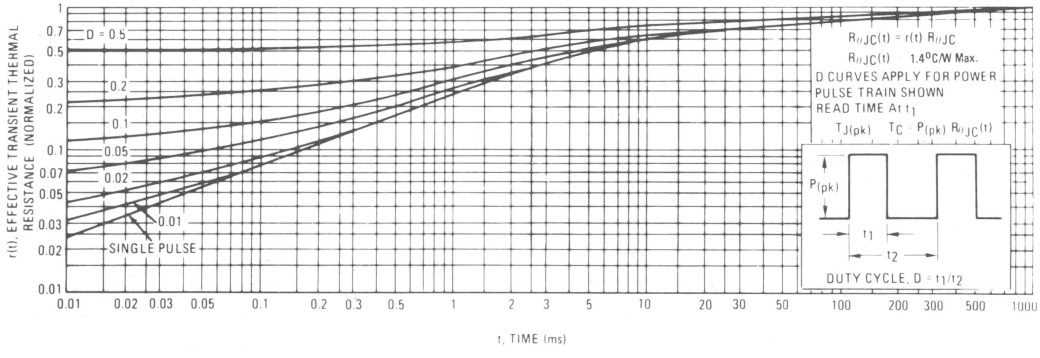

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

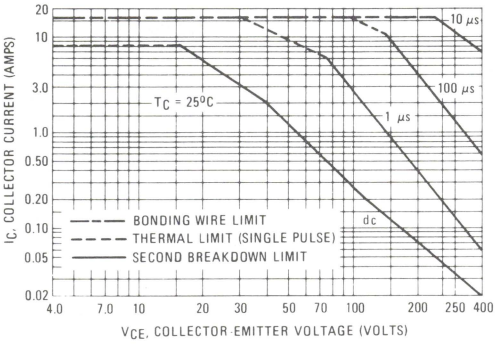

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

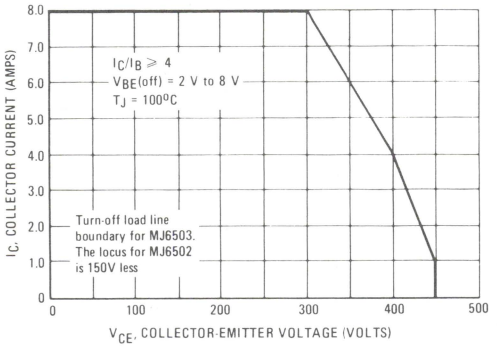

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the RBSOA characteristics.

3

FIGURE 14 PEAK REVERSE BASE CURRENT

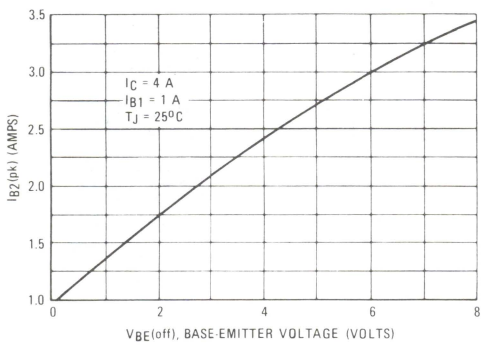

FIGURE 15 POWER DERATING

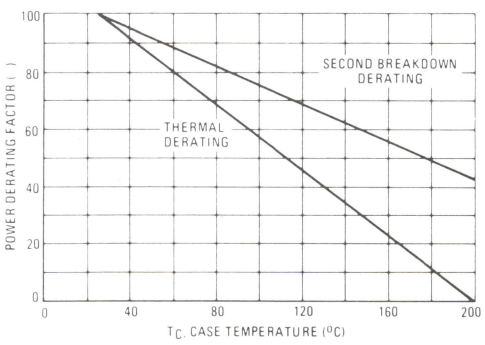

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ8501

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTOR

The MJ8501 transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
- 300 ns Inductive Fall Time – 25°C (Typ)
- 500 ns Inductive Crossover Time – 25°C (Typ)
- 900 ns Inductive Storage Time – 25°C (Typ)

Operating Temperature Range –65 to +200°C

100°C Performance Specified for:
- Reversed Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

2.5 AMPERE

NPN SILICON
POWER TRANSISTOR

800 VOLTS
125 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.





NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀.13 (0.005) M T V M
   FOR LEADS:
   ⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

STYLE 1
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

CASE 1-05
TO-204AA

MAXIMUM RATINGS

Rating	Symbol	MJ8501	Unit
Collector-Emitter Voltage	V_{CEO}	800	Vdc
Collector-Emitter Voltage	V_{CEV}	1400	Vdc
Emitter Base Voltage	V_{EB}	8.0	Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	2.5 5.0	Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	2.0 4.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	125 71 0.71	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ8501	$V_{CEO(sus)}$	 800	– –	– –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 – –	 – –	 0.25 5 0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 7.0 Vdc, I_C = 0)		I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 0.5 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	7.5	–	–	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.33 Adc) (I_C = 2.5 Adc, I_B = 1.0 Adc) (I_C = 1.0 Adc, I_B = 0.33 Adc, T_C = 100°C)		$V_{CE(sat)}$	 – – –	 – – –	 2.0 5.0 3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.33 Adc) (I_C = 1.0 Adc, I_B = 0.33 Adc, TC = 100°C)		$V_{BE(sat)}$	 – –	 – –	 1.5 1.5	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	50	–	250	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 500 Vdc, I_C = 1.0 A, I_{B1} = 0.33 A, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.045	0.20	μs
Rise Time		t_r	–	0.2	2.0	μs
Storage Time		t_s	–	1.0	4.0	μs
Fall Time		t_f	–	0.5	2.0	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 1.0 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 0.33 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_{sv}	–	1.3	4.0	μs
Crossover Time		t_c	–	0.6	2.0	μs
Storage Time	(I_C = 1.0 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 0.33 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	0.9	–	μs
Crossover Time		t_c	–	0.5	–	μs
Fall Time		t_{fi}	–	0.3	–	μs

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤ 2%.

FIGURE 1 – DC CURRENT GAIN

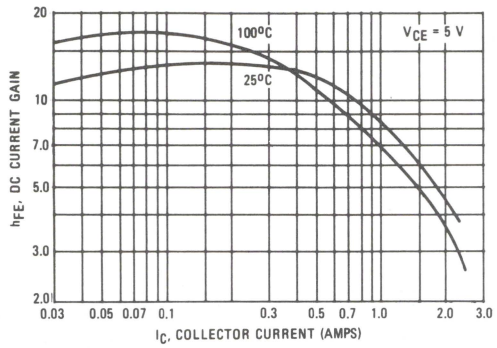

FIGURE 2 – COLLECTOR SATURATION REGION

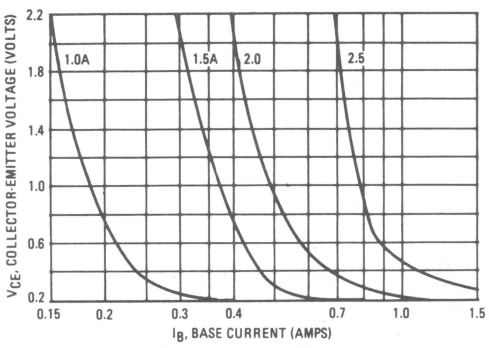

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

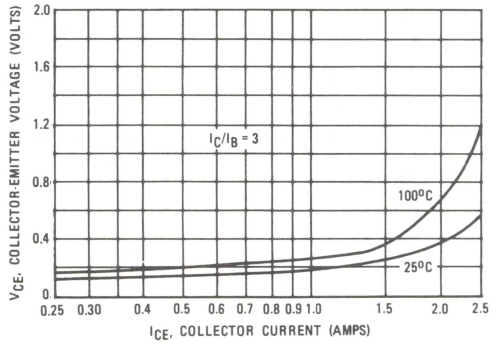

FIGURE 4 – BASE-EMITTER VOLTAGE

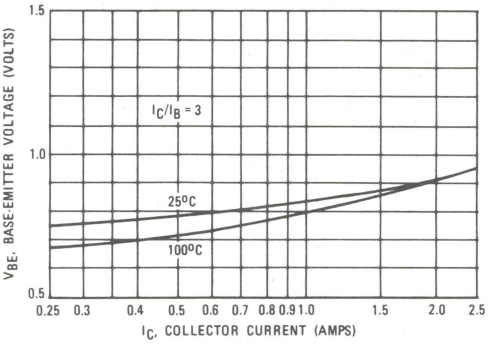

FIGURE 5 – COLLECTOR CUTOFF REGION

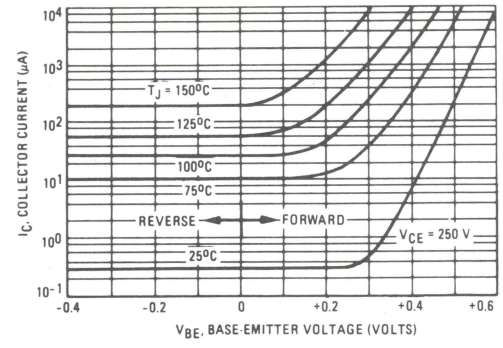

FIGURE 6 – CAPACITANCE

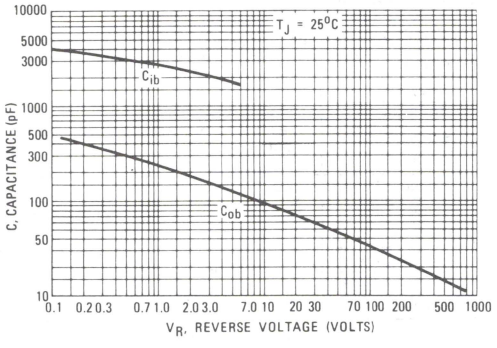

3

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

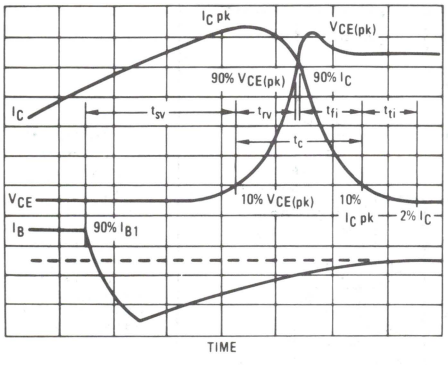

FIGURE 8 – PEAK REVERSE BASE CURRENT

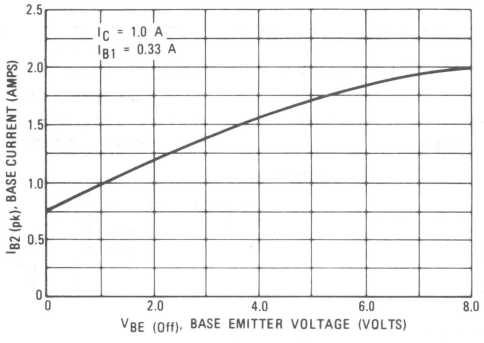

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% $V_{CE\,(pk)}$

t_{rv} = Voltage Rise Time, 10–90% $V_{CE\,(pk)}$

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% $V_{CE\,(pk)}$ to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

3

RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN - ON SWITCHING TIMES

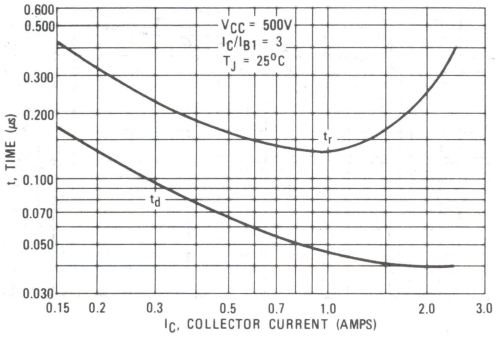

FIGURE 10 – TURN - OFF SWITCHING TIMES

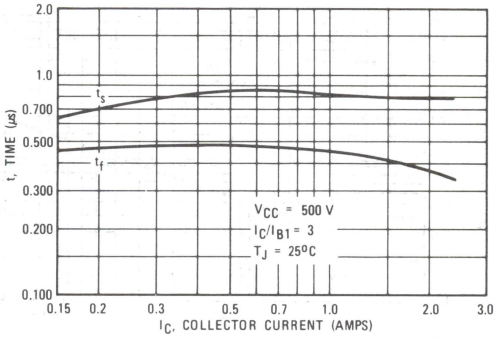

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	250 μF, 470 Ω 2 W, 47 Ω, R1, +15, 15 V, 0, 330 Ω, 5.1 Ω 5 W, R2, 1, 2, 50 Ω, 100 Ω, 430 Ω, 39 Ω, 250 μF, Adjust to obtain $V_{BE(off)}$ = −5.0 V All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 500 V	V_{CC} = 500 V R_L = 500 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT MR816, TUT, IN4934, MR816, IN4934, V_{clamp}, V_{CC}, 1, 2 OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent		RESISTIVE TEST CIRCUIT MR816, TUT, IN4934, IN4934, R_L, V_{CC}, 1, 2

FIGURE 11 – THERMAL RESPONSE

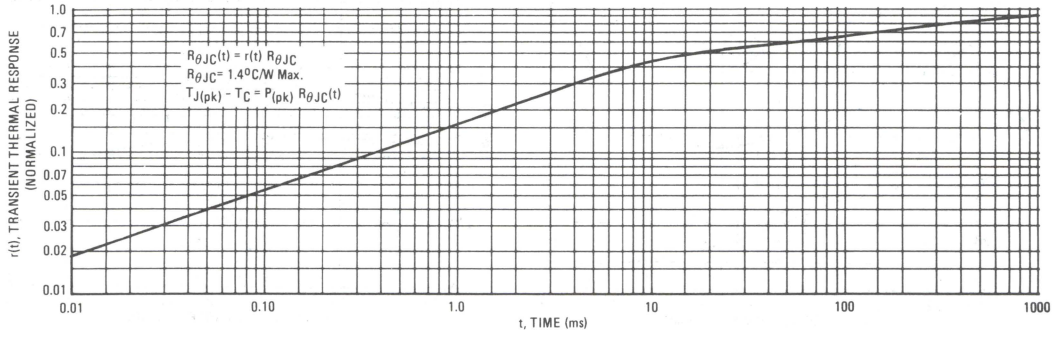

FIGURE 12 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

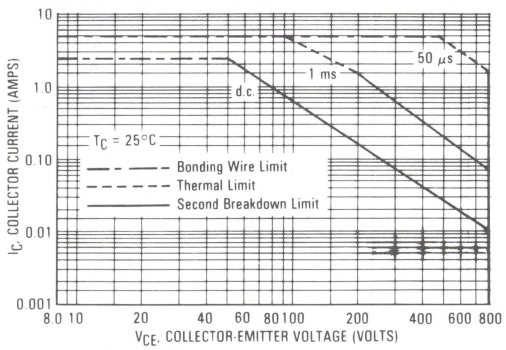

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

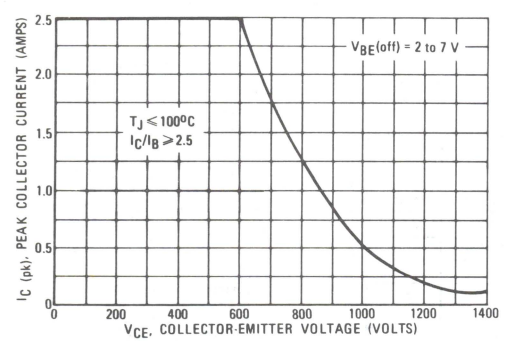

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

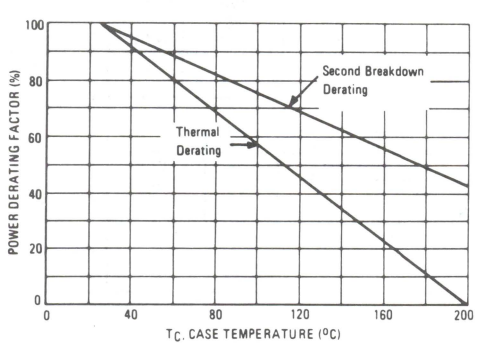

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ8502
MJ8503

Designers Data Sheet

5.0 AMPERE

NPN SILICON POWER TRANSISTORS

700 and 800 VOLTS
150 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJ8502 and MJ8503 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times

150 ns Inductive Fall Time–25°C (Typ)
400 ns Inductive Crossover Time–25°C (Typ)
1200 ns Inductive Storage Time–25°C (Typ)

Operating Temperature Range –65 to + 200°C

100°C Performance Specified for:

Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers' Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ8502	MJ8503	Unit
Collector-Emitter Voltage	V_{CEO}	700	800	Vdc
Collector-Emitter Voltage	V_{CEV}	1200	1400	Vdc
Emitter Base Voltage	V_{EB}	8.0	8.0	Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	5.0 10	5.0 10	Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	4.0 8.0	4.0 8.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 86 0.85	150 86 0.85	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.16	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ 0.13 (0.005) M T V M
   FOR LEADS:
   ⌖ 0.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ8502 MJ8503	$V_{CEO(sus)}$	700 800	– –	– –	Vdc
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5.0	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 7.0 Vdc, I_C = 0)		I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	7.5	–	–	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 1.0 Adc)			–	–	2.0	
(I_C = 5.0 Adc, I_B = 2.0 Adc)			–	–	5.0	
(I_C = 2.5 Adc, I_B = 1.0 Adc, T_C = 100°C)			–	–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 1.0 Adc)			–	–	1.5	
(I_C = 2.5 Adc, I_B = 1.0 Adc, T_C = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	60	–	300	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 500 Vdc, IC = 2.5A, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.040	0.20	μs
Rise Time		t_r	–	0.125	2.0	μs
Storage Time		t_s	–	1.2	4.0	μs
Fall Time		t_f	–	0.65	2.0	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 2.5 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, TC = 100°C)	t_{sv}	–	1.6	5.0	μs
Crossover Time		t_c	–	0.60	2.0	μs
Storage Time	(I_C = 2.5 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	1.2	–	μs
Crossover Time		t_c	–	0.4	–	μs
Fall Time		t_{fi}	–	0.15	–	μs

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – DC CURRENT GAIN

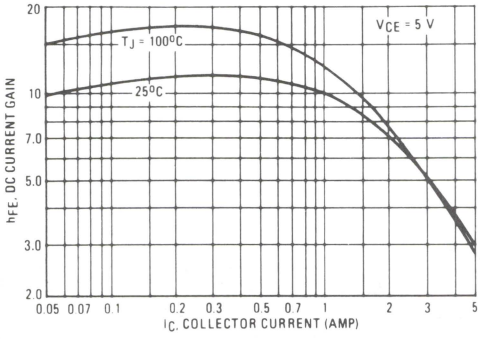

FIGURE 2 – COLLECTOR SATURATION REGION

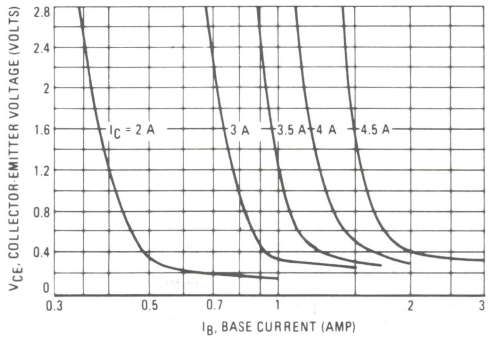

FIGURE 3 – COLLECTOR -EMITTER SATURATION REGION

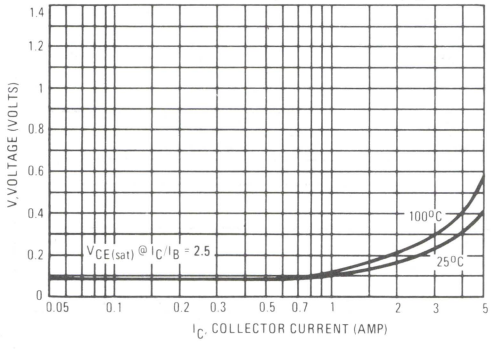

FIGURE 4 – BASE-EMITTER VOLTAGE

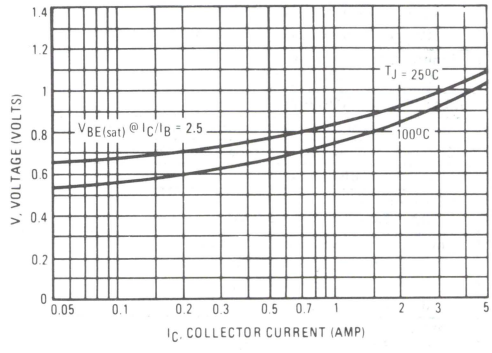

FIGURE 5 – COLLECTOR CUTOFF REGION

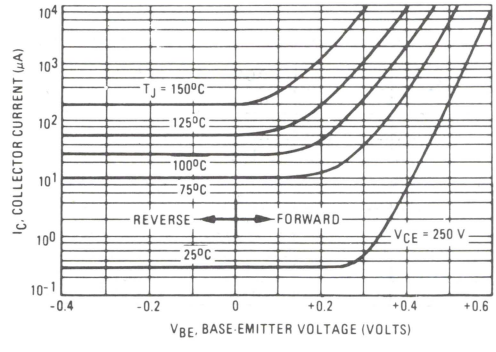

FIGURE 6 – CAPACITANCE

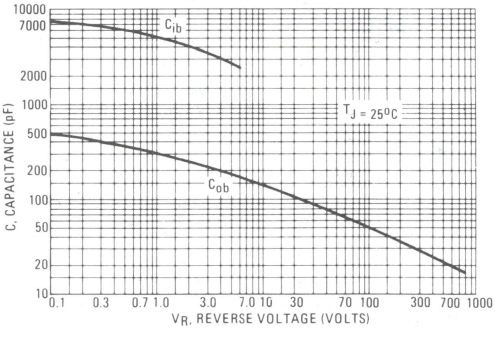

3

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

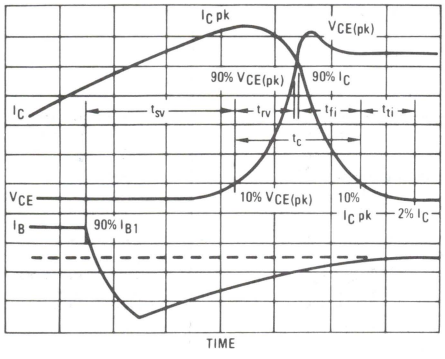

FIGURE 8 – PEAK REVERSE BASE CURRENT

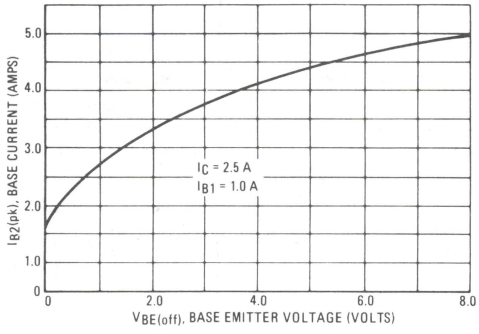

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% $V_{CE(pk)}$
t_{rv} = Voltage Rise Time, 10–90% $V_{CE(pk)}$
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% $V_{CE(pk)}$ to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

3

RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN-ON SWITCHING TIMES

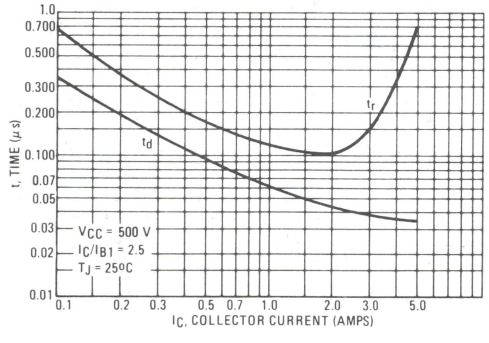

FIGURE 10 – TURN-OFF SWITCHING TIMES

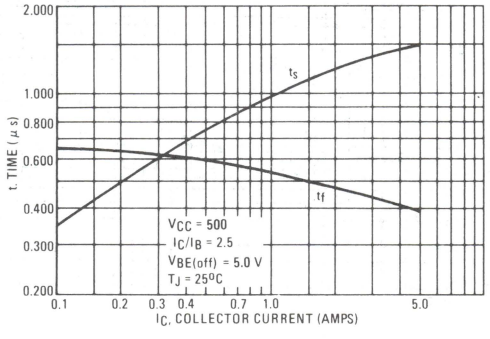

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	250 μF, 470 Ω 2 W, 47 Ω, R1, +15, 15 V, 0, 330 Ω, 5.1 Ω 5 W, R2, 1, 2, 50 Ω, 100 Ω, 430 Ω, 39 Ω, 250 μF, Adjust to obtain $V_{BE(off)}$ = −5.0 V All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 500 V	V_{CC} = 500 V R_L = 200 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT MR816, IN4934, TUT, IN4934, MR816, V_{clamp}, V_{CC}, 1, 2 OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent		RESISTIVE TEST CIRCUIT MR816, IN4934, TUT, IN4934, 1, 2, R_L, V_{CC}

FIGURE 11 – THERMAL RESPONSE

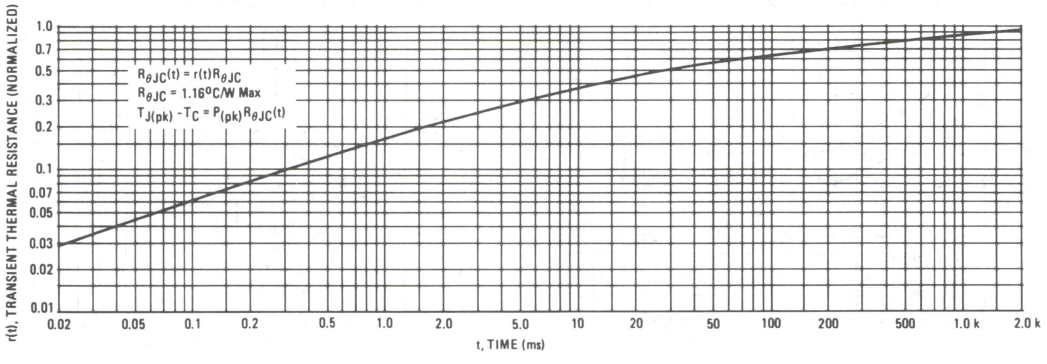

FIGURE 12 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

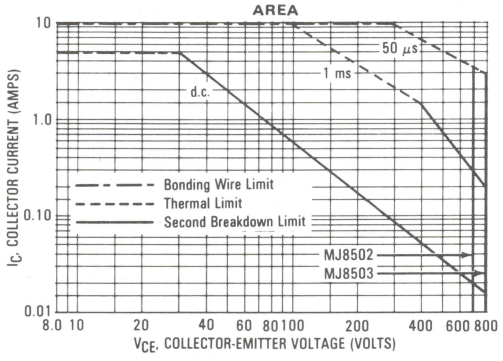

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

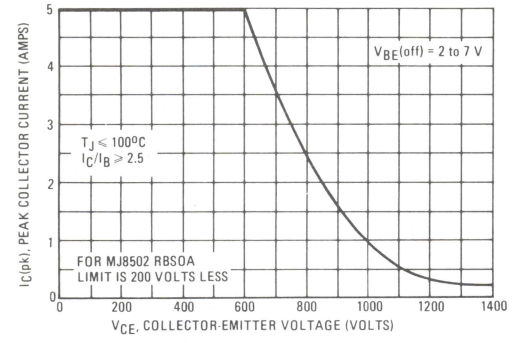

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

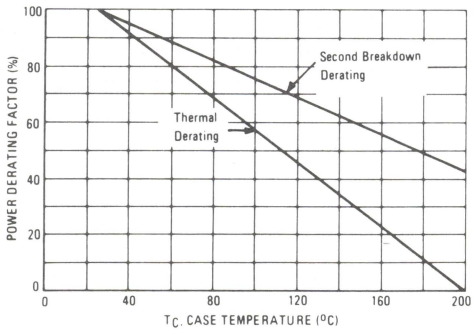

MJ8504
MJ8505

Designers Data Sheet

10 AMPERE

NPN SILICON POWER TRANSISTORS

700 and 800 VOLTS
175 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJ8504 and MJ8505 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
75 ns Inductive Fall Time –25°C (typ)
150 ns Inductive Crossover Time –25°C (typ)
1.25 μs Inductive Storage Time –25°C (typ)

Operating Temperature Range –65 to + 200°C

100°C Performance Specified for:
Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
⌖ 0.13 (0.005) Ⓜ T V Ⓜ
FOR LEADS:
⌖ 0.13 (0.005) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

MAXIMUM RATINGS

Rating	Symbol	MJ8504	MJ8505	Unit
Collector-Emitter Voltage	V_{CEO}	700	800	Vdc
Collector-Emitter Voltage	V_{CEV}	1200	1400	Vdc
Emitter Base Voltage	V_{EB}	8.0	8.0	Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	10 15	10 15	Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	8 12	8 12	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1.0	175 100 1.0	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1)	MJ8504	$V_{CEO(sus)}$	700	–	–	Vdc
(I_C = 100 mA, I_B = 0)	MJ8505		800	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5.0	
Collector Cutoff Current		I_{CER}	–	–	5.0	mAdc
(V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)						
Emitter Cutoff Current		I_{EBO}	–	–	1.0	mAdc
(V_{EB} = 7.0 Vdc, I_C = 0)						
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}	7.5	–	–	–
(I_C = 1.5 Adc, V_{CE} = 5.0 Vdc)						
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 5.0 Adc, I_B = 2.0 Adc)			–	–	2.0	
(I_C = 10 Adc, I_B = 4.0 Adc)			–	–	5.0	
(I_C = 5.0 Adc, I_B = 2.0 Adc, T_C = 100°C)			–	–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 5.0 Adc, I_B = 2.0 Adc)			–	–	1.5	
(I_C = 5.0 Adc, I_B = 2.0 Adc, T_C = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Output Capacitance		C_{ob}	90	–	450	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)						
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 500 Vdc, I_C = 5.0 A, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.050	0.20	μs
Rise Time		t_r	–	0.175	2.0	μs
Storage Time		t_s	–	1.25	4.0	μs
Fall Time		t_f	–	0.60	2.0	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 5.0 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5 Vdc. T_C = 100°C	t_{sv}	–	1.75	5.5	μs
Crossover Time		t_c	–	0.400	2.0	μs
Storage Time	(I_C = 5.0 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	1.25	–	μs
Crossover Time		t_c	–	0.150	–	μs
Fall Time		t_{fi}	–	0.075	–	μs

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – DC CURRENT GAIN

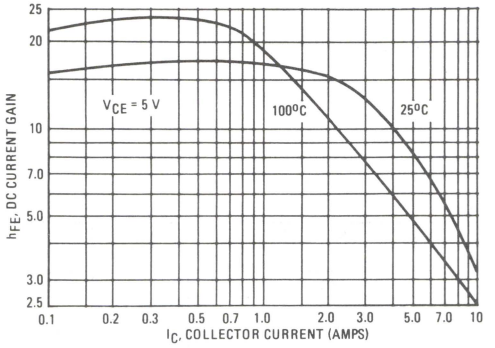

FIGURE 2 – COLLECTOR SATURATION REGION

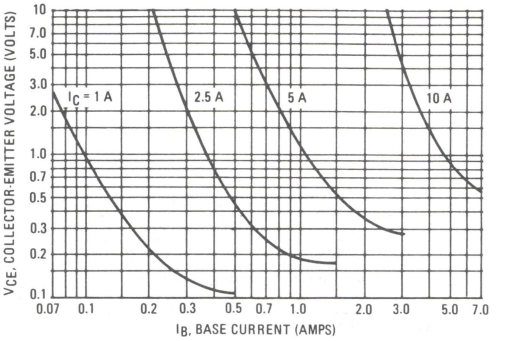

FIGURE 3 – COLLECTOR-EMITTER SATURATION REGION

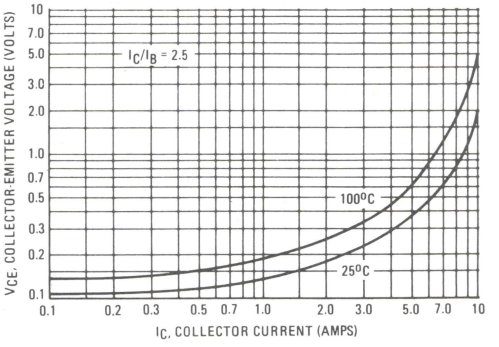

FIGURE 4 – BASE EMITTER VOLTAGE

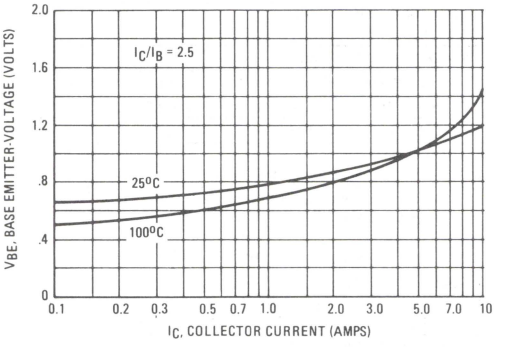

FIGURE 5 – COLLECTOR CUTOFF REGION

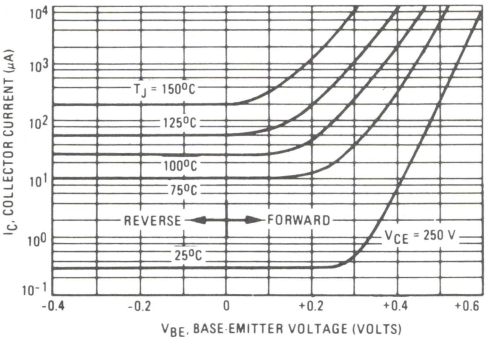

FIGURE 6 – CAPACITANCE

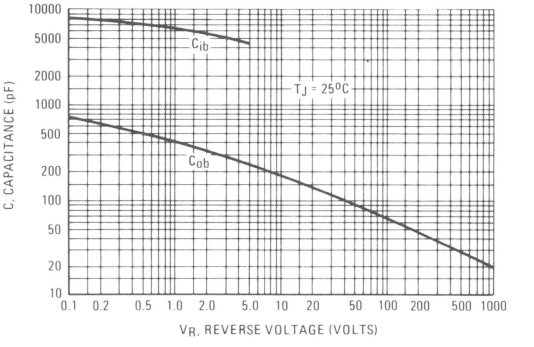

3

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

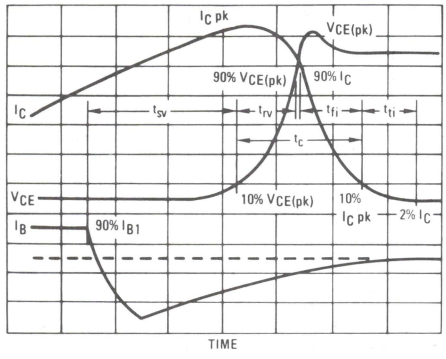

FIGURE 8 – PEAK REVERSE BASE CURRENT

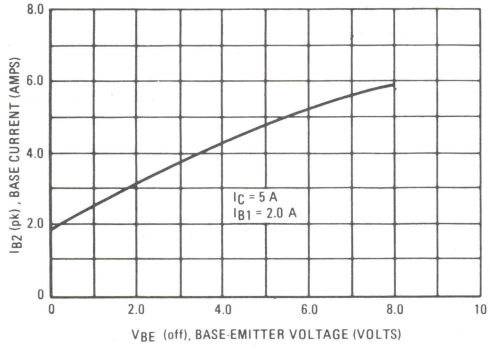

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% $V_{CE(pk)}$
t_{rv} = Voltage Rise Time, 10–90% $V_{CE(pk)}$
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% $V_{CE(pk)}$ to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN-ON SWITCHING TIMES

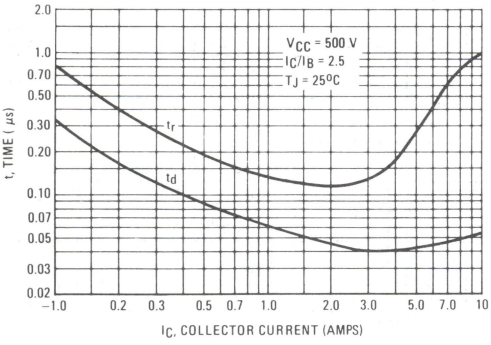

FIGURE 10 – TURN-OFF SWITCHING TIMES

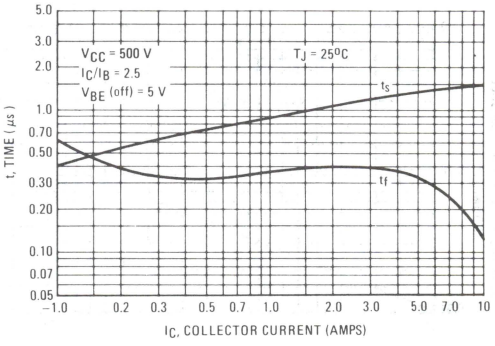

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	 PW Varied to Attain I_C = 100 mA	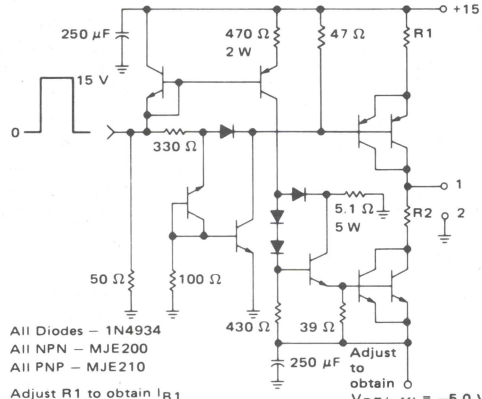 All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	 I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 500 V	V_{CC} = 500 V R_L = 100 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT 	OUTPUT WAVEFORMS  t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 

FIGURE 11 – THERMAL RESPONSE

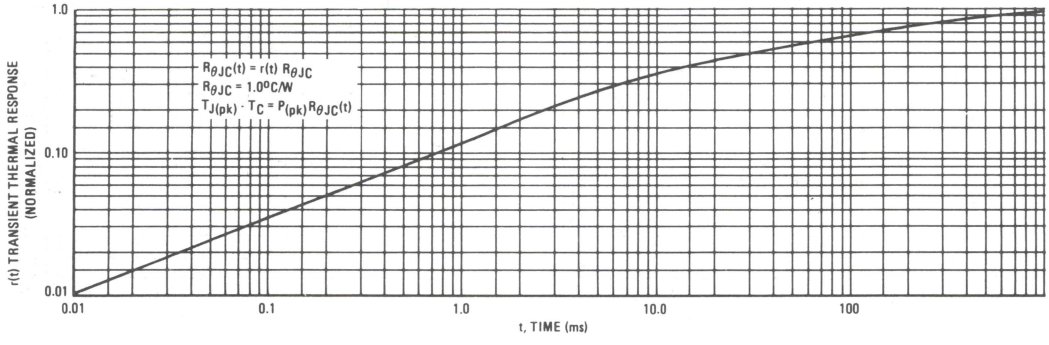

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

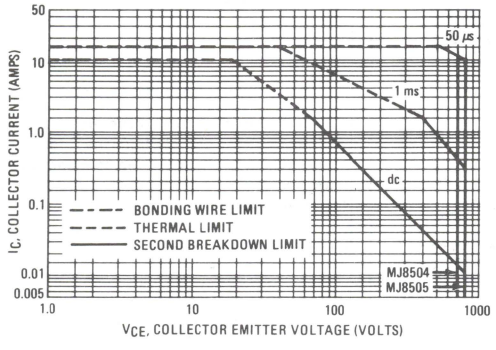

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

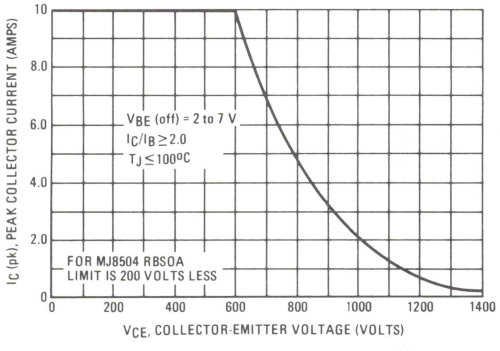

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

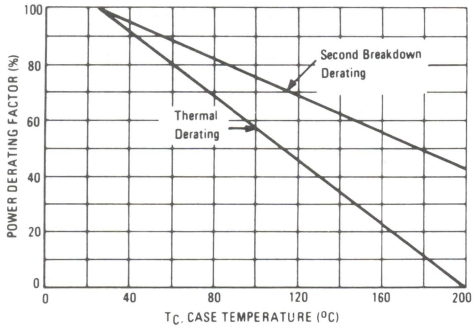

MJ10000
MJ10001

Designer's Data Sheet

20 AMPERE
NPN SILICON
POWER DARLINGTON
TRANSISTORS
350 and 400 VOLTS
175 WATTS

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS

The MJ10000 and MJ10001 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times With Inductive Loads —
210 ns Inductive Fall Time (Typ)
Saturation Voltages
Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJ10000	MJ10001	Unit
Collector-Emitter Voltage	V_{CEO}	350	400	Vdc
Collector-Emitter Voltage	V_{CEX}	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	450	500	Vdc
Emitter Base Voltage	V_{EB}	8		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	20 30		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2.5 5		Adc
Total Power Dissipation @ $T_C = 25^oC$ @ $T_C = 100^oC$ Derate above 25°C	P_D	175 100 1		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (2)					
Collector-Emitter Sustaining Voltage (Table 1)	$V_{CEO(sus)}$				Vdc
(I_C = 250 mA, I_B = 0, V_{clamp} = Rated V_{CEO}) MJ10000		350	–	–	
MJ10001		400	–	–	
Collector-Emitter Sustaining Voltage (Table 1, Figure 12)	$V_{CEX(sus)}$				Vdc
I_C = 2 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C MJ10000		400	–	–	
MJ10001		450	–	–	
I_C = 10 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C MJ10000		275	–	–	
MJ10001		325	–	–	
Collector Cutoff Current	I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)		–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		–	–	5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	–	–	5	mAdc
Emitter Cutoff Current (V_{EB} = 8 Vdc, I_C = 0)	I_{EBO}	–	–	150	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$	See Figure 11			Adc
ON CHARACTERISTICS (2)					
DC Current Gain	h_{FE}				–
(I_C = 5 Adc, V_{CE} = 5 Vdc)		50	–	600	
(I_C = 10 Adc, V_{CE} = 5 Vdc)		40	–	400	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 400 mAdc)		–	–	1.9	
(I_C = 20 Adc, I_B = 1 Adc)		–	–	3	
(I_C = 10 Adc, I_B = 400 mAdc, T_C = 100°C)		–	–	2	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 400 mAdc)		–	–	2.5	
(I_C = 10 Adc, I_B = 400 mAdc, T_C = 100°C)		–	–	2.5	
Diode Forward Voltage (1) (I_F = 10 Adc)	V_f	–	3	5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)	$\lvert h_{fe} \rvert$	10		–	–
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)	C_{ob}	100		325	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	t_d	–	0.12	0.2	μs
Rise Time (V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 400 mA, $V_{BE(off)}$ = 5 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%).	t_r	–	0.20	0.6	μs
Storage Time	t_s	–	1.5	3.5	μs
Fall Time	t_f	–	1.1	2.4	μs
Inductive Load, Clamped (Table 1)					
Storage Time (I_C = 10 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 400 mA,	t_{sv}	–	3.5	5.5	μs
Crossover Time $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	–	1.5	3.7	μs
Storage Time (I_C = 10 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 400 mA,	t_{sv}	–	1.0	–	μs
Crossover Time $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_c	–	0.7	–	μs

(1) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

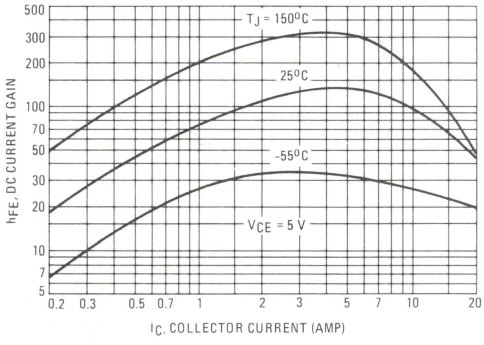

FIGURE 2 – COLLECTOR SATURATION REGION

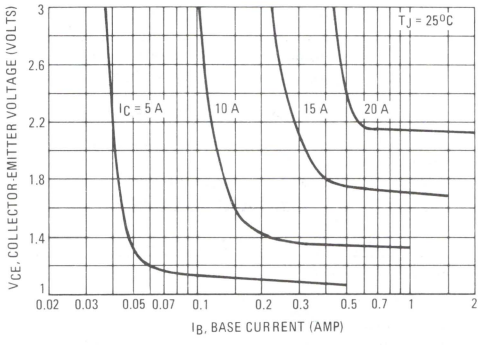

FIGURE 3 – COLLECTOR EMMITTER SATURATION VOLTAGES

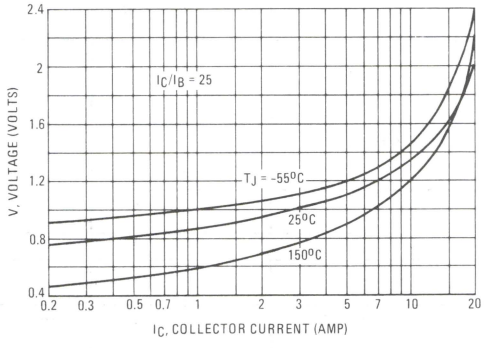

FIGURE 4 – BASE-EMITTER VOLTAGE

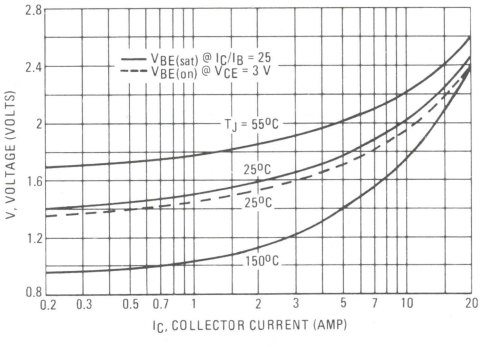

FIGURE 5 – COLLECTOR CUTOFF REGION

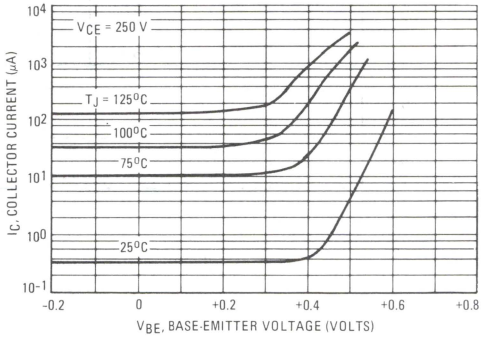

FIGURE 6 – OUTPUT CAPACITANCE

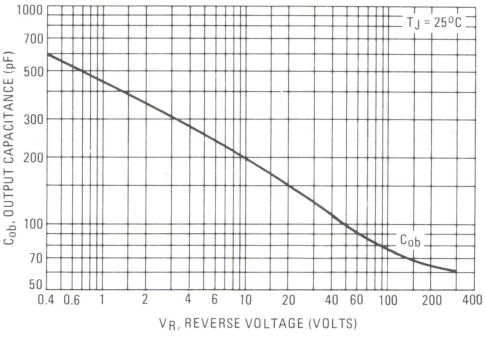

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	$V_{CEX(sus)}$ AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	PW Varied to Attain I_C = 250 mA	Adjust R1 to obtain a forced h_{FE} = 25 Pulse Width Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 50 μs) Duty Cycle ≤ 3% +5 V −5.2 V	Q1 2N2907 Q2 2N2222 Q3 2N3762 Q4 MJE210 Q5 MJE200 D1 1N914 D2 1N914 D3 1N914
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = Rated V_{CEX} Value	V_{CC} = 250 V R_L = 25 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT Input 1N4937 or Equivalent See Above For Detailed Conditions R_{coil} L_{coil} V_{CC} V_{clamp} R_S 0.1 Ω	OUTPUT WAVEFORMS t_f Clamped t_f Unclamped ≈ t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope-Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT TUT R_L V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

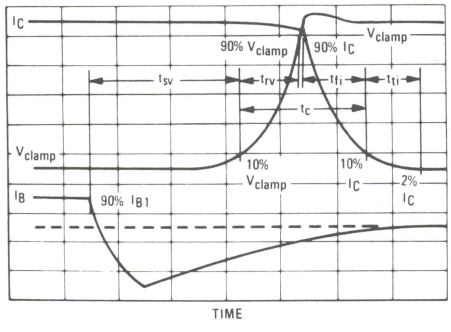

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the turn-off waveforms is shown in Figure 7 to aid in the visual identity of these terms.

3

SWITCHING TIMES NOTE (continued)

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c)\ f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

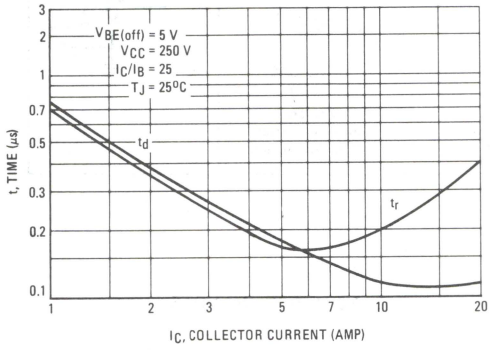

FIGURE 9 – TURN-OFF TIME

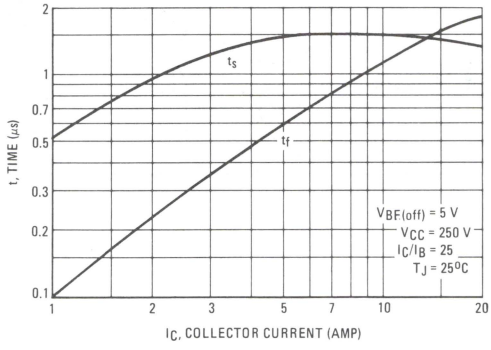

FIGURE 10 – THERMAL RESPONSE

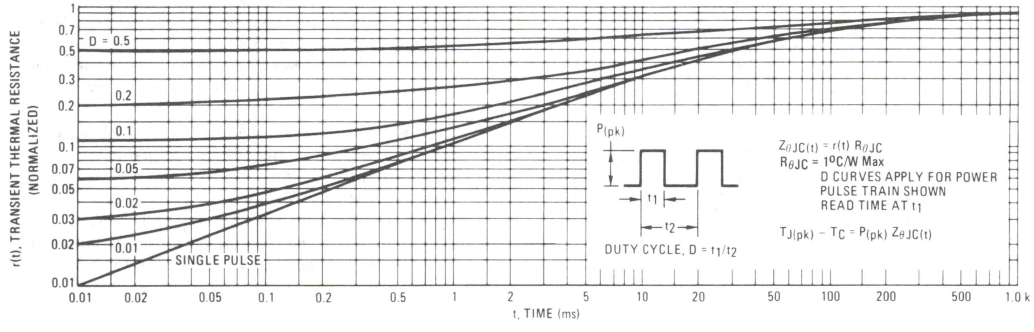

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATING AREA

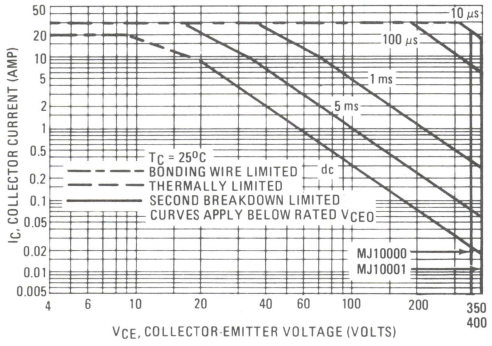

FIGURE 12 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

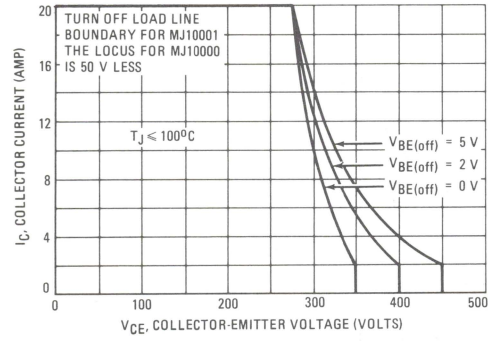

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as $V_{CEX(sus)}$ at a given collector current and represents a voltage-current condition that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete reverse bias safe operating area characteristics.

FIGURE 13 – POWER DERATING

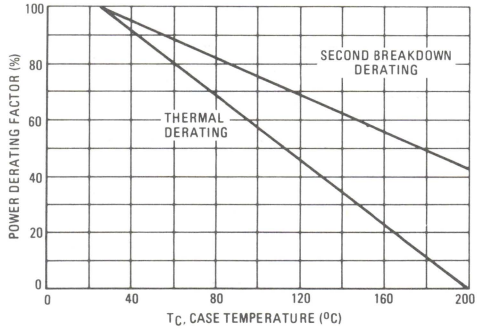

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ10002

Designers Data Sheet

10 AMPERE
NPN SILICON
POWER DARLINGTON
TRANSISTORS

350 VOLTS
150 WATTS

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS

The MJ10002 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



100°C Performance Specified for:

Reversed Biased SOA with Inductive Loads

Switching Times with Inductive Loads — 140 ns Inductive Fall Time (Typ)

Saturation Voltages

Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.





NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

MAXIMUM RATINGS

Rating	Symbol	MJ10002	Unit
Collector-Emitter Voltage	V_{CEO}	350	Vdc
Collector-Emitter Voltage	V_{CEX}	400	Vdc
Collector-Emitter Voltage	V_{CEV}	450	Vdc
Emitter Base Voltage	V_{EB}	8.0	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	10 20	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2.5 5.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 100 0.86	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (2)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 250 mA, I_B = 0, V_{clamp} = Rated V_{CEO}) MJ10002	$V_{CEO(sus)}$	350	–	–	Vdc
Collector-Emitter Sustaining Voltage (Table 1, Figure 12) (I_C = 1.0 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C) MJ10002 (I_C = 5.0 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C) MJ10002	$V_{CEX(sus)}$	400 275	– –	– –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEV}	– –	– –	0.25 5.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 8.0 Vdc, I_C = 0)	I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$	See Figure 11			Adc
ON CHARACTERISTICS (2)					
DC Current Gain (I_C = 2.5 Adc, V_{CE} = 5.0 Vdc) (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	40 30	– –	500 300	–
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 250 mAdc) (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 5.0 Adc, I_B = 250 mAdc, T_C = 100°C)	$V_{CE(sat)}$	– – –	– – –	1.9 2.9 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 250 mAdc) (I_C = 5.0 Adc, I_B = 250 mAdc, T_C = 100°C)	$V_{BE(sat)}$	– –	– –	2.5 2.5	Vdc
Diode Forward Voltage (1) (I_F = 5.0 Adc)	V_f	–	3.0	5.0	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)	$\lvert h_{fe} \rvert$	10	–	–	–
Output Capacitance (V_{CB} = 50 Vdc, I_E = 0, f_{test} = 100 kHz)	C_{ob}	60	–	275	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(V_{CC} = 250 Vdc, I_C = 5.0 A, I_{B1} = 250 mA, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2.0%).	t_d	–	0.05	0.2	μs
Rise Time		t_r	–	0.25	0.6	μs
Storage Time		t_s	–	1.2	3.0	μs
Fall Time		t_f	–	0.6	1.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 5.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 250 mA, $V_{BE(off)}$ = 5.0 Vdc, T_C = 100°C)	t_{sv}	–	2.1	5.0	μs
Crossover Time		t_c	–	1.3	3.3	μs
Storage Time	(I_C = 5.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 250 mA, $V_{BE(off)}$ = 5.0 Vdc, T_C = 25°C)	t_{sv}	–	0.92	–	μs
Crossover Time		t_c	–	0.5	–	μs

(1) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

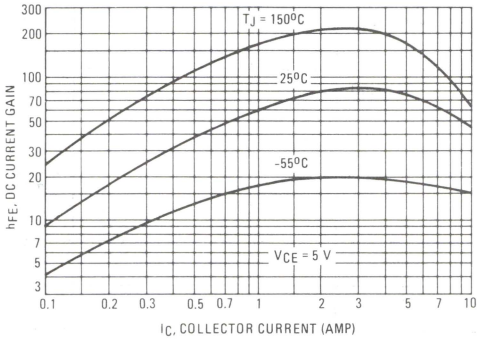

FIGURE 2 – COLLECTOR SATURATION REGION

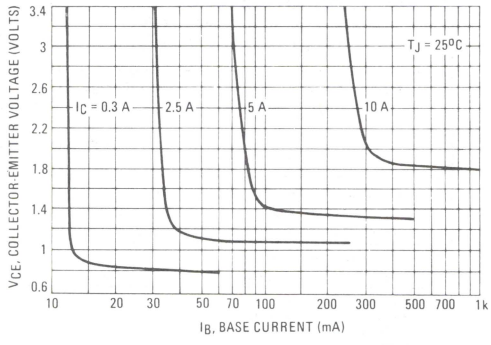

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

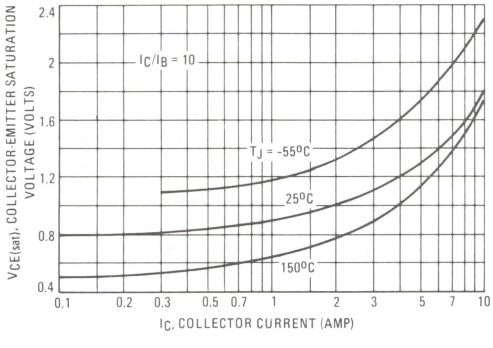

FIGURE 4 – BASE-EMITTER VOLTAGE

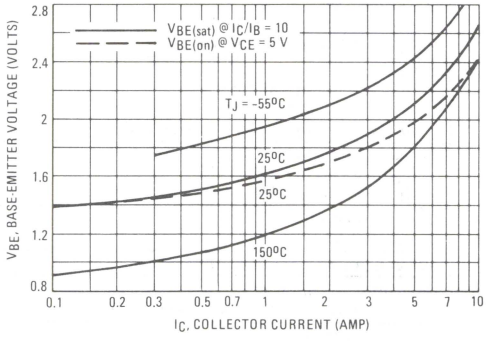

FIGURE 5 – COLLECTOR CUT-OFF REGION

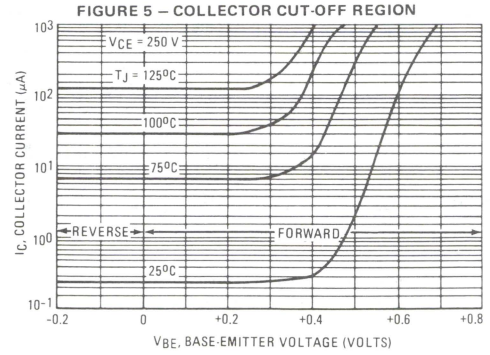

FIGURE 6 – OUTPUT CAPACITANCE

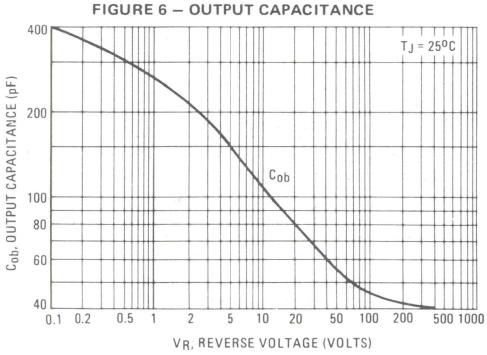

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	$V_{CEX(sus)}$ AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	PW Varied to Attain I_C = 250 mA	Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 50 μs)	Q1 2N2907 Q2 2N2222 Q3 2N3762 Q4 MJE210 Q5 MJE200 D1 1N914 D2 1N914 D3 1N914
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = Rated V_{CEX} Value	V_{CC} = 250 V R_L = 50 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT	OUTPUT WAVEFORMS	RESISTIVE TEST CIRCUIT

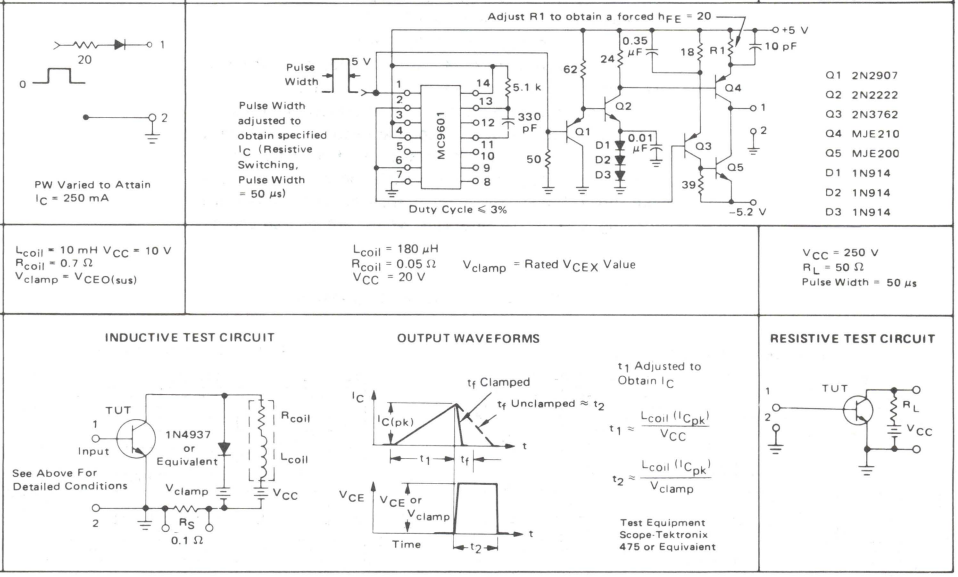

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

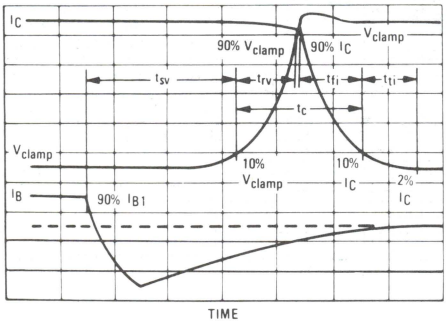

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the turn-off waveforms is shown in Figure 7 to aid in the visual identity of these terms.

SWITCHING TIME NOTES (continued)

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C(t_c)\ f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

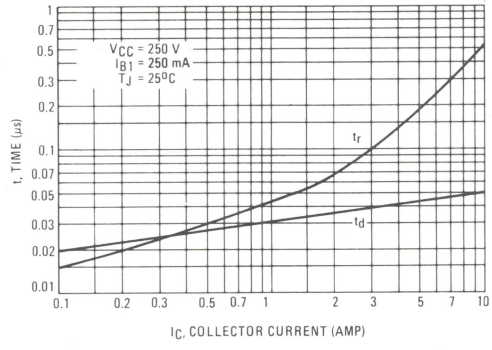

FIGURE 9 – TURN-OFF TIME

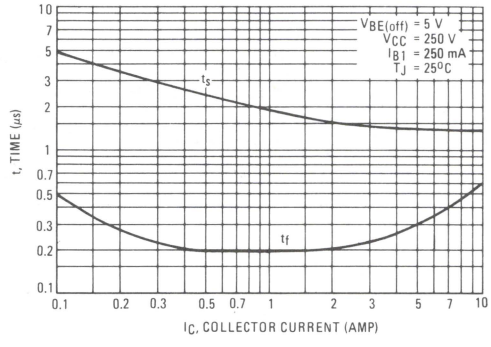

FIGURE 10 – THERMAL RESPONSE

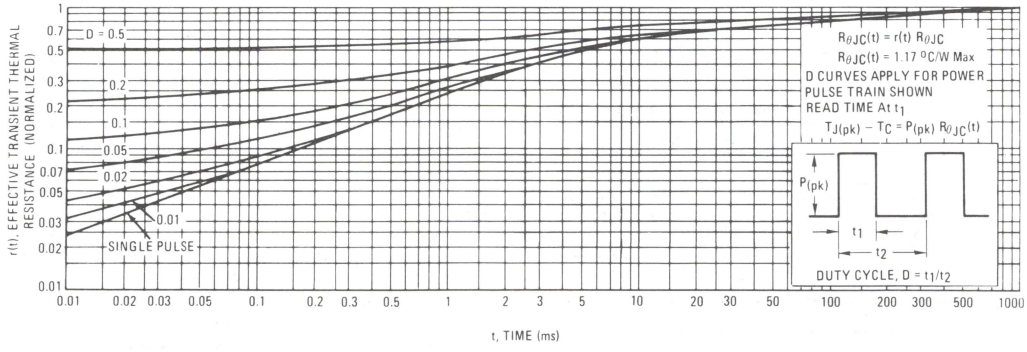

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – ACTIVE-REGION SAFE OPERATING AREA

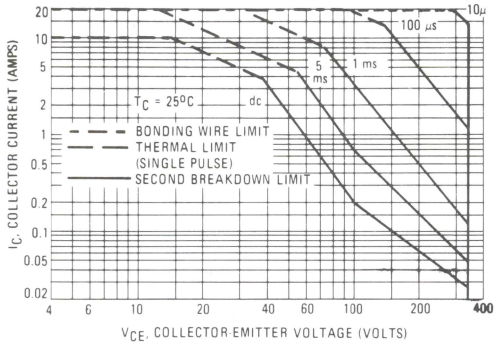

FIGURE 12 – REVERSE BIASED SWITCHING SAFE OPERATING AREA

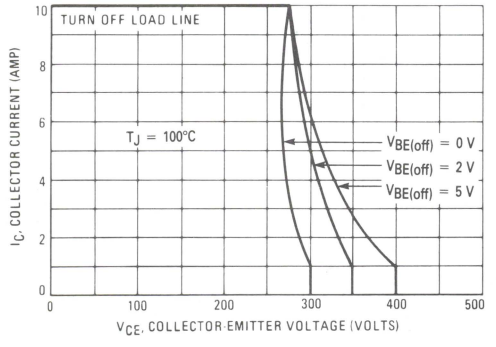

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as $V_{CEX(sus)}$ at a given collector current and represents a voltage-current condition that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete reverse bias safe operating area characteristics.

3

FIGURE 13 – POWER DERATING

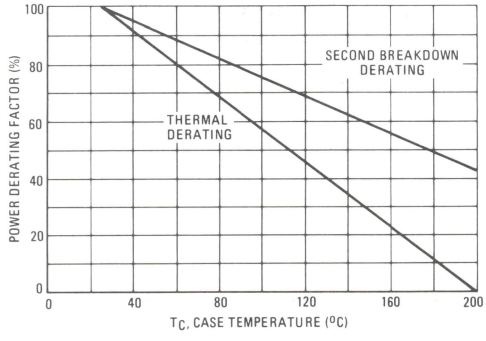

MJ10004
MJ10005

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS
WITH BASE-EMITTER SPEEDUP DIODE

The MJ10004 and MJ10005 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
40 ns Inductive Fall Time – 25°C (Typ)
650 ns Inductive Storage Time – 25°C (Typ)

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

20 AMPERE
NPN SILICON
POWER DARLINGTON TRANSISTORS
350 and 400 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJ10004	MJ10005	Unit
Collector-Emitter Voltage	V_{CEO}	350	400	Vdc
Collector-Emitter Voltage	V_{CEX}	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	450	500	Vdc
Emitter Base Voltage	V_{EB}	8.0		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	20 30		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	2.5 5.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1.0		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

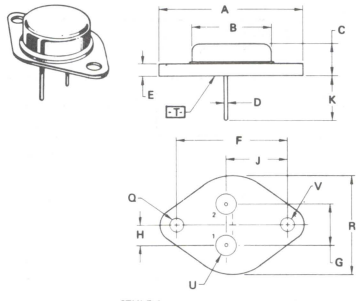

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
⌖ | Ø.13 (0.005) M | T | V M
FOR LEADS:
⌖ | Ø.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CEO(sus)}$				Vdc
(I_C = 250 mA, I_B = 0, V_{clamp} = Rated V_{CEO})	MJ10004		350	–	–	
	MJ10005		400	–	–	
Collector-Emitter Sustaining Voltage (Table 1, Figure 12)		$V_{CEX(sus)}$				Vdc
(I_C = 2.0 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C)	MJ10004		400	–	–	
	MJ10005		450	–	–	
(I_C = 10 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C)	MJ10004		275	–	–	
	MJ10005		325	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5.0	
Collector Cutoff Current		I_{CER}	–	–	5.0	mAdc
(V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)						
Emitter Cutoff Current		I_{EBO}	–	–	175	mAdc
(V_{EB} = 2.0 Vdc, I_C = 0)						
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 11			
ON CHARACTERISTICS (2)						
DC Current Gain		h_{FE}				–
(I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)			50	–	600	
(I_C = 10 Adc, V_{CE} = 5.0 Vdc)			40	–	400	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 400 mAdc)			–	–	1.9	
(I_C = 20 Adc, I_B = 2.0 Adc)			–	–	3.0	
(I_C = 10 Adc, I_B = 400 mAdc, T_C = 100°C)			–	–	2.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 400 mAdc)			–	–	2.5	
(I_C = 10 Adc, I_B = 400 mAdc, T_C = 100°C)			–	–	2.5	
Diode Forward Voltage (1)		V_f	–	3.0	5.0	Vdc
(I_F = 10 Adc)						
DYNAMIC CHARACTERISTICS						
Small-Signal Current Gain		$\lvert h_{fe} \rvert$	10	–	–	–
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)						
Output Capacitance		C_{ob}	100	–	325	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)						
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 400 mA, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%).	t_d	–	0.12	0.2	μs
Rise Time		t_r	–	0.2	0.6	μs
Storage Time		t_s	–	0.6	1.5	μs
Fall Time		t_f	–	0.15	0.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 10 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 400 mA, $V_{BE(off)}$ = 5.0 Vdc, T_C = 100°C)	t_{sv}	–	1.0	2.5	μs
Crossover Time		t_c	–	0.4	1.5	μs
Storage Time	(I_C = 10 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 400 mA, $V_{BE(off)}$ = 5.0 Vdc, T_C = 25°C)	t_{sv}	–	0.65	–	μs
Crossover Time		t_c	–	0.2	–	μs

(1) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

(2) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

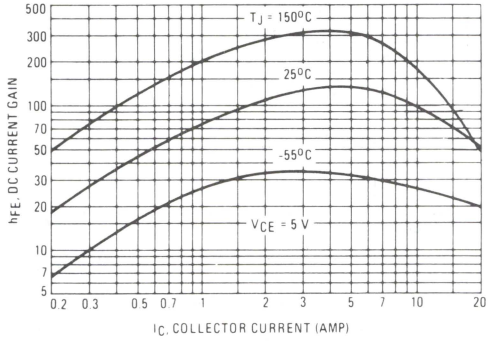

FIGURE 2 – COLLECTOR SATURATION REGION

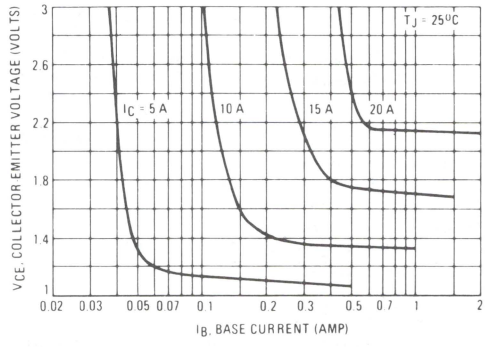

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

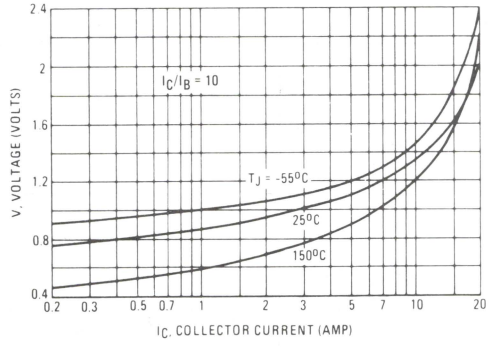

FIGURE 4 – BASE-EMITTER VOLTAGE

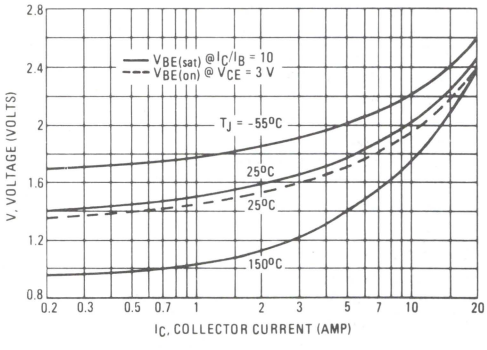

FIGURE 5 – COLLECTOR CUTOFF REGION

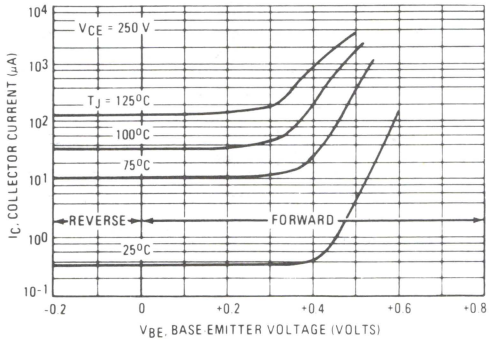

FIGURE 6 – OUTPUT CAPACITANCE

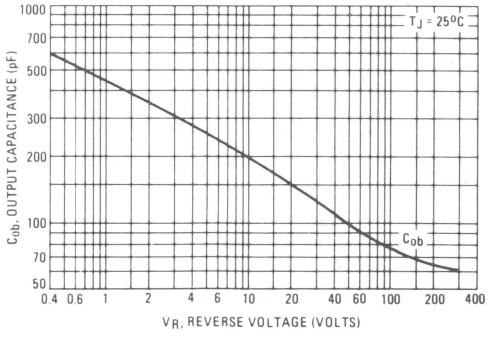

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	$V_{CEX(sus)}$ AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	20, 0, 1, 2 PW Varied to Attain I_C = 250 mA	Adjust R1 to obtain a forced h_{FE} = 25 Pulse Width 5 V Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 50 μs) MC9601 5.1 k 330 pF 62 24 0.35 μF 18 R1 10 pF +5 V Q1 Q2 Q3 Q4 Q5 D1 D2 D3 0.01 μF 50 39 -5.2 V Duty Cycle ≤ 3%	Q1 2N2907 Q2 2N2222 Q3 2N3762 Q4 MJE210 Q5 MJE200 D1 1N914 D2 1N914 D3 1N914
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = Rated V_{CEX} Value	V_{CC} = 250 V R_L = 25 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT 1N4937 or Equivalent Input See Above For Detailed Conditions R_{coil} L_{coil} V_{clamp} V_{CC} R_S 0.1 Ω	OUTPUT WAVEFORMS t_f Clamped t_f Unclamped ≈ t_2 I_C $I_{C(pk)}$ t_1 t_f V_{CE} V_{CE} or V_{clamp} Time t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT TUT R_L V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

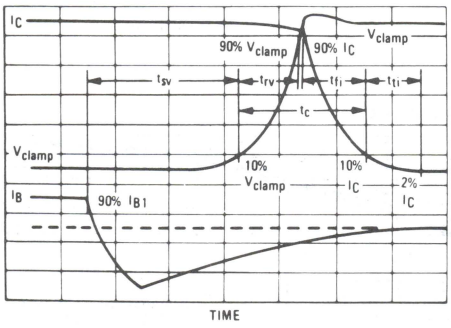

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the turn-off waveforms is shown in Figure 7 to aid in the visual identity of these terms.

TYPICAL CHARACTERISTICS

SWITCHING TIME NOTES (continued)

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c)\ f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

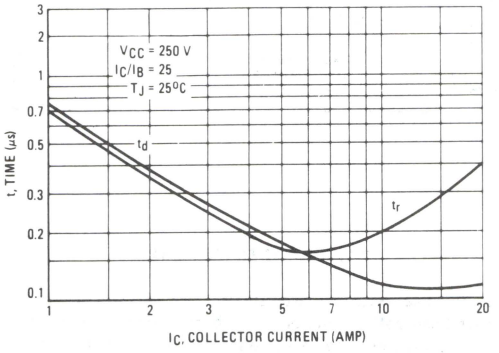

FIGURE 9 – TURN-OFF TIME

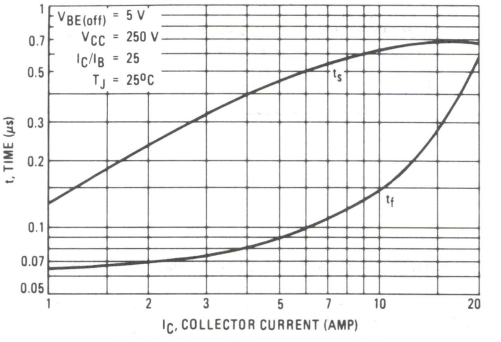

FIGURE 10 – THERMAL RESPONSE

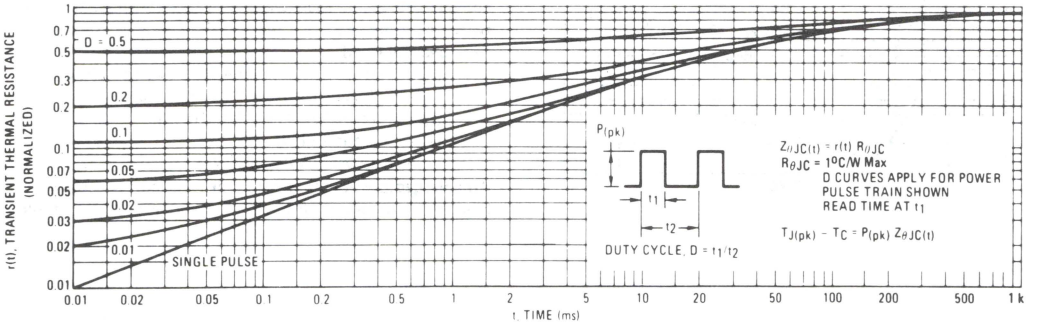

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATING AREA

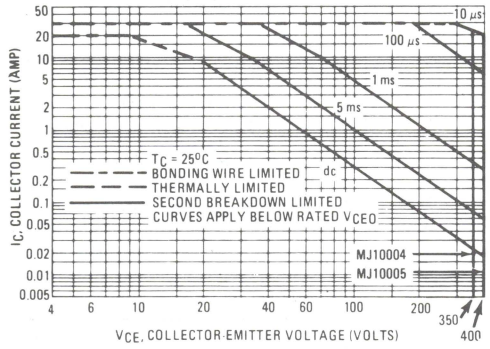

FIGURE 12 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

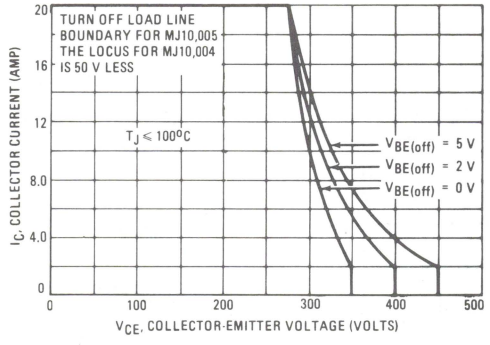

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as $V_{CEX(sus)}$ at a given collector current and represents a voltage-current condition that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete reverse bias safe operating area characteristics.

FIGURE 13 – POWER DERATING

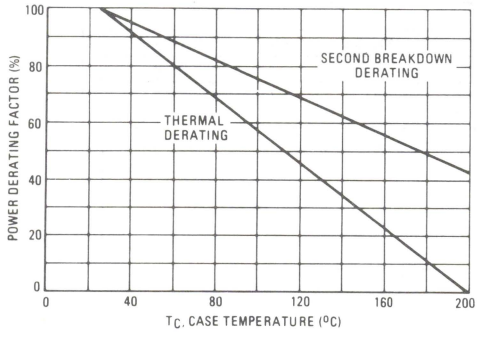

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ10006
MJ10007

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The MJ10006 and MJ10007 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
30 ns Inductive Fall Time – 25°C (Typ)
500 ns Inductive Storage Time – 25°C (Typ))
Operating Temperature Range -65 to +200°C
100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

10 AMPERE

NPN SILICON

POWER DARLINGTON TRANSISTORS

350 AND 400 VOLTS
150 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJ10006	MJ10007	Unit
Collector-Emitter Voltage	V_{CEO}	350	400	Vdc
Collector-Emitter Voltage	V_{CEX}	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	450	500	Vdc
Emitter Base Voltage	V_{EB}	8.0		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	10 20		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	2.5 5.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 100 0.86		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.





STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
⌖ ⌀.13 (0.005) M T V M
FOR LEADS:
⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CEO(sus)}$				Vdc
(I_C = 250 mA, I_B = 0, V_{clamp} = Rated V_{CEO})	MJ10006		350	–	–	
	MJ10007		400	–	–	
Collector-Emitter Sustaining Voltage (Table 1, Figure 12)		$V_{CEX(sus)}$				Vdc
(I_C = 1 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C)	MJ10006		400	–	–	
	MJ10007		450	–	–	
(I_C = 5 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C)	MJ10006		275	–	–	
	MJ10007		325	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5.0	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 2 Vdc, I_C = 0)		I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 11			
ON CHARACTERISTICS (2)						
DC Current Gain		h_{FE}				–
(I_C = 2.5 Adc, V_{CE} = 5.0 Vdc)			40	–	500	
(I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)			30	–	300	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 5.0 Adc, I_B = 250 mAdc)			–	–	1.9	
(I_C = 10 Adc, I_B = 1.0 Adc)			–	–	2.9	
(I_C = 5.0 Adc, I_B = 250 mAdc, T_C = 100°C)			–	–	2.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 5.0 Adc, I_B = 250 mAdc)			–	–	2.5	
(I_C = 5.0 Adc, I_B = 250 mAdc, T_C = 100°C)			–	–	2.5	
Diode Forward Voltage (1) (I_F = 5.0 Adc)		V_f	–	3.0	5	Vdc
DYNAMIC CHARACTERISTICS						
Small-Signal Current Gain (I_C = 1.0 Adc, V_{CE} = 10 Vdc, f_{test} = 1.0 MHz)		$\lvert h_{fe} \rvert$	10	–	–	–
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)		C_{ob}	60	–	275	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 5.0 A, I_{B1} = 250 mA, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs., Duty Cycle ≤ 2.0%).	t_d	–	0.05	0.2	μs
Rise Time		t_r	–	0.25	0.6	μs
Storage Time		t_s	–	0.5	1.5	μs
Fall Time		t_f	–	0.06	0.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 5.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 250 mA, $V_{BE(off)}$ = 5.0 Vdc, T_C = 100°C)	t_{sv}	–	0.8	2.0	μs
Crossover Time		t_c	–	0.6	1.5	μs
Storage Time	(I_C = 5.0 A(pk), V_{clamp} = Rated V_{CEX}, I_{B1} = 250 mA, $V_{BE(off)}$ = 5.0 Vdc, T_C = 25°C)	t_{sv}	–	0.5	–	μs
Crossover Time		t_c	–	0.3	–	μs

(1) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

(2) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

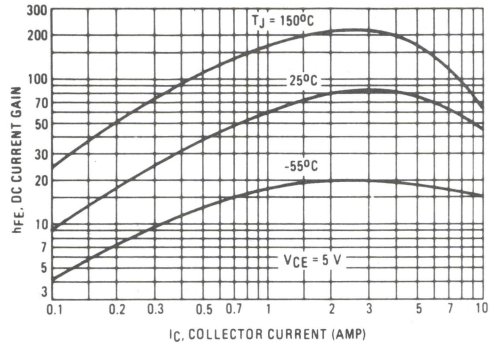

FIGURE 2 – COLLECTOR SATURATION REGION

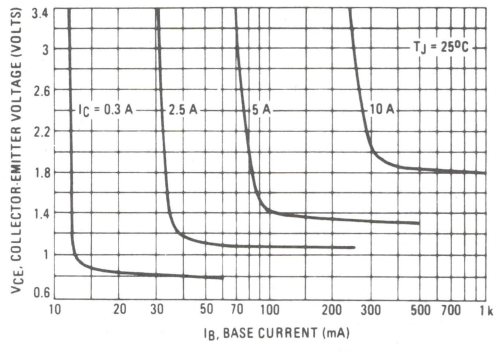

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

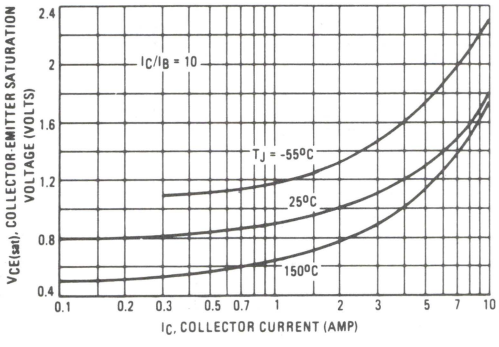

FIGURE 4 – BASE-EMITTER VOLTAGE

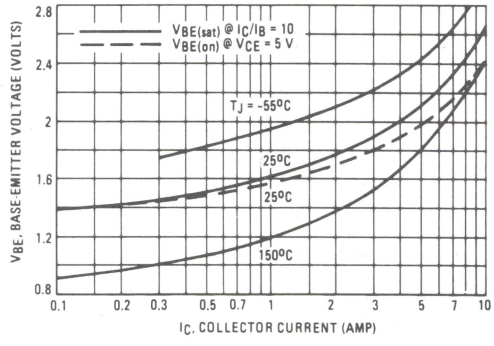

FIGURE 5 – COLLECTOR CUTOFF REGION

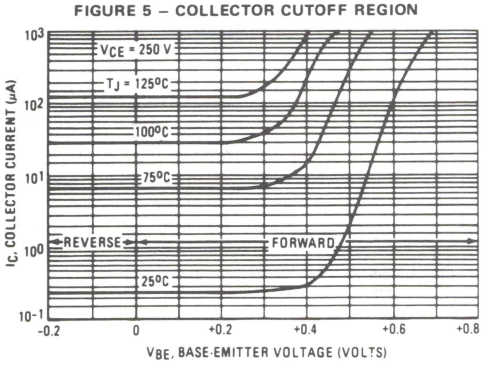

FIGURE 6 – OUTPUT CAPACITANCE

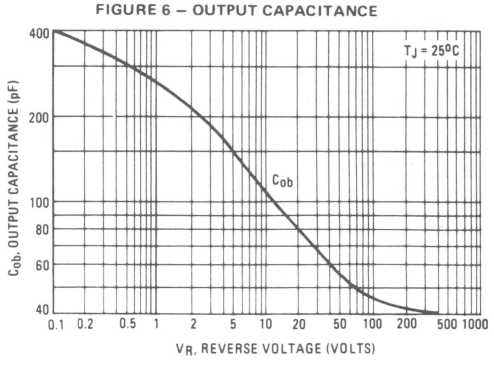

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	$V_{CEX(sus)}$ AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	PW Varied to Attain I_C = 250 mA	Adjust R1 to obtain a forced h_{FE} = 20; Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 50 μs); Duty Cycle ≤ 3%	Q1 2N2907 Q2 2N2222 Q3 2N3762 Q4 MJE210 Q5 MJE200 D1 1N914 D2 1N914 D3 1N914
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = Rated V_{CEX} Value f_o = 500 kHz	V_{CC} = 250 V R_L = 50 Ω Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S 0.1 Ω, Input, See Above For Detailed Conditions	OUTPUT WAVEFORMS: t_f Clamped, t_f Unclamped ≈ t_2, t_1 Adjusted to Obtain I_C; $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$; $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$; Test Equipment: Scope-Tektronix 475 or Equipment	RESISTIVE TEST CIRCUIT: TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

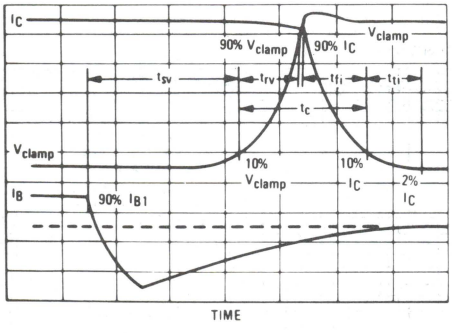

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the turn-off waveforms is shown in Figure 7 to aid in the visual identity of these terms.

3

SWITCHING TIME NOTES (continued)

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c)\ f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

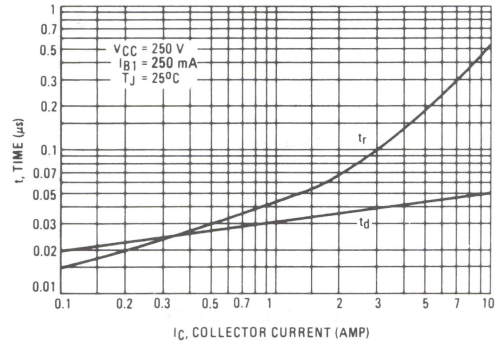

FIGURE 9 – TURN-OFF TIME

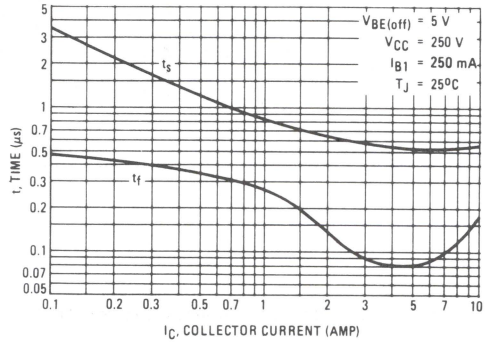

FIGURE 10 – THERMAL RESPONSE

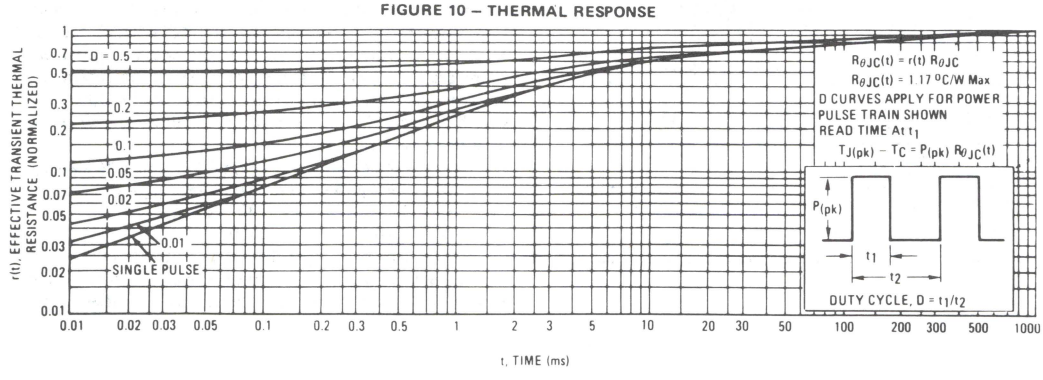

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATING AREA

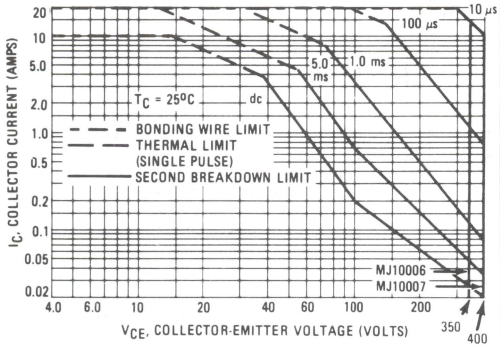

FIGURE 12 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

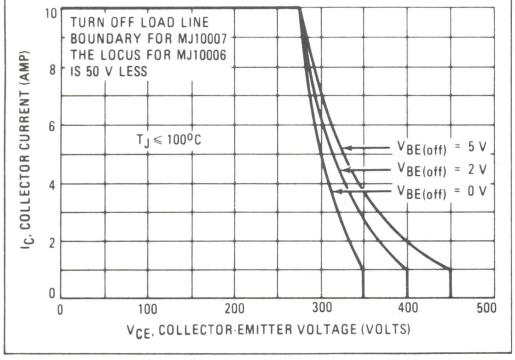

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as $V_{CEX(sus)}$ at a given collector current and represents a voltage-current condition that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete reverse bias safe operating area characteristics.

FIGURE 13 – POWER DERATING

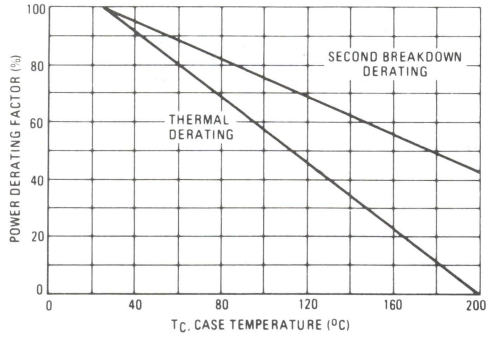

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ10008
MJ10009

Designer's Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS
WITH BASE-EMITTER SPEEDUP DIODE

The MJ10008 and MJ10009 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
- 1.6 μs (max) Inductive Crossover Time – 10 A, 100°C
- 3.5 μs (max) Inductive Storage Time – 10 A, 100°C

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
- Reversed Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

20 AMPERE
NPN SILICON
POWER DARLINGTON TRANSISTORS
450 and 500 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.





STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

MAXIMUM RATINGS

Rating	Symbol	MJ10008	MJ10009	Unit
Collector-Emitter Voltage	V_{CEO}	450	500	Vdc
Collector-Emitter Voltage	V_{CEX}	450	500	Vdc
Collector-Emitter Voltage	V_{CEV}	650	700	Vdc
Emitter Base Voltage	V_{EB}	8		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	20 30		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	2.5 5		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CEO(sus)}$				Vdc
(I_C = 100 mA, I_B = 0, V_{clamp} = Rated V_{CEO})	MJ10008		450	–	–	
	MJ10009		500	–	–	
Collector-Emitter Sustaining Voltage (Table 1, Figure 12)		$V_{CEX(sus)}$				Vdc
(I_C = 2 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C,	MJ10008		450	–	–	
$V_{BE(off)}$ = 5 V)	MJ10009		500	–	–	
(I_C = 10 A, V_{clamp} = Rated V_{CEX}, T_C = 100°C,	MJ10008		325	–	–	
$V_{BE(off)}$ = 5 V)	MJ10009		375	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5	
Collector Cutoff Current		I_{CER}	–	–	5	mAdc
(V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)						
Emitter Cutoff Current		I_{EBO}	–	–	175	mAdc
(V_{EB} = 2 Vdc, I_C = 0)						
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 11			
ON CHARACTERISTICS (2)						
DC Current Gain		h_{FE}				–
(I_C = 5 Adc, V_{CE} = 5 Vdc)			40	–	400	
(I_C = 10 Adc, V_{CE} = 5 Vdc)			30	–	300	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 500 mAdc)			–	–	2	
(I_C = 20 Adc, I_B = 2 Adc)			–	–	3.5	
(I_C = 10 Adc, I_B = 500 mAdc, T_C = 100°C)			–	–	2.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 500 mAdc)			–	–	2.5	
(I_C = 10 Adc, I_B = 500 mAdc, T_C = 100°C)			–	–	2.5	
Diode Forward Voltage (1)		V_f	–	3	5	Vdc
(I_F = 10 Adc)						
DYNAMIC CHARACTERISTICS						
Small-Signal Current Gain		$\|h_{fe}\|$	8	–	–	–
(I_C = 1 Adc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)						
Output Capacitance		C_{ob}	100	–	325	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)						
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 500 mA, $V_{BE(off)}$ = 5 Vdc, t_p = 25 μs Duty Cycle ≤ 2%).	t_d	–	0.12	0.25	μs
Rise Time		t_r	–	0.5	1.5	μs
Storage Time		t_s	–	0.8	2.0	μs
Fall Time		t_f	–	0.2	0.6	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 10 A(pk), V_{clamp} = 250 V, I_{B1} = 500 mA, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_{sv}	–	1.5	3.5	μs
Crossover Time		t_c	–	0.36	1.6	μs
Storage Time	(I_C = 10 A(pk), V_{clamp} = 250 V, I_{B1} = 500 mA, $V_{BE(off)}$ = 5 Vdc)	t_{sv}	–	0.8	–	μs
Crossover Time		t_c	–	0.18	–	μs

(1) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

(2) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

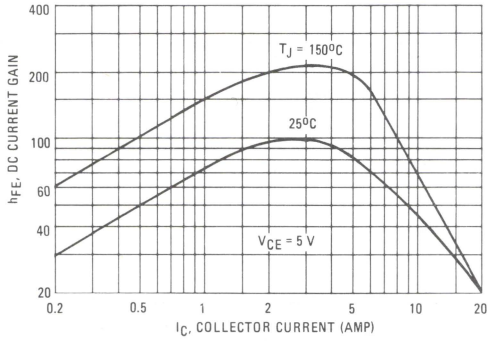

FIGURE 2 – COLLECTOR SATURATION REGION

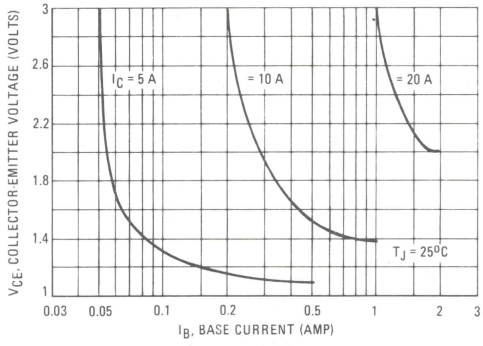

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

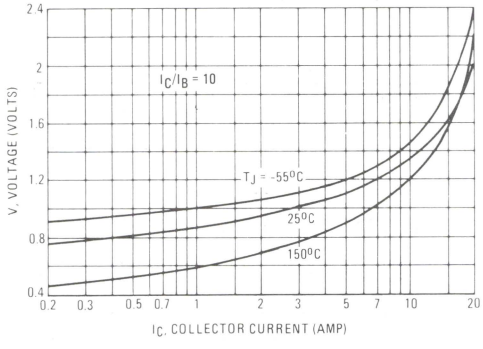

FIGURE 4 – BASE-EMITTER VOLTAGE

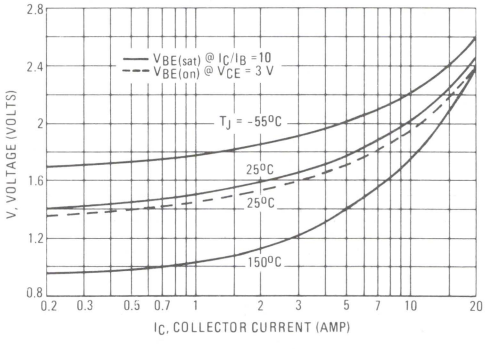

FIGURE 5 – COLLECTOR CUTOFF REGION

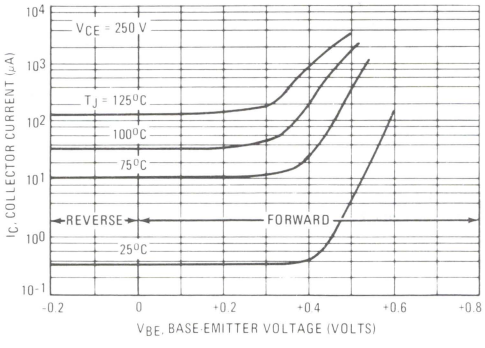

FIGURE 6 – OUTPUT CAPACITANCE

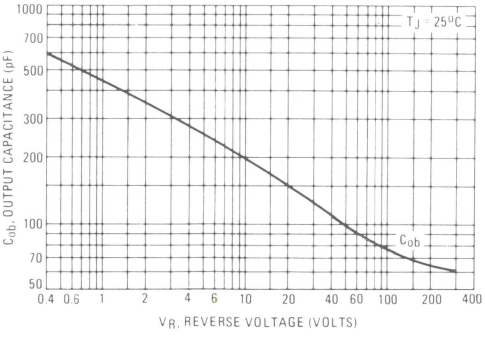

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

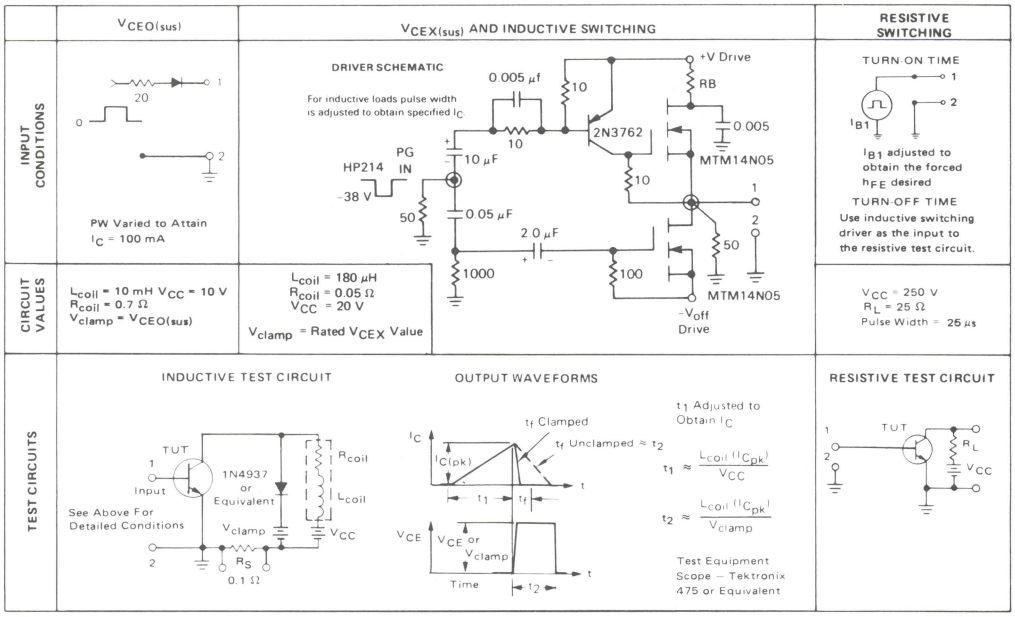

*Adjust –V such that $V_{BE(off)}$ = 5 V except as required for RB SOA (Figure 12).

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

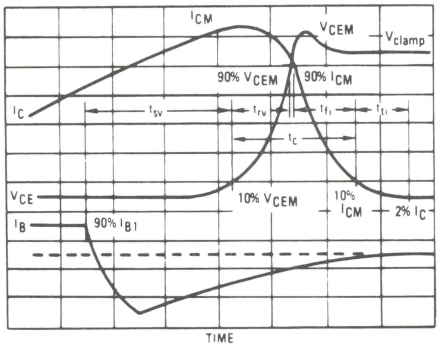

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

– continued –

TYPICAL CHARACTERISTICS

SWITCHING TIMES NOTE (continued)

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c)\ f$$

Typical inductive switching waveforms are shown in Figure 7. In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at $T_C = 25^oC$ and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at $T_C = 100^oC$.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

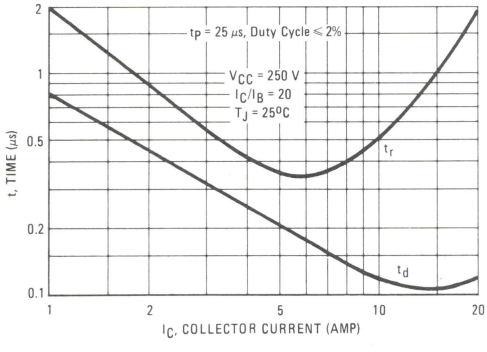

FIGURE 9 – TURN-OFF TIME

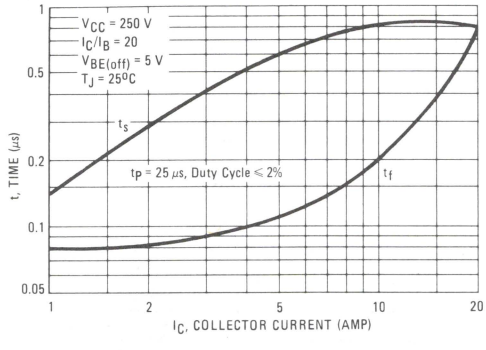

FIGURE 10 – THERMAL RESPONSE

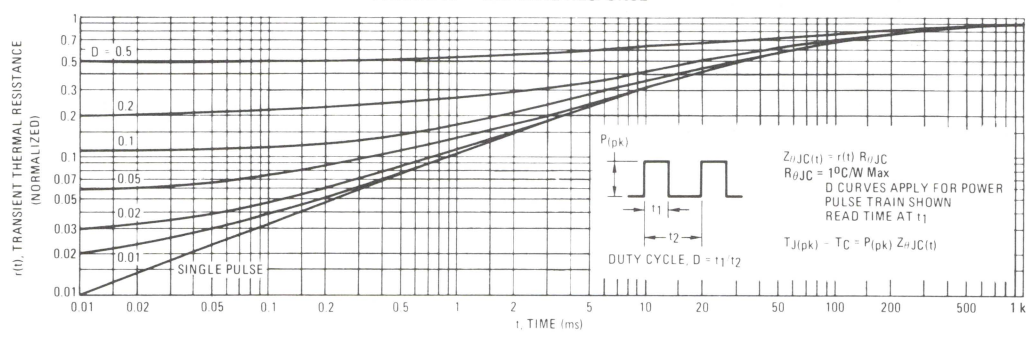

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATING AREA

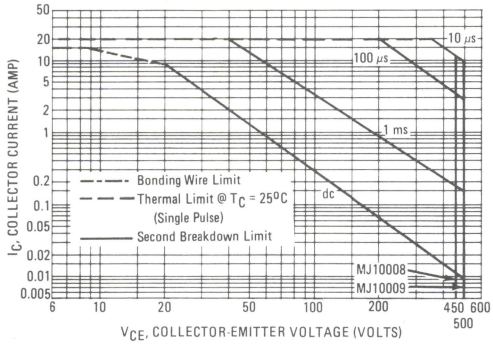

FIGURE 12 – REVERSE BIAS SWITCHING SAFE OPERATING AREA (MJ10009)

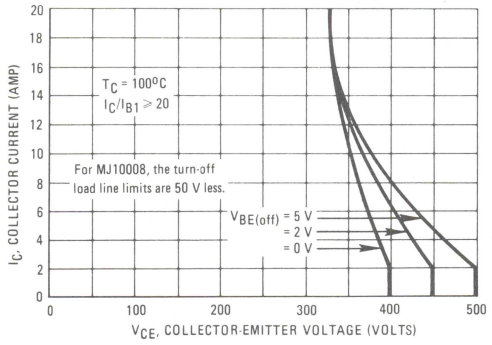

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as $V_{CEX(sus)}$ at a given collector current and represents a voltage-current condition that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete reverse bias safe operating area characteristics. See Table 1 for circuit conditions.

FIGURE 13 – POWER DERATING

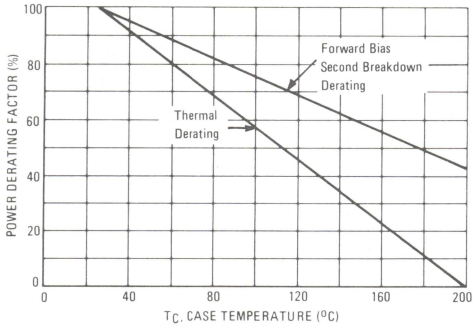

FIGURE 14 – REVERSE BASE CURRENT versus $V_{BE(off)}$ WITH NO EXTERNAL BASE RESISTANCE

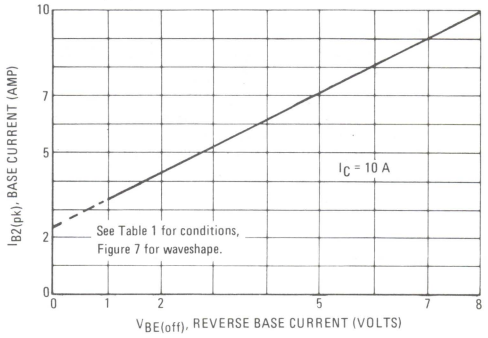

3

MJ10011

DARLINGTON HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in deflection circuits.

- $V_{CE(sat)}$ = 3.0 Volts (Max) @ I_C = 4.0 Amps, I_B = 200 mA
- Built-In Damper Diode
- V_{CEX} = 1400 Volts
- Glassivated Base-Collector Junction
- Safe Operating Area @ 50 μs = 25 A, 200 V



8.0 AMPERE

NPN SILICON DARLINGTON POWER TRANSISTOR

1400 VOLTS
80 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEX}	1400	Vdc
Emitter Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous Peak (1)	I_C I_{CM}	8.0 16	Adc
Base Current — Continuous Peak (1)	I_B I_{BM}	2.0 4.0	Adc
Emitter Current — Continuous Peak (1)	I_E I_{EM}	10 20	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	80 0.6	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Maximum Lead Temperature for Soldering Purposes: 1.8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 1.0 ms, Duty Cycle ≤ 10%.



STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
⌖ ⌀.13 (0.005) M T V M
FOR LEADS:
⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

FIGURE 1 — FORWARD BIAS SAFE OPERATING AREA

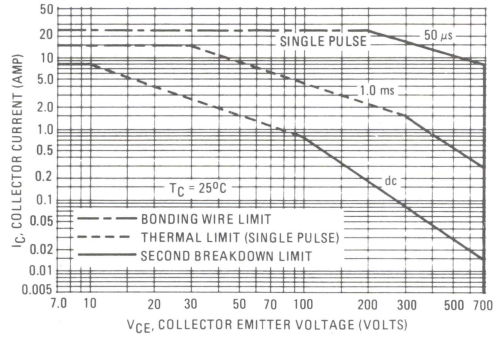

3

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	700	–	–	Vdc
Collector Cutoff Current (V_{CE} = 1400 Vdc, V_{BE} = 0)	I_{CES}	–	–	0.25	mAdc
Emitter Cutoff Current (V_{BE} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	–	50	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 3.5 Adc, I_B = 0.15 Adc)		–	–	3.0	
(I_C = 4.0 Adc, I_B = 0.2 Adc)		–	–	3.0	
Base Emitter Saturation Voltage	$V_{BE(sat)}$				Vdc
(I_C = 3.5 Adc, I_B = 0.15 Adc)		–	–	2.0	
(I_C = 4.0 Adc, I_B = 0.2 Adc)		–	–	2.0	
Forward Diode Voltage (I_F = 4.0 Adc)	V_f	–	1.2	2.0	Vdc
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 1			
SWITCHING CHARACTERISTICS					
Fall Time (See Figure 2) (I_C = 4.0 Adc, I_{B1} = 0.2 Adc)	t_f	–	0.65	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

FIGURE 2 – FALL TIME TEST CIRCUIT

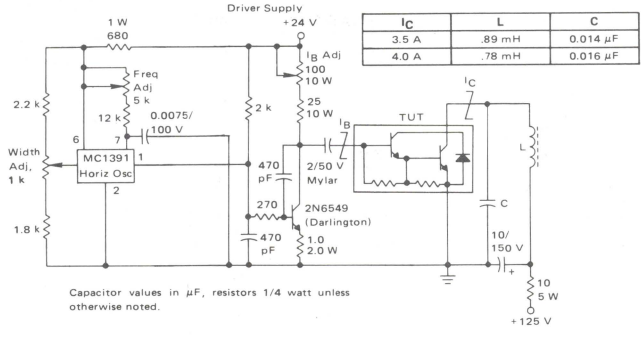

I_C	L	C
3.5 A	.89 mH	0.014 μF
4.0 A	.78 mH	0.016 μF

FIGURE 3 – DC CURRENT GAIN

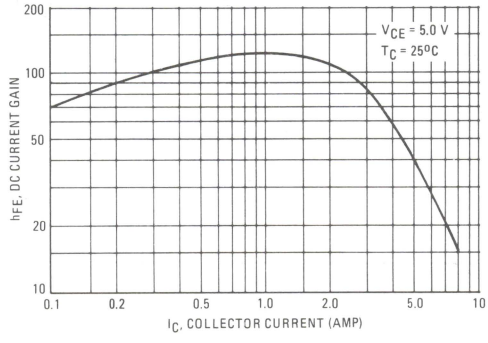

MJ10012
MJH10012

NPN SILICON POWER DARLINGTON TRANSISTOR

The MJ10012 and MJH10012 are high-voltage, high-current Darlington transistors designed for automotive ignition, switching regulator and motor control applications.

- Collector-Emitter Sustaining Voltage — $V_{CEO(sus)}$ = 400 Vdc (Min)
- 175 Watts Capability at 50 Volts
- Automotive Functional Tests



10 AMPERE

POWER TRANSISTORS DARLINGTON NPN SILICON

400 VOLTS
175 AND 118 WATTS

MJ10012

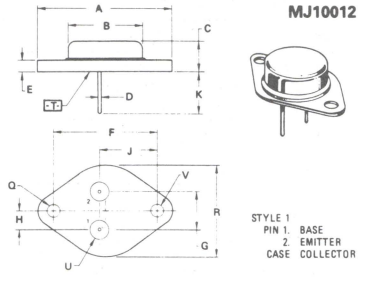

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
⌖ ⌀.13 (0.005) M T V M
FOR LEADS.
⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 DSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

MJH10012



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

MAXIMUM RATINGS

Rating	Symbol	MJ10012	MJH10012	Unit
Collector-Emitter Voltage	V_{CEO}	400		Vdc
Collector-Emitter Voltage (R_{BE} = 27 Ω)	V_{CER}	550		Vdc
Collector-Base Voltage	V_{CBO}	600		Vdc
Emitter-Base Voltage	V_{EBO}	8.0		Vdc
Collector Current — Continuous — Peak (1)	I_C	10 15		Adc
Base Current	I_B	2.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	 175 100 1.0	 118 47.5 1.05	 Watts Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200	−55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	0.95	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Figure 1) (I_C = 200 mAdc, I_B = 0, V_{clamp} = Rated V_{CEO})		$V_{CEO(sus)}$	400	–	–	Vdc
Collector-Emitter Sustaining Voltage (Figure 1) (I_C = 200 mAdc, R_{BE} = 27 Ohms, V_{clamp} = Rated V_{CER})		$V_{CER(sus)}$	425	–	–	Vdc
Collector Cutoff Current (Rated V_{CER}, R_{BE} = 27 Ohms)		I_{CER}	–	–	1.0	mAdc
Collector Cutoff Current (Rated V_{CBO}, I_E = 0)		I_{CBO}	–	–	1.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	–	–	40	mAdc
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 3.0 Adc, V_{CE} = 6.0 Vdc) (I_C = 6.0 Adc, V_{CE} = 6.0 Vdc) (I_C = 10 Adc, V_{CE} = 6.0 Vdc)		h_{FE}	 300 100 20	 550 350 150	 – 2000 –	–
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) (I_C = 6.0 Adc, I_B = 0.6 Adc) (I_C = 10 Adc, I_B = 2.0 Adc)		$V_{CE(sat)}$	 – – –	 – – –	 1.5 2.0 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 6.0 Adc, I_B = 0.6 Adc) (I_C = 10 Adc, I_B = 2.0 Adc)		$V_{BE(sat)}$	 – –	 – –	 2.5 3.0	Vdc
Base-Emitter On Voltage (I_C = 10 Adc, V_{CE} = 6.0 Vdc)		$V_{BE(on)}$	–	–	2.8	Vdc
Diode Forward Voltage (I_F = 10 Adc)		V_f	–	2.0	3.5	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)		C_{ob}	–	165	350	pF
SWITCHING CHARACTERISTICS						
Storage Time	(V_{CC} = 12 Vdc, I_C = 6.0 Adc, I_{B1} = I_{B2} = 0.3 Adc) Figure 2	t_s	–	7.5	15	μs
Fall Time		t_f	–	5.2	15	μs
FUNCTIONAL TESTS						
Second Breakdown Collector Current with Base-Forward Biased		$I_{S/B}$	See Figure 10			–
Pulsed Energy Test (See Figure 12)		$\frac{I_C^2 L}{2}$	–	–	180	mJ

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

FIGURE 1 – SUSTAINING VOLTAGE TEST CIRCUIT

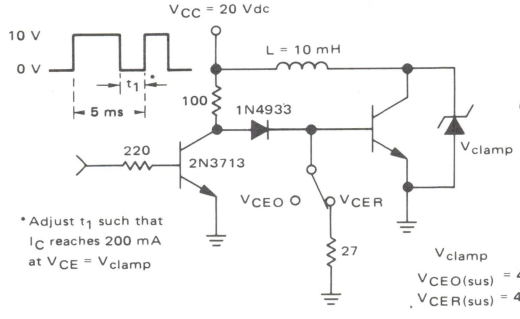

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

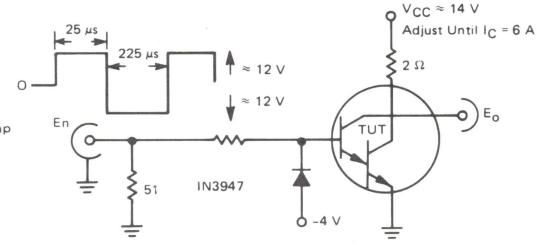

3

FIGURE 3 – DC CURRENT GAIN

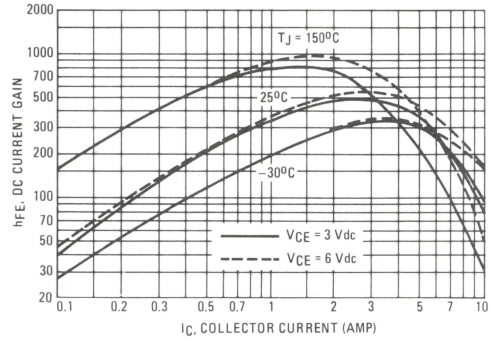

FIGURE 4 – COLLECTOR-SATURATION REGION

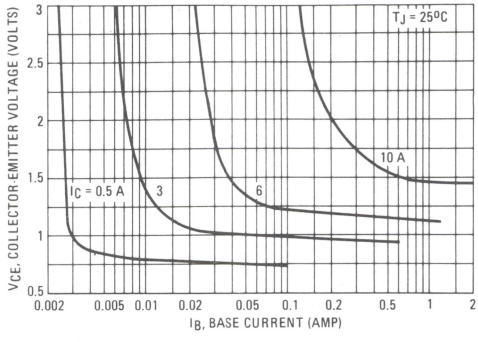

FIGURE 5 – COLLECTOR-EMITTER SATURATION VOLTAGE

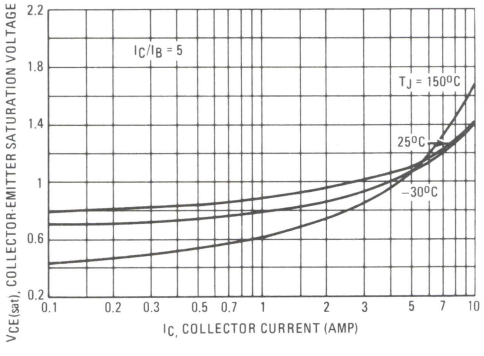

FIGURE 6 – BASE-EMITTER VOLTAGE

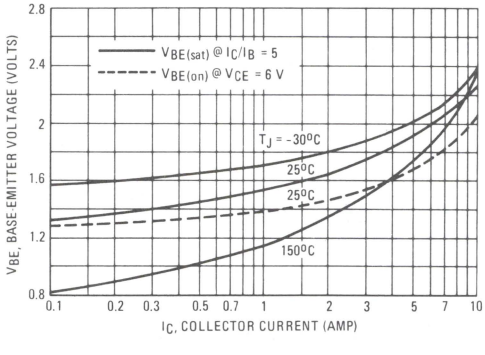

FIGURE 7 – TURN-OFF SWITCHING TIME

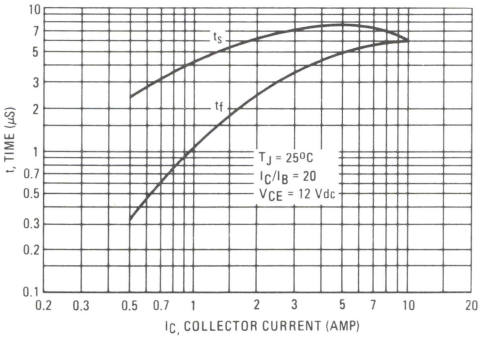

FIGURE 8 – COLLECTOR CUTOFF REGION

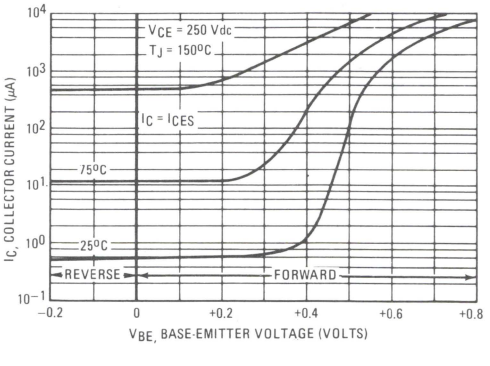

3

FIGURE 9 – THERMAL RESPONSE

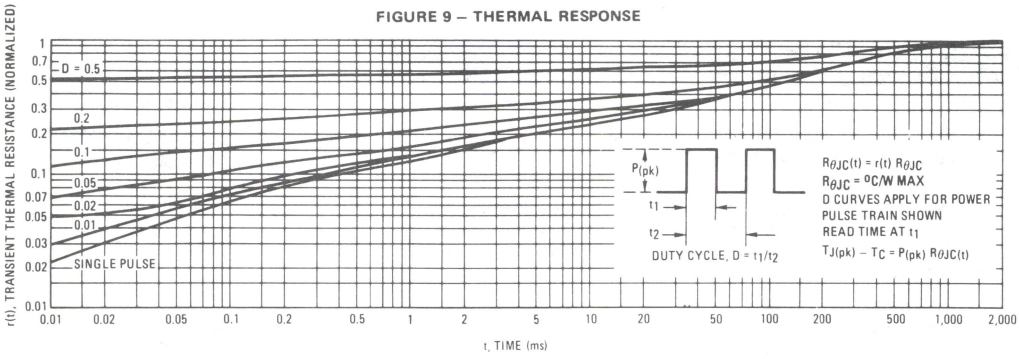

FIGURE 10 – FORWARD BIAS SAFE OPERATING AREA

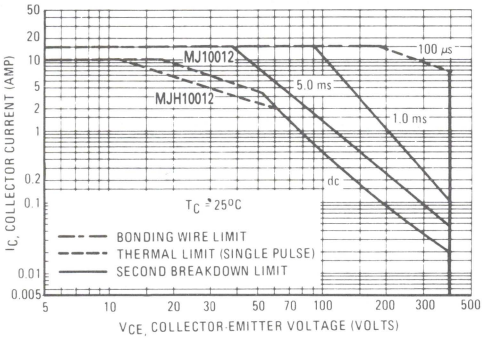

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 10 may be found at any case temperature by using the appropriate curve on Figure 11.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 11 – POWER DERATING

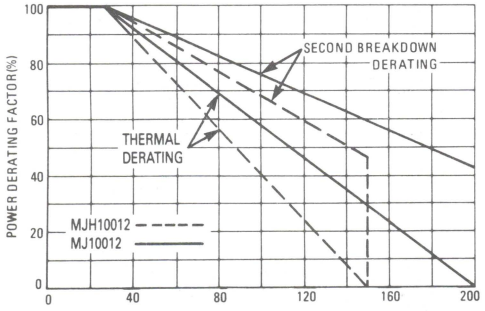

FIGURE 12 – USAGE TEST CIRCUIT

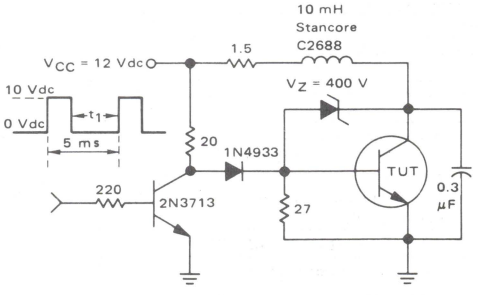

t_1 to be selected such that I_C reaches 6 Adc before switch-off.

NOTE:

"Usage Test," Figure 12 specifies energy handling capabilities in an automotive ignition circuit.

3

MJ10014

Designers Data Sheet

10 AMPERE
NPN SILICON
POWER DARLINGTON
TRANSISTOR

600 VOLTS
175 WATTS

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTOR

The MJ10014 Darlington transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line-operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



- Fast Turn-Off Times
  - 250 ns Inductive FAll Time–25°C (Typ)
  - 500 ns Inductive Crossover Time–25°C (Typ)
  - 1.4 μs Inductive Storage Time–25°C (Typ)
- Operating Temperature Range: -65 to +200°C
- 100°C Performance Specified for:
  - Reversed Biased SOA With Inductive Loads
  - Switching Times With Inductive Loads
  - Saturation Voltages
  - Leakage Currents

Designers Data for "Worst-Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data–representing device characteristic boundaries–are given to facilitate "worst-case" design.

MAXIMUM RATINGS

Rating	Symbol	MJ10014	Unit
Collector-Emitter Voltage	V_{CEO}	600	Vdc
Collector-Emitter Voltage	V_{CEV}	700	Vdc
Emitter Base Voltage	V_{EB}	8	Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	10 15	Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	7 10	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%

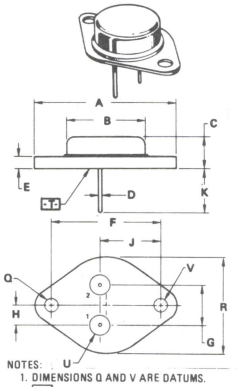

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | Ø.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | Ø.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$				Vdc
MJ10014		600	–	–	
Collector Cutoff Current	I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)		–	–	0.3	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		–	–	5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	–	–	5	mAdc
Emitter Cutoff Current (V_{EB} = 2 Vdc, I_C = 0)	I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 13			
ON CHARACTERISTICS (2)					
DC Current Gain	h_{FE}				–
(I_C = 5 Adc, V_{CE} = 5 Vdc)		20	–	500	
(I_C = 10 Adc, V_{CE} = 5 Vdc)		10	–	250	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 2 Adc)		–	–	2.5	
(I_C = 10 Adc, I_B = 2 Adc, T_C = 100°C)		–	–	2.6	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 2 Adc)		–	–	3	
(I_C = 10 Adc, I_B = 2 Adc, T_C = 100°C)		–	–	3	
Diode Forward Voltage (1) (I_F = 10 Adc)	V_f	–	3	5	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1 Adc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)	$\|h_{fe}\|$	10	–	–	–
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)	C_{ob}	100	–	350	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	t_d	–	0.02	0.2	μs
Rise Time	t_r	–	0.9	2	μs
Storage Time	t_s	–	0.95	4	μs
Fall Time	t_f	–	0.22	1	μs
(V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 400 mA, $V_{BE(off)}$ = 5 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%).					
Inductive Load, Clamped (Table 1)					
Storage Time	t_s	–	2.3	6	μs
Crossover Time	t_c	–	1	3	μs
Storage Time	t_s	–	1.4	–	μs
Crossover Time	t_c	–	0.5	–	μs
Fall Time	t_{fi}	–	0.25	–	μs
(I_C = 10 A(pk), V_{clamp} = 250 Vdc, I_{B1} = 1 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)					
(I_C = 10 A(pk), V_{clamp} = 250 Vdc, I_{B1} = 1 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)					

(1) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

(2) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

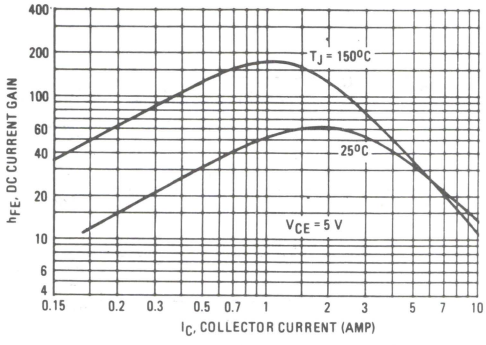

FIGURE 2 – COLLECTOR SATURATION REGION

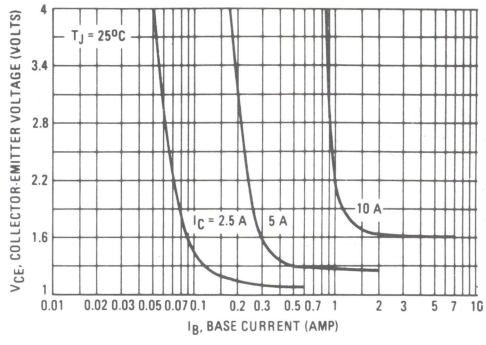

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

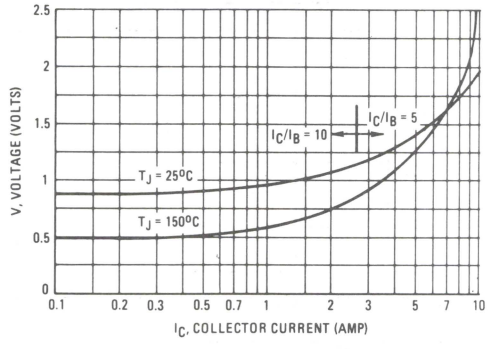

FIGURE 4 – BASE-EMITTER VOLTAGE

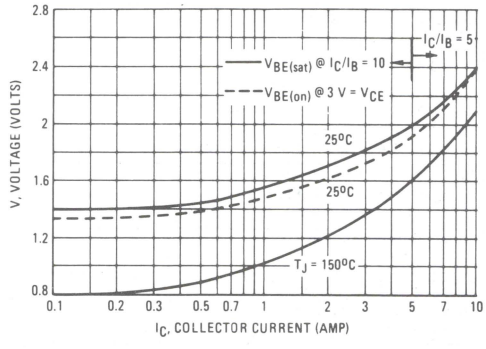

3

FIGURE 5 – COLLECTOR CUTOFF REGION

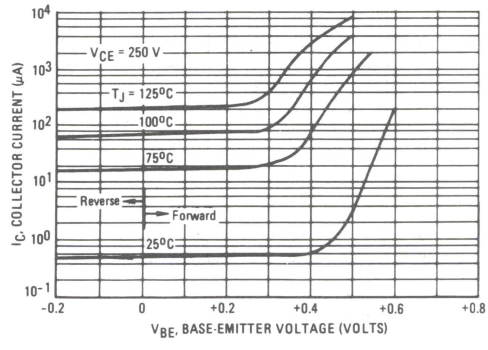

FIGURE 6 – OUTPUT CAPACITANCE

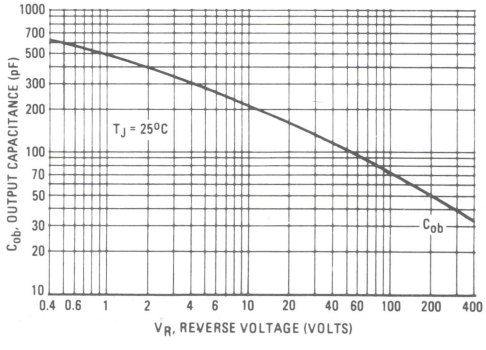

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	PW Varied to Attain I_C = 250 mA	Adjust R1 to obtain a forced h_{FE} = 10; Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 50 μs); Duty Cycle ≤ 3%; Q1 2N2907, Q2 2N2222, Q3 2N3762, Q4 MJE210, Q5 MJE200, D1 1N914, D2 1N914, D3 1N914	
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V, R_{coil} = 0.7 Ω, V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH, R_{coil} = 0.05 Ω, V_{CC} = 20 V	V_{CC} = 250 V, R_L = 25 Ω, Pulse Width = 50 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT; OUTPUT WAVEFORMS; t_1 Adjusted to Obtain I_C; $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$; $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$; Test Equipment: Scope – Tektronix 475 or Equivalent		RESISTIVE TEST CIRCUIT

SWITCHING TIME NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the turn-off waveforms is shown in Figure 7 to aid in the visual identity of these terms.

– continued –

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

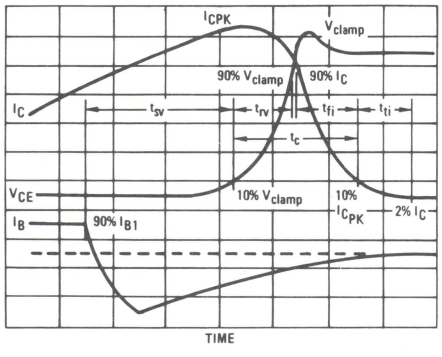

FIGURE 8 – PEAK REVERSE CURRENT

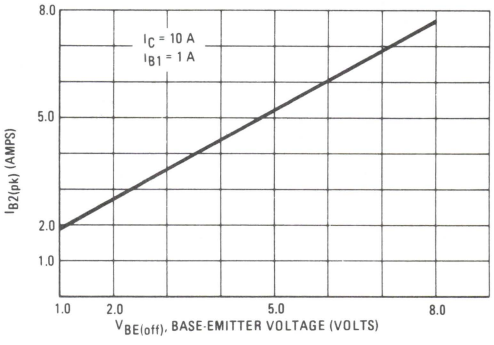

TYPICAL CHARACTERISTICS

SWITCHING TIMES NOTE (continued)

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C(t_c)\ f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN-ON TIME

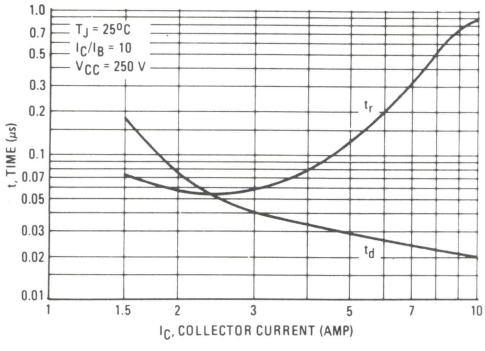

FIGURE 10 – TURN-OFF TIME

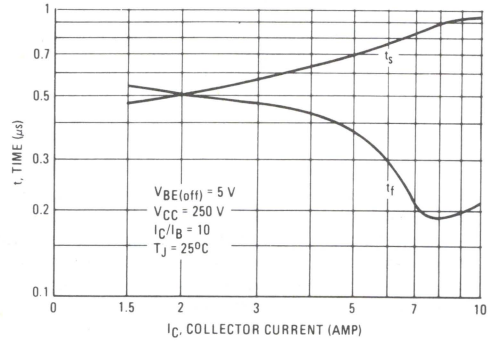

3

FIGURE 11 – THERMAL RESPONSE

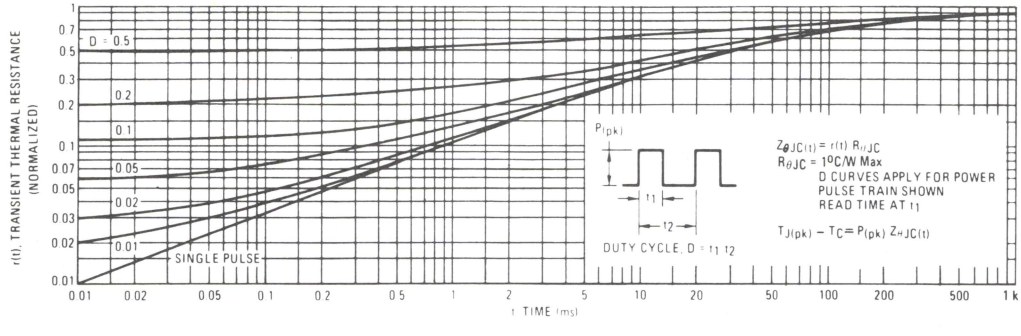

The Safe Operating Area figures shown in Figures 12 and 13 are specified for theses devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

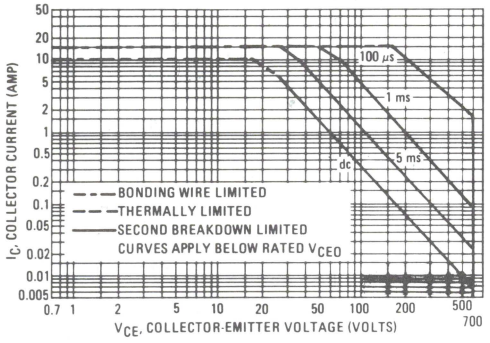

FIGURE 13 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

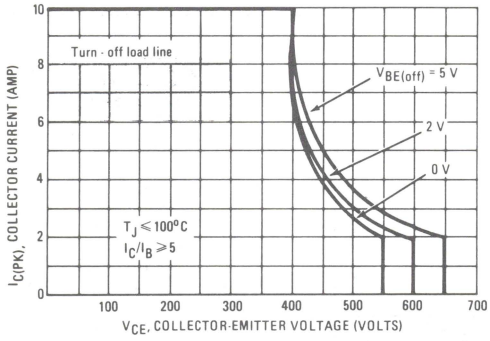

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

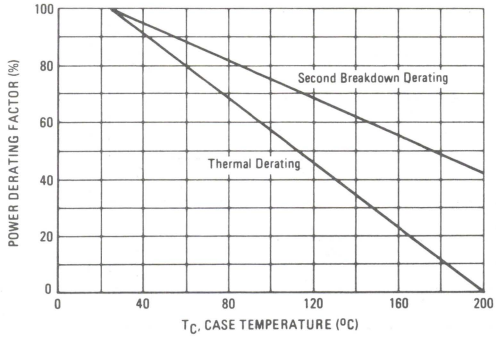

3

MJ10015
MJ10016

50 AMPERE

NPN SILICON POWER DARLINGTON TRANSISTORS

400 and 500 VOLTS
250 WATTS

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The MJ10015 and MJ10016 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- Switching Regulators
- Motor Controls
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  - 1.0 μs (max) Inductive Crossover Time – 20 Amps
  - 2.5 μs (max) Inductive Storage Time – 20 Amps
- Operating Temperature Range –65 to +200°C
- Performance Specified for
  - Reversed Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents









STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

MAXIMUM RATINGS

Rating	Symbol	MJ10015	MJ10016	Unit
Collector-Emitter Voltage	V_{CEO}	400	500	Vdc
Collector-Emitter Voltage	V_{CEV}	600	700	Vdc
Emitter Base Voltage	V_{EB}	8.0		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	50 75		Adc
Base Current – Continous – Peak (1)	I_B I_{BM}	10 15		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 143 1.43		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0, V_{clamp} = Rated V_{CEO})	MJ10015 MJ10016	$V_{CEO(sus)}$	 400 500	 – –	 – –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)		I_{CEV}	–	–	0.25	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 Vdc, I_C = 0)		I_{EBO}	–	–	350	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 7			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 8			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 20 Adc, V_{CE} = 5.0 Vdc) (I_C = 40 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	 25 10	 – –	 – –	–
Collector-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 1.0 Adc) (I_C = 50 Adc, I_B = 10 Adc)		$V_{CE(sat)}$	 – –	 – –	 2.2 5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 1.0 Adc)		$V_{BE(sat)}$	–	–	2.75	Vdc
Diode Forward Voltage (2) (I_F = 20 Adc)		V_f	–	2.5	5.0	Vdc
DYNAMIC CHARACTERISTIC						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)		C_{ob}	–	–	750	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 20 A, I_{B1} = 1.0 Adc, $V_{BE(off)}$ = 5 Vdc, t_p = 25 μs Duty Cycle ≤ 2%).	t_d	–	0.14	0.3	μs
Rise Time		t_r	–	0.3	1.0	μs
Storage Time		t_s	–	0.8	2.5	μs
Fall Time		t_f	–	0.3	1.0	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 20 A(pk), V_{clamp} = 250 V, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5.0 Vdc)	t_{sv}	–	1.0	2.5	μs
Crossover Time		t_c	–	0.36	1.0	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

(2) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

TYPICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

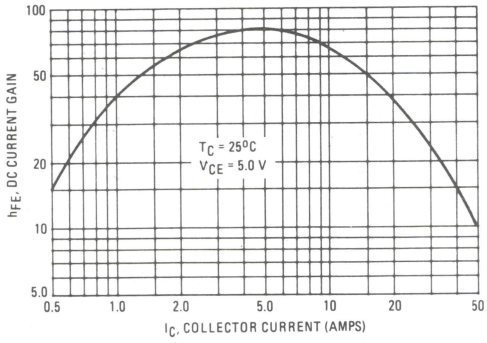

FIGURE 2 – COLLECTOR-EMITTER SATURATION VOLTAGE

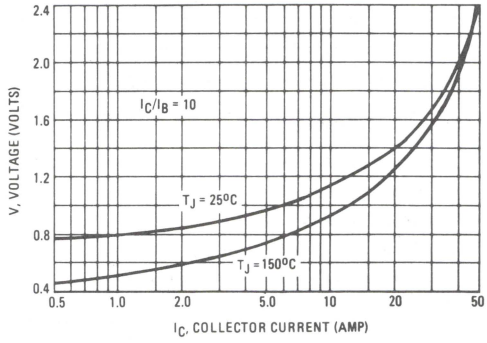

FIGURE 3 – BASE-EMITTER SATURATION VOLTAGE

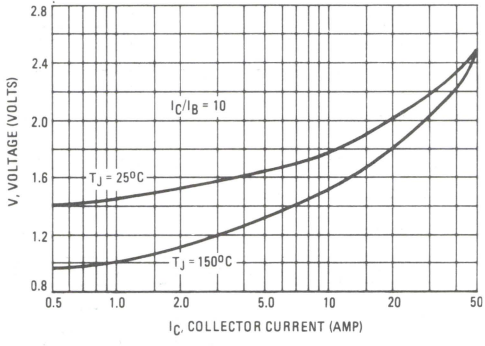

FIGURE 4 – COLLECTOR CUTOFF REGION

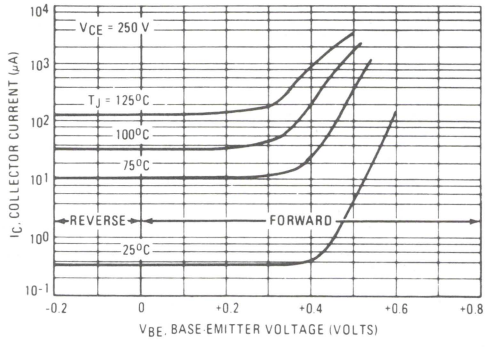

3

FIGURE 5 – OUTPUT CAPACITANCE

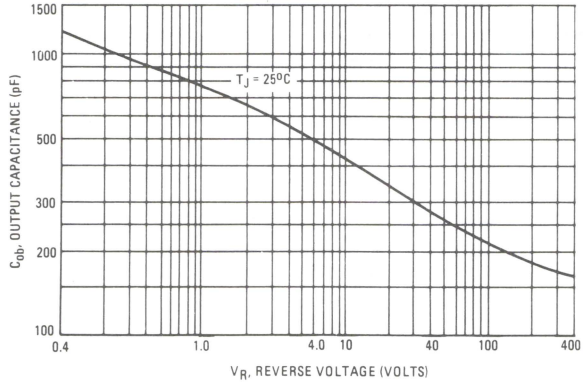

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

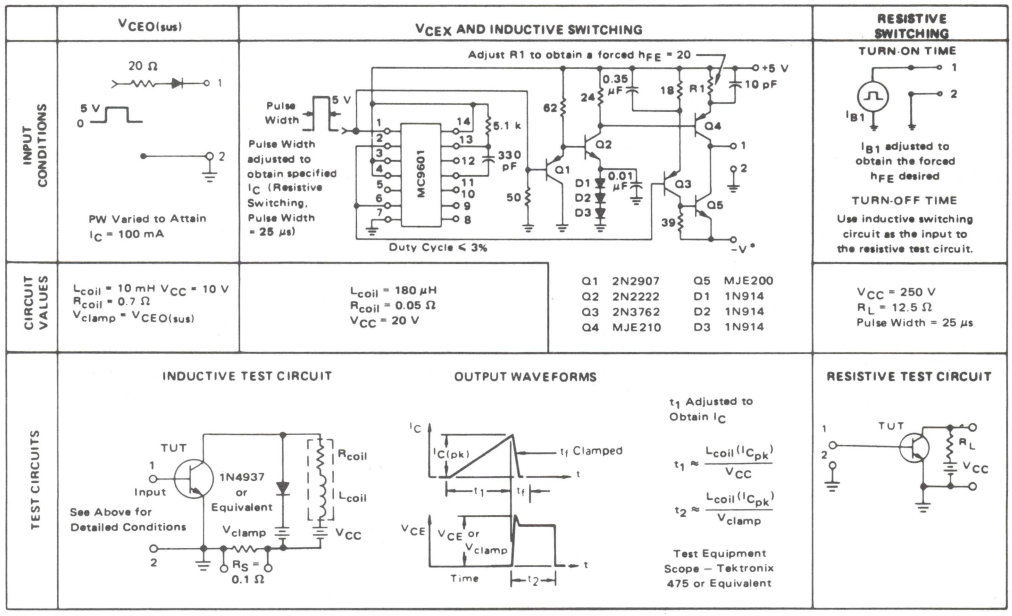

*Adjust –V such that $V_{BE(off)}$ = 5 V except as required for RB SOA (Figure 8).

FIGURE 6 – INDUCTIVE SWITCHING MEASUREMENTS

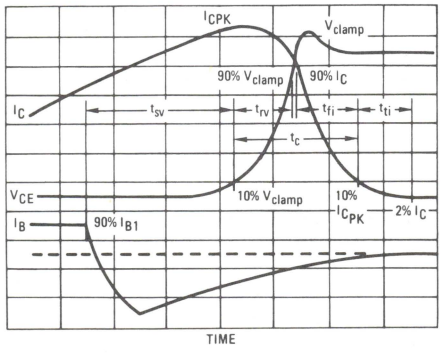

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10-90% V_{clamp}
t_{fi} = Current Fall Time, 90-10% I_C
t_{ti} = Current Tail, 10-2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \cong t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed.

3

The Safe Operating Area figures shown in Figures 7 and 8 are specified ratings for these devices under the test conditions shown.

FIGURE 7 – FORWARD BIAS SAFE OPERATING AREA

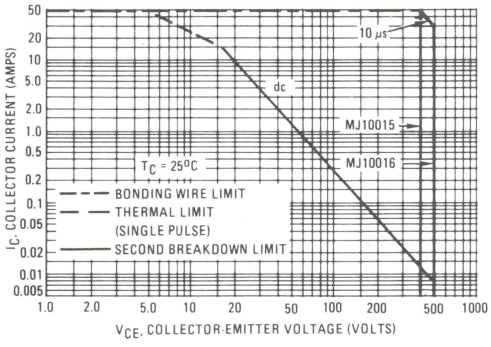

FIGURE 8 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

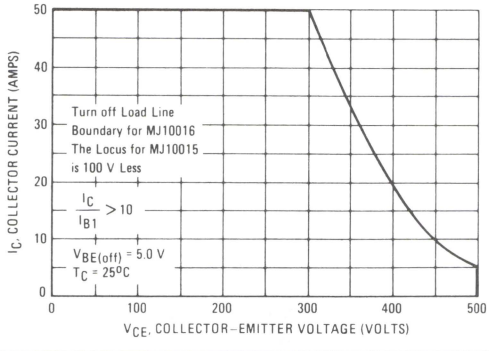

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 7 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 7 may be found at any case temperature by using the appropriate curve on Figure 9.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 8 gives the complete RBSOA characteristics.

FIGURE 9 – POWER DERATING

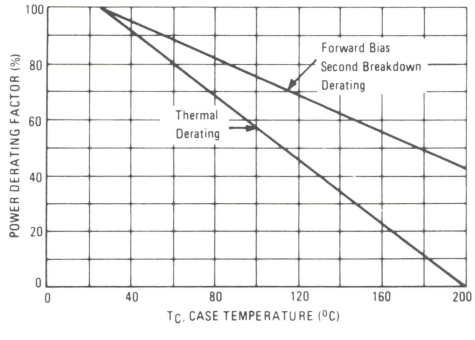

FIGURE 10 – TYPICAL REVERSE BASE CURRENT versus $V_{BE(off)}$ WITH NO EXTERNAL BASE RESISTANCE

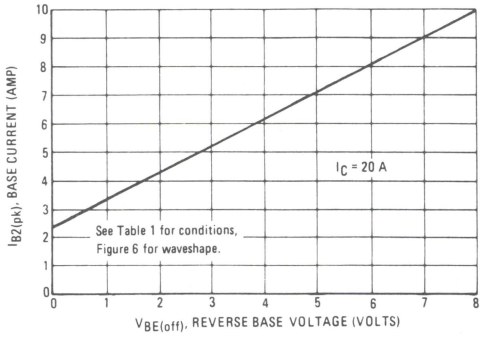

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ10020
MJ10021

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS
WITH BASE-EMITTER SPEEDUP DIODE

The MJ10020 and MJ10021 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  - 150 ns Inductive Fall Time at 25°C (Typ)
  - 750 ns Inductive Storage Time at 25°C (Typ)
- Operating Temperature Range −65 to +200°C
- 100°C Performance Specified for:
  - Reversed Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents



60 AMPERE

NPN SILICON POWER DARLINGTON TRANSISTORS

200 and 250 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ10020	MJ10021	Unit
Collector-Emitter Voltage	V_{CEO}	200	250	Vdc
Collector-Emitter Voltage	V_{CEV}	300	350	Vdc
Emitter Base Voltage	V_{EB}	8.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	60 100		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	20 30		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 143 1.43		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%

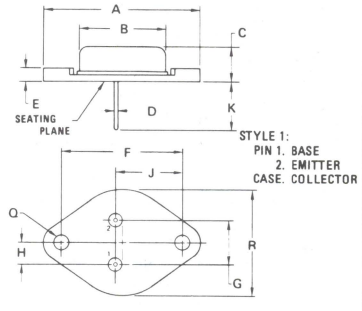

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ10020 MJ10021	$V_{CEO(sus)}$	200 250	– –	– –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 – –	 – –	 0.25 5.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)		I_{EBO}	–	–	175	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$		See Figure 13		
Clamped Inductive SOA with Base Reverse Biased		RBSOA		See Figure 14		
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 15 Adc, V_{CE} = 5.0 V)		h_{FE}	75	–	1000	–
Collector-Emitter Saturation Voltage (I_C = 30 Adc, I_B = 1.2 Adc) (I_C = 60 Adc, I_B = 4.0 Adc) (I_C = 30 Adc, I_B = 1.2 Adc, T_C = 100°C)		$V_{CE(sat)}$	 – – –	 – – –	 2.2 4.0 2.4	Vdc
Base-Emitter Saturation Voltage (I_C = 30 Adc, I_B = 1.2 Adc) (I_C = 30 Adc, I_B = 1.2 Adc, T_C = 100°C)		$V_{BE(sat)}$	 – –	 – –	 3.0 3.5	Vdc
Diode Forward Voltage (I_F = 30 Adc)		V_f	–	2.5	5.0	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	175	–	700	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 175 Vdc, I_C = 30 A, I_{B1} = 1.2 Adc, $V_{BE(off)}$ = 5.0 V, t_p = 25 μs Duty Cycle ≤ 2.0%).	t_d	–	0.02	0.2	μs
Rise Time		t_r	–	0.30	1.0	μs
Storage Time		t_s	–	1.0	3.5	μs
Fall Time		t_f	–	0.07	0.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_{CM} = 30 A(pk), V_{CEM} = 200 V, I_{B1} = 1.2 A, $V_{BE(off)}$ = 5 V, T_C = 100°C)	t_{sv}	–	1.2	3.5	μs
Crossover Time		t_c	–	0.45	2.0	μs
Storage Time	(I_{CM} = 30 A(pk), V_{CEM} = 200 V, I_{B1} = 1.2 A, $V_{BE(off)}$ = 5 V, T_C = 25°C)	t_{sv}	–	0.75	–	μs
Crossover Time		t_c	–	0.25	–	μs
Fall Time		t_{fi}	–	0.15	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

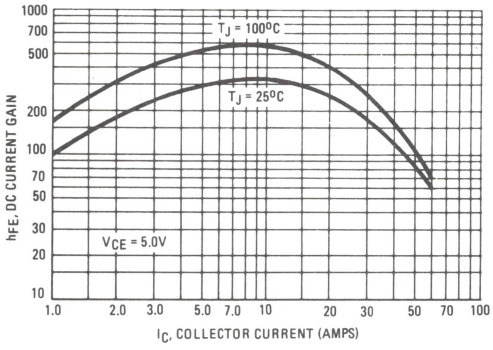

FIGURE 2 – COLLECTOR SATURATION REGION

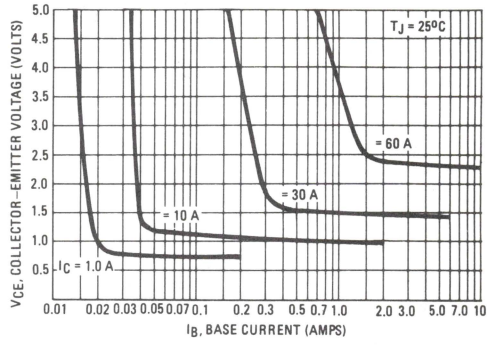

FIGURE 3 – COLLECTOR–EMITTER SATURATION VOLTAGE

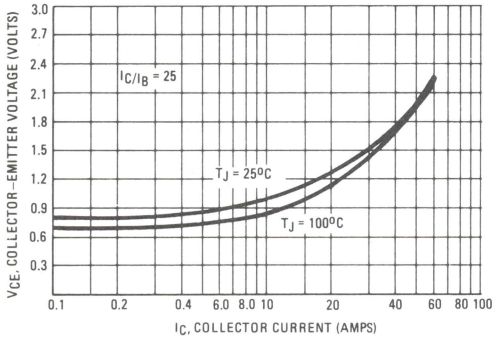

FIGURE 4 – BASE–EMITTER VOLTAGE

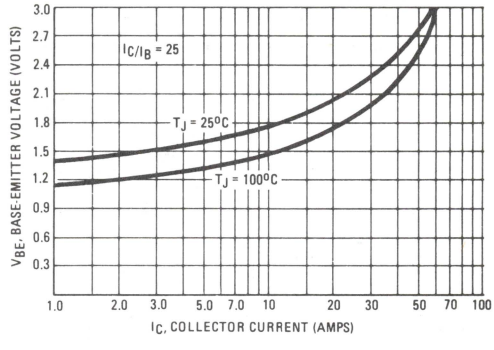

FIGURE 5 – COLLECTOR CUTOFF REGION

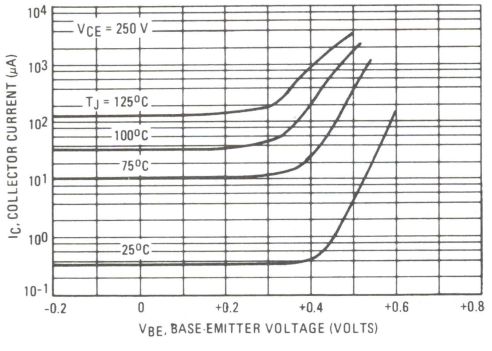

FIGURE 6 – OUTPUT CAPACITANCE

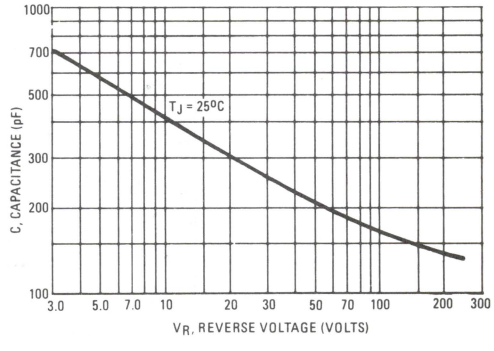

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	20 Ω, 5 V, 0, PW Varied to Attain I_C = 100 mA	Adjust R1 to obtain a forced h_{FE} = ; Pulse Width; Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 25 μs); MC9601; Duty Cycle ≤ 3%	TURN-ON TIME; I_{B1} adjusted to obtain the forced h_{FE} desired; TURN-OFF TIME; Use inductive switching circuit as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V	Q1 2N2907 Q5 MJE15028 Q2 2N2222 D1 1N914 Q3 2N3762 D2 1N914 Q4 MJE15029 D3 1N914	V_{CC} = 175 V R_L = 5.6 Ω Pulse Width = 25 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S = 0.1 Ω, See Above for Detailed Conditions	OUTPUT WAVEFORMS: I_C, I_{CM}, t_1 Clamped, V_{CE}, V_{CEM}, V_{clamp}, Time, t_1, t_2	t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT: TUT, R_L, V_{CC}

*Adjust – V such that $V_{BE(off)}$ = 5 V except as required for RBSOA (Figure 14).

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

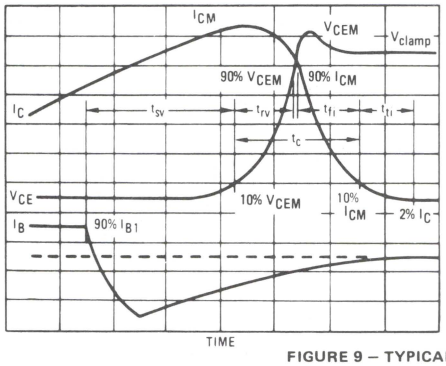

FIGURE 8 – TYPICAL PEAK REVERSE BASE CURRENT

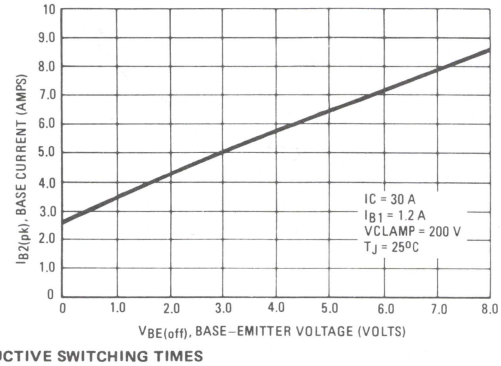

FIGURE 9 – TYPICAL INDUCTIVE SWITCHING TIMES

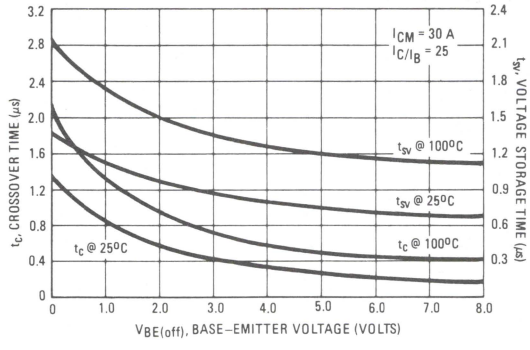

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}

t_{rv} = Voltage Rise Time, 10 – 90% V_{CEM}

t_{fi} = Current Fall Time, 90 – 10% I_{CM}

t_{ti} = Current Tail, 10 – 2% I_{CM}

t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \cong t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING

FIGURE 10 – TYPICAL TURN-ON SWITCHING TIMES

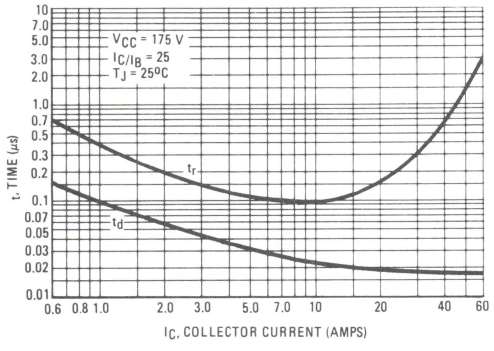

FIGURE 11 – TYPICAL TURN-OFF SWITCHING TIMES

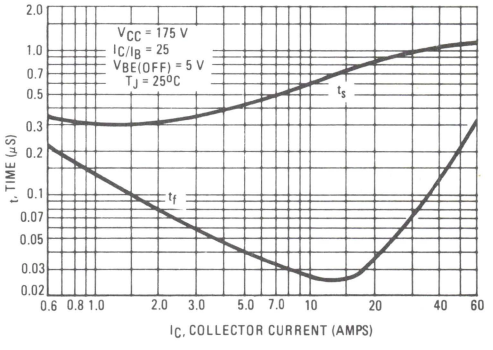

3

FIGURE 12 – THERMAL RESPONSE

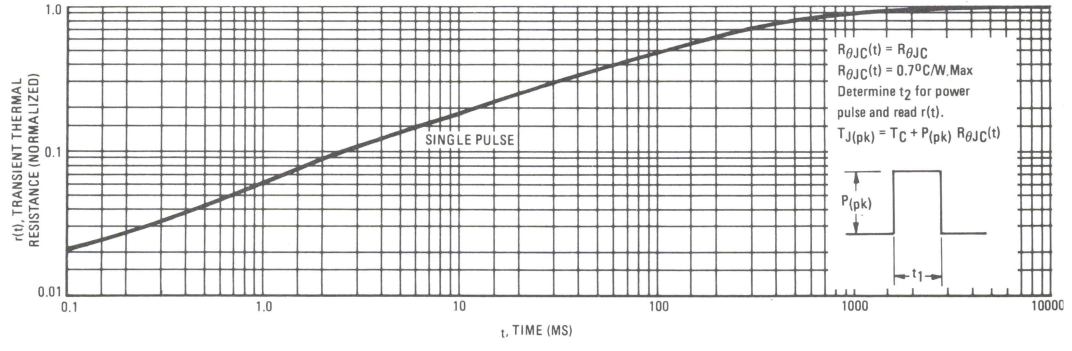

The Safe Operating Area figures shown in Figures 13 and 14 are specified for these devices under the test conditions shown.

FIGURE 13 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

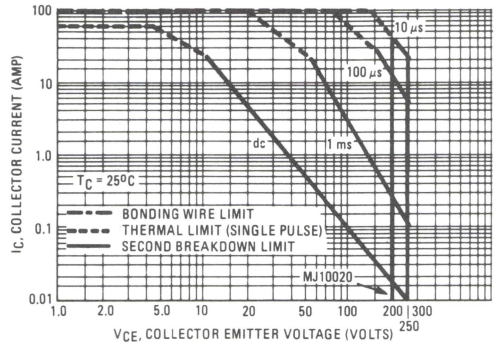

FIGURE 14 – MAXIMUM RBSOA, REVERSE BIAS SAFE OPERATING AREA

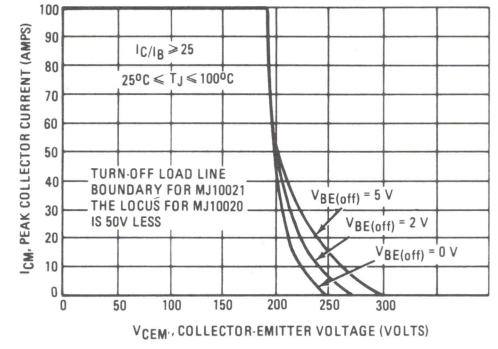

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq$ 25° C. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 13 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 12. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives the RBSOA characteristics.

FIGURE 15 – POWER DERATING

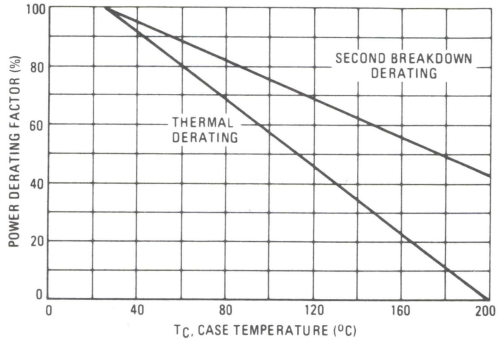

MJ10022
MJ10023

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS WITH BASE-EMITTER SPEEDUP DIODE

The MJ10022 and MJ10023 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Fast Turn-Off Times
  150 ns Inductive Fall Time @ 25°C (Typ)
  300 ns Inductive Storage Time @ 25°C (Typ)
- Operating Temperature Range -65 to +200°C
- 100°C Performance Specified for:
  Reversed Biased SOA with Inductive Loads
  Switching Times with Inductive Loads
  Saturation Voltages
  Leakage Currents



40 AMPERE

NPN SILICON POWER DARLINGTON TRANSISTORS

350 and 400 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ10022	MJ10023	Unit
Collector-Emitter Voltage	V_{CEO}	350	400	Vdc
Collector-Emitter Voltage	V_{CEV}	450	600	Vdc
Emitter Base Voltage	V_{EB}	8.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	40 80		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	20 40		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 143 1.43		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

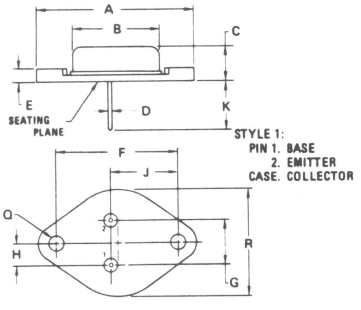

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ10022 MJ10023	$V_{CEO(sus)}$	350 400	— —	— —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 — —	 — —	 0.25 5.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	—	—	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)		I_{EBO}	—	—	175	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$		See Figure 13		
Clamped Inductive SOA with Base Reverse Biased		RBSOA		See Figure 14		
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 10 Adc, V_{CE} = 5.0 V)		h_{FE}	50	—	600	—
Collector-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 1.0 Adc) I_C = 40 Adc, I_B = 5.0 Adc) (I_C = 20 Adc, I_B = 1.0 Adc, T_C = 100°C)		$V_{CE(sat)}$	 — — —	 — — —	 2.2 5.0 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 1.2 Adc) (I_C = 20 Adc, I_B = 1.2 Adc, T_C = 100°C)		$V_{BE(sat)}$	 — —	 — —	 2.5 2.5	Vdc
Diode Forward Voltage (I_F = 20 Adc)		V_f	—	2.5	5.0	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	150	—	600	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 20 A, I_{B1} = 1.0 Adc, $V_{BE(off)}$ = 5.0 V, t_p = 50 μs, Duty Cycle ⩽ 2.0%)	t_d	—	0.03	0.2	μs
Rise Time		t_r	—	0.4	1.2	μs
Storage Time		t_s	—	0.9	2.5	μs
Fall Time		t_f	—	0.3	0.9	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_{CM} = 20 A, V_{CEM} = 250 V, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 V, T_C = 100°C)	t_{sv}	—	1.9	4.4	μs
Crossover Time		t_c	—	0.6	2.0	μs
Fall Time		t_{fi}	—	0.3	—	μs
Storage Time	(I_{CM} = 20 A, V_{CEM} = 250 V, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 V, T_C = 25°C)	t_{sv}	—	1.0	—	μs
Crossover Time		t_c	—	0.3	—	μs
Fall Time		t_{fi}	—	0.15	—	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ⩽ 2%

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

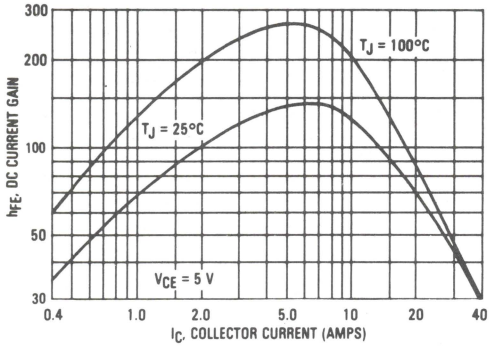

FIGURE 2 — COLLECTOR SATURATION REGION

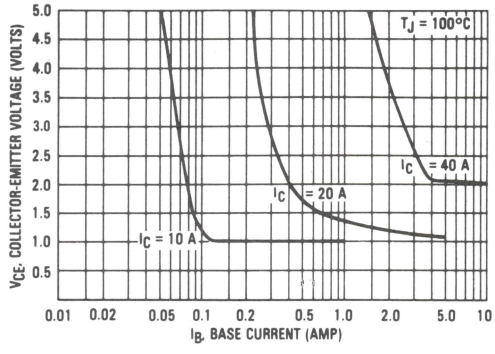

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

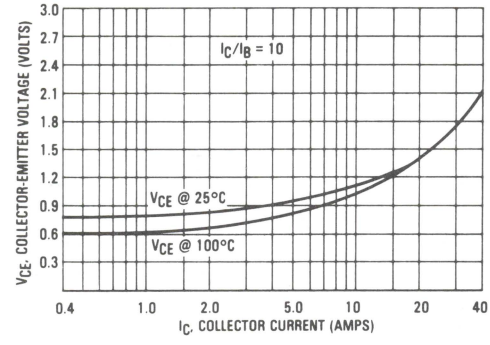

FIGURE 4 — BASE-EMITTER SATURATION VOLTAGE

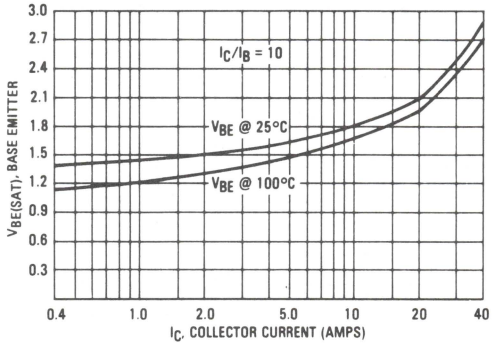

FIGURE 5 — COLLECTOR CUTOFF REGION

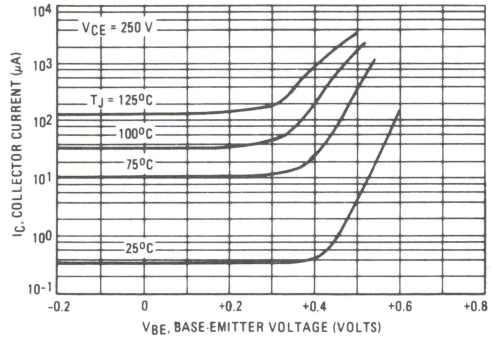

FIGURE 6 — C_{ob}, OUTPUT CAPACITANCE

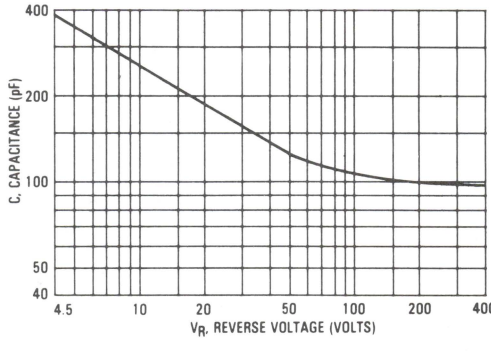

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	20 Ω, 5 V, PW Varied to Attain I_C = 100 mA	Adjust R1 to obtain a forced h_{FE} = 20; Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 25 μs); Duty Cycle ≤ 3%	TURN-ON TIME: I_{B1} adjusted to obtain the forced h_{FE} desired. TURN-OFF TIME: Use inductive switching circuit as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V, R_{coil} = 0.7 Ω, V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH, R_{coil} = 0.05 Ω, V_{CC} = 20 V; Q1 2N2907, Q2 2N2222, Q3 2N3762, Q4 MJE15029, Q5 MJE15028, D1 1N914, D2 1N914, D3 1N914	V_{CC} = 250 V, R_L = 12.5 Ω, Pulse Width = 25 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S = 0.1 Ω, See Above for Detailed Conditions	OUTPUT WAVEFORMS: t_1 Adjusted to Obtain I_C; $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$; $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$; Test Equipment: Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT: TUT, R_L, V_{CC}

*Adjust – V such that $V_{BE(off)}$ = 5 V except as required for RBSOA (Figure 14).

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

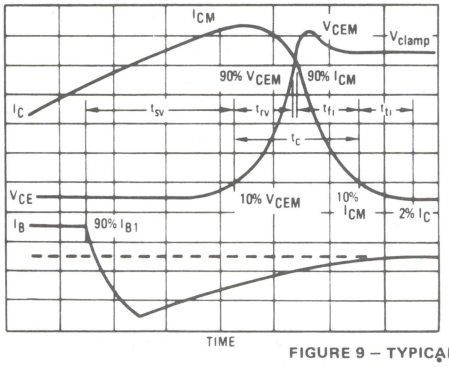

FIGURE 8 — TYPICAL PEAK REVERSE BASE CURRENT

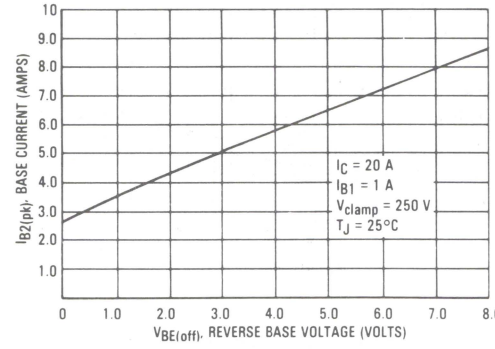

FIGURE 9 – TYPICAL INDUCTIVE SWITCHING TIMES

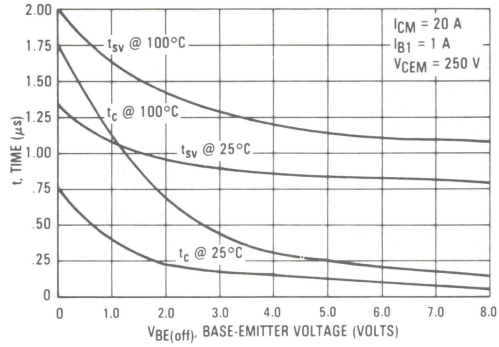

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}
t_{rv} = Voltage Rise Time, 10—90% V_{CEM}
t_{fi} = Current Fall Time, 90—10% I_{CM}
t_{ti} = Current Tail, 10—2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is shown in Figure 7 to aid on the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \cong t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user orinented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

FIGURE 10 — TYPICAL TURN-ON SWITCHING TIMES

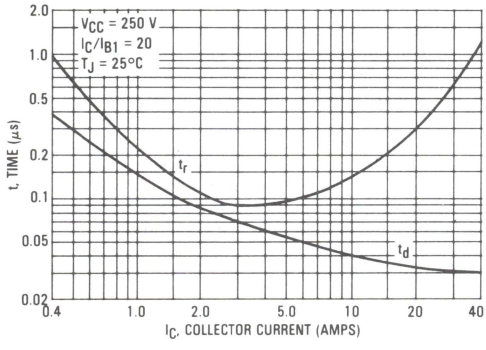

FIGURE 11 — TYPICAL TURN-OFF SWITCHING TIMES

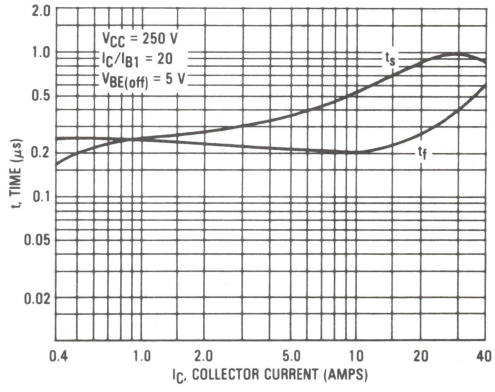

FIGURE 12 — THERMAL RESPONSE

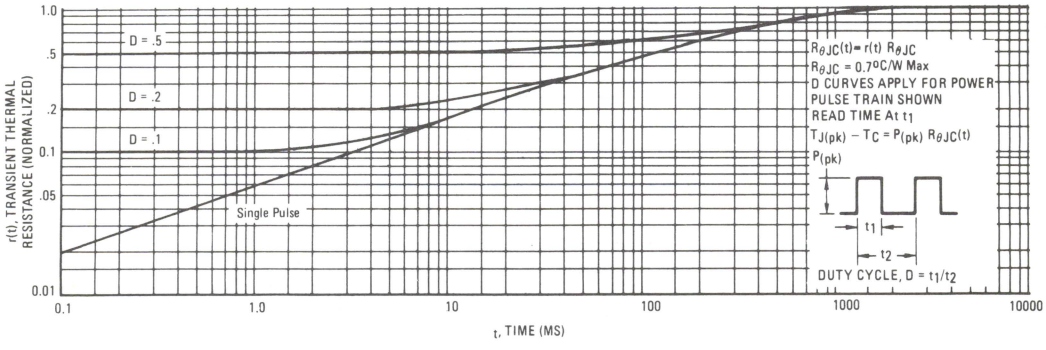

3

The Safe Operating Area figures shown in Figures 13 and 14 are specified for these devices under the test conditions shown.

FIGURE 13 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

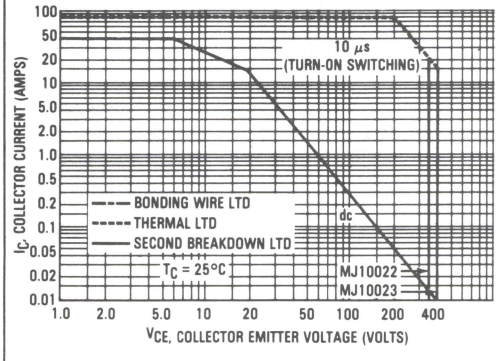

FIGURE 14 – MAXIMUM RBSOA, REVERSE BIAS SAFE OPERATING AREA

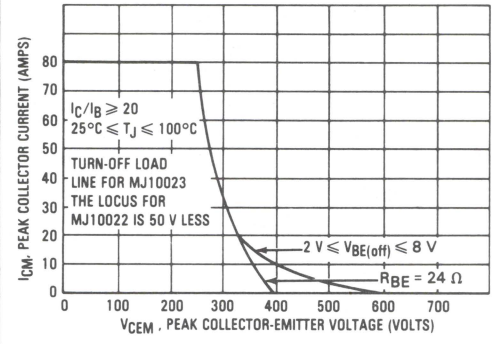

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq$ 25°C. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 13 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 12. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives the RBSOA characteristics.

FIGURE 15 – POWER DERATING

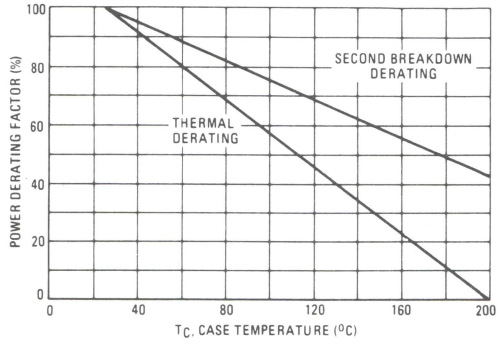

MJ10024
MJ10025

Designer's Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER DARLINGTON TRANSISTORS
WITH BASE-EMITTER SPEEDUP DIODE

The MJ10024 and MJ10025 Darlington transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications such as:

- AC and DC Motor Controls
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Operating Temperature Range -65 to +200°C
- 100°C Performance Specified for:
  - Reversed Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents



20 AMPERE

NPN SILICON POWER DARLINGTON TRANSISTORS

750 and 850 VOLTS
250 WATTS

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ10024	MJ10025	Unit
Collector-Emitter Voltage	V_{CEO}	750	850	Vdc
Collector-Emitter Voltage	V_{CEV}	1000	1200	Vdc
Emitter Base Voltage	V_{EB}	8.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	20 40		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	10 20		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 143 1.43		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ∅.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ∅.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ10024 MJ10025	$V_{CEO(sus)}$	750 850	— —	— —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 — —	 — —	 0.25 5.0	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	—	—	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 2.0 V, I_C = 0)		I_{EBO}	—	—	175	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$		See Figure 14		
Clamped Inductive SOA with base reverse biased		RBSOA		See Figure 15		
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 V)		h_{FE}	50	—	600	—
Collector-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc) I_C = 20 Adc, I_B = 5.0 Adc) (I_C = 10 Adc, I_B = 1.0 Adc, T_C = 100°C)		$V_{CE(sat)}$	 — — —	 — — —	 2.2 5.0 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 10 Adc, I_B = 1.0 Adc, T_C = 100°C)		$V_{BE(sat)}$	 — —	 — —	 2.5 2.5	Vdc
Diode Forward Voltage (I_F = 10 Adc)		V_f	—	1.25	4.0	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	110	—	500	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time Rise Time Storage Time Fall Time	(V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 1.0 Adc, $V_{BE(off)}$ = 5.0 V, t_p = 50 μs, Duty Cycle ≤ 2.0%)	t_d t_r t_s t_f	— — — —	0.03 0.6 2.0 0.6	0.3 1.8 5.0 1.8	μs
Inductive Load, Clamped (Table 1)						
Storage Time Crossover Time	(I_{CM} = 10 A, V_{CEM} = 250 V, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 V, T_C = 100°C)	t_{sv} t_c	— —	2.9 1.0	7.0 3.3	μs
Storage Time Crossover Time	(I_{CM} = 10 A, V_{CEM} = 250 V, I_{B1} = 1.0 A, R_{BE} = 24 Ω, T_C = 100°C	t_{sv} t_c	— —	21 9.0	50 25	μs
Storage Time Crossover Time	(I_{CM} = 10 A, V_{CEM} = 250 V, $V_{BE(off)}$ = 5.0 V, I_{B1} Baker Clamped [1 Ampere Source], T_C = 100°C)	t_{sv} t_c	— —	2.2 0.5	— —	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%

FIGURE 1 — DC CURRENT GAIN

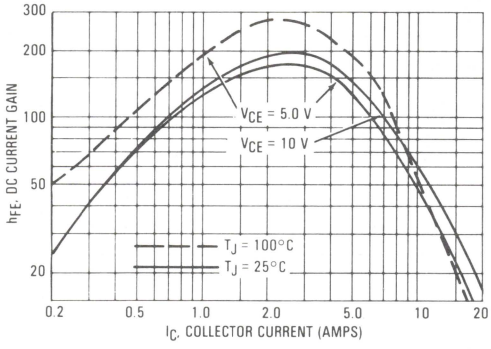

FIGURE 2 — COLLECTOR SATURATION REGION

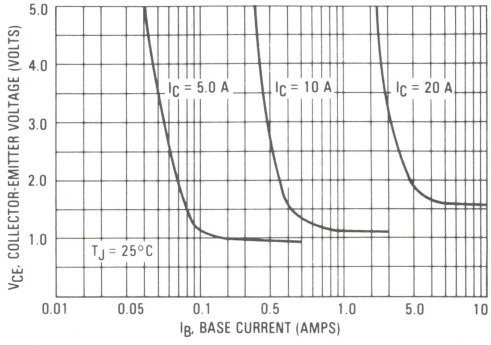

FIGURE 3 — COLLECTOR SATURATION VOLTAGE

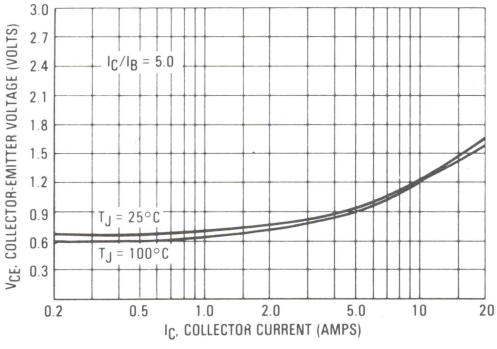

FIGURE 4 — BASE-EMITTER SATURATION VOLTAGE

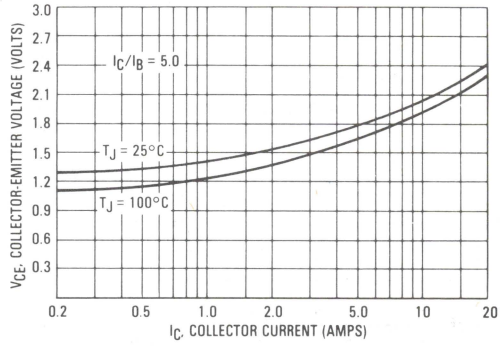

FIGURE 5 — COLLECTOR CUTOFF REGION

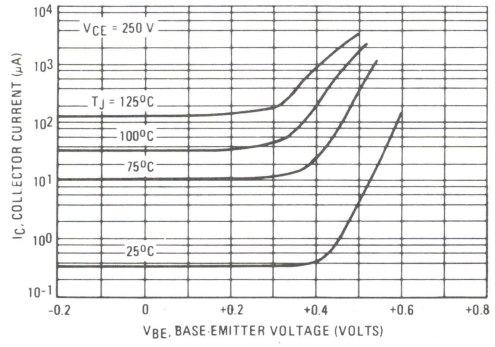

FIGURE 6 — C_{ob}, OUTPUT CAPACITANCE

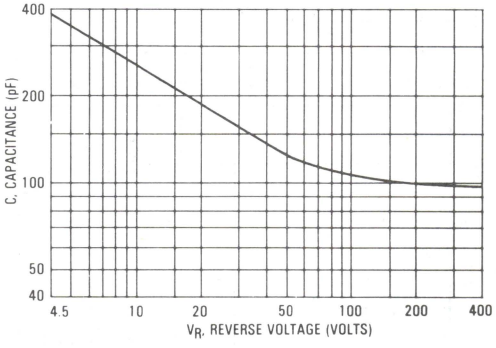

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	20 Ω, 5 V, 0, PW Varied to Attain I_C = 100 mA	Adjust R1 to obtain a forced h_{FE} = 10; Pulse Width; Pulse Width adjusted to obtain specified I_C (Resistive Switching, Pulse Width = 25 μs); MC9601; Duty Cycle ≤ 3%	TURN ON TIME: I_{B1} adjusted to obtain the forced h_{FE} desired. TURN-OFF TIME: Use inductive switching circuit as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V, R_{coil} = 0.7 Ω, V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 180 μH, R_{coil} = 0.05 Ω, V_{CC} = 20 V; Q1 2N2907, Q2 2N2222, Q3 2N3762, Q4 MJE15029, Q5 MJE15028, D1 1N914, D2 1N914, D3 1N914	V_{CC} = 250 V, R_L = 25 Ω, Pulse Width = 25 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT: TUT, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S = 0.1 Ω, See Above for Detailed Conditions	OUTPUT WAVEFORMS: t_1 Adjusted to Obtain I_C; $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$; $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$; Test Equipment: Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT: TUT, R_L, V_{CC}

*Adjust – V such that $V_{BE(off)}$ = 5 V except as required for RBSOA (Figure 14).

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

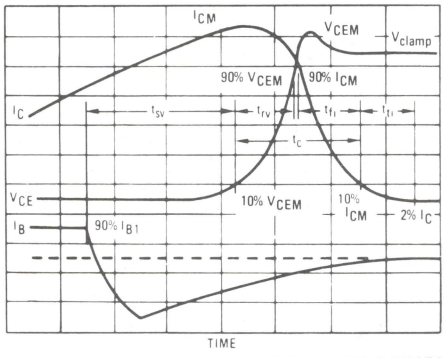

FIGURE 8 — TYPICAL PEAK REVERSE BASE CURRENT

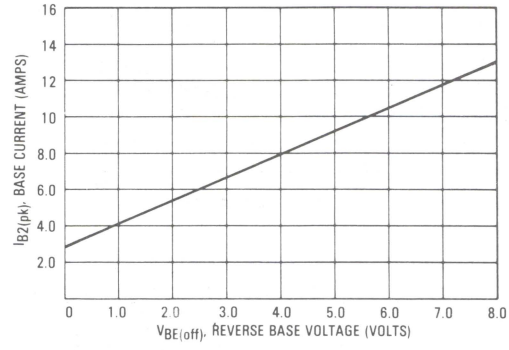

FIGURE 9 — TYPICAL INDUCTIVE SWITCHING TIMES

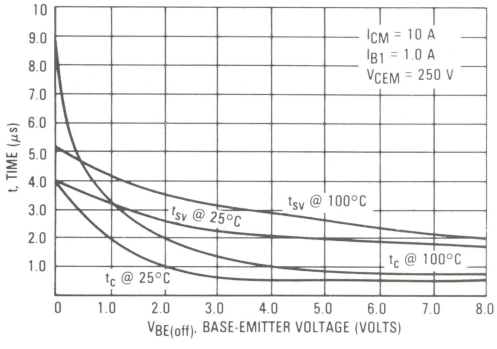

FIGURE 10 — TYPICAL INDUCTIVE SWITCHING TIMES

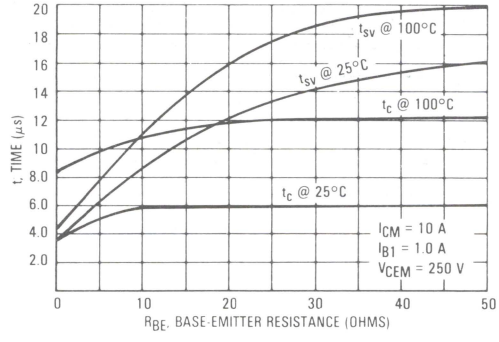

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}
t_{rv} = Voltage Rise Time, 10—90% V_{CEM}
t_{fi} = Current Fall Time, 90—10% I_{CM}
t_{ti} = Current Tail, 10—2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is shown in Figure 7 to aid on the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C(t_c) f$$

In general, $t_{rv} + t_{fi} \cong t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user orinented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

FIGURE 11 — TYPICAL TURN-ON SWITCHING TIMES

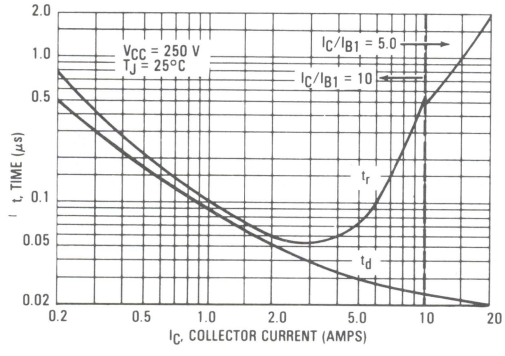

FIGURE 12 — TYPICAL TURN-OFF SWITCHING TIMES

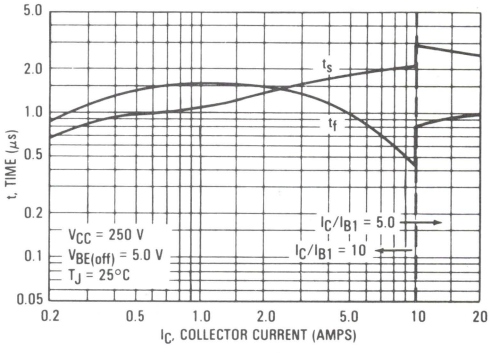

FIGURE 13 — THERMAL RESPONSE

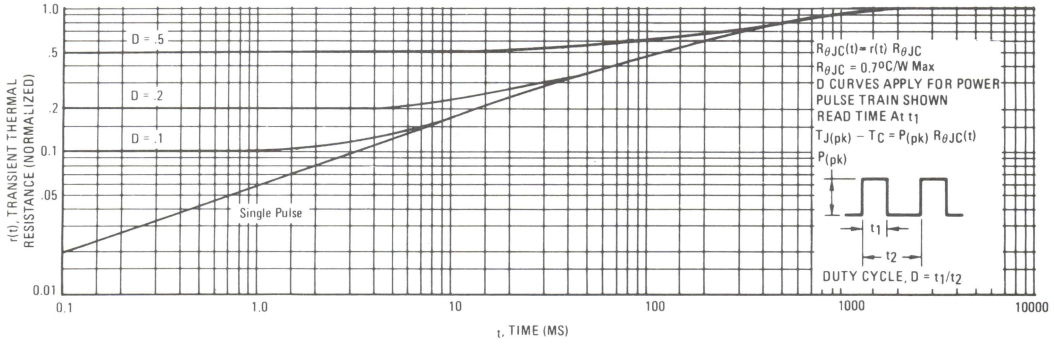

The Safe Operating Area figures shown in Figures 14 and 15 are specified for these devices under the test conditions shown.

FIGURE 14 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

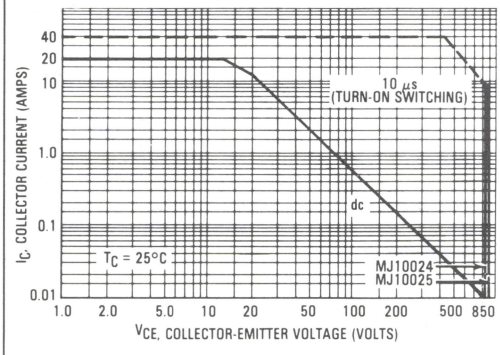

FIGURE 15 — MAXIMUM RBSOA, REVERSE BIAS SAFE OPERATING AREA

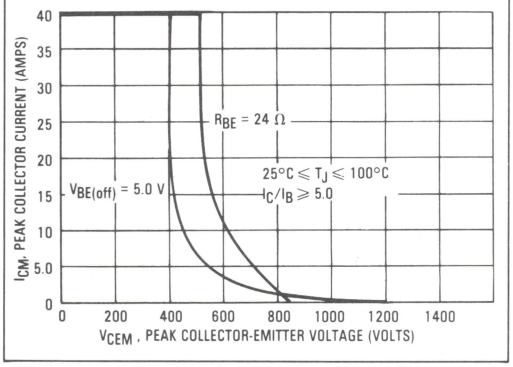

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 14 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 14 may be found at any case temperature by using the appropriate curve on Figure 16.

$T_{J(pk)}$ may be calculated from the data in Figure 13. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 15 gives the RBSOA characteristics.

3

FIGURE 16 — POWER DERATING

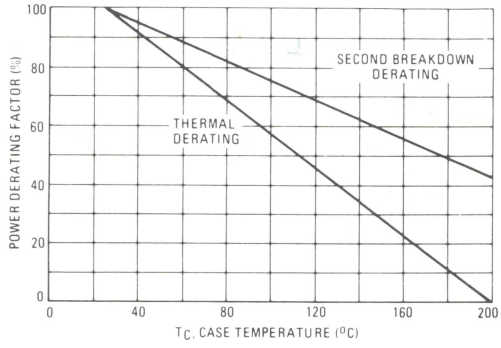

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ10041
MJ10044
MJ10047

Designer's Data Sheet

25 kVA ENERGY MANAGEMENT SERIES SWITCHMODE DARLINGTON TRANSISTORS 25, 50 and 100 Ampere Operating Current

These Darlington transistors are designed for industrial service under practical operating environments requiring fast switching speed for highly efficient systems operating at high frequency such as inverters, PWM controllers and other high frequency systems operating from 120, 230 and 460 V lines.







*Emitter-Collector Diode is a fast recovery high power diode.
Note: The 8 ohm resistor is not included in the MJ10044 and MJ10047.

MAXIMUM RATINGS

Mechanical Ratings		
Rating	**Value**	**Unit**
Mounting Torque (To heat sink with 6-32 Screw) (Note 1)	8.0	in.-lb
Lead Torque (Lead to bus with 5 mm Screw) (Note 2)	20	in.-lb
Per Unit Weight	41	grams

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case, $R_{\theta JC}$	0.5	°C/W

Mica Insulators available as separate items.
0.003" thick. Motorola Part Number 14CSB12387B003.

Notes:
1. A Belleville washer of 0.281" O.D., 0.138" I.D., 0.013" thick and 43 pounds flat is recommended.
2. The maximum penetration of the screw should be limited to 0.50".
3. To adapt the collector and emitter terminals to quick connect terminals, AMP 250 Series Faston tab P/N 61499-1 is suggested.
4. The mounting holes of this package are compatible with TO-204 (formerly TO-3) mounting holes.

25, 50, and 100 AMPERE
NPN SILICON
POWER DARLINGTON
TRANSISTOR
250, 450 and 850 VOLTS
250 WATTS

Designer's Data for "Worst-Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst-case" design.

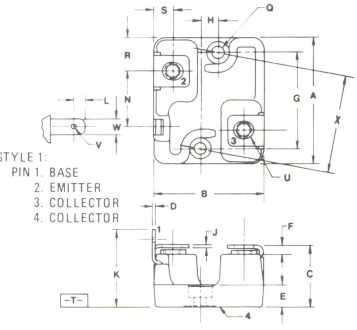

NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS BOTH A DATUM SURFACE AND SEATING PLANE.
2. POSITIONAL TOLERANCE FOR MOUNTING HOLES: ⌖ Ø 0.25 (0.010) Ⓜ | T | A Ⓜ | B Ⓜ
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.
4. CONTROLLING DIMENSION: INCH EXCEPT FOR METRICALLY THREADED INSERTS.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	39.11	40.13	1.540	1.580
B	33.93	34.95	1.336	1.376
C	–	20.32	–	0.800
D	0.68	0.83	0.027	0.033
E	8.30	8.81	0.327	0.347
F	–	4.44	–	0.175
G	29.67 BSC		1.168 BSC	
H	5.08 BSC		0.200 BSC	
J	0.93	1.09	0.037	0.043
K	—	25.40	–	1.000
L	2.92	3.30	0.115	0.130
N	17.14	17.39	0.675	0.685
Q	3.73	3.88	0.147	0.153
R	10.41	10.79	0.410	0.425
S	5.84	6.35	0.230	0.250
U	M5 .8 (METRIC THRD)			
V	1.27	1.52	0.050	0.060
W	4.69	4.85	0.185	0.191
X	30.15 BSC		1.187 BSC	

CASE 353-01

3

MAXIMUM RATINGS (Continued) (T_C = 25°C unless otherwise noted.)

Rating		Symbol	MJ10041	MJ10044	MJ10047	Unit
Collector-Emitter Voltage (I_B = 0)		V_{CEO}	850	450	250	Vdc
Collector-Emitter Voltage (R_{BE} = 10 Ohms)		V_{CER}	900	500	300	Vdc
Collector-Base Voltage		V_{CB}	900	500	300	Vdc
Emitter-Base Voltage		V_{EB}	8.0			Vdc
Collector Current — Operating	(T_C = 115°C) (T_C = 85°C) (T_C = 85°C)	$I_{C(op)}$	25 — —	— 50 —	— — 100*	A
Collector Current — Continuous — Peak Repetitive — Peak Nonrepetitive		I_C	37.5 75 125	75 150 250	100 300 500	A
Base Current — Continuous — Peak Nonrepetitive		I_B	25 50			A
Total Device Dissipation Derate above T_C = 25°C For 1-minute overload		P_D	250 2.0 333			Watts W/°C Watts
Operating Junction and Storage Temperature Range For 1-minute overload		T_J, T_{stg}	−55 to +150 −55 to 200			°C

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 125 mAdc)	MJ10041 MJ10044 MJ10047	$V_{CEO(sus)}$	 850 450 250	 — — —	Vdc
Collector Cutoff Current (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 — —	 2.0 10	mA
Collector Cutoff Current (V_{CE} = Rated V_{CER}, R_{BE} = 10 Ω, T_C = 100°C)		I_{CER}	—	10	mA
Emitter Cutoff Current (V_{EB} = 4.0 Vdc, I_C = 0)	MJ10041 MJ10044 MJ10047	I_{EBO}	 — —	 500 2.5	mA
SAFE OPERATING AREA					
Second Breakdown Collector Current with Base Forward-Biased		FBSOA	See Figures 32, 34 & 36		
Clamped Inductive SOA with Base Reverse-Biased		RBSOA	See Figures 33, 35 & 37		
Overload Safe Operating Area		OLSOA	See Figures 38, 39, 40, 41, 42 & 43		
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	—	2000	pF

(1) Pulse Test. Pulse width of 300 μs, duty cycle ≤ 2.0%.

*This rating is with a 50% duty cycle, and is limited by power dissipation. Higher operating currents are allowable at lower duty cycles.

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS (1)				
MJ10041				
DC Current Gain	h_{FE}			
(I_C = 25 Adc, V_{CE} = 5.0 Vdc)		25	—	
(I_C = 25 Adc, V_{CE} = 10 Vdc)		40	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.0 Adc)		—	2.0	
(I_C = 37.5 Adc, I_B = 7.5 Adc)		—	5.0	
(I_C = 25 Adc, I_B = 2.0 Adc, T_C = 100°C)		—	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.0 Adc)		—	3.0	
(I_C = 25 Adc, I_B = 2.0 Adc, T_C = 100°C)		—	3.0	
MJ10044				
DC Current Gain	h_{FE}			
(I_C = 50 Adc, V_{CE} = 5.0 Vdc)		50	—	
(I_C = 50 Adc, V_{CE} = 10 Vdc)		60	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 50 Adc, I_B = 1.67 Adc)		—	2.0	
(I_C = 75 Adc, I_B = 6.0 Adc)		—	3.3	
(I_C = 50 Adc, I_B = 1.67 Adc, T_C = 100°C)		—	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
(I_C = 50 Adc, I_B = 1.67 Adc)		—	3.0	
(I_C = 50 Adc, I_B = 1.67 Adc, T_C = 100°C)		—	3.0	
MJ10047				
DC Current Gain	h_{FE}			
(I_C = 100 Adc, V_{CE} = 5.0 Vdc)		75	—	
(I_C = 100 Adc, V_{CE} = 10 Vdc)		90	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 100 Adc, I_B = 2.75 Adc)		—	2.0	
(I_C = 100 Adc, I_B = 2.75 Adc, T_C = 100°C)		—	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
(I_C = 100 Adc, I_B = 2.75 Adc)		—	3.5	
(I_C = 100 Adc, I_B = 2.75 Adc, T_C = 100°C)		—	3.5	

(1) Pulse Test: Pulse width of 300 μs, duty cycle ≤ 2.0%.

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted.)

Characteristic			Symbol	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS							
MJ10041							
Resistive Load							
Delay Time	(V_{CC} = 300 Vdc, I_C = 25 A, I_{B1} = 2.5 A, $V_{BE(OFF)}$ = 5.0 V, t_p = 50 μs, Duty Cycle ≤ 2.0%)		t_d	—	0.03	0.25	μs
Rise Time			t_r	—	1.2	5.0	
Storage Time			t_s	—	3.3	10	
Fall Time			t_f	—	1.5	5.0	
Inductive Load, Clamped							
Storage Time	(I_{CM} = 25 A, V_{CEM} = 300 V, $V_{BE(OFF)}$ = 5.0 V, I_{B1} = 2.5 A)	T_J = 100°C	t_{sv}	—	5.0	15	μs
Crossover Time			t_c	—	3.0	10	
Storage Time		T_J = 25°C	t_{sv}	—	3.5	10	
Crossover Time			t_c	—	1.5	5.0	

3

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted.)

Characteristic			Symbol	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS							
MJ10044							
Resistive Load							
Delay Time	(V_{CC} = 250 Vdc, I_C = 50 A, I_{B1} = 1.67 A, $V_{BE(OFF)}$ = 5.0 V, t_p = 50 μs, Duty Cycle ≤ 2.0%)		t_d	—	0.03	0.25	μs
Rise Time			t_r	—	0.9	3.0	
Storage Time			t_s	—	1.5	3.8	
Fall Time			t_f	—	0.4	1.3	
Inductive Load, Clamped							
Storage Time	(I_{CM} = 50 A, V_{CEM} = 250 V, $V_{BE(OFF)}$ = 5.0 V, I_{B1} = 1.67 A)	T_J = 100°C	t_{sv}	—	2.5	7.5	μs
Crossover Time			t_c	—	0.8	3.0	
Storage Time		T_J = 25°C	t_{sv}	—	1.5	3.8	
Crossover Time			t_c	—	0.5	1.5	
MJ10047							
Resistive Load							
Delay Time	(V_{CC} = 150 Vdc, I_C = 100 A, I_{B1} = 2.75 A, $V_{BE(OFF)}$ = 5.0 V, t_p = 50 μs, Duty Cycle ≤ 2.0%)		t_d	—	0.035	0.25	μs
Rise Time			t_r	—	1.2	4.0	
Storage Time			t_s	—	1.4	4.0	
Fall Time			t_f	—	0.25	1.0	
Inductive Load, Clamped							
Storage Time	(I_{CM} = 100 A, V_{CEM} = 150 V, $V_{BE(OFF)}$ = 5.0 V, I_{B1} = 2.75 A)	T_J = 100°C	t_{sv}	—	2.8	8.0	μs
Crossover Time			t_c	—	1.4	4.0	
Storage Time		T_J = 25°C	t_{sv}	—	2.2	6.5	
Crossover Time			t_c	—	1.0	3.0	
C-E DIODE CHARACTERISTICS							
Power Dissipation (I_B = 0)			P_D	—	—	125	W
Single Cycle Surge Current (60 Hz)			I_{FSM}	—	—	250	Apk
Forward Voltage (1)			V_F				Vdc
(I_F = 25 Adc)		MJ10041		—	2.7	5.0	
(I_F = 50 Adc)		MJ10044		—	1.7	5.0	
(I_F = 100 Adc)		MJ10047		—	2.5	5.0	
Reverse Recovery Time			t_{rr}				μs
(I_F = 25 Adc, di/dt = 25 A/μs)		MJ10041		—	0.2	1.0	
(I_F = 50 Adc, di/dt = 50 A/μs)		MJ10044		—	0.4	1.0	
(I_F = 100 Adc, di/dt = 100 A/μs)		MJ10047		—	0.4	1.0	
Reverse Recovery Current			$I_{RM(rec)}$				A
(I_F = 25 A, di/dt = 25 A/μs)		MJ10041		—	3.5	12.5	
(I_F = 50 A, di/dt = 50 A/μs)		MJ10044		—	10	25	
(I_F = 100 A, di/dt = 100 A/μs)		MJ10047		—	25	50	
Forward Turn-On Time (Compliance Voltage = 250 V)			t_{on}				μs
(I_F = 25 Adc)		MJ10041		—	0.1	1.0	
(I_F = 50 Adc)		MJ10044		—	0.1	0.5	
(I_F = 100 Adc)		MJ10047		—	0.4	1.0	

(1) Pulse Test: Pulse width of 300 μs, duty cycle ≤ 2.0%.

TYPICAL ELECTRICAL CHARACTERISTICS

MJ10041

FIGURE 1 — DC CURRENT GAIN

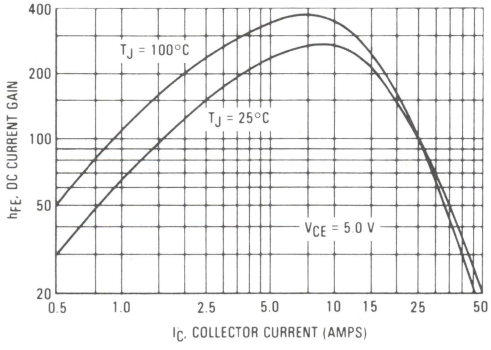

FIGURE 2 — DC CURRENT GAIN

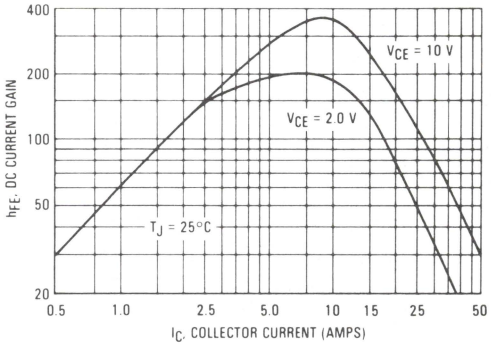

MJ10044

FIGURE 3 — DC CURRENT GAIN

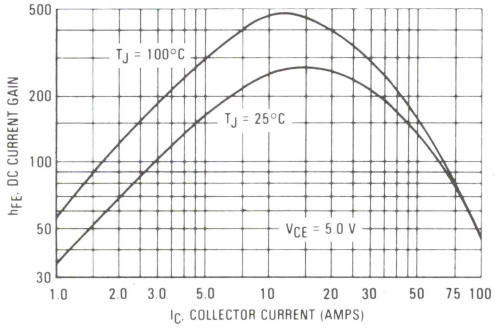

FIGURE 4 — DC CURRENT GAIN

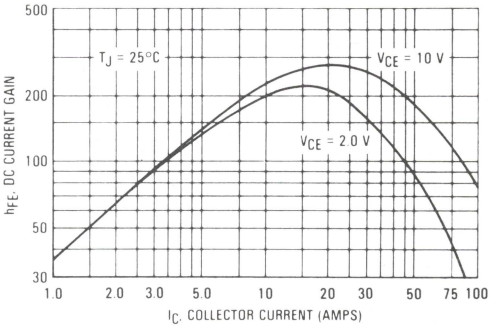

MJ10047

FIGURE 5 — DC CURRENT GAIN

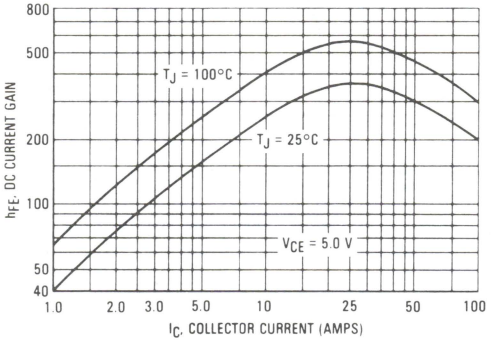

FIGURE 6 — DC CURRENT GAIN

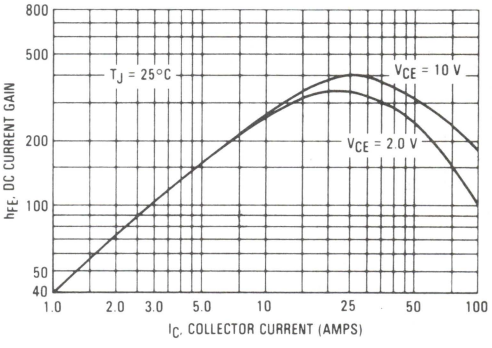

3

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

MJ10041

FIGURE 7 — DC CURRENT GAIN

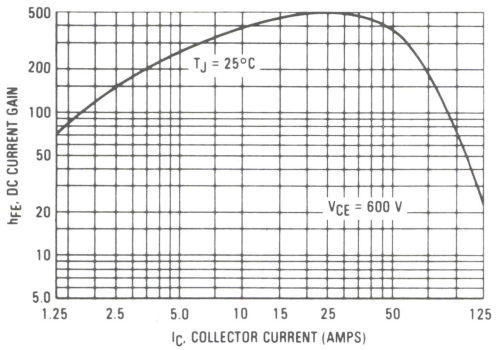

FIGURE 8 — COLLECTOR SATURATION VOLTAGE

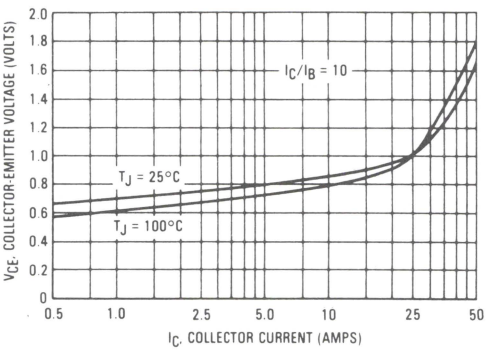

MJ10044

FIGURE 9 — DC CURRENT GAIN

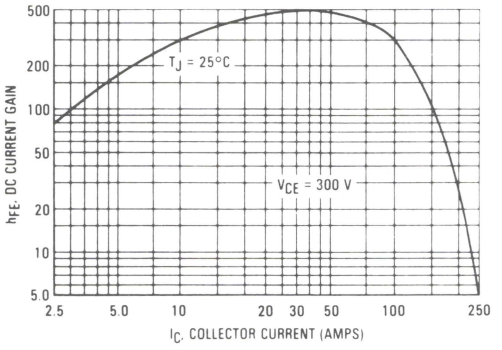

FIGURE 10 — COLLECTOR SATURATION REGION

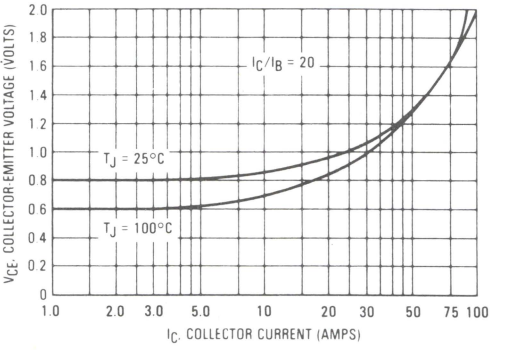

MJ10047

FIGURE 11 — DC CURRENT GAIN

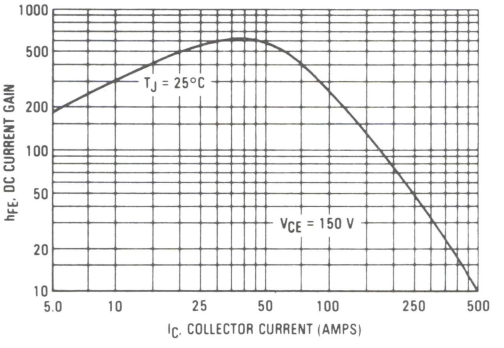

FIGURE 12 — COLLECTOR SATURATION REGION

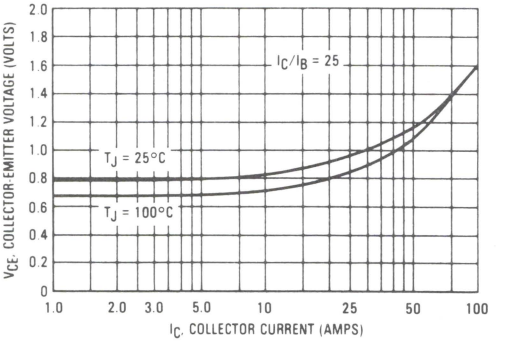

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

MJ10041

FIGURE 13 — BASE-EMITTER SATURATION VOLTAGE

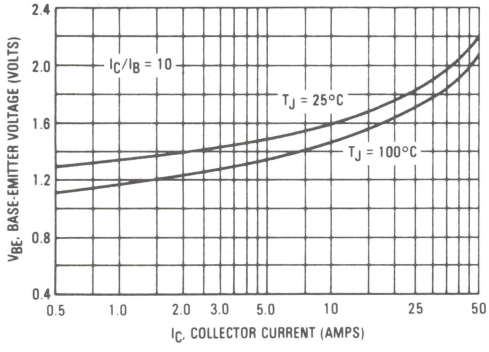

FIGURE 14 — PEAK REVERSE BASE CURRENT

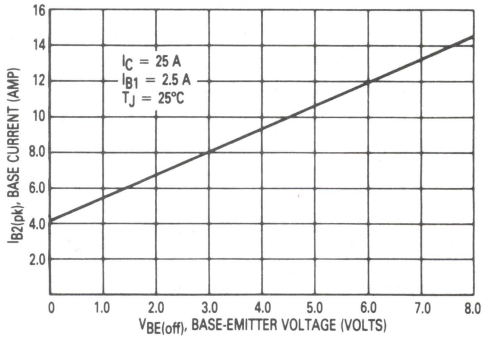

MJ10044

FIGURE 15 — BASE-EMITTER SATURATION VOLTAGE

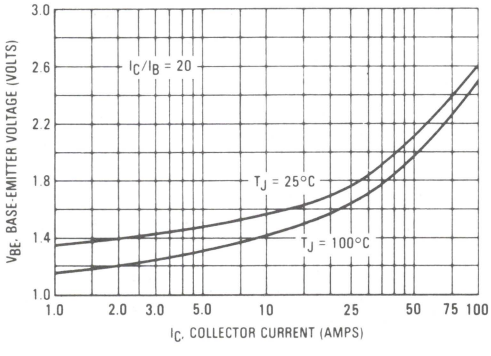

FIGURE 16 — PEAK REVERSE BASE CURRENT

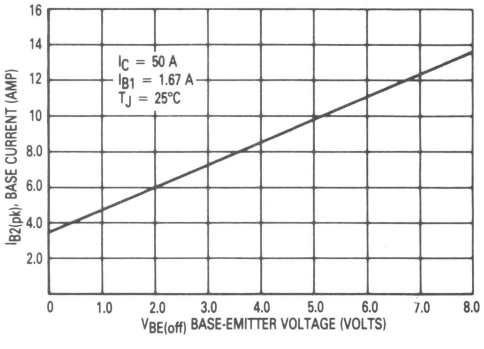

MJ10047

FIGURE 17 — BASE-EMITTER SATURATION VOLTAGE

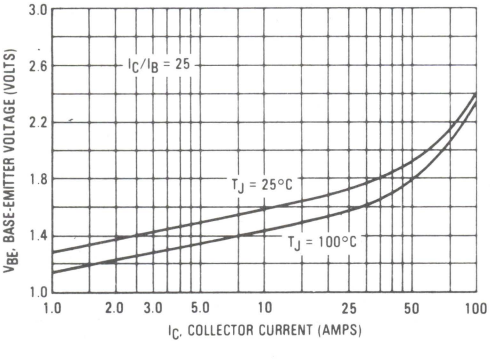

FIGURE 18 — PEAK REVERSE BASE CURRENT

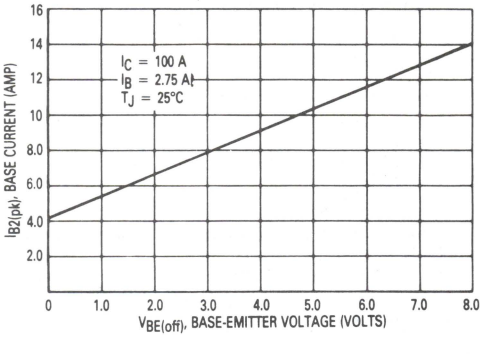

3

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

MJ10041

FIGURE 19 — TYPICAL INDUCTIVE SWITCHING TIMES

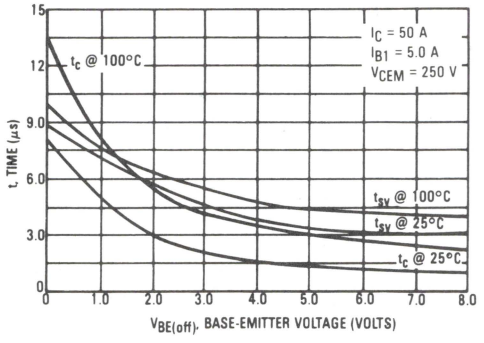

FIGURE 20 — TYPICAL TURN-ON SWITCHING TIMES

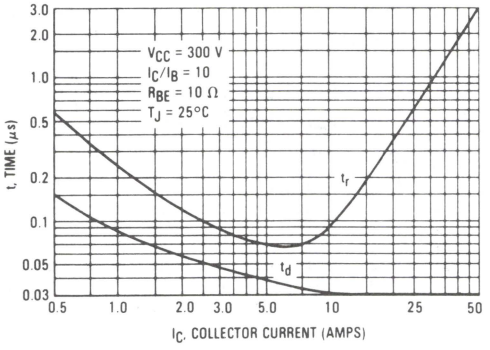

MJ10044

FIGURE 21 — TYPICAL INDUCTIVE SWITCHING TIMES

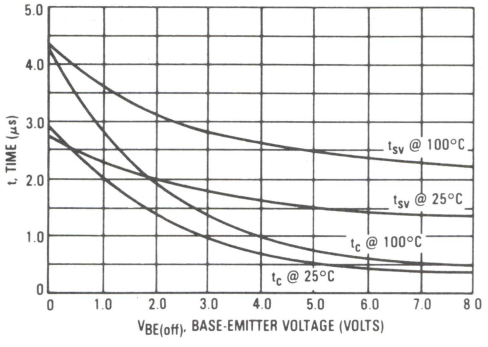

FIGURE 22 — TYPICAL TURN-ON SWITCHING TIMES

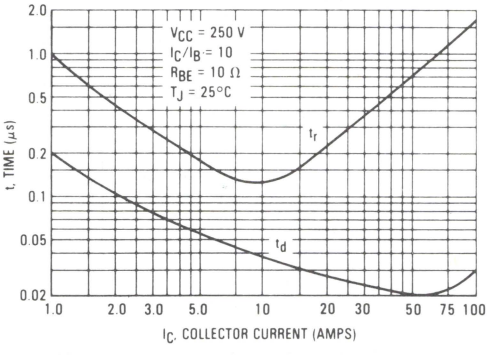

MJ10047

FIGURE 23 — TYPICAL INDUCTIVE SWITCHING TIMES

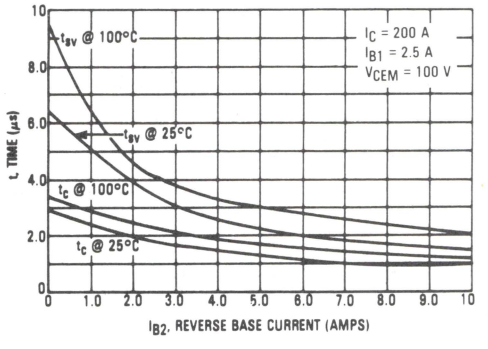

FIGURE 24 — TYPICAL TURN-ON SWITCHING TIMES

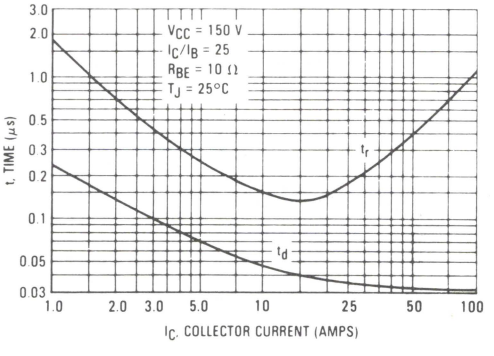

3

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

FIGURE 25 — TYPICAL TURN-OFF SWITCHING TIMES MJ10041

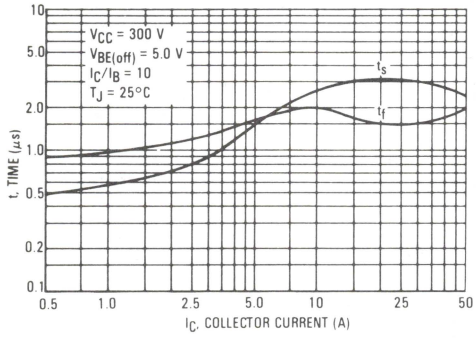

FIGURE 26 — EMITTER-COLLECTOR DIODE FORWARD VOLTAGE

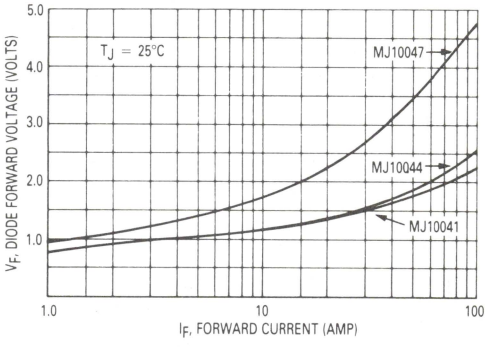

FIGURE 27 — TYPICAL TURN-OFF SWITCHING TIMES MJ10044

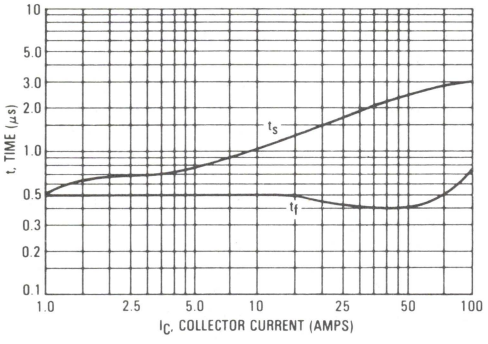

FIGURE 28 — POWER DERATING

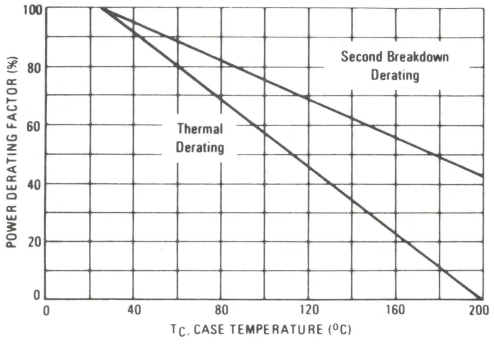

FIGURE 29 — TYPICAL TURN-OFF SWITCHING TIMES MJ10047

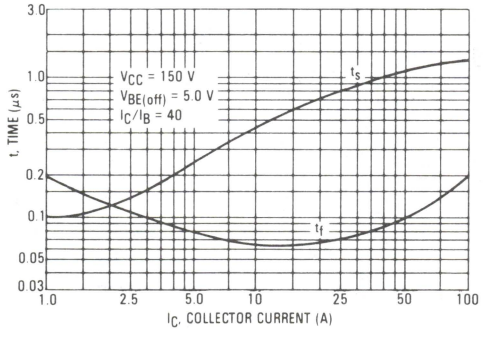

3

TABLE 1 — TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	20 Ω, 5.0 V, 0, 1, 2 PW varied to Attain I_C = 125 mA	DRIVER SCHEMATIC For inductive loads pulse width is adjusted to obtain specified I_C 200 Ω, +30 V, R1 Adjust R1 to obtain desired I_{B1}, 0.1 μF, 5.0 μF, 25 V, 0.01, 0.005, 10 μF, 100 Ω, 50 Ω, 2N3762, MTM12N08, −50 V, 50 Ω, 0.003, 100 Ω, 10 Ω, 1, 2	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN-OFF TIME Use inductive switching circuit as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 10 mH V_{CC} = 10 V R_{coil} = 0.7 Ω V_{clamp} = $V_{CEO(sus)}$	L_{coil} = 5.0 μH V_{CC} = 20 V	V_{CC} = 150 to 300 V Pulse Width = 50 μs Adjust R_L for I_{CM}
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, See Above for Detailed Conditions, V_{clamp}, R_{coil}, L_{coil}, V_{CC}, 2, R_S = 0.1 Ω OUTPUT WAVEFORMS I_C, I_{CM}, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CEM}, V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope — Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, TUT, 2, R_L, V_{CC}

*Adjust — V such that $V_{BE(off)}$ = 5.0 V except as required for RBSOA

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and motor controls, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}
t_{rv} = Voltage Rise Time, 10–90% V_{CEM}
t_{fi} = Current Fall Time, 90–10% I_{CM}
t_{ti} = Current Tail, 10–2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is shown in Figure 30 to aid on the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = \tfrac{1}{2} V_{CC} I_C(t_c) f$$

In general, $t_{rv} + t_{fi} \approx t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user-oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

FIGURE 30 — INDUCTIVE SWITCHING MEASUREMENTS

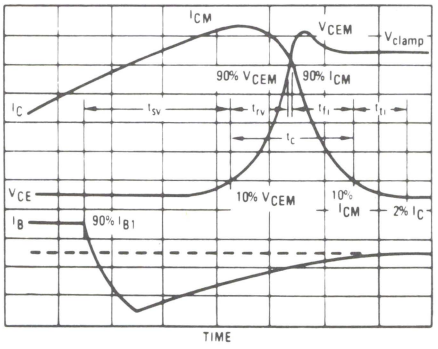

FIGURE 31 — THERMAL RESPONSE

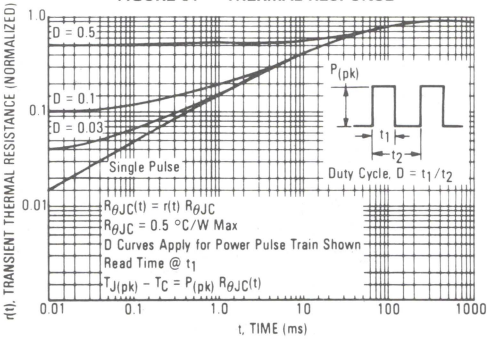

SAFE OPERATING AREA INFORMATION

MJ10041

FIGURE 32 — MAXIMUM RATED FORWARD-BIAS SAFE OPERATING AREA (FBSOA)

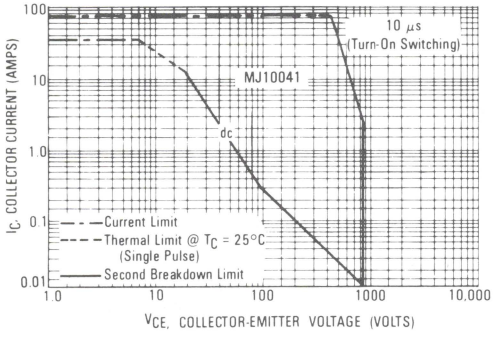

FIGURE 33 — MAXIMUM RATED REVERSE-BIAS SAFE OPERATING AREA (RBSOA)

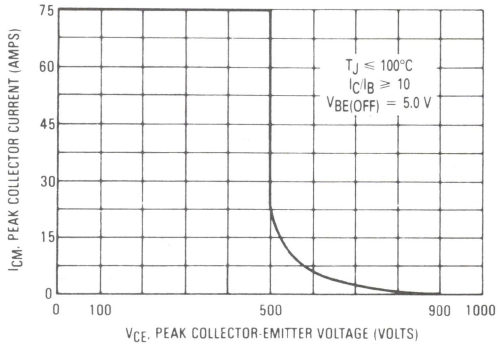

MJ10044

FIGURE 34 — MAXIMUM RATED FORWARD-BIAS SAFE OPERATING AREA (FBSOA)

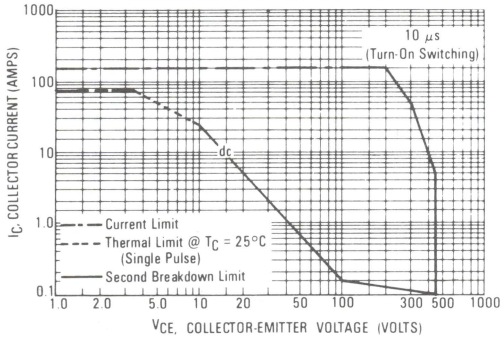

FIGURE 35 — MAXIMUM RATED REVERSE-BIAS SAFE OPERATING AREA (RBSOA)

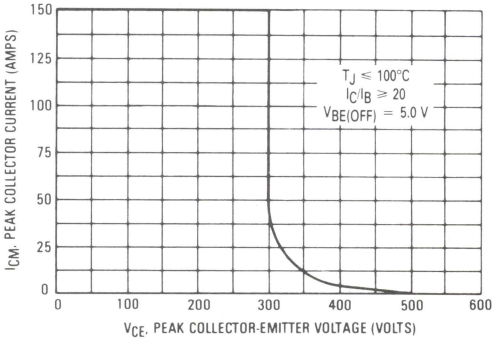

MJ10047

FIGURE 36 — MAXIMUM RATED FORWARD-BIAS SAFE OPERATING AREA (FBSOA)

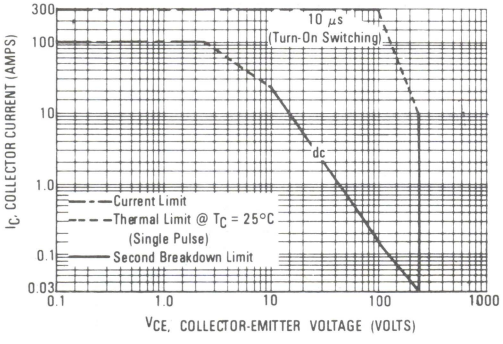

FIGURE 37 — MAXIMUM RATED REVERSE-BIAS SAFE OPERATING AREA (RBSOA)

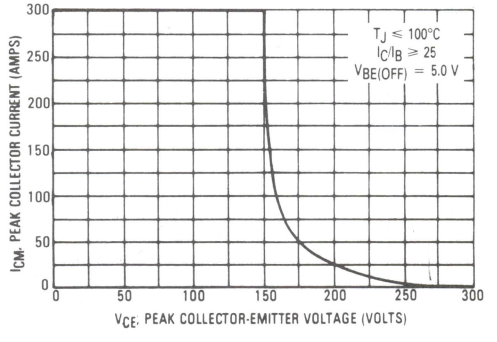

3

OVERLOAD CHARACTERISTICS

MJ10041

FIGURE 38 — OVERLOAD SAFE OPERATING AREA TYPE I (OLSOA)

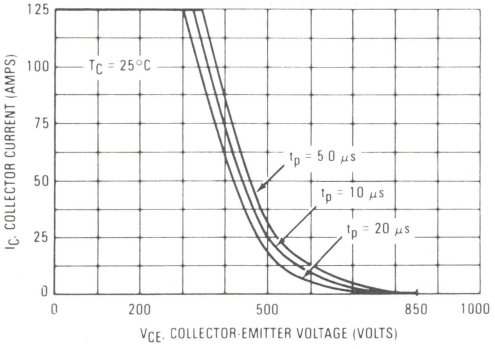

FIGURE 39 — OVERLOAD SAFE OPERATING AREA TYPE II (OLSOA)

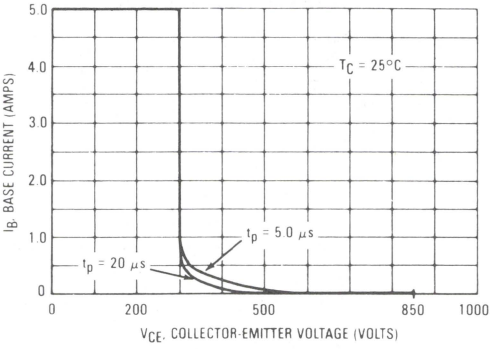

MJ10044

FIGURE 40 — OVERLOAD SAFE OPERATING AREA TYPE I (OLSOA)

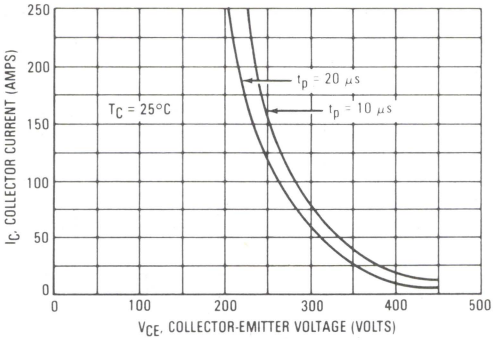

FIGURE 41 — OVERLOAD SAFE OPERATING AREA TYPE II (OLSOA)

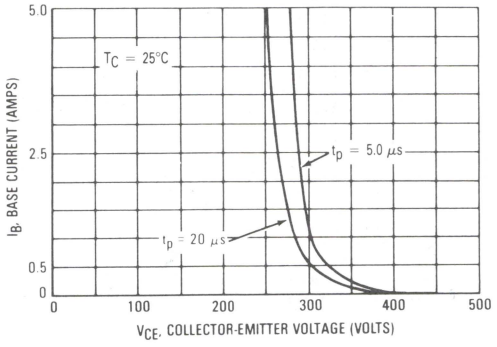

MJ10047

FIGURE 42 — OVERLOAD SAFE OPERATING AREA TYPE I (OLSOA)

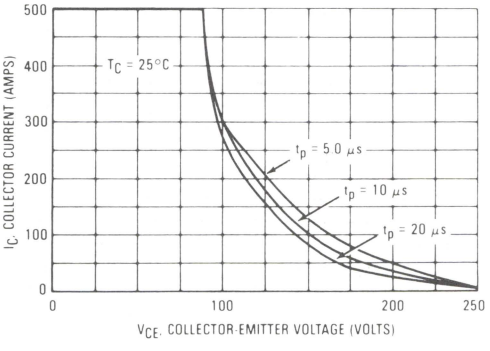

FIGURE 43 — OVERLOAD SAFE OPERATING AREA TYPE II (OLSOA)

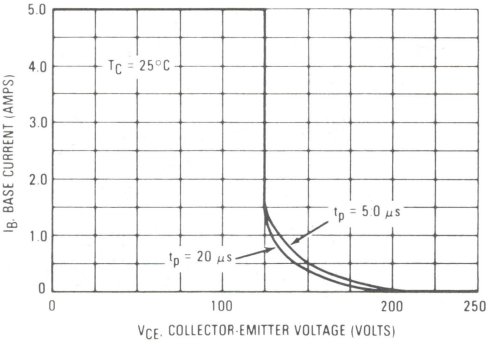

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transitor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 32, 34, and 36 are based on $T_C = 25°C$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on these figures may be found at any case temperature by using the appropriate curve on Figure 28.

$T_{J(pk)}$ may be calculated from the data in Figure 31. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse-biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse-Bias Safe Operating Area and represents the voltage-current condition allowable during reverse-biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figures 33, 35 and 37 give the RBSOA characteristics.

OVERLOAD SAFE OPERATING AREA

The forward-bias safe operating area (FBSOA) specification given in these figures adequately describes transistor capability for normal repetitive operation. When short circuit or fault conditions occur, these transistor specifications are not always adequate. A specification called overload safe operating area (OLSOA) has been developed to describe the transistor's ability to survive under fault conditions. OLSOA is specified under two types of conditions.

TYPE I OLSOA

Type I OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known. Figures 38, 40 and 42 depict the Type I OLSOA rating for these devices. Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, these figures define the maximum time which can be allowed for fault detection and shutdown of base drive.

Type I OLSOA is measured in a common-base circuit (Figure 44) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

TYPE II OLSOA

Type II OLSOA applies when maximum collector current is not limited by circuit design, but is limited only by the gain of the transistor. Therefore, collector current does not appear on the Type II OLSOA curve. This curve defines a safe region of operation from the information that is usually available to the designer.

This information is normally base drive, bus voltage and time. In terms of the OLSOA curve, bus voltage is assumed to be worst-case collector-emitter voltage, and time is defined to be the same pulse width that was described for Type I OLSOA. Using these variables, maximum collector-emitter voltage versus base drive is plotted for several values of pulse width. A safe region of operation is thus determined by the circuit parameters. Type II OLSOA, as shown in Figures 39, 41 and 43 are measured in the circuit shown in Figure 45, and measurement is made as follows: Base current is applied while the collector is open, allowing a highly overdriven saturated condition. Next, a stiff voltage source is applied to the collector. The rising voltage at the collector of the transistor triggers a delay function. At the end of this delay, base drive is removed. The delay time is the variable on the Type II OLSOA curve. The storage time of the transistor is thereby factored into the rating.

There are several additional aspects to be considered regarding OLSOA. The first consideration is that OLSOA is strictly a NON-REPETITIVE rating. It is intended to describe the survivability of the transistor during an accidental overload and is not intended to describe a stress level which can be sustained indefinitely. The number of nonrepetitive faults for which OLSOA is defined for these devices is 100 occurrences. Another factor is the form of turn-off bias. For these devices, turn-off bias has relatively little effect on its OLSOA capability. This observation is valid from $I_{B2} = 0$ (soft) to $V_{BE(off)} \simeq 5.0$ V (stiff).

OLSOA is subject to the same derating with temperature as normal FBSOA. The second breakdown derating curve is applied to the allowable current at any given voltage, using the same procedure that is followed with pulsed FBSOA.

OVERLOAD SAFE OPERATING TEST CIRCUITS

FIGURE 44 — OVERLOAD SOA TEST CIRCUIT
TYPE I (OLSOA)



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

FIGURE 45 — OVERLOAD SOA TEST CIRCUIT
TYPE II (OLSOA)

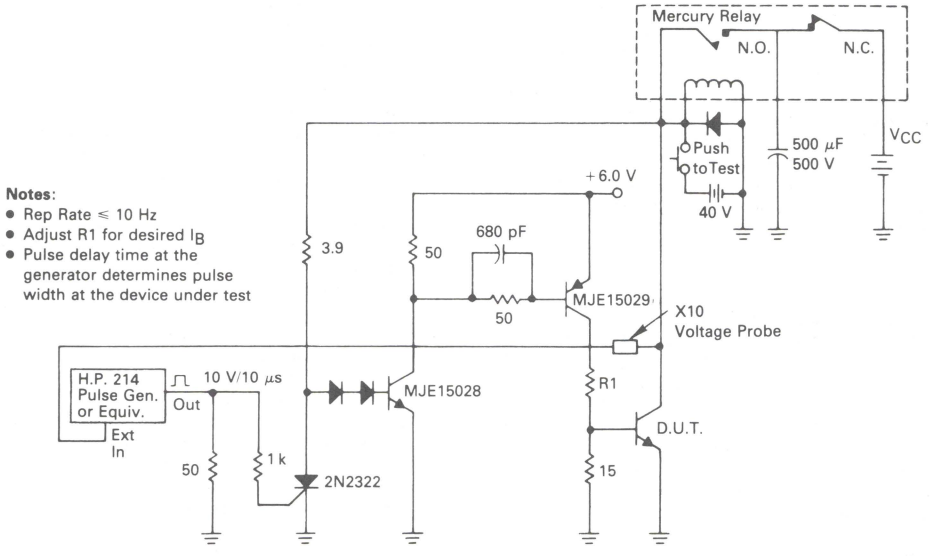

Notes:

- Rep Rate ≤ 10 Hz
- Adjust R1 for desired I_B
- Pulse delay time at the generator determines pulse width at the device under test

3

MJ10042
MJ10045
MJ10048

Designer's Data Sheet

25 KVA ENERGY MANAGEMENT SERIES SWITCHMODE DARLINGTON TRANSISTORS
25, 50 and 100 Ampere Operating Current

These Darlington transistors are designed for industrial service under practical operating environments found in switching high power inductive loads off 120, 230 and 460 Volt lines.

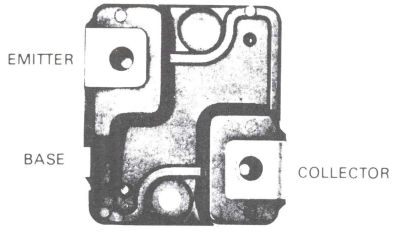





*Emitter-Collector Diode is a high power diode.

25, 50, and 100 AMPERE
NPN SILICON
POWER DARLINGTON
TRANSISTOR
250, 450 and 850 VOLTS
250 WATTS

Designer's Data for "Worst-Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data—representing device characteristics boundaries—are given to facilitate "worst-case" design.

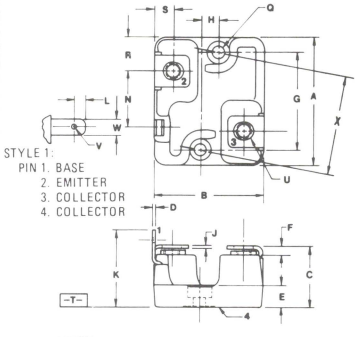

NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS BOTH A DATUM SURFACE AND SEATING PLANE.
2. POSITIONAL TOLERANCE FOR MOUNTING HOLES:
   ⌖ Ø 0.25 (0.010) Ⓜ | T | A Ⓜ | B Ⓜ
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.
4. CONTROLLING DIMENSION: INCH EXCEPT FOR METRICALLY THREADED INSERTS.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	39.11	40.13	1.540	1.580
B	33.93	34.95	1.336	1.376
C	–	20.32	–	0.800
D	0.68	0.83	0.027	0.033
E	8.30	8.81	0.327	0.347
F	–	4.44	–	0.175
G	29.67 BSC		1.168 BSC	
H	5.08 BSC		0.200 BSC	
J	0.93	1.09	0.037	0.043
K	—	25.40	–	1.000
L	2.92	3.30	0.115	0.130
N	17.14	17.39	0.675	0.685
Q	3.73	3.88	0.147	0.153
R	10.41	10.79	0.410	0.425
S	5.84	6.35	0.230	0.250
U	M5 .8 (METRIC THRD)			
V	1.27	1.52	0.050	0.060
W	4.69	4.85	0.185	0.191
X	30.15 BSC		1.187 BSC	

CASE 353-01

MAXIMUM RATINGS

Mechanical Ratings

Rating	Value	Unit
Mounting Torque (To heat sink with 6-32 Screw) (Note 1)	8.0	in.-lb
Lead Torque (Lead to bus with 5 mm Screw) (Note 2)	20	in.-lb
Per Unit Weight	41	grams

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case, $R_{\theta JC}$	0.5	°C/W

Mica Insulators available as separate items.
0.003" thick. Motorola Part Number 14CSB12387B003.

Notes:
1. A Belleville washer of 0.281" O.D., 0.138" I.D., 0.013" thick and 43 pounds flat is recommended.
2. The maximum penetration of the screw should be limited to 0.50".
3. To adapt the collector and emitter terminals to quick connect terminals, AMP 250 Series Faston tab P/N 61499-1 is suggested.
4. The mounting holes of this package are compatible with TO-204 (formerly TO-3) mounting holes.

3

MAXIMUM RATINGS (Continued) (T_C = 25°C unless otherwise noted.)

Rating		Symbol	MJ10042	MJ10045	MJ10048	Unit
Collector-Emitter Voltage (I_B = 0)		V_{CEO}	850	450	250	Vdc
Collector-Emitter Voltage (R_{BE} = 10 Ohms)		V_{CER}	900	500	300	Vdc
Collector-Base Voltage		V_{CB}	900	500	300	Vdc
Emitter-Base Voltage		V_{EB}	8.0			Vdc
Collector Current — Operating	(T_C = 115°C) (T_C = 85°C) (T_C = 85°C)	$I_{C(op)}$	25 — —	— 50 —	— — 100*	A
Collector Current — Continuous — Peak Repetitive — Peak Nonrepetitive		I_C	37.5 75 125	75 150 250	100 300 500	A
Base Current — Continuous — Peak Nonrepetitive		I_B	25 50			A
Total Device Dissipation Derate above T_C = 25°C For 1-minute overload		P_D	250 2.0 333			Watts W/°C Watts
Operating Junction and Storage Temperature Range For 1-minute overload		T_J, T_{stg}	−55 to +150 −55 to 200			°C

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 125 mAdc)	MJ10042 MJ10045 MJ10048	$V_{CEO(sus)}$	 850 450 250	 — — —	Vdc
Collector Cutoff Current (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)		I_{CEV}	 — —	 2.0 10	mA
Collector Cutoff Current (V_{CE} = Rated V_{CER}, R_{BE} = 10 Ω, T_C = 100°C)		I_{CER}	—	10	mA
Emitter Cutoff Current (V_{EB} = 4.0 Vdc, I_C = 0)		I_{EBO}	—	350	mA
SAFE OPERATING AREA					
Second Breakdown Collector Current with Base Forward-Biased		FBSOA	See Figures 32, 34 & 36		
Clamped Inductive SOA with Base Reverse-Biased		RBSOA	See Figures 33, 35 & 37		
Overload Safe Operating Area		OLSOA	See Figures 38, 39, 40, 41, 42 & 43		
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	—	2000	pF

(1) Pulse Test: Pulse width of 300 μs, duty cycle ≤ 2.0%.

* This rating is with a 50% duty cycle, and is limited by power dissipation. Higher operating currents are allowable at lower duty cycles.

3

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS (1)				
MJ10042				
DC Current Gain	h_{FE}			
(I_C = 25 Adc, V_{CE} = 5.0 Vdc)		35	—	
(I_C = 25 Adc, V_{CE} = 10 Vdc)		40	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.0 Adc)		—	2.0	
(I_C = 37.5 Adc, I_B = 7.5 Adc)		—	5.0	
(I_C = 25 Adc, I_B = 2.0 Adc, T_C = 100°C)		—	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.0 Adc)		—	3.0	
(I_C = 25 Adc, I_B = 2.0 Adc, T_C = 100°C)		—	3.0	
MJ10045				
DC Current Gain	h_{FE}			
(I_C = 50 Adc, V_{CE} = 5.0 Vdc)		50	—	
(I_C = 50 Adc, V_{CE} = 10 Vdc)		60	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 50 Adc, I_B = 1.67 Adc)		—	2.0	
(I_C = 75 Adc, I_B = 6.0 Adc)		—	3.3	
(I_C = 50 Adc, I_B = 1.67 Adc, T_C = 100°C)		—	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
(I_C = 50 Adc, I_B = 1.67 Adc)		—	3.0	
(I_C = 50 Adc, I_B = 1.67 Adc, T_C = 100°C)		—	3.0	
MJ10048				
DC Current Gain	h_{FE}			
(I_C = 100 Adc, V_{CE} = 5.0 Vdc)		75	—	
(I_C = 100 Adc, V_{CE} = 10 Vdc)		90	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 100 Adc, I_B = 2.75 Adc)		—	2.0	
(I_C = 100 Adc, I_B = 2.75 Adc, T_C = 100°C)		—	2.5	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
(I_C = 100 Adc, I_B = 2.75 Adc)		—	3.0	
(I_C = 100 Adc, I_B = 2.75 Adc, T_C = 100°C)		—	3.0	

(1) Pulse Test: Pulse width of 300 μs, duty cycle ≤ 2.0%.

ELECTRICAL CHARACTERISTICS (Continued) (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS							
MJ10042							
Resistive Load							
Delay Time	(V_{CC} = 300 Vdc, I_C = 25 A, I_{B1} = 2.0 A, R_{BE} = 10 Ω, t_p = 50 μs, Duty Cycle ≤ 2.0%)		t_d	—	0.03	0.25	μs
Rise Time			t_r	—	1.2	5.0	
Storage Time			t_s	—	35	100	
Fall Time			t_f	—	8.5	35	
Inductive Load, Clamped							
Storage Time	(I_{CM} = 25 A, V_{CEM} = 350 V, R_{BE} = 10 Ω, I_{B1} = 2.0 A)	T_J = 100°C	t_{sv}	—	50	150	μs
Crossover Time			t_c	—	20	60	
Storage Time		T_J = 25°C	t_{sv}	—	35	100	
Crossover Time			t_c	—	10	35	
MJ10045							
Resistive Load							
Delay Time	(V_{CC} = 250 Vdc, I_C = 50 A, I_{B1} = 1.67 A, R_{BE} = 10 Ω, t_p = 50 μs, Duty Cycle ≤ 2.0%)		t_d	—	0.03	0.25	μs
Rise Time			t_r	—	0.9	3.0	
Storage Time			t_s	—	10	25	
Fall Time			t_f	—	3.0	10	
Inductive Load, Clamped							
Storage Time	(I_{CM} = 50 A, V_{CEM} = 250 V, R_{BE} = 10 Ω, I_{B1} = 1.67 A)	T_J = 100°C	t_{sv}	—	15	50	μs
Crossover Time			t_c	—	4.0	15	
Storage Time		T_J = 25°C	t_{sv}	—	10	25	
Crossover Time			t_c	—	2.7	10	
MJ10048							
Resistive Load							
Delay Time	(V_{CC} = 150 Vdc, I_C = 100 A, I_{B1} = 2.75 A, R_{BE} = 10 Ω, t_p = 50 μs, Duty Cycle ≤ 2.0%)		t_d	—	0.035	0.25	μs
Rise Time			t_r	—	1.2	4.0	
Storage Time			t_s	—	6.3	20	
Fall Time			t_f	—	2.5	8.0	
Inductive Load, Clamped							
Storage Time	(I_{CM} = 100 A, V_{CEM} = 150 V, R_{BE} = 10 Ω, I_{B1} = 2.75 A)	T_J = 100°C	t_{sv}	—	9.0	30	μs
Crossover Time			t_c	—	3.3	12	
Storage Time		T_J = 25°C	t_{sv}	—	6.5	20	
Crossover Time			t_c	—	2.3	8.0	

C-E DIODE CHARACTERISTICS

Power Dissipation (I_B = 0)	P_D	—	—	125	W
Single Cycle Surge Current (60 Hz)	I_{FSM}	—	—	250	Apk
Forward Voltage (1)	V_F				Vdc
(I_F = 25 Adc) MJ10042		—	—	1.5	
(I_F = 50 Adc) MJ10045		—	—	1.5	
(I_F = 100 Adc) MJ10048		—	—	2.0	
Reverse Recovery Time (d_i/d_t = 25 A/μs)	t_{rr}				μs
(I_F = 25 Adc) MJ10042		—	4.0	12	
(I_F = 50 Adc) MJ10045		—	3.3	10	
(I_F = 100 Adc) MJ10048		—	2.5	8.0	
Forward Turn-On Time (Compliance Voltage = 250 V)	t_{on}				μs
(I_F = 25 Adc) MJ10042		—	0.3	1.2	
(I_F = 50 Adc) MJ10045		—	0.3	1.0	
(I_F = 100 Adc) MJ10048		—	1.0	3.5	

(1) Pulse Test: Pulse width of 300 μs, duty cycle ≤2.0%.

TYPICAL ELECTRICAL CHARACTERISTICS

MJ10042

FIGURE 1 — DC CURRENT GAIN

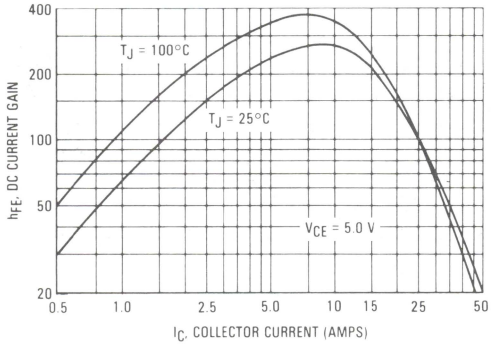

FIGURE 2 — DC CURRENT GAIN

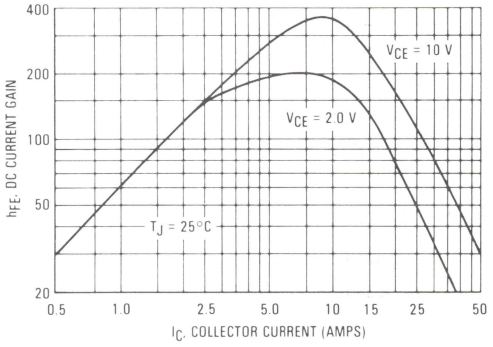

MJ10045

FIGURE 3 — DC CURRENT GAIN

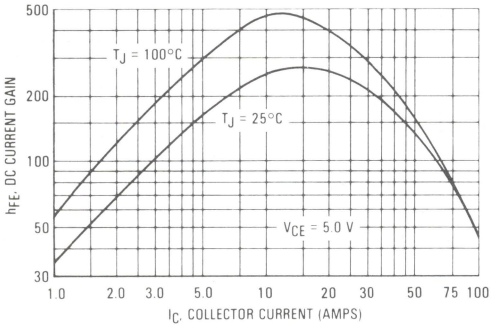

FIGURE 4 — DC CURRENT GAIN

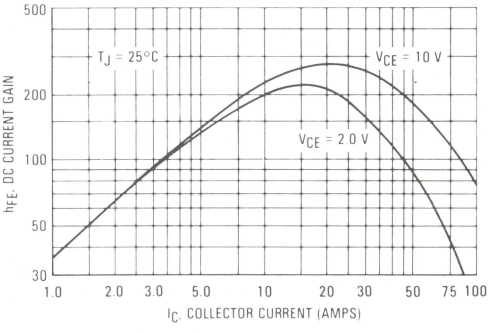

MJ10048

FIGURE 5 — DC CURRENT GAIN

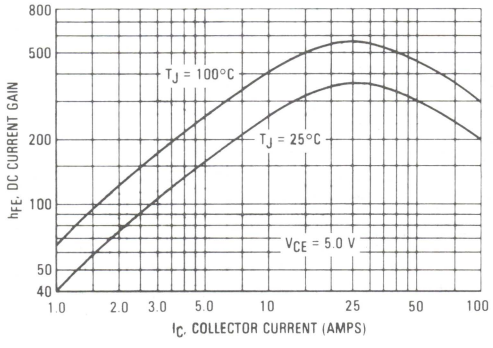

FIGURE 6 — DC CURRENT GAIN

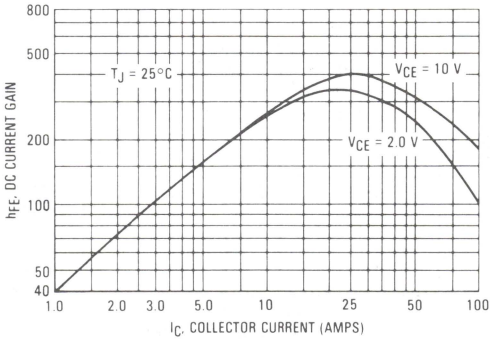

3

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

MJ10042

FIGURE 7 — DC CURRENT GAIN

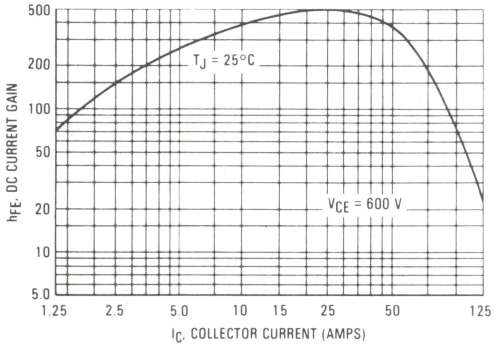

FIGURE 8 — COLLECTOR SATURATION VOLTAGE

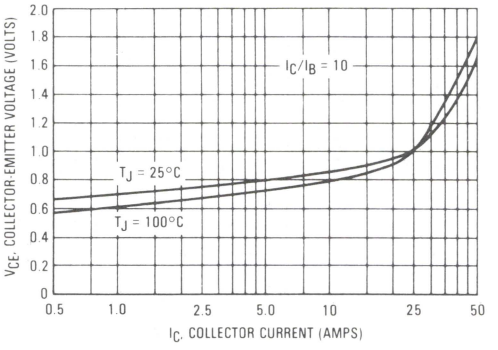

MJ10045

FIGURE 9 — DC CURRENT GAIN

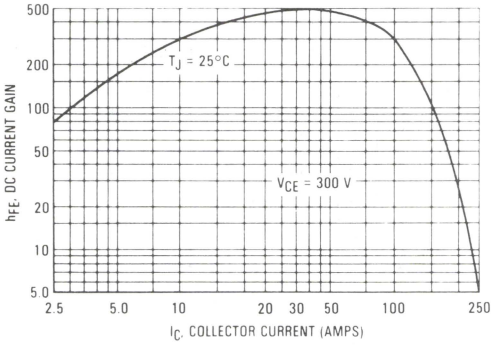

FIGURE 10 — COLLECTOR SATURATION REGION

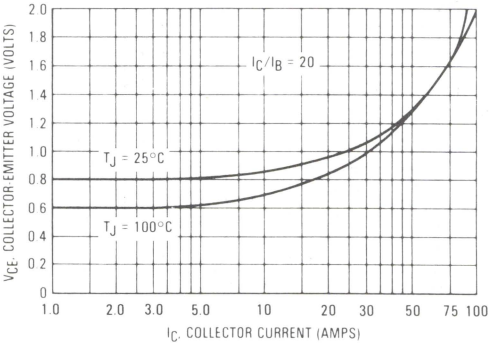

MJ10048

FIGURE 11 — DC CURRENT GAIN

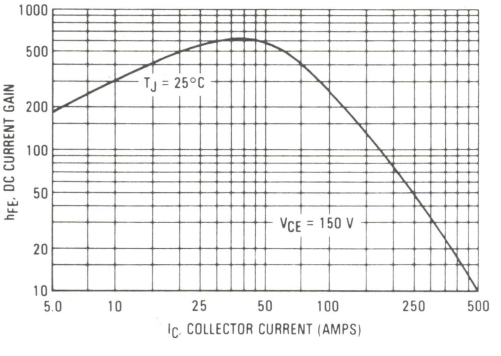

FIGURE 12 — COLLECTOR SATURATION REGION

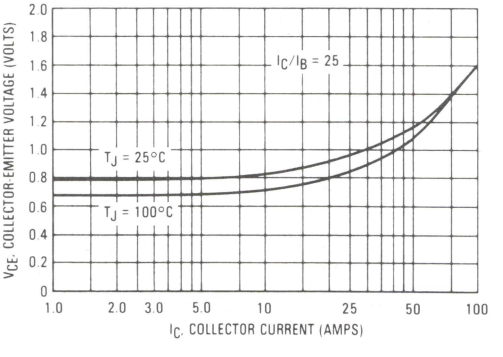

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

MJ10042

FIGURE 13 — BASE-EMITTER SATURATION VOLTAGE

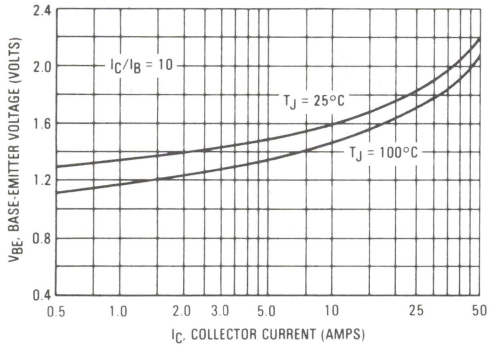

FIGURE 14 — TYPICAL PEAK REVERSE BASE CURRENT

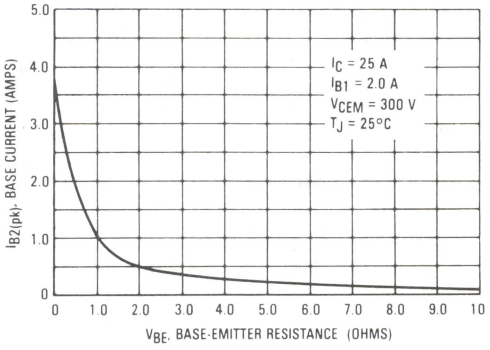

MJ10045

FIGURE 15 — BASE-EMITTER SATURATION VOLTAGE

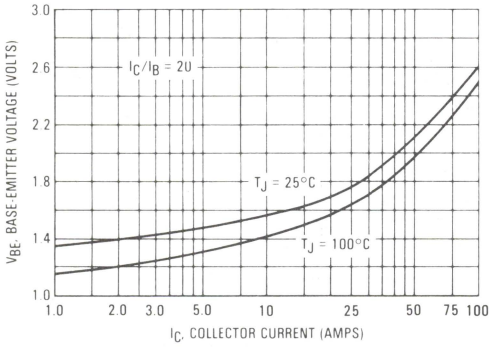

FIGURE 16 — TYPICAL PEAK REVERSE BASE CURRENT

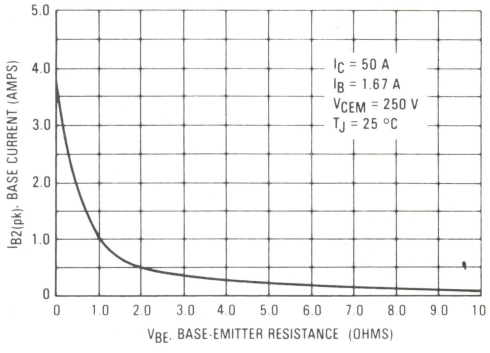

MJ10048

FIGURE 17 — BASE-EMITTER SATURATION VOLTAGE

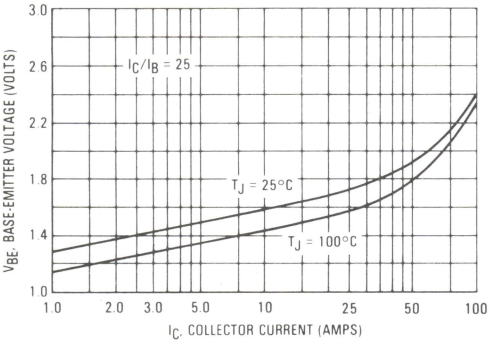

FIGURE 18 — TYPICAL PEAK REVERSE BASE CURRENT

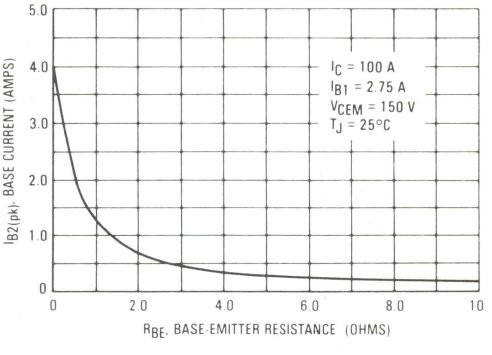

3

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

MJ10042

FIGURE 19 — TYPICAL INDUCTIVE SWITCHING TIMES

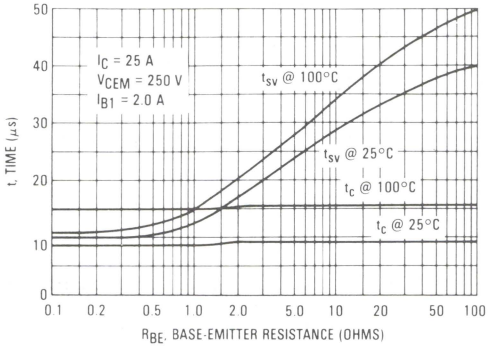

FIGURE 20 — TYPICAL TURN-ON SWITCHING TIMES

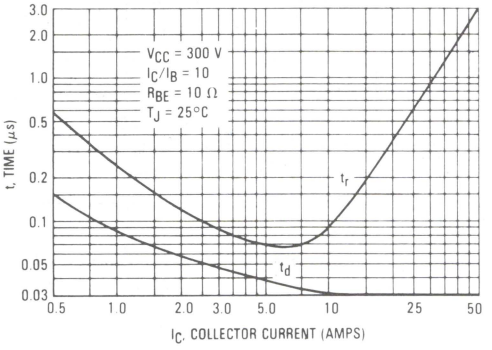

MJ10045

FIGURE 21 — TYPICAL INDUCTIVE SWITCHING TIMES

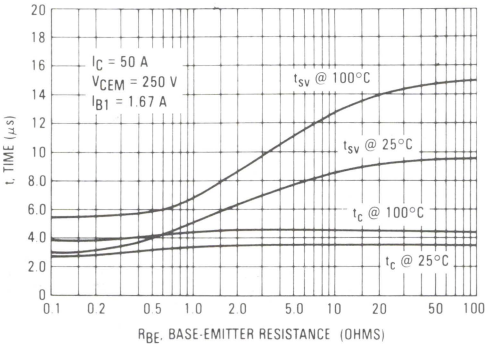

FIGURE 22 — TYPICAL TURN-ON SWITCHING TIMES

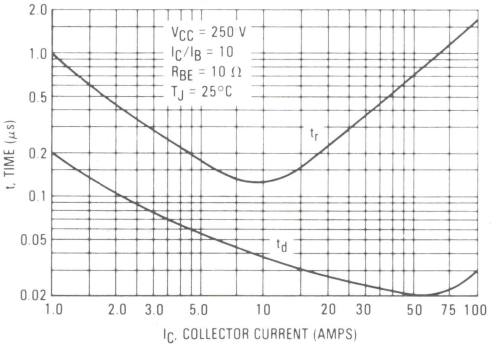

MJ10048

FIGURE 23 — TYPICAL INDUCTIVE SWITCHING TIMES

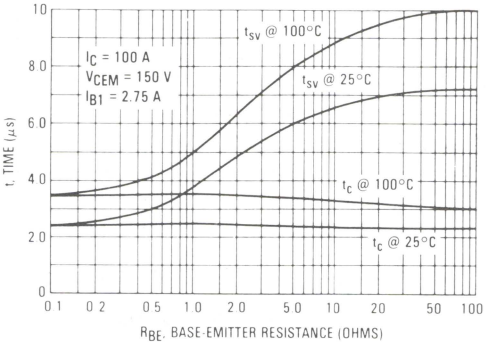

FIGURE 24 — TYPICAL TURN-ON SWITCHING TIMES

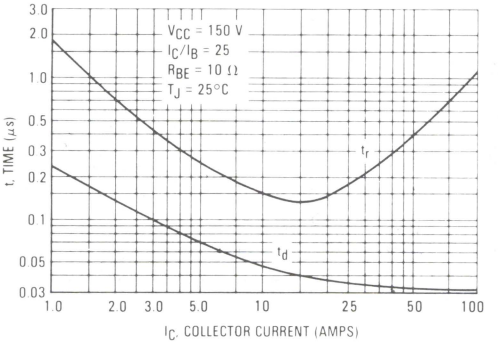

3

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

FIGURE 25 — TYPICAL TURN-OFF SWITCHING TIMES
MJ10042

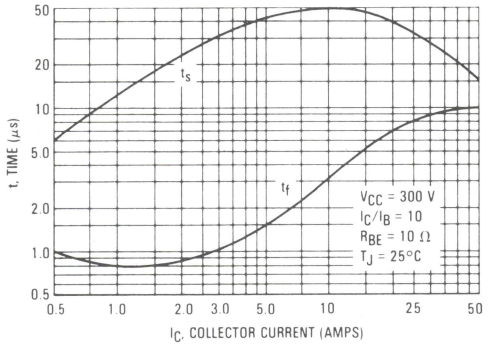

FIGURE 26 — EMITTER-COLLECTOR DIODE FORWARD VOLTAGE

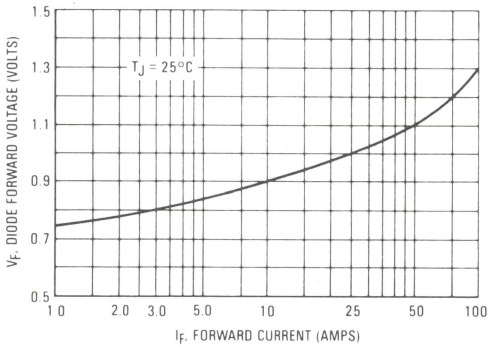

FIGURE 27 — TYPICAL TURN-OFF SWITCHING TIMES
MJ10045

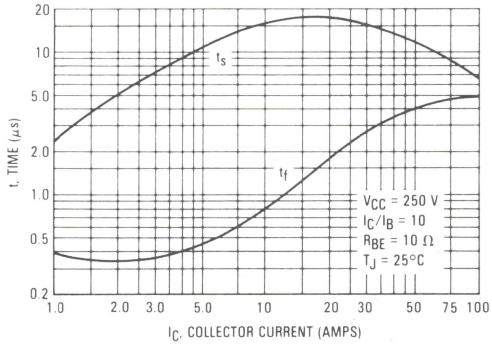

FIGURE 28 — POWER DERATING

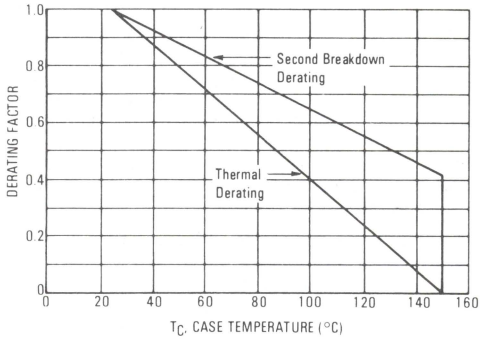

FIGURE 29 — TYPICAL TURN-OFF SWITCHING TIMES
MJ10048

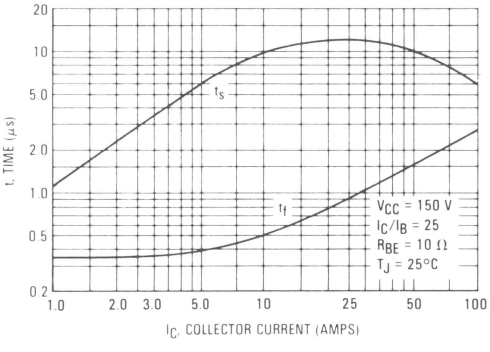

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

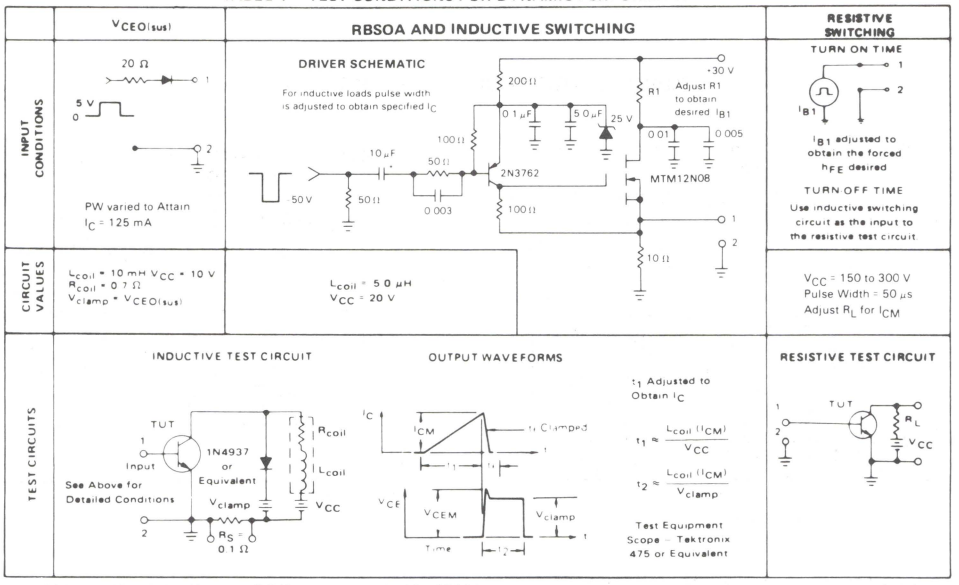

*Adjust — V such that $V_{BE(off)}$ = 5.0 V except as required for RBSOA.

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and motor controls, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10 % V_{CEM}
t_{rv} = Voltage Rise Time, 10—90% V_{CEM}
t_{fi} = Current Fall Time, 90—10% I_{CM}
t_{ti} = Current Tail, 10—2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is shown in Figure 30 to aid on the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C(t_c) f$$

In general, $t_{rv} + t_{fi} \cong t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user-oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

FIGURE 30 — INDUCTIVE SWITCHING MEASUREMENTS

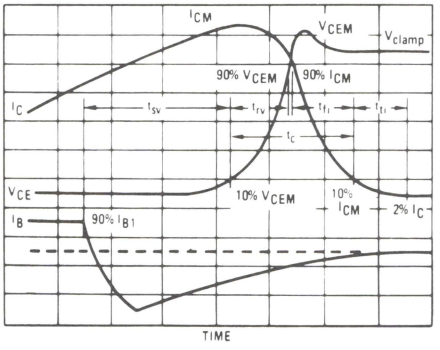

FIGURE 31 — THERMAL RESPONSE

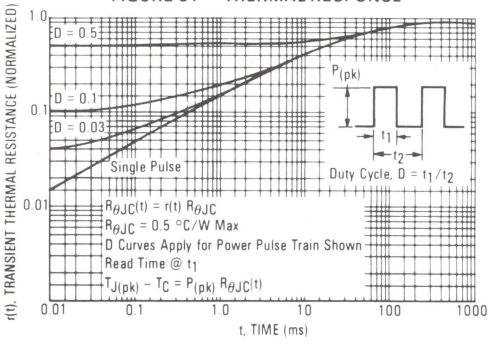

SAFE OPERATING AREA INFORMATION

MJ10042

FIGURE 32 — MAXIMUM RATED FORWARD-BIAS SAFE OPERATING AREA (FBSOA)

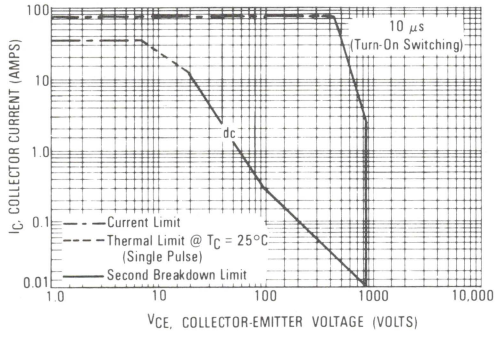

FIGURE 33 — MAXIMUM RATED REVERSE-BIAS SAFE OPERATING AREA (RBSOA)

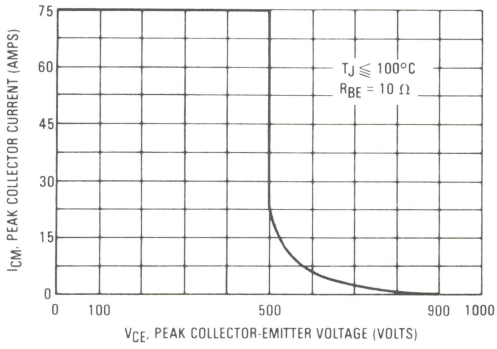

MJ10045

FIGURE 34 — MAXIMUM RATED FORWARD-BIAS SAFE OPERATING AREA (FBSOA)

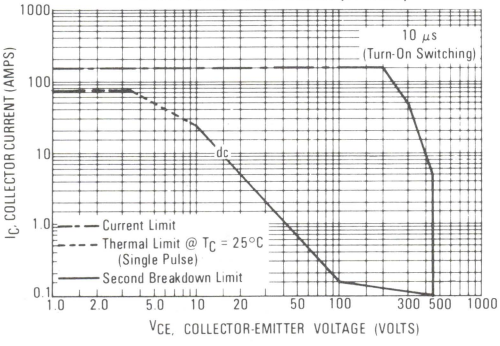

FIGURE 35 — MAXIMUM RATED REVERSE-BIAS SAFE OPERATING AREA (RBSOA)

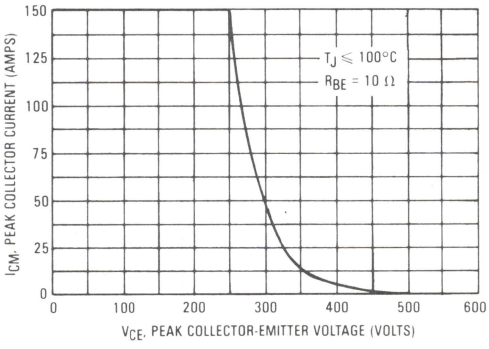

MJ10048

FIGURE 36 — MAXIMUM RATED FORWARD-BIAS SAFE OPERATING AREA (FBSOA)

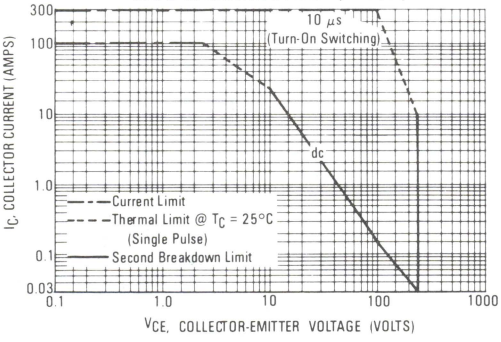

FIGURE 37 — MAXIMUM RATED REVERSE-BIAS SAFE OPERATING AREA (RBSOA)

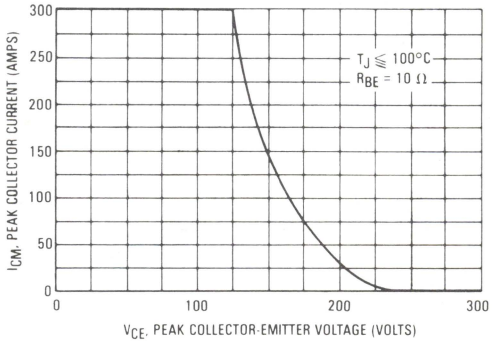

3

OVERLOAD CHARACTERISTICS

MJ10042

FIGURE 38 — OVERLOAD SAFE OPERATING AREA TYPE I (OLSOA)

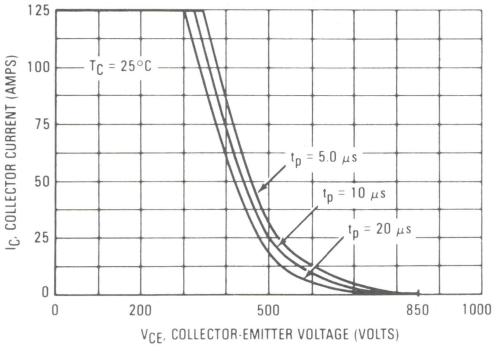

FIGURE 39 — OVERLOAD SAFE OPERATING AREA TYPE II (OLSOA)

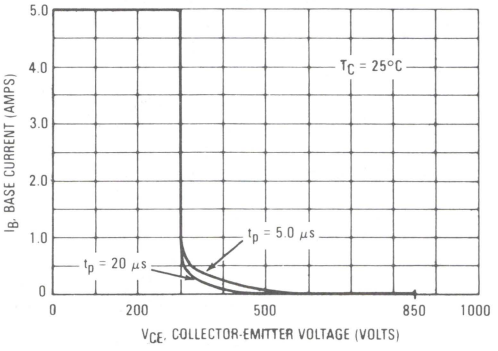

MJ10045

FIGURE 40 — OVERLOAD SAFE OPERATING AREA TYPE I (OLSOA)

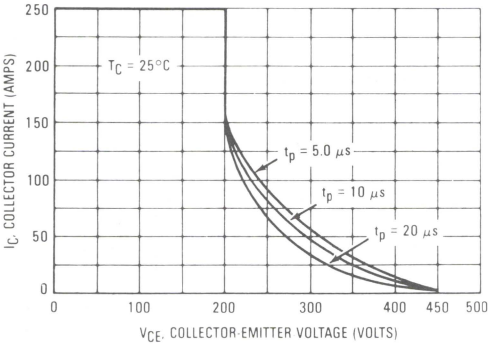

FIGURE 41 — OVERLOAD SAFE OPERATING AREA TYPE II (OLSOA)

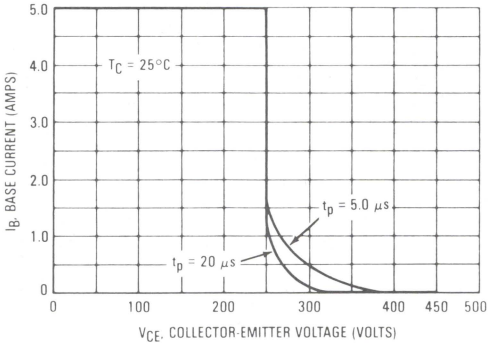

MJ10048

FIGURE 42 — OVERLOAD SAFE OPERATING AREA TYPE I (OLSOA)

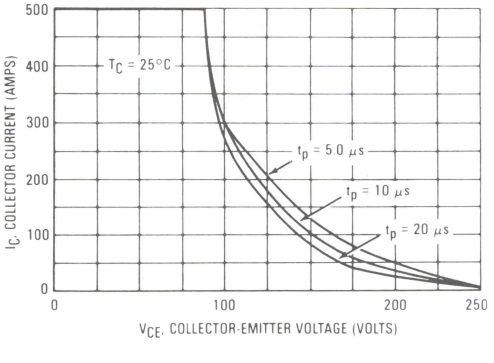

FIGURE 43 — OVERLOAD SAFE OPERATING AREA TYPE II (OLSOA)

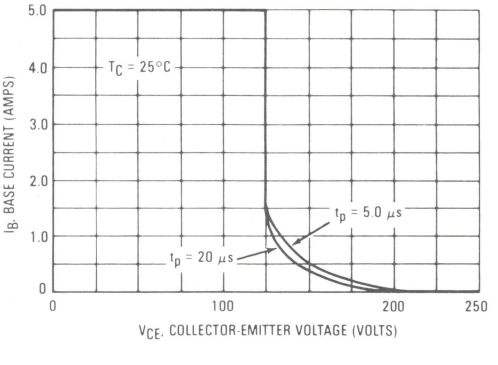

3

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 32, 34 and 36 are based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on these figures may be found at any case temperature by using the appropriate curve on Figure 28.

$T_{J(pk)}$ may be calculated from the data in Figure 31. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse-biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse-Bias Safe Operating Area and represents the voltage-current condition allowable during reverse-biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figures 33, 35 and 37 give the RBSOA characteristics.

OVERLOAD SAFE OPERATING AREA

The forward-bias safe operating area (FBSOA) specification given in these figures adequately describes transistor capability for normal repetitive operation. When short circuit or fault conditions occur, these transistor specifications are not always adequate. A specification called overload safe operating area (OLSOA) has been developed to describe the transistor's ability to survive under fault conditions. OLSOA is specified under two types of conditions.

TYPE I OLSOA

Type I OLSOA applies when maximum collector current is limited and known. A good example is a circuit where an inductor is inserted between the transistor and the bus, which limits the rate of rise of collector current to a known value. If the transistor is then turned off within a specified amount of time, the magnitude of collector current is also known. Figures 38, 40 and 42 depict the Type I OLSOA rating for these devices. Maximum allowable collector-emitter voltage versus collector current is plotted for several pulse widths. (Pulse width is defined as the time lag between the fault condition and the removal of base drive.) Storage time of the transistor has been factored into the curve. Therefore, with bus voltage and maximum collector current known, these figures define the maximum time which can be allowed for fault detection and shutdown of base drive.

Type I OLSOA is measured in a common-base circuit (Figure 44) which allows precise definition of collector-emitter voltage and collector current. This is the same circuit that is used to measure forward-bias safe operating area.

TYPE II OLSOA

Type II OLSOA applies when maximum collector current is not limited by circuit design, but is limited only by the gain of the transistor. Therefore, collector current does not appear on the Type II OLSOA curve. This curve defines a safe region of operation from the information that is usually available to the designer.

This information is normally base drive, bus voltage and time. In terms of the OLSOA curve, bus voltage is assumed to be worst-case collector-emitter voltage, and time is defined to be the same pulse width that was described for Type I OLSOA. Using these variables, maximum collector-emitter voltage versus base drive is plotted for several values of pulse width. A safe region of operation is thus determined by the circuit parameters. Type II OLSOA, as shown in Figures 39, 41 and 43 are measured in the circuit shown in Figure 45, and measurement is made as follows: Base current is applied while the collector is open, allowing a highly overdriven saturated condition. Next, a stiff voltage source is applied to the collector. The rising voltage at the collector of the transistor triggers a delay function. At the end of this delay, base drive is removed. The delay time is the variable on the Type II OLSOA curve. The storage time of the transistor is thereby factored into the rating.

There are several additional aspects to be considered regarding OLSOA. The first consideration is that OLSOA is strictly a NON-REPETITIVE rating. It is intended to describe the survivability of the transistor during an accidental overload and is not intended to describe a stress level which can be sustained indefinitely. The number of nonrepetitive faults for which OLSOA is defined for these devices is 100 occurrences. Another factor is the form of turn-off bias. For these devices, turn-off bias has relatively little effect on its OLSOA capability. This observation is valid from I_{B2} = 0 (soft) to $V_{BE(off)}$ = 5 V (stiff).

OLSOA is subject to the same derating with temperature as normal FBSOA. The second breakdown derating curve is applied to the allowable current at any given voltage, using the same procedure that is followed with pulsed FBSOA.

OVERLOAD SAFE OPERATING TEST CIRCUITS

FIGURE 44 — OVERLOAD SOA TEST CIRCUIT
TYPE I (OLSOA)



Notes:

- $V_{CE} = V_{CC} + V_{BE}$
- Adjust pulsed current source for desired I_C, t_p

FIGURE 45 — OVERLOAD SOA TEST CIRCUIT
TYPE II (OLSOA)

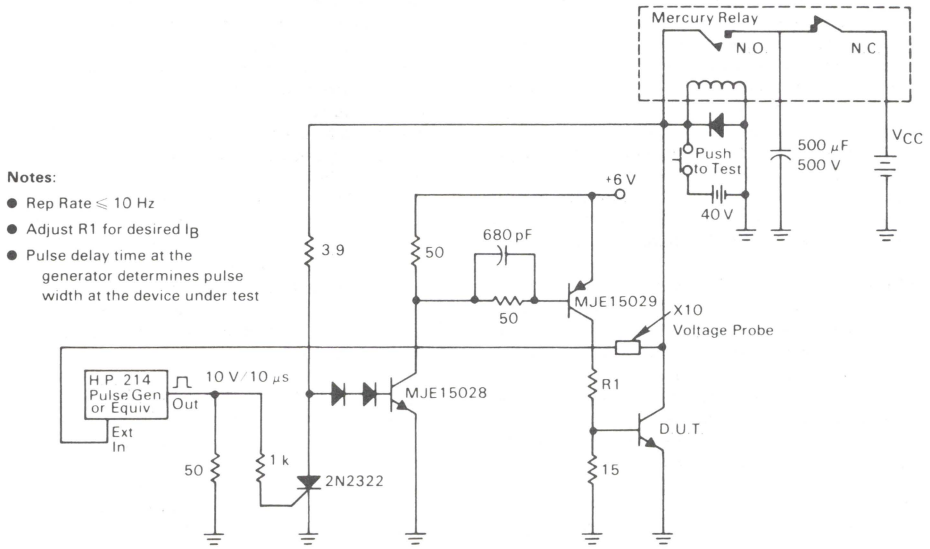

Notes:

- Rep Rate ≤ 10 Hz
- Adjust R1 for desired I_B
- Pulse delay time at the generator determines pulse width at the device under test

3

PNP MJ11011 MJ11013 MJ11015 — NPN MJ11012 MJ11014 MJ11016

HIGH-CURRENT COMPLEMENTARY SILICON TRANSISTORS

. . . for use as output devices in complementary general purpose amplifier applications.

- High DC Current Gain – h_{FE} = 1000 (Min) @ I_C = 20 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor
- Junction Temperature to +200°C

30 AMPERE

DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON

60-120 VOLTS
200 WATTS

MAXIMUM RATINGS

Rating	Symbol	MJ11011 MJ11012	MJ11013 MJ11014	MJ11015 MJ11016	Unit
Collector-Emitter Voltage	V_{CEO}	60	90	120	Vdc
Collector-Base Voltage	V_{CB}	60	90	120	Vdc
Emitter-Base Voltage	V_{EB}	5			Vdc
Collector Current	I_C	30			Adc
Base Current	I_B	1			Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C @ T_C = 100°C	P_D	200 1.15			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.87	°C/W
Maximum Lead Temperature for Soldering Purposes for ≤ 10 Seconds.	T_L	275	°C

FIGURE 1 – DARLINGTON CIRCUIT SCHEMATIC

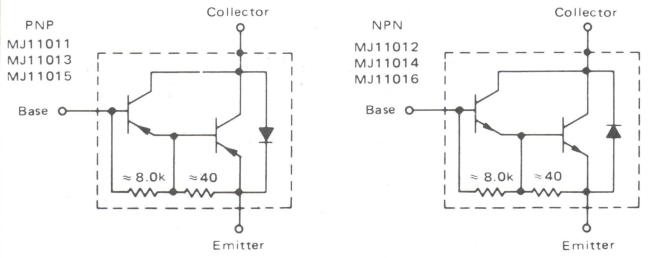

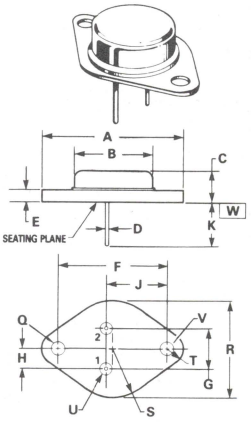

NOTES:
1. DIAMETER V AND SURFACE W ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ⌀ 0.25 (0.010) Ⓜ | W | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ ⌀ 0.30 (0.012) Ⓜ | W | V Ⓜ | Q Ⓜ

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.151	0.165

CASE 1-04
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage(1)		$V_{(BR)CEO}$			Vdc
(I_C = 100 mAdc, I_B = 0)	MJ11011,MJ11012		60	–	
	MJ11013,MJ11014		90	–	
	MJ11015,MJ11016		120	–	
Collector Emitter Leakage Current		I_{CER}			mAdc
(V_{CE} = 60 Vdc, R_{BE} = 1 k ohm)	MJ11011,MJ11012		–	1	
(V_{CE} = 90 Vdc, R_{BE} = 1 k ohm)	MJ11013,MJ11014		–	1	
(V_{CE} = 120 Vdc, R_{BE} = 1 k ohm)	MJ11015,MJ11016		–	1	
(V_{CE} = 60 Vdc, R_{BE} = 1 k ohm, T_C = 150°C)	MJ11011,MJ11012		–	5	
(V_{CE} = 90 Vdc, R_{BE} = 1 k ohm, T_C = 150°C)	MJ11013,MJ11014		–	5	
(V_{CE} = 120 Vdc, R_{BE} = 1 k ohm, T_C = 150°C)	MJ11015,MJ11016		–	5	
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)		I_{EBO}	–	5	mAdc
Collector-Emitter Leakage Current (V_{CE} = 50 Vdc, I_B = 0)		I_{CEO}	–	1	mAdc
ON CHARACTERISTICS(1)					
DC Current Gain		h_{FE}			–
(I_C = 20 Adc, V_{CE} = 5 Vdc)			1000	–	
(I_C = 30 Adc, V_{CE} = 5 Vdc)			200	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 20 Adc, I_B = 200 mAdc)			–	3	
(I_C = 30 Adc, I_B = 300 mAdc)			–	4	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
I_C = 20 Adc, I_B = 200 mAdc)			–	3.5	
I_C = 30 Adc, I_B = 300 mAdc)			–	5	
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio (I_C = 10 Adc, V_{CE} = 3 Vdc, f = 1 MHz)		$\lvert h_{fe} \rvert$	4	–	MHz

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN (1)

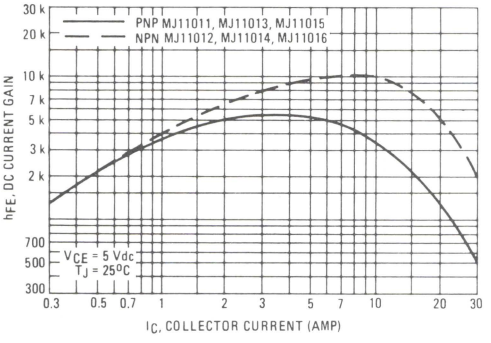

FIGURE 3 – SMALL-SIGNAL CURRENT GAIN

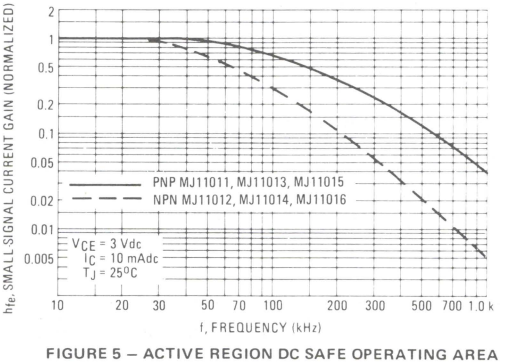

FIGURE 4 – "ON" VOLTAGES (1)

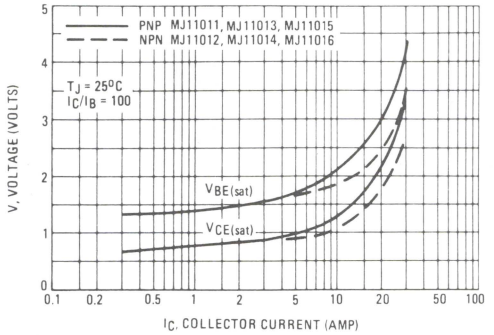

FIGURE 5 – ACTIVE REGION DC SAFE OPERATING AREA

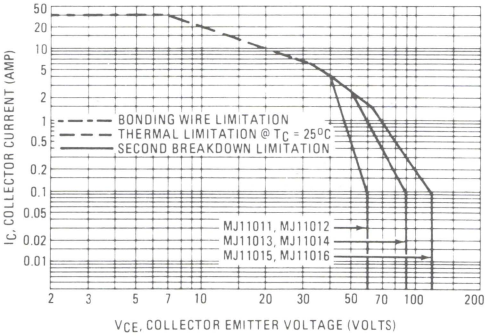

There are two limitations on the power handling ability of a transistor: average junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

PNP	NPN
MJ11017	MJ11018
MJ11019	MJ11020
MJ11021	MJ11022

COMPLEMENTARY DARLINGTON SILICON POWER TRANSISTORS

. . . designed for use as general purpose amplifiers, low frequency switching and motor control applications.

- High dc Current Gain @ 10 Adc — h_{FE} = 400 Min (All Types)
- Collector-Emitter Sustaining Voltage
  $V_{CEO(sus)}$ = 150 Vdc (Min) — MJ11018, 17
  = 200 Vdc (Min) — MJ11020, 19
  = 250 Vdc (Min) — MJ11022, 21
- Low Collector-Emitter Saturation
  $V_{CE(sat)}$ = 1.0 V (Typ) @ I_C = 5.0 A
  = 1.8 V (Typ) @ I_C = 10 A
- Monolithic Construction
- 100% SOA Tested @ V_{CE} = 44 V, I_C = 4.0 A, t = 250 ms.

15 AMPERE

DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON

150, 200, 250 VOLTS
175 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ11018 MJ11017	MJ11020 MJ11019	MJ11022 MJ11021	Unit
Collector-Emitter Voltage	V_{CEO}	150	200	250	Vdc
Collector-Base Voltage	V_{CB}	150	200	250	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous Peak	I_C	15 30			Adc
Base Current	I_B	0.5			Adc
Total Device Dissipation @ T_C = 25°C Derate Above 25°C	P_D	175 1.16			Watts W/°C
Operating and Storage Junction Temperature Range	T_J T_{stg}	-65 to +175 -65 to +200			°C °C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.86	°C/W

(1) Pulse Test: Pulse Width 5.0 ms, Duty Cycle ≤ 10%

FIGURE 1 — POWER DERATING

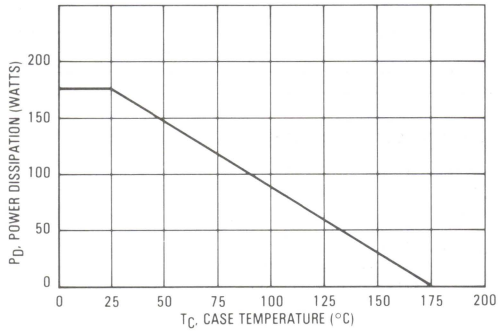



NOTES:
1. DIAMETER V AND SURFACE W ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ | ϕ 0.25 (0.010) Ⓜ | W | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ | ϕ 0.30 (0.012) Ⓜ | W | V Ⓜ | Q Ⓜ

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.151	0.165

CASE 1-04
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C Unless Otherwise Noted)

Characteristics	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1)	$V_{CEO(sus)}$			Vdc
(I_C = 0.1 Adc, I_B = 0) MJ11017, MJ11018		150	—	
MJ11019, MJ11020		200	—	
MJ11021, MJ11022		250	—	
Collector Cutoff Current	I_{CEO}			mAdc
(V_{CE} = 75, I_B = 0) MJ11017, MJ11018		—	1.0	
(V_{CE} = 100, I_B = 0) MJ11019, MJ11020		—	1.0	
(V_{CE} = 125, I_B = 0) MJ11021, MJ11022		—	1.0	
Collector Cutoff Current	I_{CEV}			mAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)		—	0.5	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_J = 150°C)		—	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	—	2.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain	h_{FE}			—
(I_C = 10 Adc, V_{CE} = 5.0 Vdc)		400	15,000	
(I_C = 15 Adc, V_{CE} = 5.0 Vdc)		100	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 100 mA)		—	2.0	
(I_C = 15 Adc, I_B = 150 mA)		—	3.4	
Base-Emitter On Voltage (I_C = 10 A, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	—	2.8	Vdc
Base-Emitter Saturation Voltage (I_C = 15 Adc, I_B = 150 mA)	$V_{BE(sat)}$	—	3.8	Vdc
DYNAMIC CHARACTERISTICS				
Magnitude of Common Emitter Small Signal Short Circuit Forward Current Transfer Ratio (I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)	$\lvert h_{fe} \rvert$	3.0	—	—
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}			pF
MJ11018, MJ11020, MJ11022		—	400	
MJ11017, MJ11019, MJ11021		—	600	
Small-Signal Current Gain (I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz	h_{fe}	100	—	—

SWITCHING CHARACTERISTICS

Characteristics		Symbol	Typical NPN	Typical PNP	Unit
Delay Time	(V_{CC} = 100 V, I_C = 10 A, I_B = 100 mA $V_{BE(off)}$ = 5.0 V) (See Figure 2.)	t_d	150	75	ns
Rise Time		t_r	1.2	0.5	μs
Storage Time		t_s	4.4	2.7	μs
Fall Time		t_f	10.0	2.5	μs

(1)Pulsed Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

FIGURE 2 — SWITCHING TIMES TEST CIRCUIT

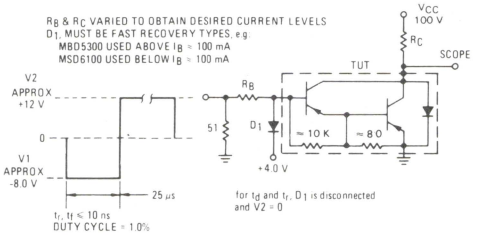

For NPN test circuit reverse diode and voltage polarities.

FIGURE 3 — THERMAL RESPONSE

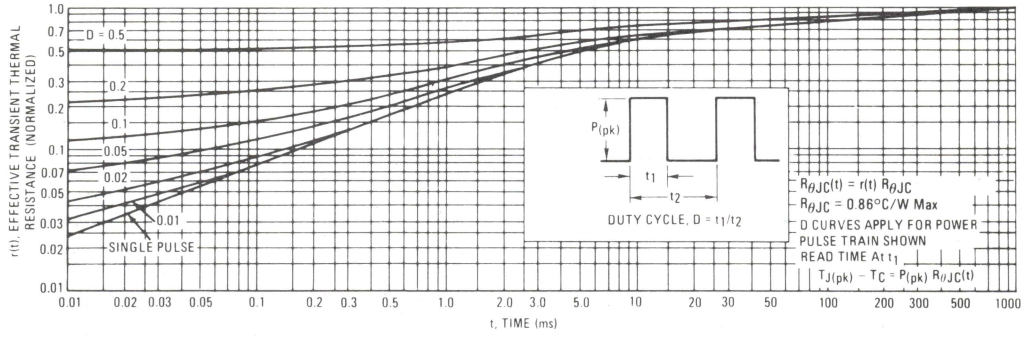

FIGURE 4 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA (FBSOA)

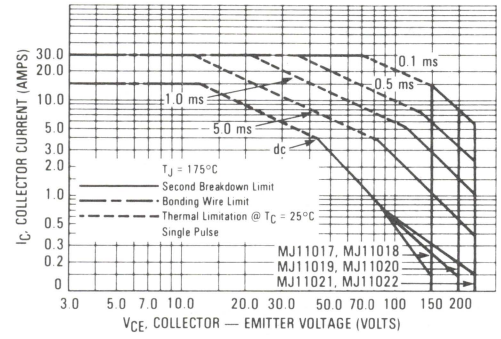

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 4 is based on $T_{J(pk)}$ = 175°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 175°C$. $T_{J(pk)}$ may be calculated from the data in Figure 3. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 5 — MAXIMUM RBSOA, REVERSE BIAS SAFE OPERATING AREA

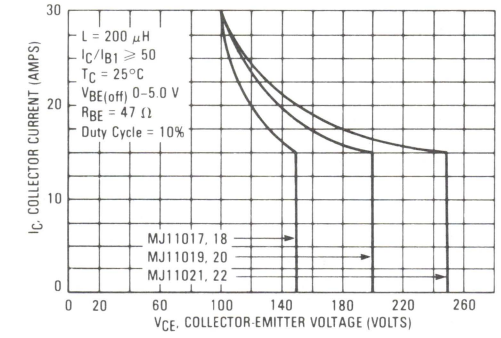

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 5 gives RBSOA characteristics.

3

FIGURE 6 — DC CURRENT GAIN

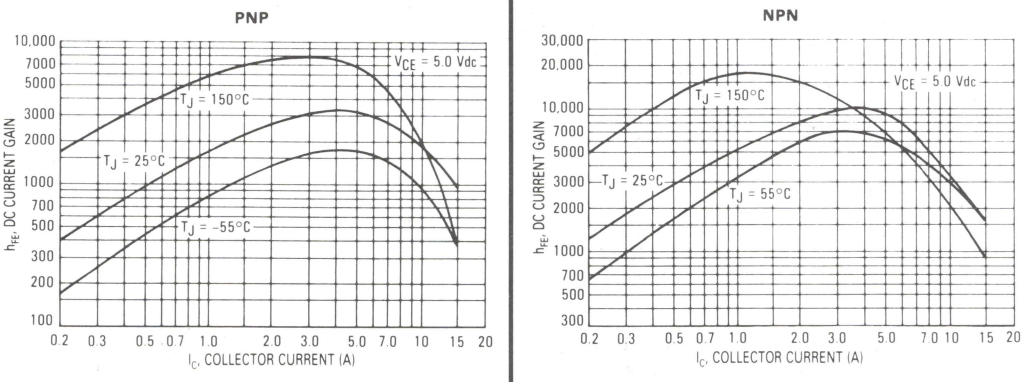

FIGURE 7 — COLLECTOR SATURATION REGION

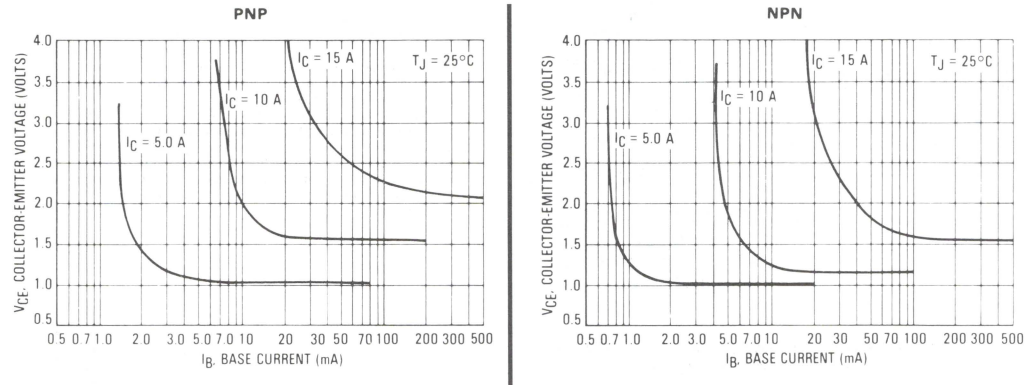

FIGURE 8 — "ON" VOLTAGES

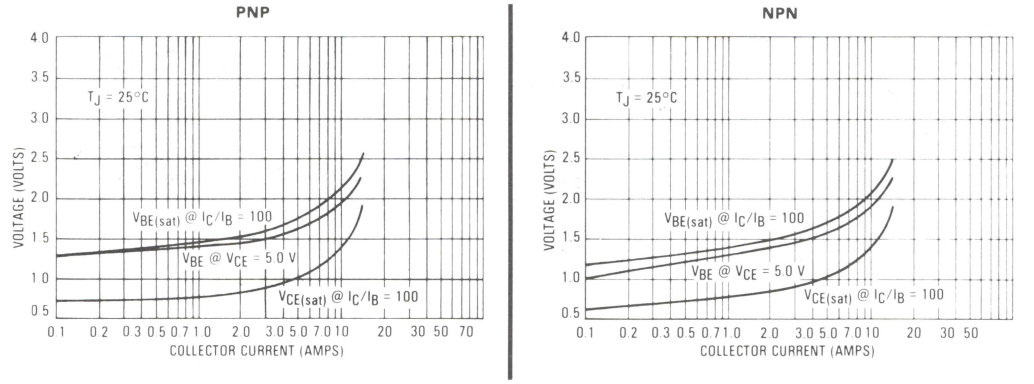

NPN **PNP**
MJ11028 MJ11029
MJ11030 MJ11031
MJ11032 MJ11033

HIGH-CURRENT COMPLEMENTARY SILICON TRANSISTORS

. . . for use as output devices in complementary general purpose amplifier applications.

- High DC Current Gain – h_{FE} = 1000 (Min) @ I_C = 25 Adc
  h_{FE} = 400 (Min) @ I_C = 50 Adc
- Curves to 100 A (Pulsed)
- Diode Protection to Rated I_C
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor
- Junction Temperature to +200°C

50 AMPERE

COMPLEMENTARY SILICON DARLINGTON POWER TRANSISTOR

60–120 VOLTS
300 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ11028 MJ11029	MJ11030 MJ11031	MJ11032 MJ11033	Unit
Collector-Emitter Voltage	V_{CEO}	60	90	120	Vdc
Collector-Base Voltage	V_{CB}	60	90	120	Vdc
Emitter-Base Voltage	V_{EB}	5			Vdc
Collector Current—Continuous Peak	I_C I_{CM}	50 100			Adc
Base Current—Continuous	I_B	2			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C @ T_C = 100°C	P_D	300 1.71			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +200			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Maximum Lead Temperature for Soldering Purposes for ≤ 10 seconds	T_L	275	°C
Thermal Resistance Junction to Case	$R_{\theta JC}$	0.584	°C

FIGURE 1 – DARLINGTON CIRCUIT SCHEMATIC

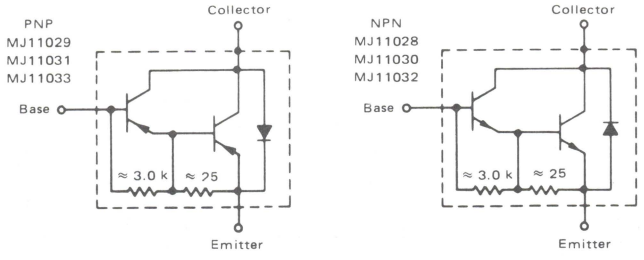



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1)		$V_{(BR)CEO}$			Vdc
(I_C = 100 mAdc, I_B = 0)	MJ11028 MJ11029		60	–	
	MJ11030 MJ11031		90	–	
	MJ11032 MJ11033		120	–	
Collector-Emitter Leakage Current		I_{CER}			mAdc
(V_{CE} = 60 Vdc, R_{BE} = 1 k ohm)	MJ11028 MJ11029		–	2	
(V_{CE} = 90 Vdc, R_{BE} = 1 k ohm)	MJ11030 MJ11031		–	2	
(V_{CE} = 120 Vdc, R_{BE} = 1 k ohm)	MJ11032 MJ11033		–	2	
(V_{CE} = 60 Vdc, R_{BE} = 1 k ohm, T_C = 150°C)	MJ11028 MJ11029		–	10	
(V_{CE} = 90 Vdc, R_{BE} = 1 k ohm, T_C = 150°C)	MJ11030 MJ11031		–	10	
(V_{CE} = 120 Vdc, R_{BE} = 1 k ohm, T_C = 150°C)	MJ11032 MJ11033		–	10	
Emitter Cutoff Current		I_{EBO}	–	5	mAdc
(V_{BE} = 5 Vdc, I_C = 0)					
Collector-Emitter Leakage Current		I_{CEO}	–	2	mAdc
(V_{CE} = 50 Vdc, I_B = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 25 Adc, V_{CE} = 5 Vdc)			1 k	18 k	
(I_C = 50 Adc, V_{CE} = 5 Vdc)			400	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 250 mAdc)			–	2.5	
(I_C = 50 Adc, I_B = 500 mAdc)			–	3.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 200 mAdc)			–	3.0	
(I_C = 50 Adc, I_B = 300 mAdc)			–	4.5	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC SAFE OPERATING AREA

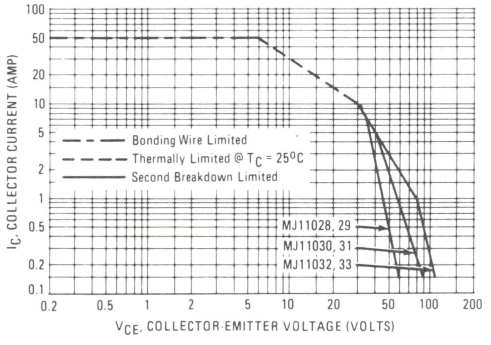

There are two limitations on the power-handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 3 – DC CURRENT GAIN

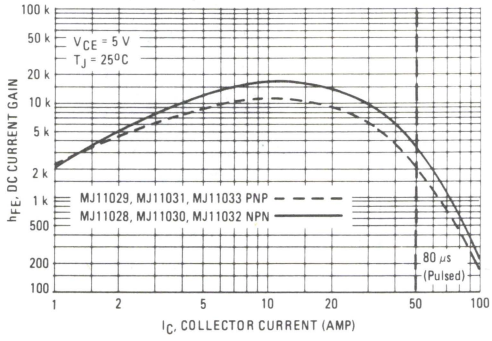

FIGURE 4 – "ON" VOLTAGE

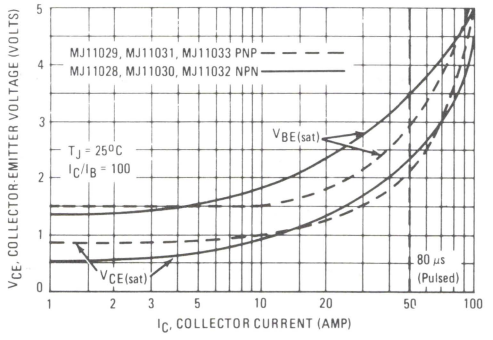

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ12002

Designers Data Sheet

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in large screen color deflection circuits.

- Collector-Emitter Voltage — V_{CEX} = 1500 Volts
- Glassivated Base-Collector Junction
- Forward Bias Safe Operating Area @ 50 μs = 15 A, 300 V
- Switching Times with Inductive Loads — t_f = 0.65 μs (Typ) @ I_C = 2.0 A

2.5 AMPERE
NPN SILICON
POWER TRANSISTOR

1500 VOLTS
75 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	750	Vdc
Collector-Emitter Voltage	V_{CEX}	1500	Vdc
Emitter-Base Voltage	V_{EBO}	5.0	Vdc
Collector Current — Continuous	I_C	2.5	Adc
Base Current — Continuous	I_B	2.0	Adc
Emitter Current — Continuous	I_E	4.5	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	75 30 0.6	Watts Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.67	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

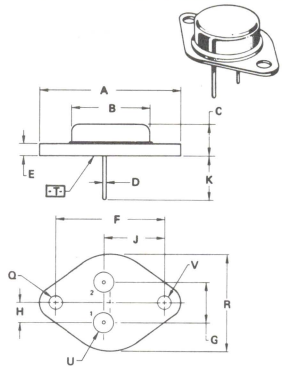

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	750	–	–	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)	I_{CES}	–	–	1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	–	0.1	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 1.8 Adc)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 1.8 Adc)	$V_{BE(sat)}$	–	–	1.5	Vdc
Second Breakdown Collector Current with Base-Forward Biased	$I_{S/B}$		See Figure 14		–
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	–	50	–	pF
Current Gain – Bandwidth Product (1) (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)	f_T	–	4.0	–	MHz
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 2.0 Adc, I_{B1} = 1.0 Adc, L_B = 12 μH, See Figure 1)	t_f	–	0.65	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

Figure 1. Switching Times Test Circuit

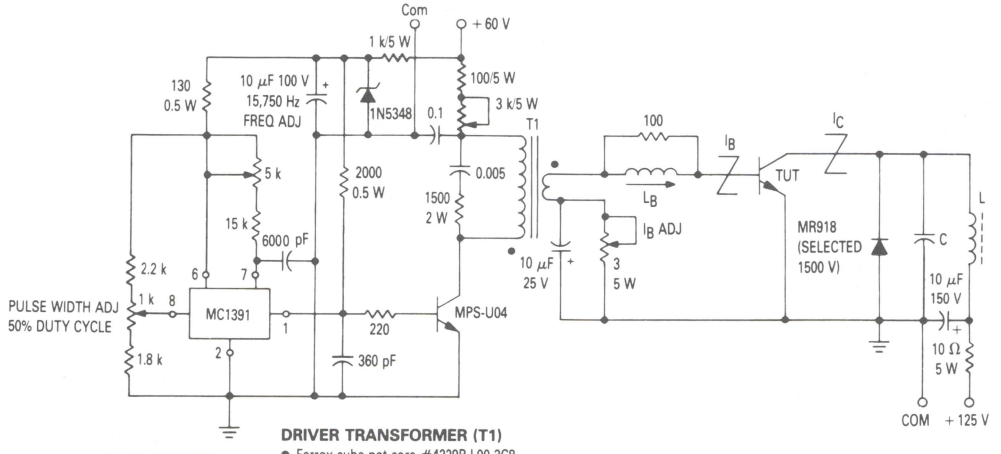

I_C	L	C
0.75 A	4.25 mH	.003 μF
1.5	2.18 mH	.006 μF
2.0	1.6 mH	.008 μF

DRIVER TRANSFORMER (T1)

- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance Lp = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

BASE DRIVE: The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Figure 2. This results in rapid, but only partial, collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Figure 3, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically, since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B as shown in Figures 4 and 5. This shows the parameter that really matters, dissipation, whether caused by switching or by saturation. The negative slope of these curves at the left (low I_{B1}) is caused by saturation losses. The positive slope portion at higher I_{B1}, and low values of L_B is due to switching losses as described above. Note that for very low L_B a very narrow optimum is obtained. This occurs when $I_{B1}\ h_{FE} = I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1}\ h_{FE} = I_{CM}$ point as the turn-off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor initiation of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left or right according to the relation $I_{B1}\ h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accommodate the lowest h_{FE} part specified. Figure 8 gives values recommended for L_B and I_{B1} for this device over a wide range of I_{CM}. These values were chosen from a large number of curves like Figure 4 and Figure 5. Neither L_B nor I_{B1} are absolutely critical, as can be seen from the examples shown, and values of Figure 8 are provided for guidance only.

TEST CIRCUIT WAVEFORMS

FIGURE 2

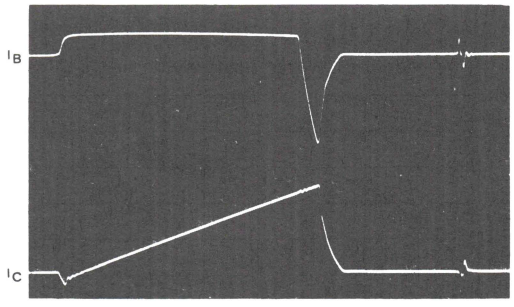

FIGURE 3

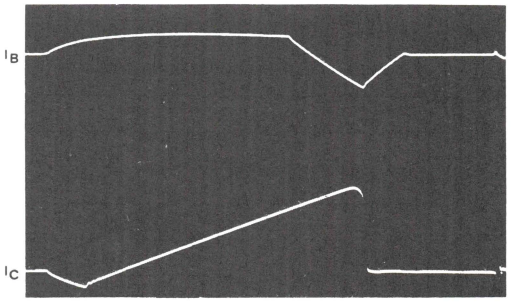

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance.

Once the required transistor operating current is determined, fixed circuit values may be selected from the table. Factory testing is performed by reading the current meter only, since the input power is proportional to current. No adjustment of the test apparatus is required.

FIGURE 4 – OPTIMIZING DRIVE @ I_C = 0.75 A

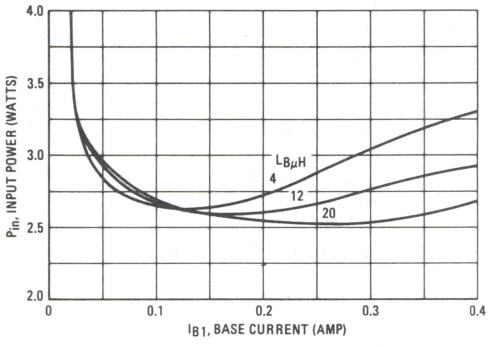

FIGURE 5 – OPTIMIZING DRIVE @ I_C = 1.5 A

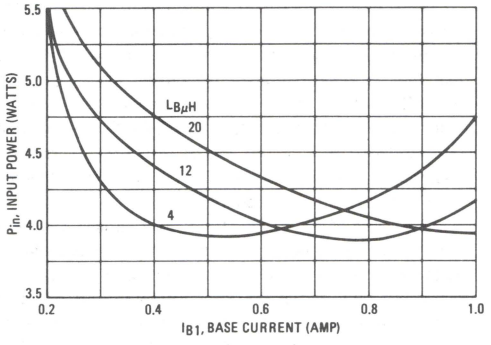

FIGURE 6 – OPTIMIZING DRIVE @ I_C = 2.0 A

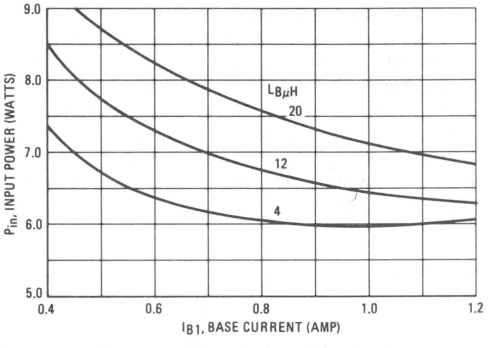

FIGURE 7 – SWITCHING BEHAVIOR versus TEMPERATURE

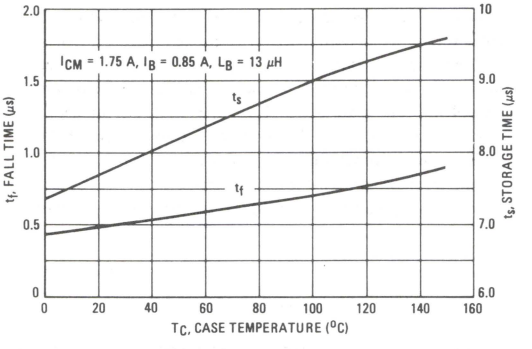

FIGURE 8 – OPTIMUM DRIVE CONDITIONS

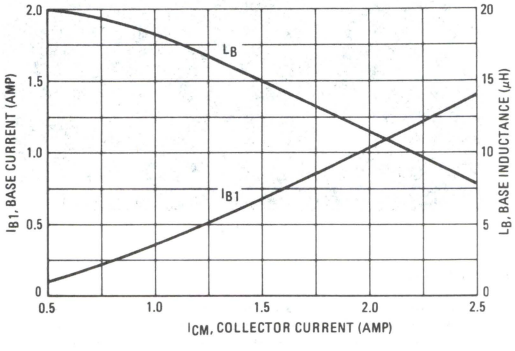

FIGURE 9 – SWITCHING BEHAVIOR versus I_{CM}

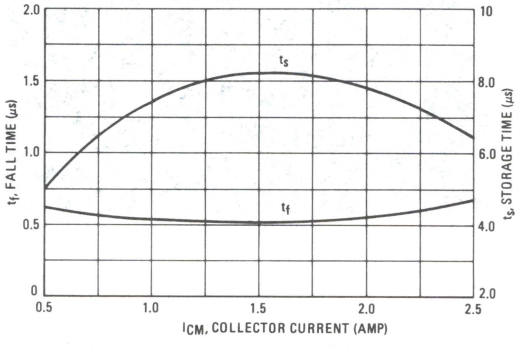

3

FIGURE 10 – THERMAL RESPONSE

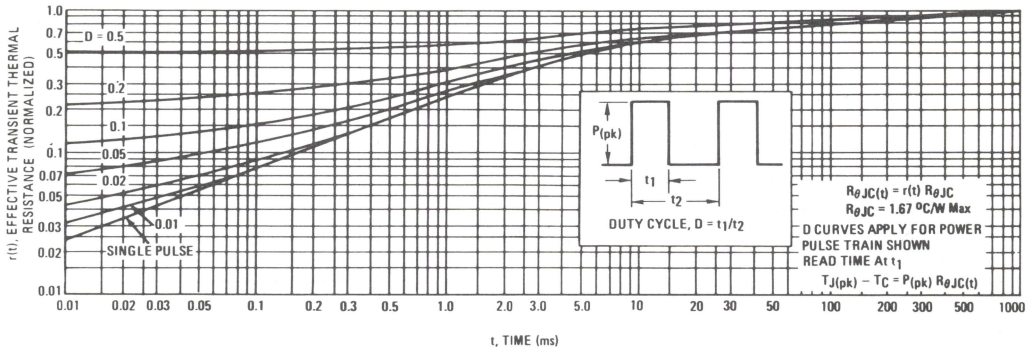

FIGURE 11 – COLLECTOR SATURATION REGION

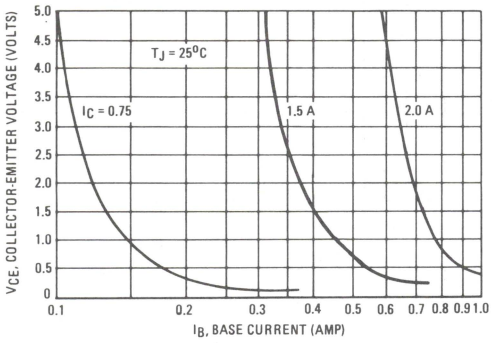

FIGURE 12 – DC CURRENT GAIN

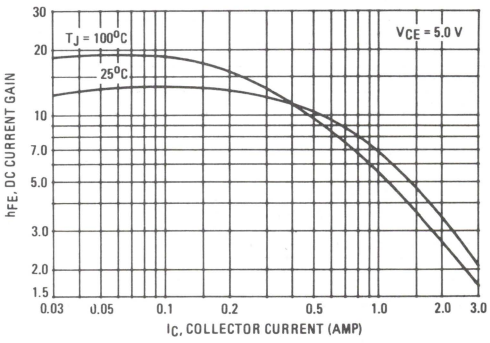

FIGURE 13 – "ON" VOLTAGES

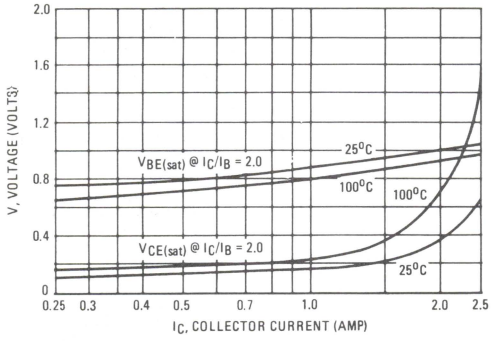

FIGURE 14-MAXIMUM FORWARD BIAS SAFE OPERATING AREA

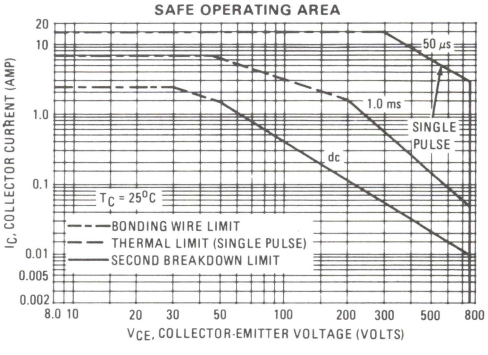

NOTE:
There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The 50 μs SB curve is beyond the thermal limits of this part. However, the parts will survive a transient that remains within these SB limits without failing.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ12003

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in CRT deflection circuits.

- Collector-Emitter Voltage — V_{CEX} = 1500 Volts
- Glassivated Base-Collector Junction
- Forward Bias Safe Operating Area @ 50 μs = 20 A, 300 V
- Switching Times with Inductive Loads —
  t_f = 0.5 μs (Typ) @ I_C = 3.0 A

4 AMPERE

NPN SILICON POWER TRANSISTOR

1500 VOLTS
100 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	750	Vdc
Collector-Emitter Voltage	V_{CEX}	1500	Vdc
Emitter-Base Voltage	V_{EBO}	5.0	Vdc
Collector-Current — Continuous	I_C	4.0	Adc
Base Current — Continuous	I_B	3.0	Adc
Emitter Current — Continuous	I_E	7.0	Adc
Total Power Dissipation @ T_C = 25°C T_C = 100°C Derate above 25°C	P_D	100 40 0.8	Watts Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes 1/8" from Case for 5 Seconds	T_L	275	°C



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

FIGURE 1 — TEST CIRCUIT

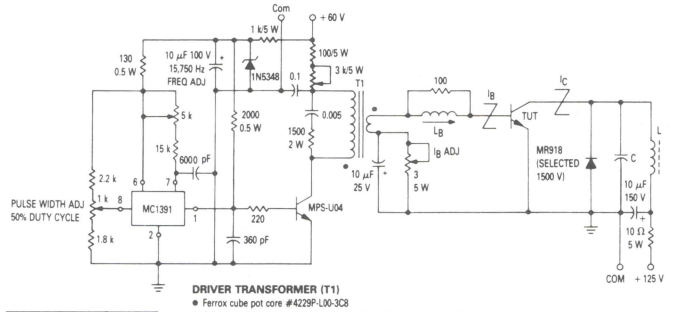

DRIVER TRANSFORMER (T1)
- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance Lp = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

I_C A	L mH	C μF
3.0	1.00	0.012

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	750	–	–	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)	I_{CES}	–	–	1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	–	1.0	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 1.2 Adc)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 1.2 Adc)	$V_{BE(sat)}$	–	–	1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 5			–
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)	f_T	–	4	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	–	90	–	pF
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 3.0 Adc, I_{B1} = 1.2 Adc, L_B = 8.0 μH, See Figure 1)	t_f	–	0.5	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

FIGURE 2 – DC CURRENT GAIN

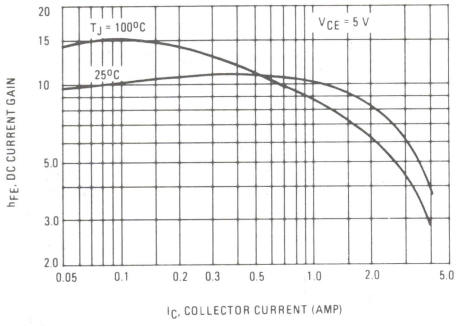

FIGURE 3 – COLLECTOR SATURATION REGION

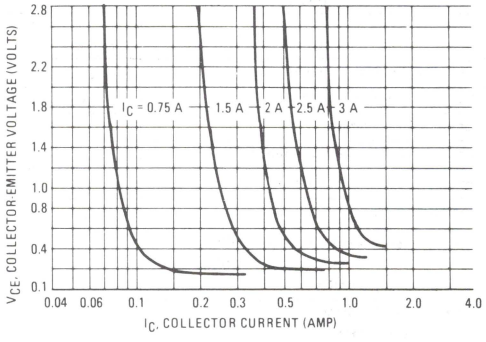

FIGURE 4 – "ON" VOLTAGES

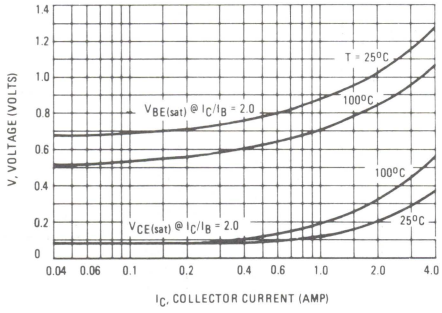

FIGURE 5 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

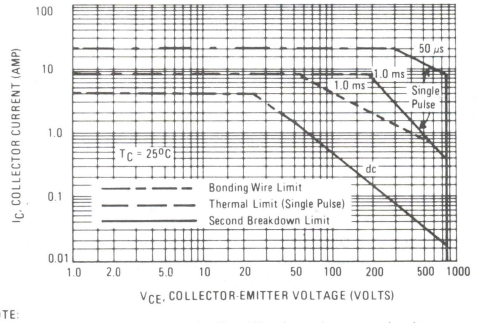

NOTE:

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The 50 μs and 1 ms curves are beyond the thermal limits of this part. However, the parts will survive a transient that remains within these SB limits without failing.

3

MJ12004
MJH12004

Designers Data Sheet

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in large screen color deflection circuits.

- Collector-Emitter Voltage — V_{CEX} = 1500 Vdc
- Glassivated Base-Collector Junction
- Safe Operating Area @ 50 μs = 20 A, 400 V
- Switching Times with Inductive Loads —
  t_f = 0.4 μs (Typ) @ I_C = 4.5 A

5.0 AMPERE

NPN SILICON POWER TRANSISTORS

1500 VOLTS
100 WATTS

MJ12004

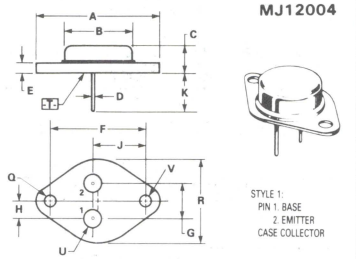

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ 0.13 (0.005) Ⓜ T V Ⓜ
   FOR LEADS:
   ⌖ 0.13 (0.005) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

MJH12004

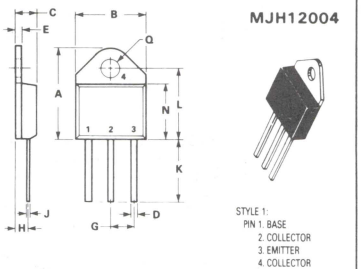

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	750	Vdc
Collector-Emitter Voltage	V_{CEX}	1500	Vdc
Emitter Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	5.0	Adc
Base Current — Continuous	I_B	4.0	Adc
Emitter Current — Continuous	I_E	9.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	100 40 0.8	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25° unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	750	–	–	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)	I_{CES}	–	–	1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	–	1.0	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 1.8 Adc) (I_C = 3.5 Adc, I_B = 1.5 Adc)	$V_{CE(sat)}$	– –	– –	5.0 5.0	Vdc
Base Emitter Saturation Voltage (I_C = 4.5 Adc, I_B = 1.8 Adc) (I_C = 3.5 Adc, I_B = 1.5 Adc)	$V_{BE(sat)}$	– –	– –	1.5 1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 14			
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1 MHz)	f_T	–	4	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	–	125	–	pF
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 4.5 Adc, I_{B1} = 1.8 Adc, L_B = 8.0 μH, See Figure 1) T_C = 25°C T_C = 100°C	t_f	– –	0.4 0.6	1.0 –	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

Figure 1. Switching Times Test Circuit

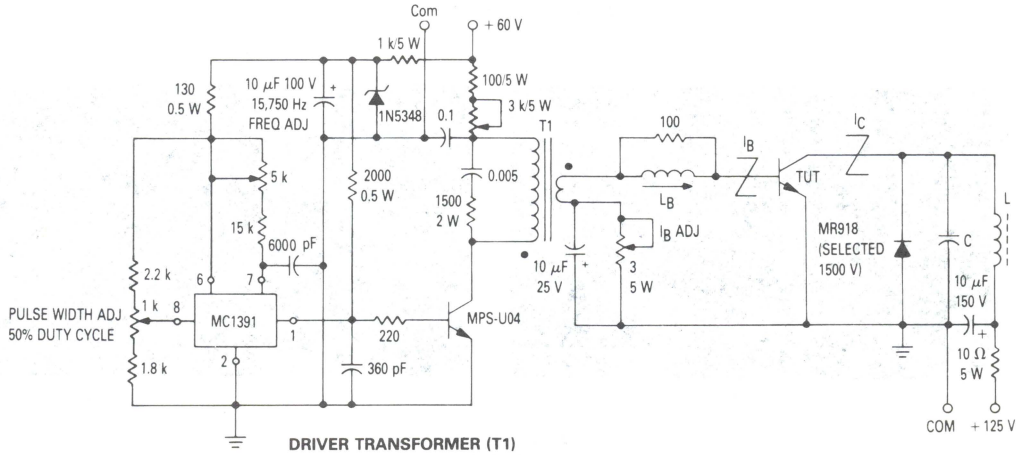

I_C A	L mH	C μF
3.5	0.87	0.013
4.5	0.67	0.017

DRIVER TRANSFORMER (T1)

- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance Lp = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

BASE DRIVE: The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst-case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Figure 2. This results in rapid, but only partial, collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Figure 3, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically, since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B as shown in Figures 4 and 5. This shows the parameter that really matters, dissipation, whether caused by switching or by saturation. The negative slope of these curves at the left (low I_{B1}) is caused by saturation losses. The positive slope portion at higher I_{B1}, and low values of L_B is due to switching losses as described above. Note that for very low L_B a very narrow optimum is obtained. This occurs when $I_{B1}\ h_{FE} = I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1}\ h_{FE} = I_{CM}$ point as the turn-off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor *initiation* of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left or right according to the relation $I_{B1}\ h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accommodate the lowest h_{FE} part specified. Figure 8 gives values recommended for L_B and I_{B1} for this device over a wide range of I_{CM}. These values were chosen from a large number of curves like Figure 4 and Figure 5. Neither L_B nor I_{B1} are absolutely critical, as can be seen from the examples shown, and values of Figure 8 are provided for guidance only.

TEST CIRCUIT WAVEFORMS

FIGURE 2

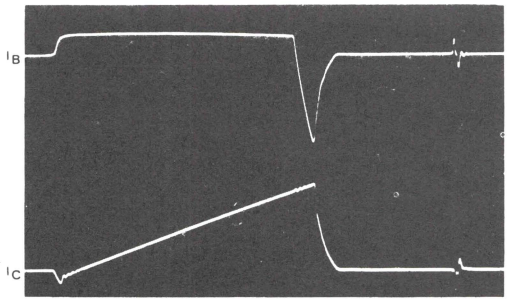

FIGURE 3

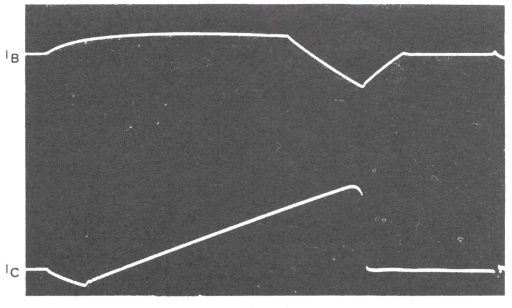

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance.

Once the required transistor operating current is determined, fixed circuit values may be selected from the table. Factory testing is performed by reading the current meter only, since the input power is proportional to current. No adjustment of the test apparatus is required.

FIGURE 4 – OPTIMIZING DRIVE @ 3.5 A

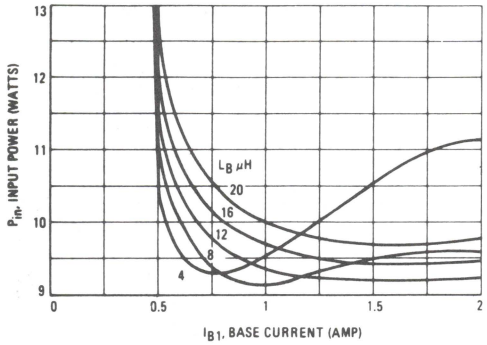

FIGURE 5 – OPTIMIZING DRIVE @ 4.5 A

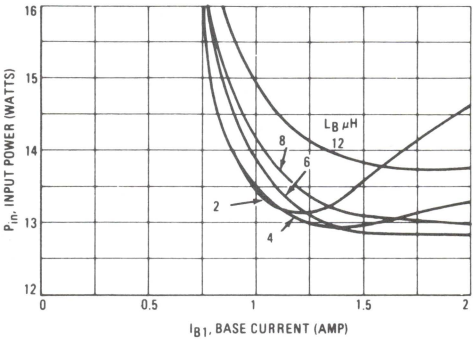

FIGURE 6 – SWITCHING BEHAVIOR versus TEMPERATURE
I_{CM} = 3.5 A, I_B = 1.5 A, L_B = 14 μH

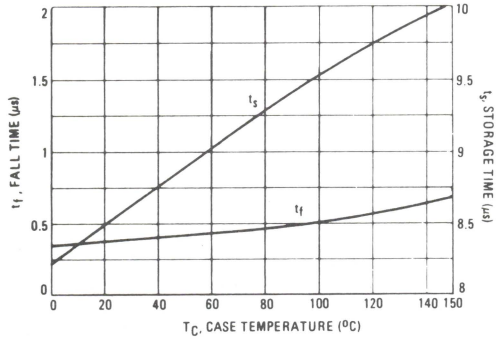

FIGURE 7 – SWITCHING BEHAVIOR versus TEMPERATURE
I_{CM} = 4.5 A, I_B = 1.75 A, L_B = 8 μH

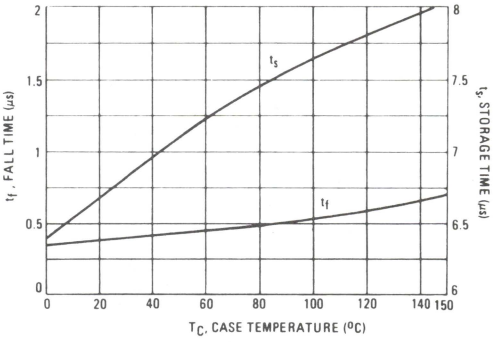

FIGURE 8 – OPTIMUM DRIVE CONDITIONS

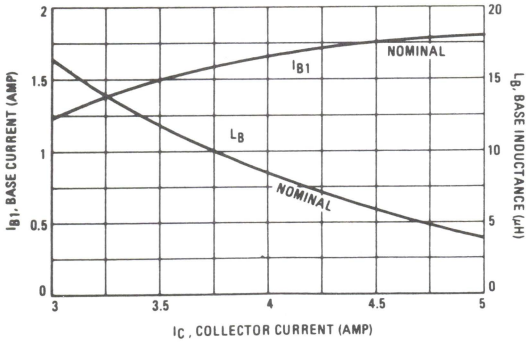

FIGURE 9 – SWITCHING BEHAVIOR versus I_{CM}

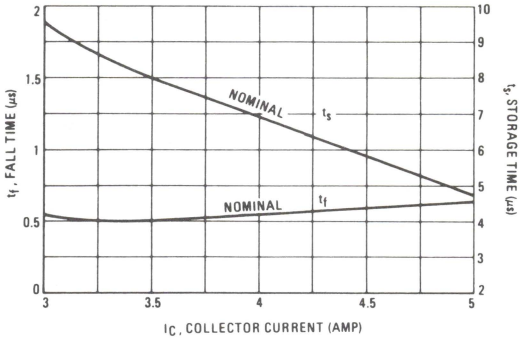

3

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 10 — DC CURRENT GAIN

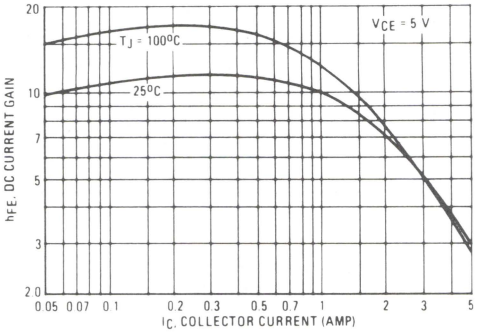

FIGURE 12 — COLLECTOR SATURATION REGION

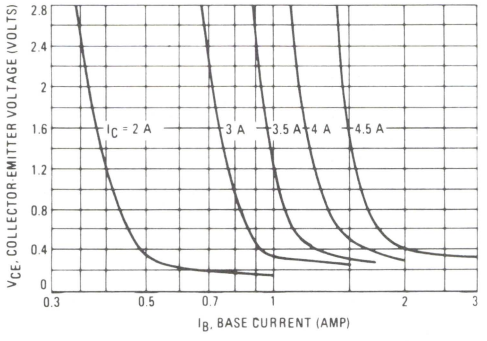

SAFE OPERATING AREA INFORMATION

FIGURE 11 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

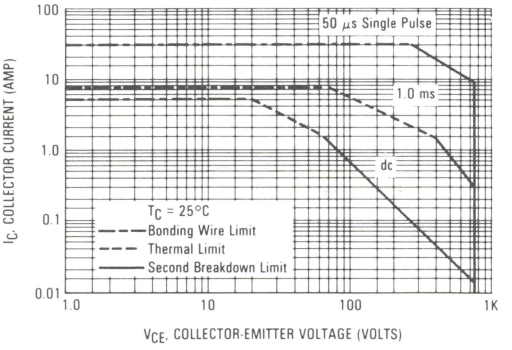

NOTE:

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The 50 μs SB curve is beyond the thermal limits of this part. However, the parts will survive a transient that remains within these SB limits without failing.

FIGURE 13 – "ON" VOLTAGES

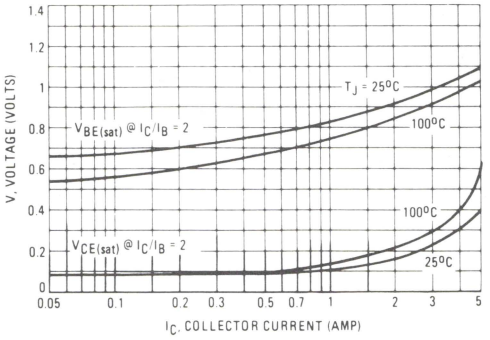

THERMAL RESPONSE

FIGURE 14 — MJ12004

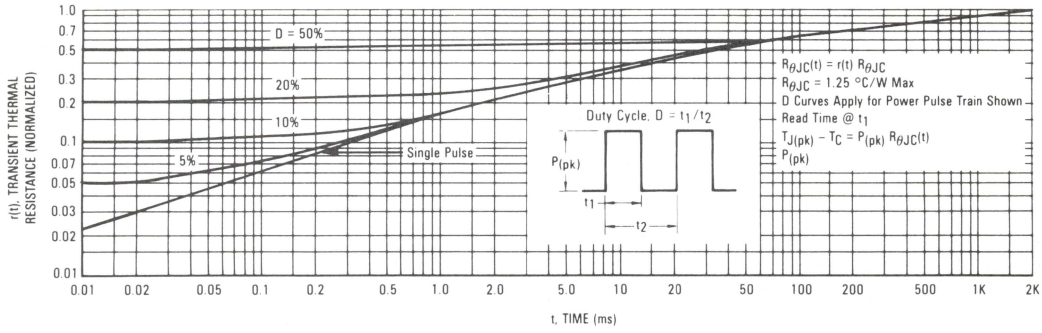

FIGURE 15 — MJH12004

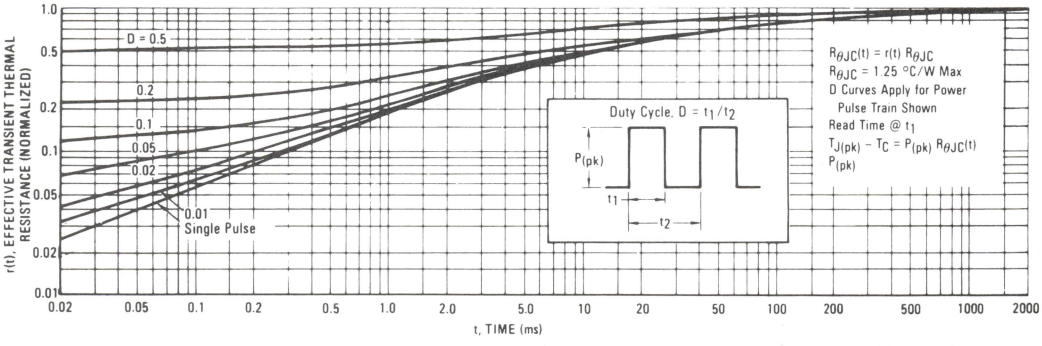

3

MJ12005

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in deflection circuits.

- V_{CEX} = 1500 V
- Glassivated Base-Collector Junction
- Safe Operating Area @ 50 μs = 20 A, 400 V

8 AMPERE

NPN SILICON
POWER TRANSISTOR

1500 VOLTS
100 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEX}	1500	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	8.0	Adc
Base Current — Continuous	I_B	4.0	Adc
Emitter Current — Continuous	I_E	12	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	100 0.8	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to + 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

3

FIGURE 1 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

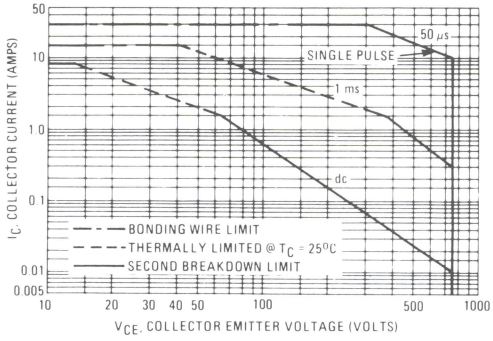



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | 0.13 (0.005) Ⓜ | T | V Ⓜ
   FOR LEADS:
   ⌖ | 0.13 (0.005) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (V_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	750	–	–	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)	I_{CES}	–	–	0.25	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	–	0.1	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc)	$V_{BE(sat)}$	–	–	1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	–	–	See Figure 1	
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 5.0 Adc, I_{B1} = 1.0 Adc, L_B = 8.0 μH)	t_f	–	0.4	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

FIGURE 2 – DC CURRENT GAIN

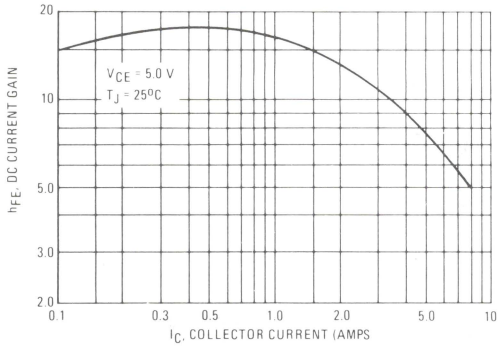

FIGURE 3 – SWITCHING TIMES TEST CIRCUIT

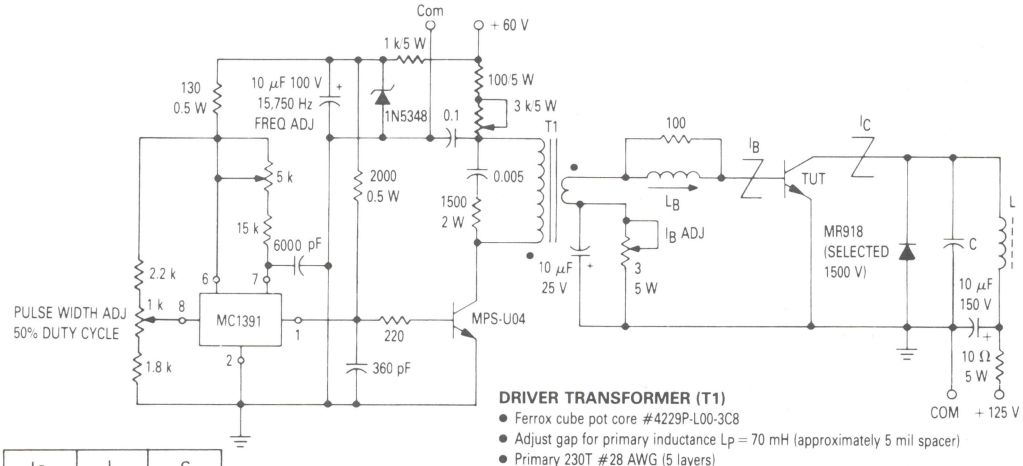

I_C A	L mH	C μF
5.0	0.575	0.018

DRIVER TRANSFORMER (T1)

- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance Lp = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ12005D

Designer's Data Sheet

NPN HORIZONTAL DEFLECTION TRANSISTOR WITH INTEGRATED DAMPER DIODE

. . . specifically designed for use in large-screen color-deflection circuits.

- Collector-Emitter Voltage — V_{CEX} = 1500 Vdc
- Glassivated Base-Collector Junction
- Safe Operating Area @ 50 μs = 20 A, 400 V
- Switching Times with Inductive Loads — t_f = 0.4 μs (Typ) @ I_C = 5.0 A
- C-E Diode Forward Voltage Specified



8.0 AMPERE

NPN SILICON POWER TRANSISTORS

1500 VOLTS
100 WATTS





NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ 0.13 (0.005) M T V M
   FOR LEADS:
   ⌖ 0.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

MAXIMUM RATINGS

Rating	Symbol	MJ12005D	Unit
Collector-Emitter Voltage	V_{CEO}	750	Vdc
Collector-Emitter Voltage	V_{CEX}	1500	Vdc
Emitter Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	8.0	Adc
Base Current — Continuous	I_B	4.0	Adc
Emitter Current — Continuous	I_E	12	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	100 40 0.8	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves—representing boundaries on device characteristics—are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	750	—	—	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)	I_{CES}	—	—	1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	—	—	200	mAdc
ON CHARACTERISTICS (1)					
Diode Forward Voltage (I_F = 8.0 Amps)	$V_{F(VEC)}$	—	—	2.5	Vdc
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc) (I_C = 8.0 Adc, I_B = 2.5 Adc)	$V_{CE(sat)}$	 — —	 — —	 5.0 5.0	Vdc
Base Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc) (I_C = 8.0 Adc, I_B = 2.5 Adc)	$V_{BE(sat)}$	 — —	 — —	 1.5 1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 14			
DYNAMIC CHARACTERISTICS					
Current-Gain — Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)	f_T	—	4.0	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	—	150	—	pF
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 5.0 Adc, I_{B1} = 1.5 Adc, L_B = 8.0 μH, See Figure 1) T_C = 25°C T_C = 100°C	t_f	 — —	 0.4 0.6	 1.0 —	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2.0%.

FIGURE 1 — SWITCHING TIMES TEST CIRCUIT

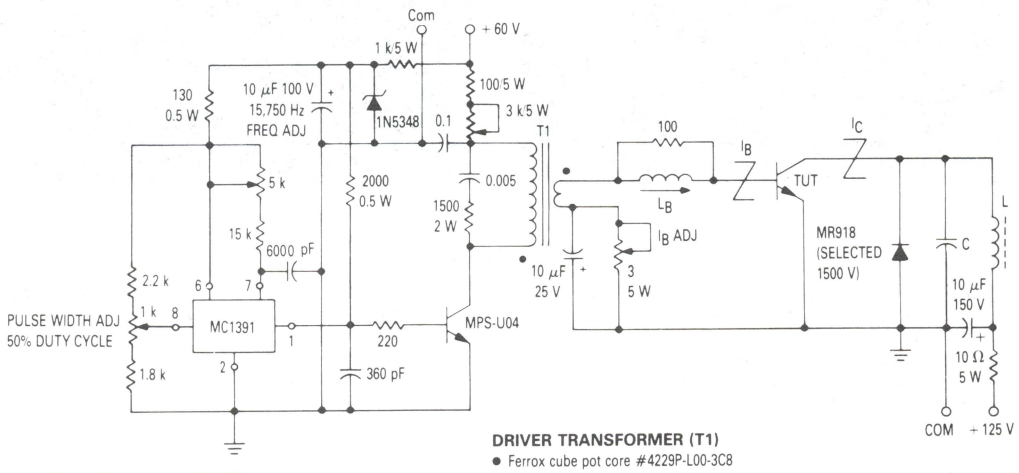

I_C A	L mH	C μF
5.0	0.57	0.018
7.0	0.45	0.025

DRIVER TRANSFORMER (T1)

- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance L_P = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

BASE DRIVE: The Key to Performance

By now, the concept of controlling the shape of the turn-off base current is widely accepted and applied in horizontal deflection design. The problem stems from the fact that good saturation of the output device, prior to turn-off, must be assured. This is accomplished by providing more than enough I_{B1} to satisfy the lowest gain output device h_{FE} at the end of scan I_{CM}. Worst-case component variations and maximum high voltage loading must also be taken into account.

If the base of the output transistor is driven by a very low impedance source, the turn-off base current will reverse very quickly as shown in Figure 2. This results in rapid, but only partial, collector turn-off, because excess carriers become trapped in the high resistivity collector and the transistor is still conductive. This is a high dissipation mode, since the collector voltage is rising very rapidly. The problem is overcome by adding inductance to the base circuit to slow the base current reversal as shown in Figure 3, thus allowing excess carrier recombination in the collector to occur while the base current is still flowing.

Choosing the right L_B is usually done empirically, since the equivalent circuit is complex, and since there are several important variables (I_{CM}, I_{B1}, and h_{FE} at I_{CM}). One method is to plot fall time as a function of L_B, at the desired conditions, for several devices within the h_{FE} specification. A more informative method is to plot power dissipation versus I_{B1} for a range of values of L_B as shown in Figures 4 and 5. This shows the parameter that really matters, dissipation, whether caused by switching or by saturation. The negative slope of these curves at the left (low I_{B1}) is caused by saturation losses. The positive slope portion at higher I_{B1}, and low values of L_B is due to switching losses as described above. Note that for very low L_B a very narrow optimum is obtained. This occurs when $I_{B1}\ h_{FE} = I_{CM}$, and therefore would be acceptable only for the "typical" device with constant I_{CM}. As L_B is increased, the curves become broader and flatter above the $I_{B1}\ h_{FE} = I_{CM}$ point as the turn-off "tails" are brought under control. Eventually, if L_B is raised too far, the dissipation all across the curve will rise, due to poor *initiation* of switching rather than tailing. Plotting this type of curve family for devices of different h_{FE}, essentially moves the curves to the left or right according to the relation $I_{B1}\ h_{FE}$ = constant. It then becomes obvious that, for a specified I_{CM}, an L_B can be chosen which will give low dissipation over a range of h_{FE} and/or I_{B1}. The only remaining decision is to pick I_{B1} high enough to accommodate the lowest h_{FE} part specified. Figure 8 gives values recommended for L_B and I_{B1} for this device over a wide range of I_{CM}. These values were chosen from a large number of curves like Figure 4 and Figure 5. Neither L_B nor I_{B1} are absolutely critical, as can be seen from the examples shown, and values of Figure 8 are provided for guidance only.

TEST CIRCUIT WAVEFORMS

FIGURE 2

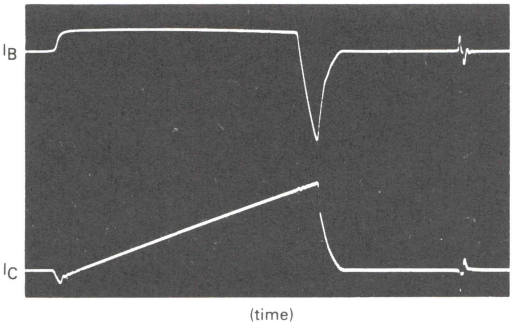

FIGURE 3

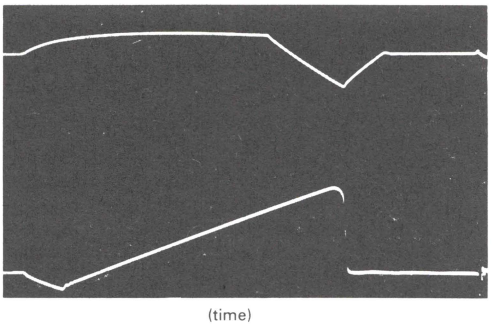

TEST CIRCUIT OPTIMIZATION

The test circuit may be used to evaluate devices in the conventional manner, i.e., to measure fall time, storage time, and saturation voltage. However, this circuit was designed to evaluate devices by a simple criterion, power supply input. Excessive power input can be caused by a variety of problems, but it is the dissipation in the transistor that is of fundamental importance. Once the required transistor operating current is determined, fixed circuit values may be selected from the table. Factory testing is performed by reading the current meter only, since the input power is proportional to current. No adjustment of the test apparatus is required.

FIGURE 4 — OPTIMIZING DRIVE @ 5.0 A

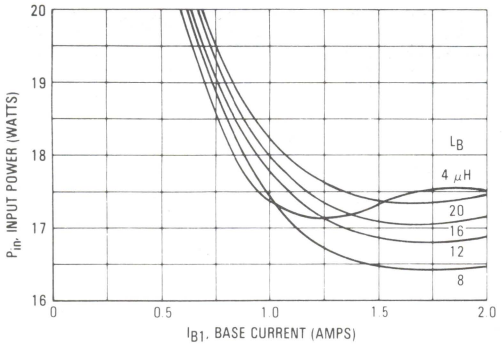

FIGURE 5 — OPTIMIZING DRIVE @ 7.0 A

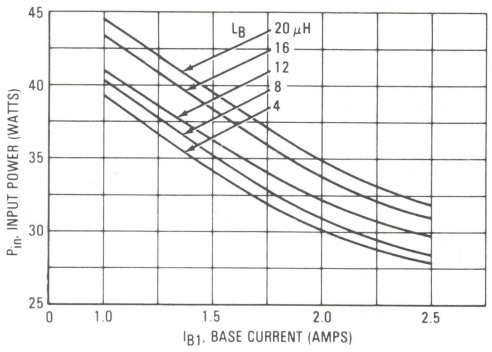

FIGURE 6 — SWITCHING BEHAVIOR versus TEMPERATURE
I_{CM} = 5.0 A, I_B = 1.5 A, L_B = 8.0 μH

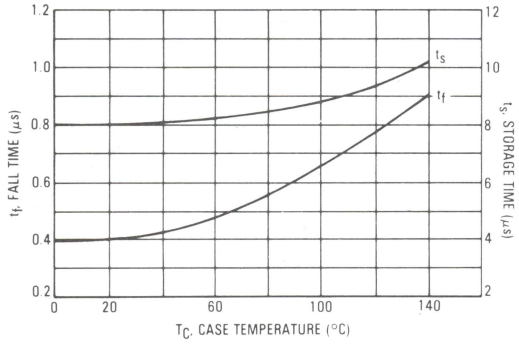

FIGURE 7 — SWITCHING BEHAVIOR versus TEMPERATURE
I_{CM} = 7.0 A, I_B = 2.0 A, L_B = 4.0 μH

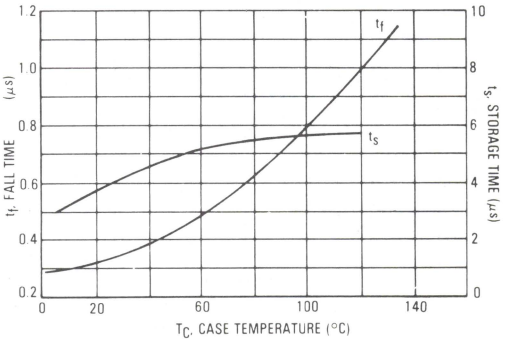

FIGURE 8 — OPTIMUM DRIVE CONDITIONS

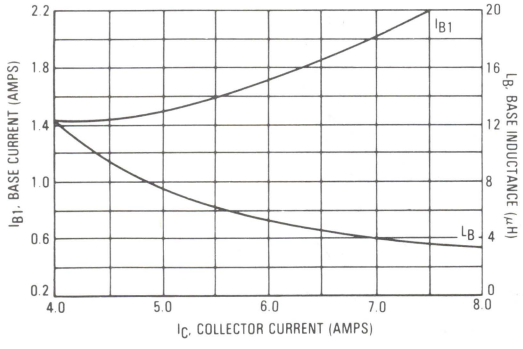

FIGURE 9 — SWITCHING BEHAVIOR versus I_{CM} AT 25°C

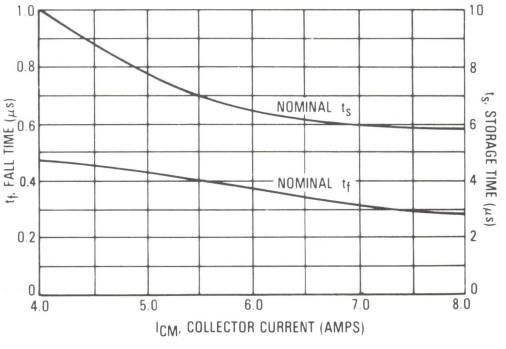

3

FIGURE 10 — THERMAL RESPONSE

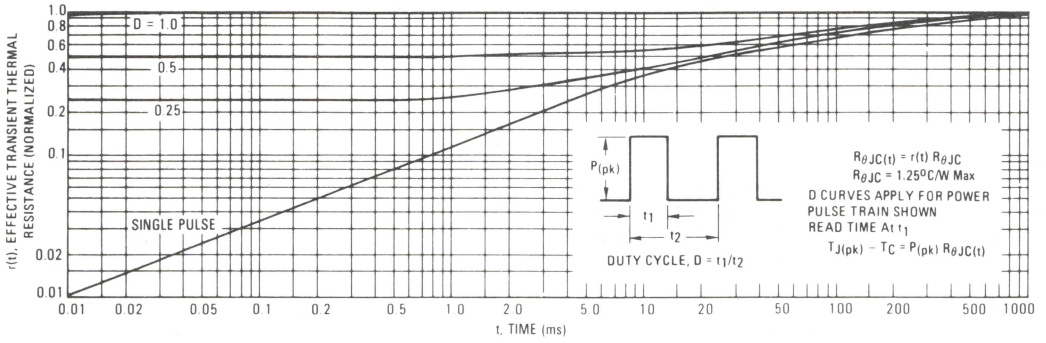

FIGURE 11 — COLLECTOR SATURATION REGION

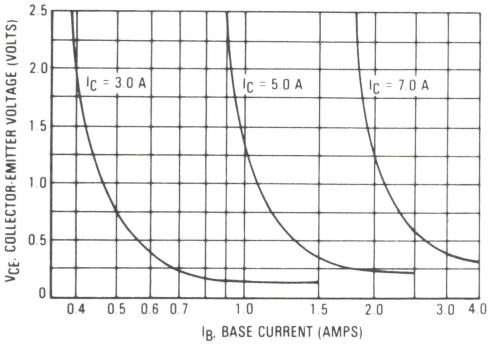

FIGURE 12 — DC CURRENT GAIN versus COLLECTOR CURRENT

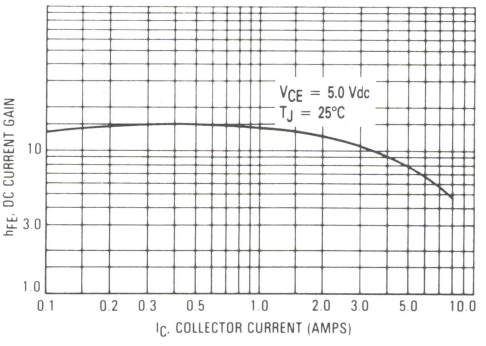

FIGURE 13 — "ON" VOLTAGES

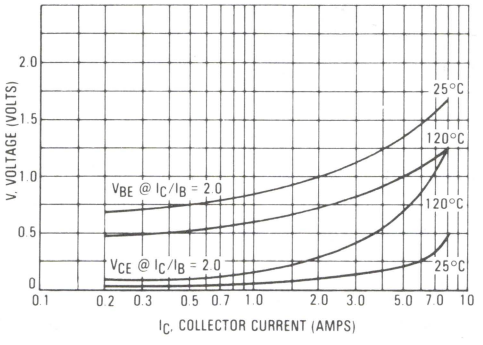

3

FIGURE 14 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

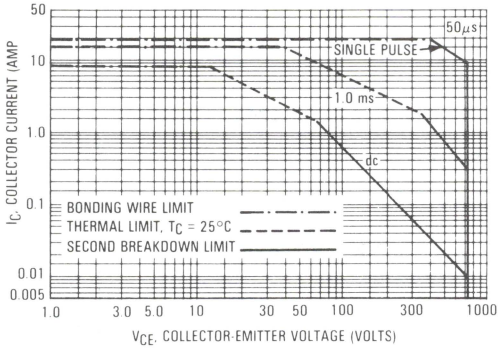

NOTE:

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The 50 μs SB curve is beyond the thermal limits of this part. However, the parts will survive a transient that remains within these SB limits without falling.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ12010

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in CRT deflection circuits.

- Collector-Emitter Voltage — V_{CEX} = 950 Volts
- Glassivated Base-Collector Junction
- Forward Bias Safe Operating Area @ 50 μs = 30 A, 300 V
- Switching Times with Inductive Loads —
  t_f = 0.5 μs (Typ) @ I_C = 5.0 A

10 AMPERE

NPN SILICON POWER TRANSISTOR

950 VOLTS
100 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	400	Vdc
Collector-Emitter Voltage	V_{CEX}	950	Vdc
Emitter-Base Voltage	V_{EBO}	5.0	Vdc
Collector-Current — Continuous	I_C	10	Adc
Base Current — Continuous	I_B	5.0	Adc
Emitter Current — Continuous	I_E	15	Adc
Total Power Dissipation @ T_C = 25°C T_C = 100°C Derate above 25°C	P_D	100 40 0.8	Watts Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	275	°C

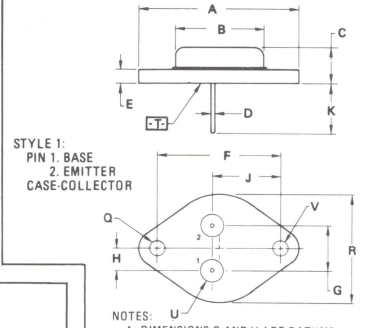

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀.13 (0.005) Ⓜ | T | V Ⓜ
   FOR LEADS:
   ⌖ | ⌀.13 (0.005) Ⓜ T | V Ⓜ | Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

FIGURE 1 — TEST CIRCUIT

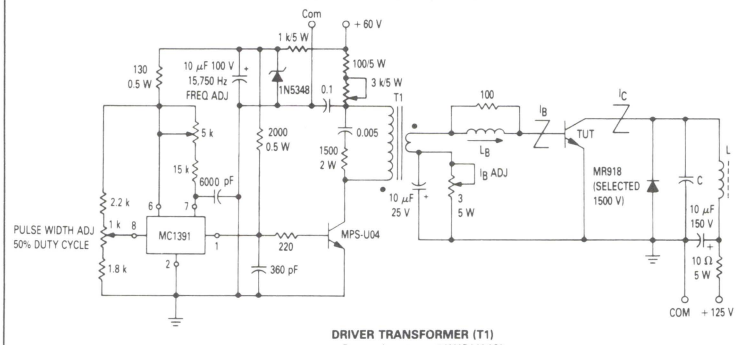

I_C A	L mH	C μF
5.0	0.57	0.039

DRIVER TRANSFORMER (T1)
- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance Lp = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	400	–	–	Vdc
Collector Cutoff Current (V_{CE} = 950 Vdc, V_{BE} = 0)	I_{CES}	–	–	1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	–	1.0	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.2 Adc)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.2 Adc)	$V_{BE(sat)}$	–	–	1.5	Vdc
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 5			–
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)	f_T	–	6.0	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	–	150	–	pF
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 5.0 Adc, I_{B1} = 1.2 Adc, L_B = 8.0 μH, See Figure 1)	t_f	–	0.5	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

FIGURE 2 – DC CURRENT GAIN

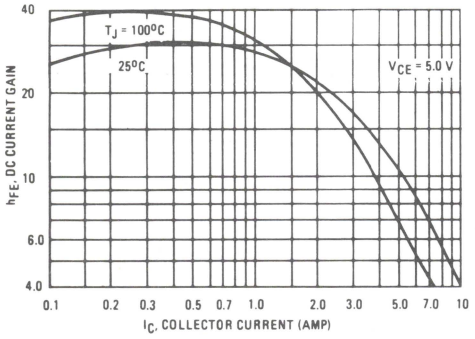

FIGURE 3 – COLLECTOR SATURATION REGION

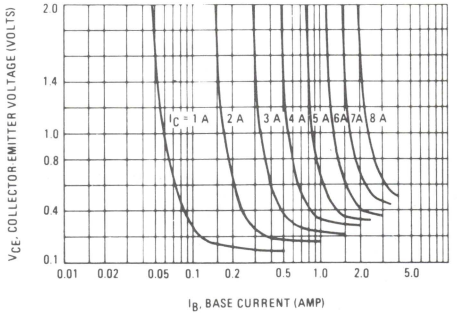

FIGURE 4 – "ON" VOLTAGES

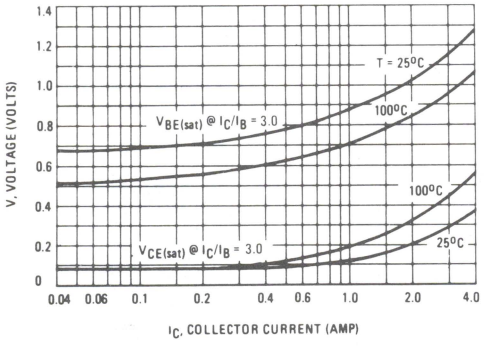

FIGURE 5 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

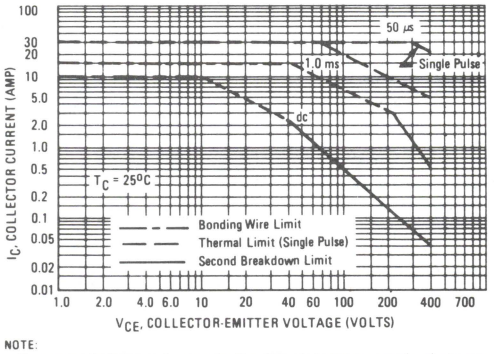

NOTE:

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The 50 μs and 1 ms curves are beyond the thermal limits of this part. However, the parts will survive a transient that remains within these SB limits without failing.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ12020
MJ12021
MJ12022

Designer's Data Sheet

5.0, 8.0 and 15 AMPERE

NPN SILICON DEFLECTION POWER TRANSISTORS

850 VOLTS
125, 150 and 175 WATTS

HIGH PERFORMANCE NPN DEFLECTION TRANSISTORS

These transistors are designed for high resolution video systems, such as, high density graphic displays, data terminals, video scanners . . . wherever high frequency deflection is required.

- Fast Turn-Off Times
- Maximum Storage and Fall Times Specified at 100°C
- Operating Junction Temperature Range -65°C to +200°C
- High f_T of 15 MHz

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ12020	MJ12021	MJ12022	Unit
Collector-Emitter Voltage	V_{CEO}		450		Vdc
Collector-Emitter Voltage	V_{CEV}		850		Vdc
Emitter Base Voltage	V_{EB}		6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	5.0 10	8.0 16	15 20	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	4.0 8.0	6.0 12	10 15	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	 125 71.5 0.714	 150 85.5 0.86	 175 100 1.0	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		-65 to +200		°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	1.17	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L		275		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ϕ.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ϕ.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA (TO-3)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)		$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc)			—	—	0.25	
(V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			—	—	1.5	
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figures 19, 21 or 23			
Turn-Off SOA with Base Reverse Biased		RBSOA	See Figures 20, 22 or 24			
ON CHARACTERISTICS (1)						
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 3.0 Adc, I_B = 0.6 Adc)	MJ12020		—	—	1.2	
(I_C = 5.0 Adc, I_B = 1.0 Adc)	MJ12021		—	—	1.2	
(I_C = 10 Adc, I_B = 2.0 Adc)	MJ12022		—	—	1.2	
Base Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 3.0 Adc, I_B = 0.6 Adc)	MJ12020		—	—	1.5	
(I_C = 5.0 Adc, I_B = 1.0 Adc)	MJ12021		—	—	1.5	
(I_C = 10 Adc, I_B = 2.0 Adc)	MJ12022		—	—	1.5	
DC Current Gain		h_{FE}				—
(I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)	MJ12020		5.0	—	—	
(I_C = 8.0 Adc, V_{CE} = 5.0 Vdc)	MJ12021		5.0	—	—	
(I_C = 15 Adc, V_{CE} = 5.0 Vdc)	MJ12022		5.0	—	—	
DYNAMIC CHARACTERISTICS						
Current Gain Bandwidth Product		f_T				MHz
(I_C = 0.3 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	MJ12020		15	—	—	
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	MJ12021		15	—	—	
(I_C = 1.3 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	MJ12022		15	—	—	
Output Capacitance		C_{ob}				pF
(V_{CB} = 10 Vdc, I_E = 0, f = 1.0 kHz)	MJ12020		—	—	200	
	MJ12021		—	—	350	
	MJ12022		—	—	400	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤2%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS							
MJ12020							
Inductive Switching, Clamped Drive							
Storage Time	(I_C = 3.0 Adc, I_B = 0.6 Adc,	T_J = 25°C	t_s	—	440	1200	ns
Fall Time	V_{CC} = 40 Vdc, $V_{BE(off)}$ = 4.0 Vdc,		t_f	—	130	300	
Storage Time	Pulse Width = 8.0 μs,	T_J = 100°C	t_s	—	550	1500	
Fall Time	Duty Cycle ≤ 2%) See Table 1		t_f	—	200	500	
Inductive Switching, Series Base Inductance							
Fall Time (I_C = 3.0 Adc, I_B = 0.6 Adc, L_B = 24 μH) See Table 2			t_f	—	175	—	ns
MJ12021							
Inductive Switching, Clamped Drive							
Storage Time	(I_C = 5.0 Adc, I_B = 1.0 Adc,	T_J = 25°C	t_s	—	550	1200	ns
Fall Time	V_{CC} = 60 Vdc, $V_{BE(off)}$ = 4.0 Vdc,		t_f	—	100	300	
Storage Time	Pulse Width = 8.0 μs,	T_J = 100°C	t_s	—	750	1600	
Fall Time	Duty Cycle ≤ 2%) See Table 1		t_f	—	180	500	
Inductive Switching, Series Base Inductance							
Fall Time (I_C = 5.0 Adc, I_B = 1.0 Adc, L_B = 24 μH) See Table 2			t_f	—	300	—	ns
MJ12022							
Inductive Switching, Clamped Drive							
Storage Time	(I_C = 10 Adc, I_B = 2.0 Adc,	T_J = 25°C	t_s	—	820	1800	ns
Fall Time	V_{CC} = 120 Vdc, $V_{BE(off)}$ = 4.0 Vdc,		t_f	—	100	300	
Storage Time	Pulse Width = 8.0 μs,	T_J = 100°C	t_s	—	1100	2500	
Fall Time	Duty Cycle ≤ 2%) See Table 1		t_f	—	130	400	
Inductive Switching, Series Base Inductance							
Fall Time (I_C = 10 Adc, I_B = 2.0 Adc, L_B = 24 μH) See Table 2			t_f	—	350	—	ns

3

TYPICAL ELECTRICAL CHARACTERISTICS

MJ12020

FIGURE 1 — DC CURRENT GAIN

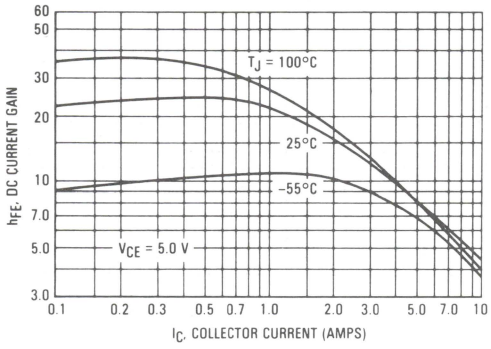

FIGURE 2 — COLLECTOR SATURATION REGION

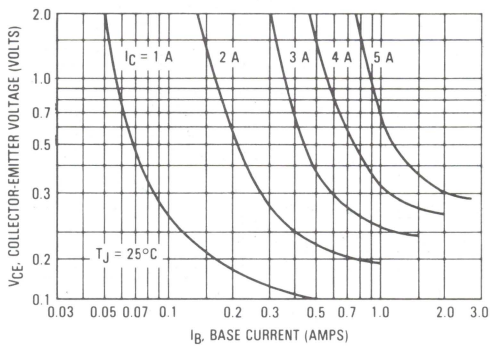

MJ12021

FIGURE 3 — DC CURRENT GAIN

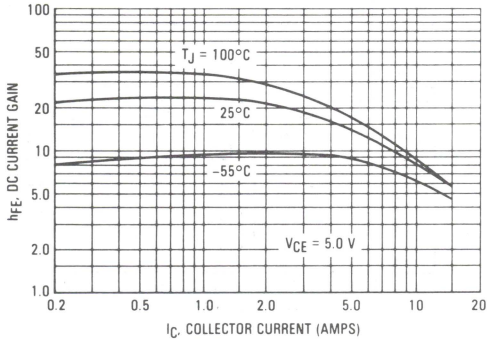

FIGURE 4 — COLLECTOR SATURATION REGION

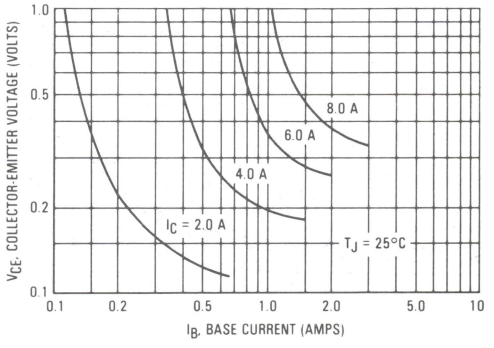

MJ12022

FIGURE 5 — DC CURRENT GAIN

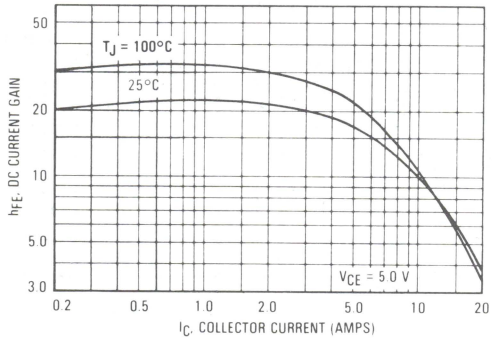

FIGURE 6 — COLLECTOR SATURATION REGION

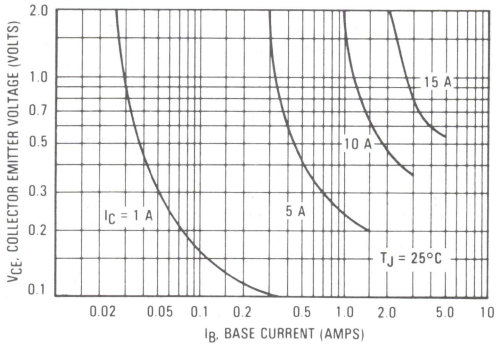

3

TYPICAL ELECTRICAL CHARACTERISTICS

MJ12020

FIGURE 7 — COLLECTOR-EMITTER SATURATION VOLTAGE

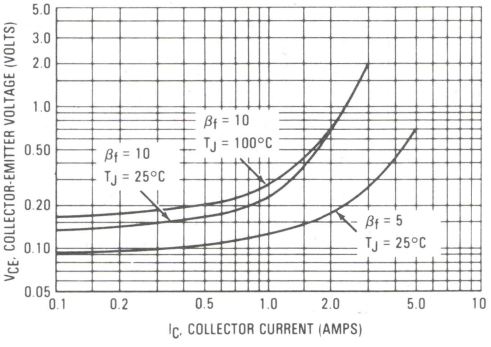

FIGURE 8 — BASE-EMITTER VOLTAGE

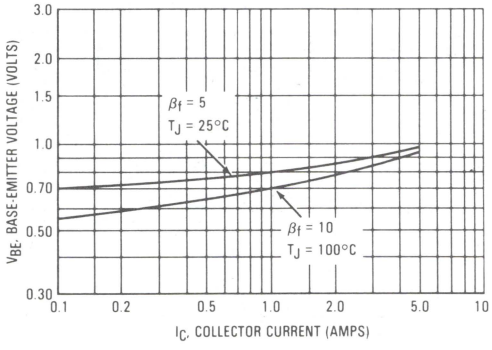

MJ12021

FIGURE 9 — COLLECTOR-EMITTER SATURATION VOLTAGE

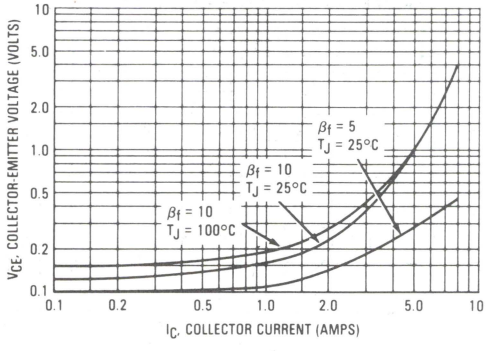

FIGURE 10 — BASE-EMITTER VOLTAGE

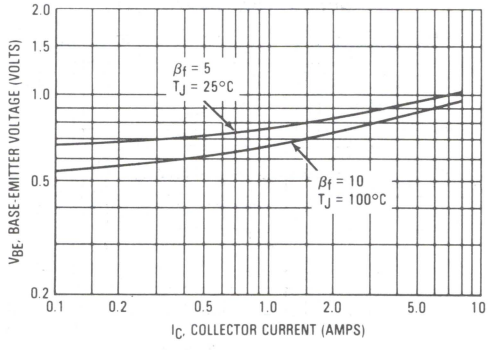

MJ12022

FIGURE 11 — COLLECTOR-EMITTER SATURATION VOLTAGE

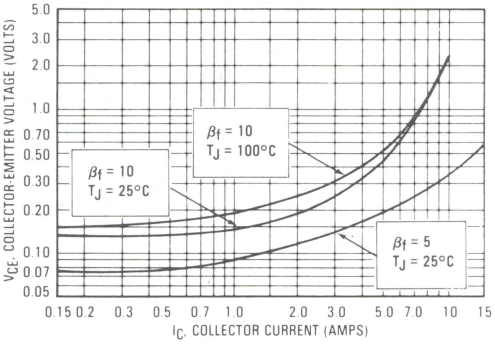

FIGURE 12 — BASE-EMITTER VOLTAGE

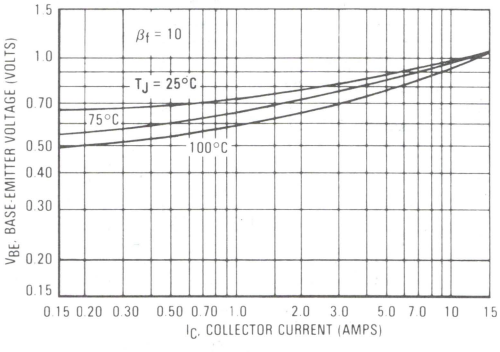

3

TYPICAL DYNAMIC CHARACTERISTICS

MJ12020

FIGURE 13 — STORAGE TIME

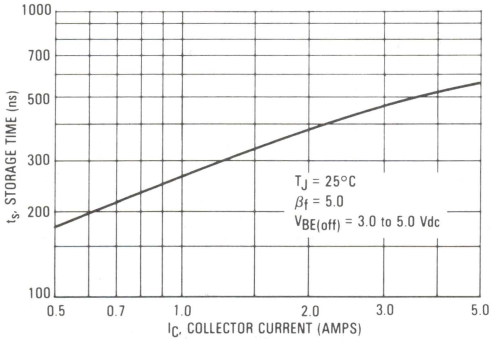

FIGURE 14 — FALL TIME

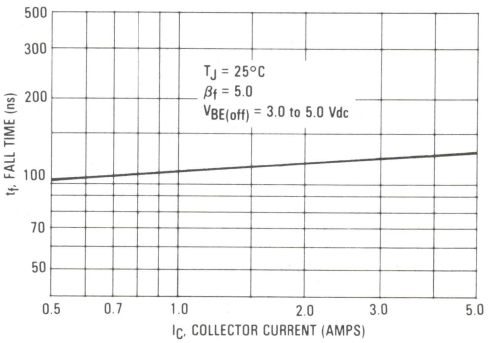

MJ12021

FIGURE 15 — STORAGE TIME

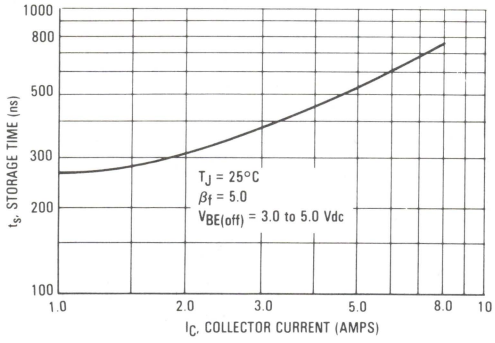

FIGURE 16 — FALL TIME

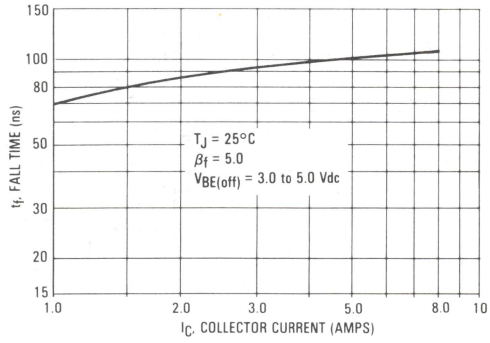

MJ12022

FIGURE 17 — STORAGE TIME

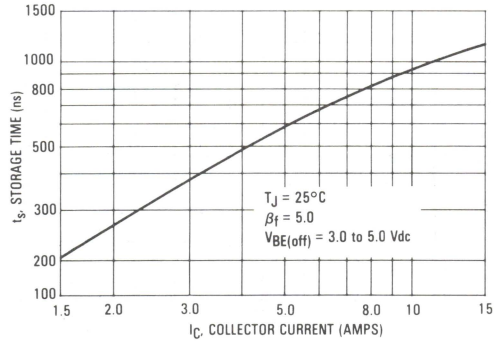

FIGURE 18 — FALL TIME

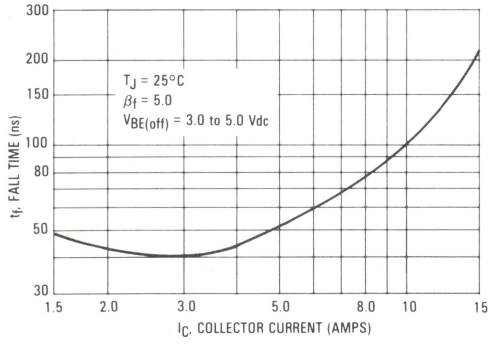

3

SAFE OPERATING AREA INFORMATION

MJ12020

FIGURE 19 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

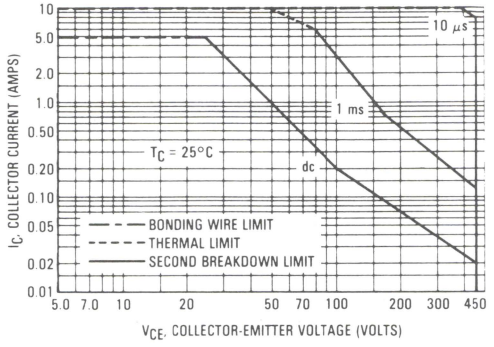

FIGURE 20 — MAXIMUM RATED TURN-OFF SAFE OPERATING AREA

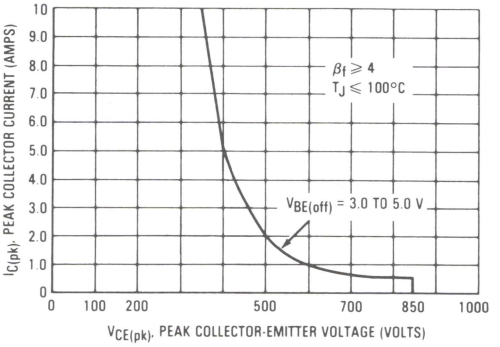

MJ12021

FIGURE 21 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

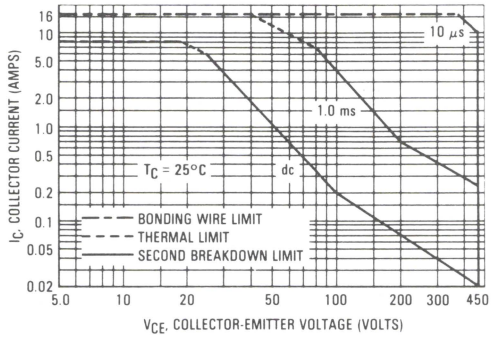

FIGURE 22 — MAXIMUM RATED TURN-OFF SAFE OPERATING AREA

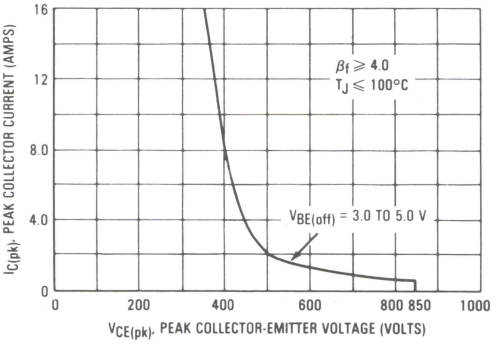

MJ12022

FIGURE 23 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

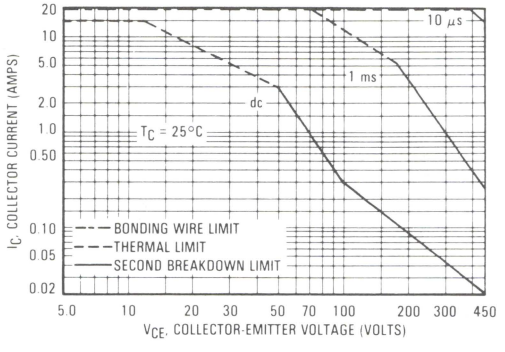

FIGURE 24 — MAXIMUM RATED TURN-OFF SAFE OPERATING AREA

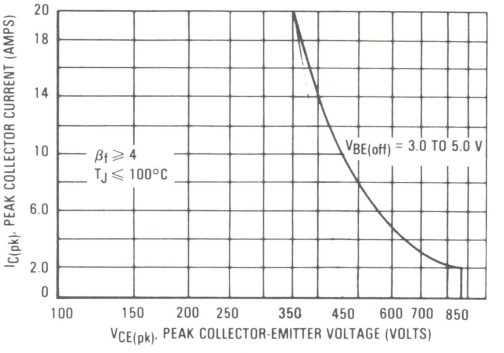

3

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 19, 21 and 23 are based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 19, 21 and 23 may be found at any case temperature by using the appropriate curve on Figure 28.

$T_{J(pk)}$ may be calculated from the data in Figures 29, 30 or 31. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

TURN-OFF

In deflection circuits, high voltage and high current normally do not occur simultaneously during turn-off with the base-emitter reverse biased. The safe level of operating these devices is specified as the Turn-Off Safe Operating Area, and represents the area the lead line may traverse during reverse biased turn off. For reliable operation, all abnormal operating conditions should be checked for operation within this area.

FIGURE 25 — CAPACITANCE VARIATION
MJ12020

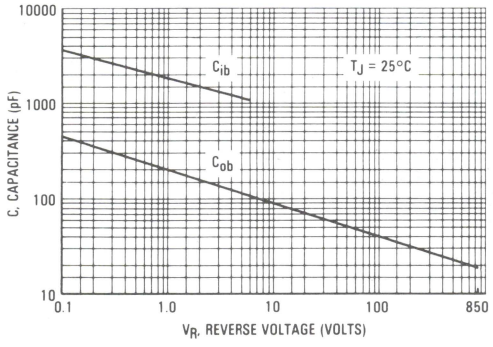

FIGURE 26 — CAPACITANCE VARIATION
MJ12021

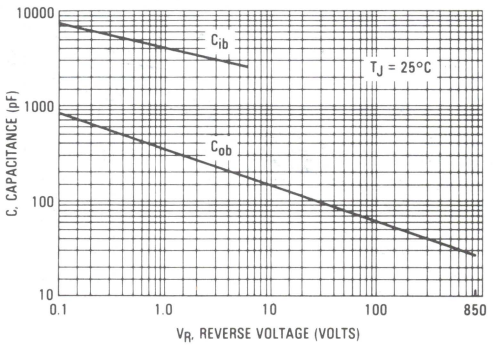

FIGURE 27 — CAPACITANCE VARIATION
MJ12022

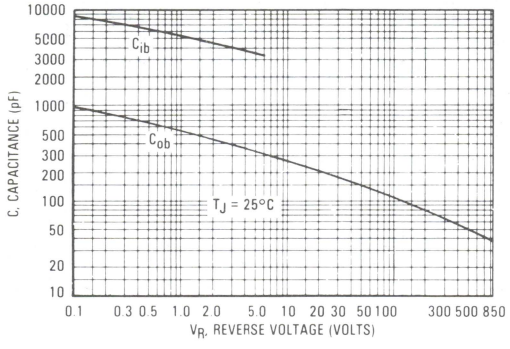

FIGURE 28 — POWER DERATING

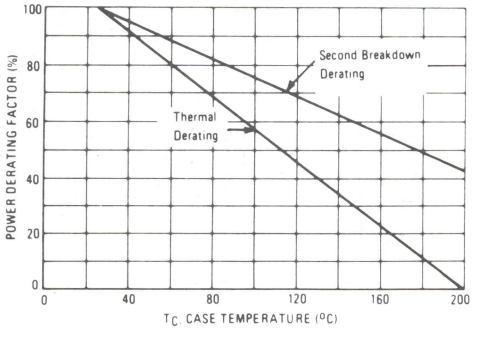

3

THERMAL RESPONSE

FIGURE 29 — MJ12020

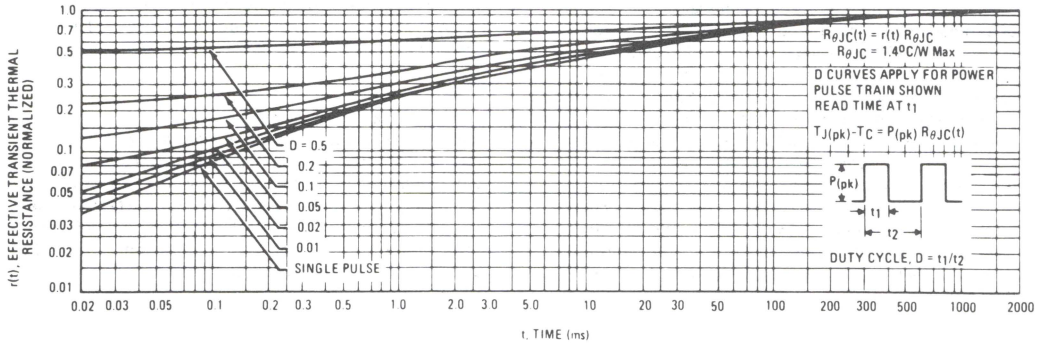

FIGURE 30 — MJ12021

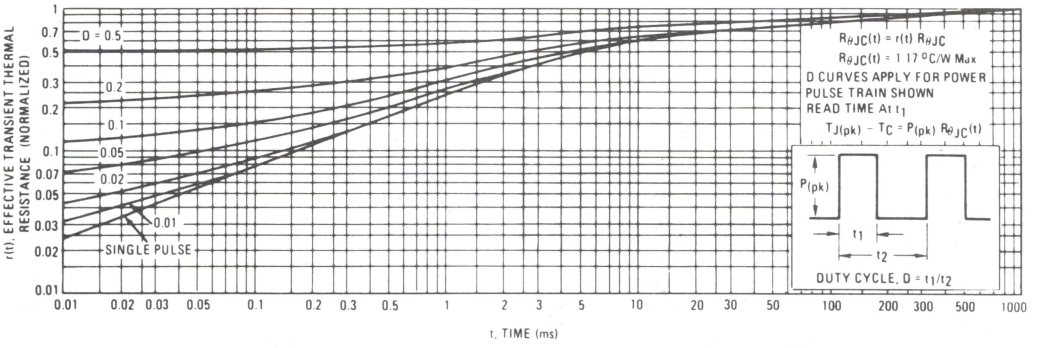

FIGURE 31 — MJ12022

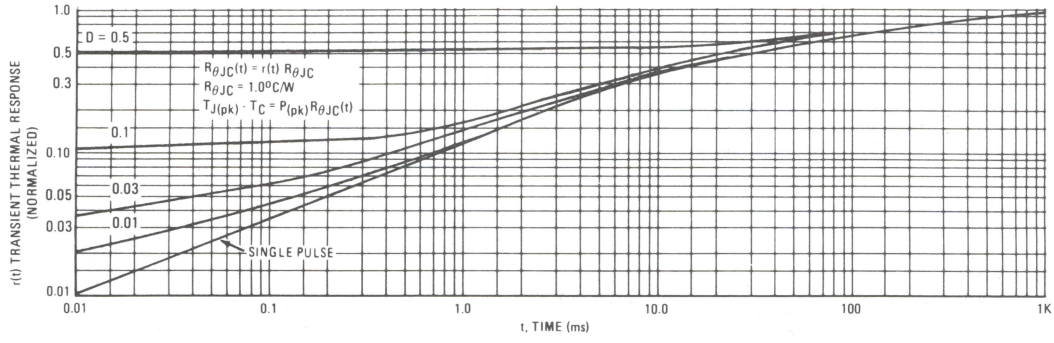

3

TABLE 1 — TEST CONDITIONS FOR DYNAMIC PERFORMANCE

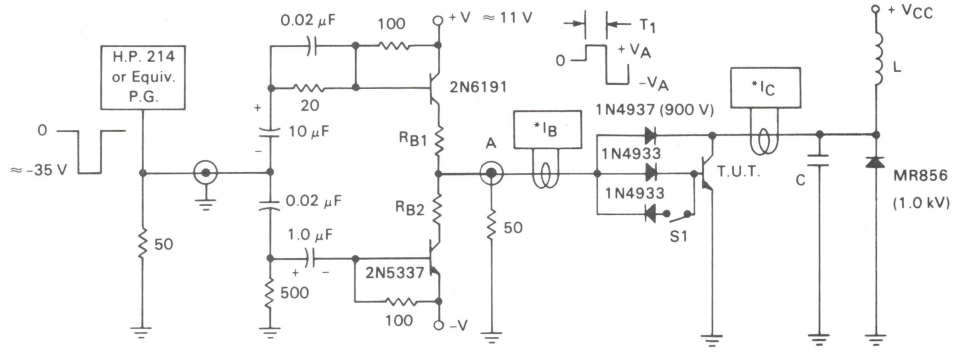

T_1 adjusted to obtain $I_{C(pk)}$
$-V_A$ adjusted to obtain $V_{BE(off)}$

$V_{CEO(sus)}$	Inductive Switching, Clamped Drive			Turn-Off SOA		
L = 10 mH $R_{B2} = \infty$ V_{CC} = 20 Vdc S1 — Open *Tektronix P-6042 or Equivalent	**MJ12020**	**MJ12021**	**MJ12022**	**MJ12020**	**MJ12021**	**MJ12022**
	C = 0.003 μF V_{CC} = 40 Vdc	C = 0.020 μF V_{CC} = 60 Vdc	C = 0.036 μF V_{CC} = 120 Vdc	C = 0.003 μF V_{CC} = 20 Vdc	C = 0.020 μF V_{CC} = 35 Vdc	C = 0.037 μF V_{CC} = 55 Vdc
	L = 100 μH, S1 — Closed R_{B2} = 0, R_{B1} selected for required I_{B1} Scope — Tektronix 7403 or Equivalent			L = 100 μH R_{B2} = 0, R_{B1} selected for required I_{B1} S1 — Closed		

TABLE 2 — TEST CIRCUIT FOR INDUCTIVE SWITCHING WITH BASE INDUCTANCE

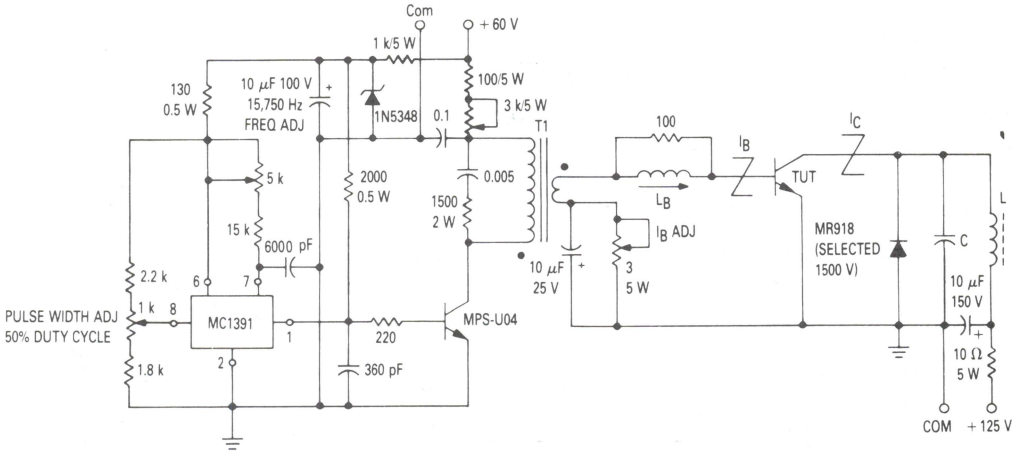

Device	V_{CC} (Volts)	$I_{C(pk)}$ (Amp)	C (μF)
MJ12020	20	3.0	0.003
MJ12021	35	5.0	0.;020
MJ12022	55	10	0.036

DRIVER TRANSFORMER (T1)

- Ferrox cube pot core #4229P-L00-3C8
- Adjust gap for primary inductance Lp = 70 mH (approximately 5 mil spacer)
- Primary 230T #28 AWG (5 layers)
- Secondary 15T #22 AWG (1 layer)
- Secondary leakage inductance should be less than 3 μH
- Use 3 mil mylar tape between each winding layer

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ13014
MJ13015

Designers Data Sheet

10 AMPERE

NPN SILICON
POWER TRANSISTORS

350 AND 400 VOLTS
150 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJ13014 and MJ13015 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn - Off Times:
60 ns Inductive Fall Time @ 25°C (Typ)
120 ns Inductive Crossover Time @ 25°C (Typ)
800 ns Inductive Storage Time @ 25°C (Typ)

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJ13014	MJ13015	Unit
Collector-Emitter Voltage	V_{CEO}	350	400	Vdc
Collector-Emitter Voltage	V_{CEV}	550	600	Vdc
Emitter Base Voltage	V_{EB}	6.0		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	10 20		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	5.0 10		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 85.5 0.86		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

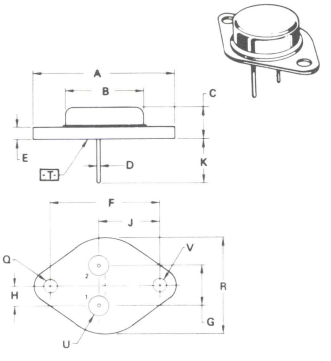

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
⌖ ⌀ 0.13 (0.005) M T V M
FOR LEADS:
⌖ ⌀ 0.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

STYLE 1
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CEO(sus)}$				Vdc
(I_C = 100 mA, I_B = 0)	MJ13014		350	–	–	
	MJ13015		400	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.5	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	2.5	
Collector Cutoff Current		I_{CER}	–	–	3.0	mAdc
(V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)						
Emitter Cutoff Current		I_{EBO}	–	–	1.0	mAdc
(V_{EB} = 6.0 Vdc, I_C = 0)						
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				–
(I_C = 2.5 Adc, V_{CE} = 5 Vdc)			12	–	40	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 5 Adc, I_B = 1.0 Adc)			–	–	1.4	
(I_C = 10 Adc, I_B = 2.0 Adc)			–	–	5.0	
(I_C = 5 Adc, I_B = 1.0 Adc, T_C = 100°C)			–	–	2.4	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 5 Adc, I_B = 1.0 Adc)			–	–	1.5	
(I_C = 5 Adc, I_B = 1.0 Adc, T_C = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Output Capacitance		C_{ob}	50	–	350	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)						
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 5.0 A, I_{B1} = 1.0 A,	t_d	–	0.01	0.1	μs
Rise Time	t_p = 25 μs, Duty Cycle ≈ 2%)	t_r	–	0.085	0.5	μs
Storage Time	(V_{CC} = 250 Vdc, I_C = 5.0 A, I_{B1} = 1.0 A,	t_s	–	0.8	2.0	μs
Fall Time	$V_{BE(off)}$ = 5.0 Vdc, t_p = 25 μs, Duty Cycle ≤ 2%)	tf	–	0.095	0.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 5 A(pk), V_{clamp} = 250 Vdc, I_{B1} = 1.0 A,	t_{sv}	–	1.5	3.5	μs
Crossover Time	$V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	–	0.25	1.0	μs
Fall Time		t_{fi}	–	0.12	–	μs
Storage Time	(I_C = 5 A (pk), V_{clamp} = 250 Vdc, I_{B1} = 1.0 A,	t_{sv}	–	0.8	–	μs
Crossover Time	$V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_c	–	0.12	–	μs
Fall Time		t_{fi}	–	0.06	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

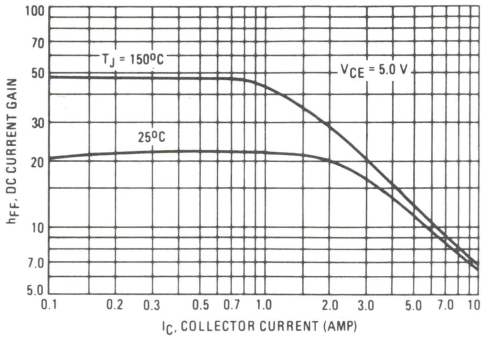

FIGURE 2 – COLLECTOR SATURATION REGION

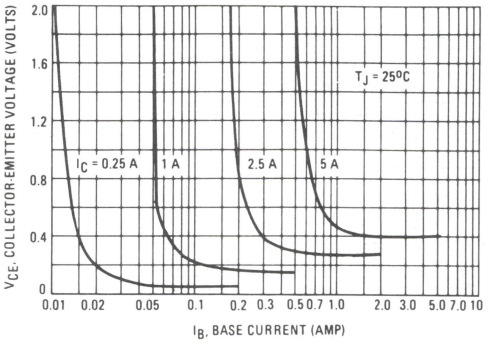

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

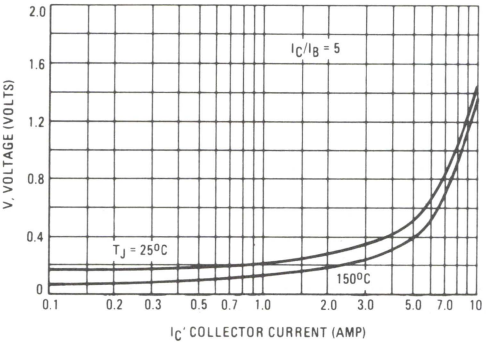

FIGURE 4 – BASE-EMITTER VOLTAGE

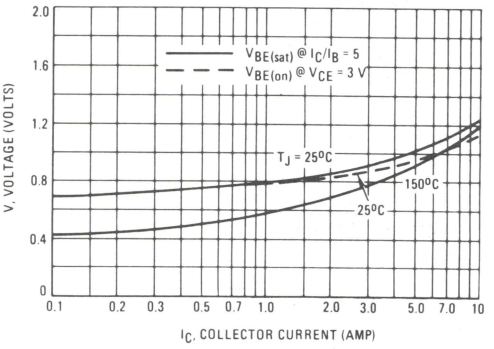

3

FIGURE 5 – COLLECTOR CUTOFF REGION

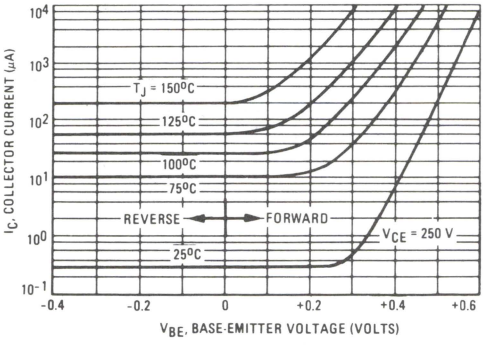

FIGURE 6 – CAPACITANCE

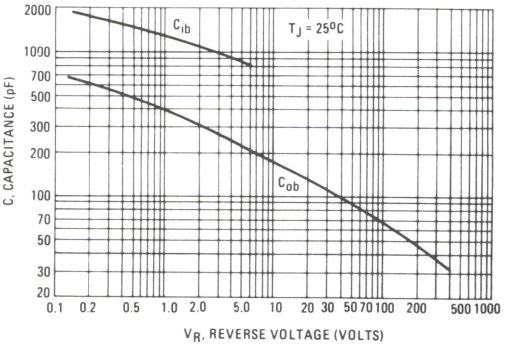

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	250 µF, 470 Ω 2 W, 47 Ω, R1, +15, 15 V, 0, 330 Ω, 5.1 Ω 5 W, R2, 50 Ω, 100 Ω, 430 Ω, 39 Ω, –5.2, 250 µF All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN-ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN-OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 µH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 50 Ω Pulse Width = 10 µs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

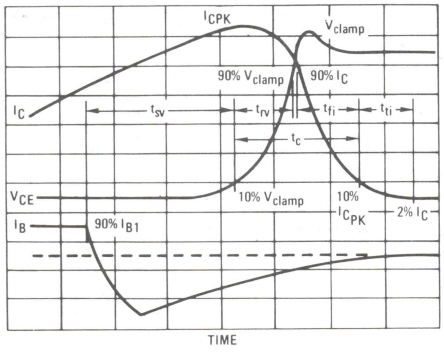

FIGURE 8 – PEAK REVERSE CURRENT

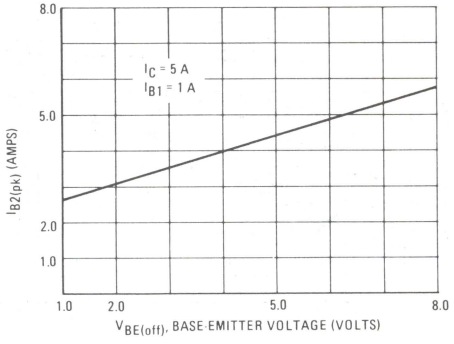

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10−90% V_{clamp}

t_{fi} = Current Fall Time, 90−10% I_C

t_{ti} = Current Tail, 10−2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C(t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING

FIGURE 9 – TURN-ON SWITCHING TIMES

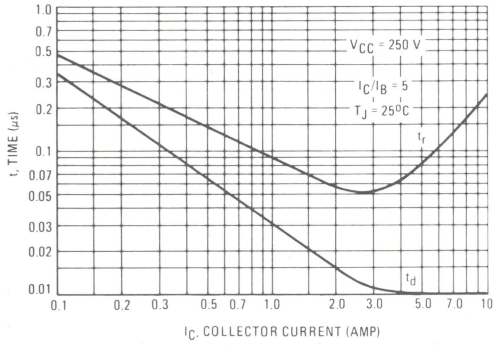

FIGURE 10 – TURN-OFF TIME

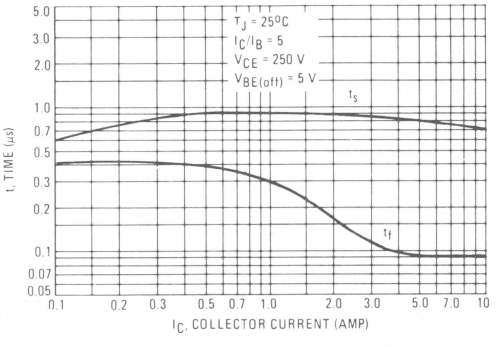

FIGURE 11 – THERMAL RESPONSE

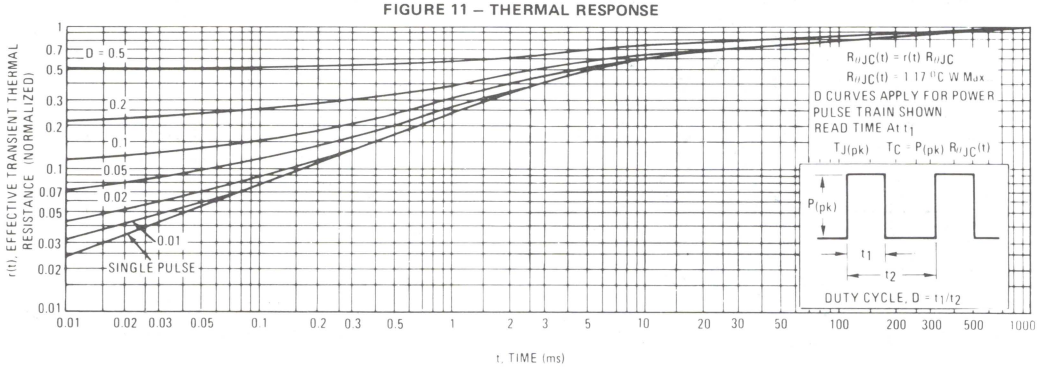

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

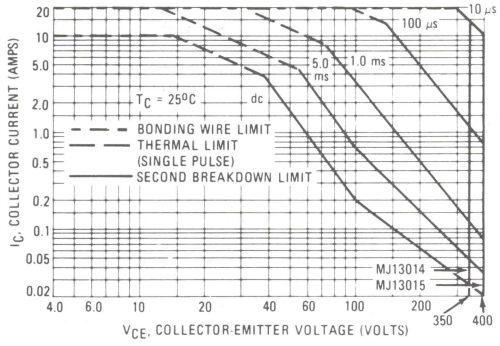

FIGURE 13 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

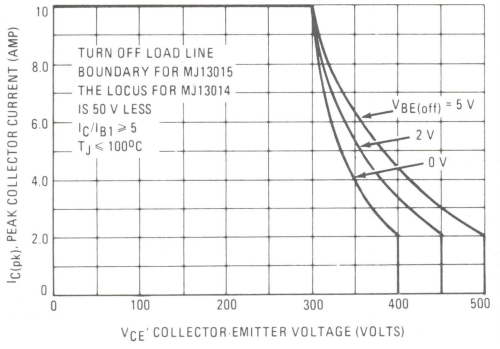

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

FIGURE 14 – POWER DERATING

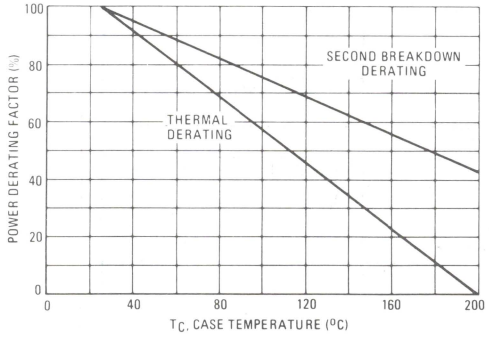

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ13070
MJ13071

Designer's Data Sheet

SWITCHMODE II SERIES
NPN SILICON POWER TRANSISTORS

The MJ13070 and MJ13071 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
- 100 ns Inductive Fall Time @ 25°C (Typ)
- 150 ns Inductive Crossover Time @ 25°C (Typ)
- 400 ns Inductive Storage Time @ 25°C (Typ)

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

5 AMPERE

NPN SILICON POWER TRANSISTORS

400 AND 450 VOLTS
125 WATTS

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ13070	MJ13071	Unit
Collector-Emitter Voltage	V_{CEO}	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	650	750	Vdc
Emitter Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	5.0 8.0		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2.0 4.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	125 71.5 0.714		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀.13 (0.005) M T V M
   FOR LEADS:
   ⌖ ⌀.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0) MJ13070 / MJ13071	$V_{CEO(sus)}$	400 / 450	— / —	— / —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) / (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— / —	— / —	0.5 / 2.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 13			
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 3.0 Adc, V_{CE} = 5.0 Vdc	h_{FE}	8.0	—	—	—
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) / (I_C = 5.0 Adc, I_B = 1.0 Adc) / (I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)	$V_{CE(sat)}$	— / — / —	— / — / —	1.0 / 3.0 / 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.6 Adc) / (I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)	$V_{BE(sat)}$	— / —	— / —	1.5 / 1.5	Vdc
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	250	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	t_d	—	0.03	0.05	μs
Rise Time	t_r	—	0.10	0.40	
Storage Time	t_s	—	0.40	1.50	
Fall Time	t_f	—	0.175	0.50	
(V_{CC} = 250 Adc, I_C = 3.0 Adc, I_{B1} = 0.4 Adc, t_p = 30 μs, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5.0 Vdc)					
Inductive Load, Clamped (Table 1)					
Storage Time	t_{sv}	—	0.70	2.0	μs
Crossover Time	t_c	—	0.28	0.50	
Fall Time	t_{fi}	—	0.15	0.30	
Storage Time	t_{sv}	—	0.40	—	
Crossover Time	t_c	—	0.15	—	
Fall Time	t_{fi}	—	0.10	—	
($I_{C(pk)}$ = 3.0 A, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V) (T_J = 100°C)					
($I_{C(pk)}$ = 3.0 A, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V) (T_J = 25°C)					

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

$\beta_f = \frac{I_C}{I_B}$

3

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

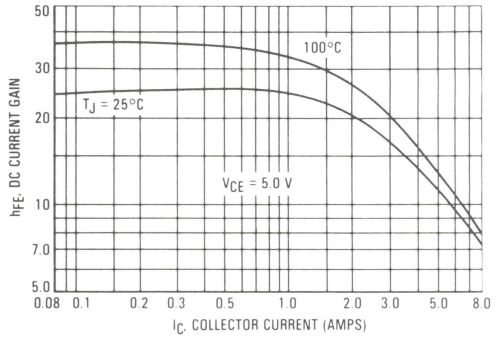

FIGURE 2 — COLLECTOR SATURATION REGION

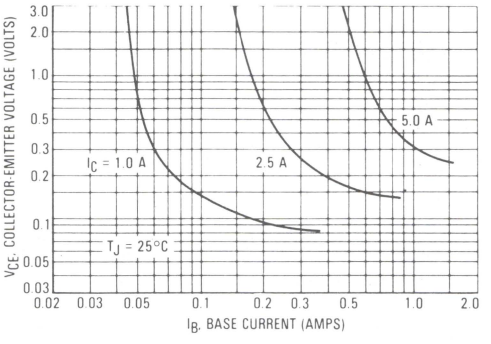

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

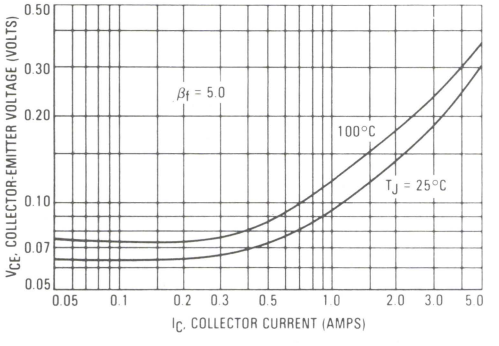

FIGURE 4 — BASE-EMITTER VOLTAGE

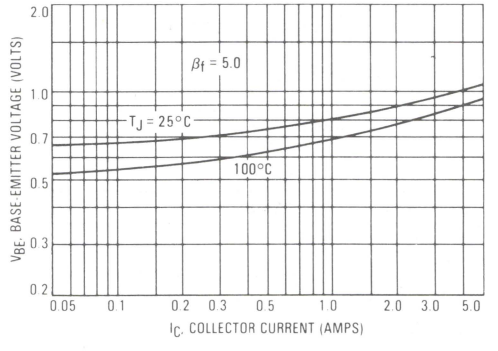

FIGURE 5 — COLLECTOR CUTOFF REGION

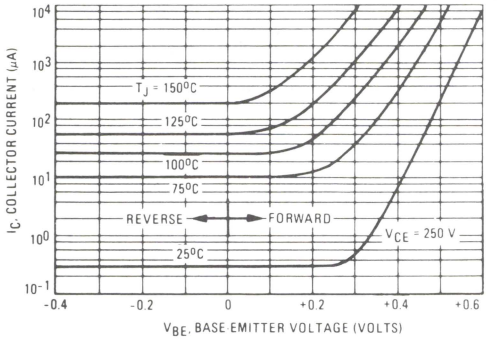

FIGURE 6 — CAPACITANCE

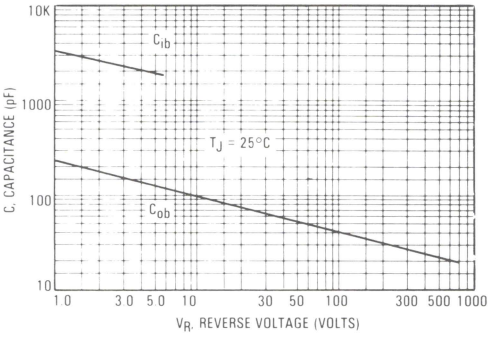

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	H.P. 214 or Equiv P.G. 0 to ≈ -35 V 0.02 μF, 100, +V ≈ 11 V, 2N6191, 20, 10 μF, R_{B1}, A, R_{B2}, 0.02 μF, 1.0 μF, 2N5337, 50, 500, 100, -V Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, TUT, 2, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

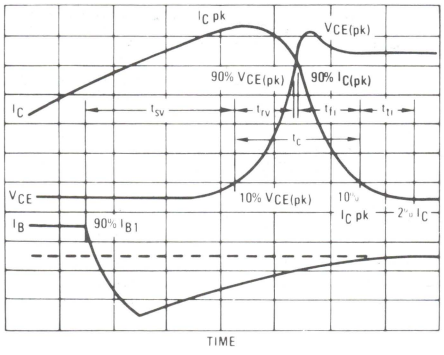

FIGURE 8 – PEAK REVERSE CURRENT

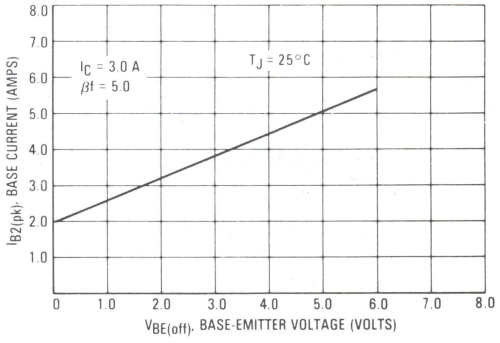

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 — STORAGE TIME

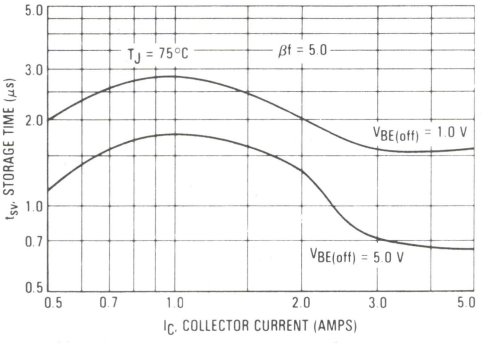

FIGURE 10 — CROSSOVER AND FALL TIMES

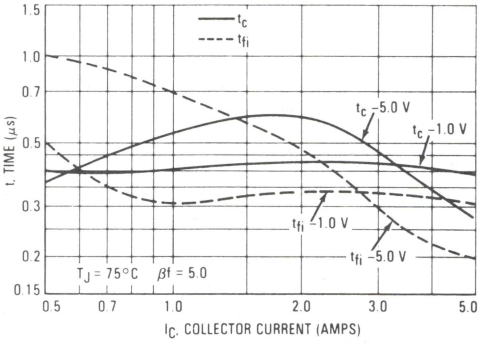

FIGURE 11 — THERMAL RESPONSE

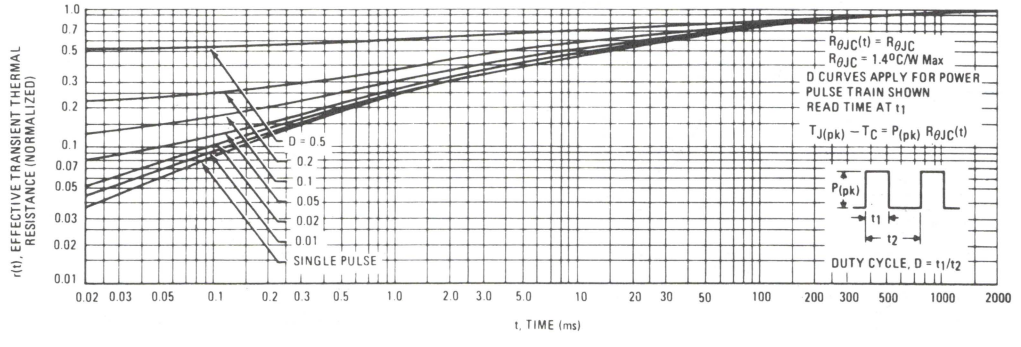

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

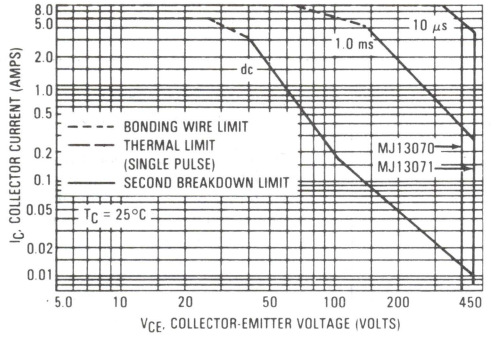

FIGURE 13 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

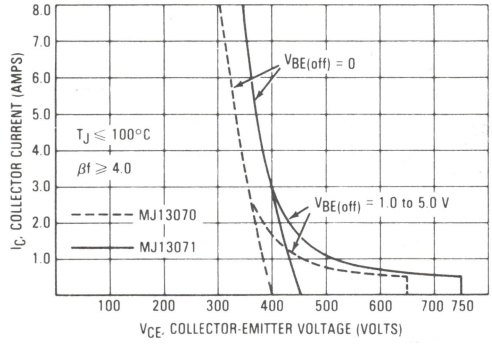

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

FIGURE 14 — POWER DERATING

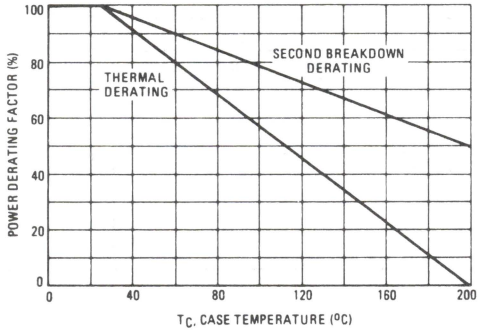

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ13080
MJ13081

Designer's Data Sheet

SWITCHMODE II SERIES
NPN SILICON POWER TRANSISTORS

The MJ13080 and MJ13081 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
- 100 ns Inductive Fall Time @ 25°C (Typ)
- 150 ns Inductive Crossover Time @ 25°C (Typ)
- 400 ns Inductive Storage Time @ 25°C (Typ)

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

8 AMPERE

NPN SILICON POWER TRANSISTORS

400 AND 450 VOLTS
150 WATTS

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ13080	MJ13081	Unit
Collector-Emitter Voltage	V_{CEO}	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	650	750	Vdc
Emitter Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	8.0 12		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	3.0 6.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 85.5 0.86		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
⌖ ⌀ 13 (0.005) M T V M Q M
FOR LEADS:
⌖ ⌀ 13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)							
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ13080 MJ13081		$V_{CEO(sus)}$	 400 450	 — —	 — —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			I_{CEV}	 — —	 — —	 0.5 2.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)			I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)			I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with Base Forward Biased			$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figure 13			
ON CHARACTERISTICS (1)							
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 3.0 Vdc			h_{FE}	 8.0	 —	 —	—
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc) (I_C = 8.0 Adc, I_B = 1.6 Adc) (I_C = 5.0 Adc, I_B = 1.0 Adc, T_C = 100°C)			$V_{CE(sat)}$	 — — —	 — — —	 1.0 3.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 1.0 Adc) (I_C = 5.0 Adc, I_B = 1.0 Adc, T_C = 100°C)			$V_{BE(sat)}$	 — —	 — —	 1.5 1.5	Vdc
DYNAMIC CHARACTERISTICS							
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)			C_{ob}	—	—	300	pF
SWITCHING CHARACTERISTICS							
Resistive Load (Table 1)							
Delay Time	(V_{CC} = 250 Vdc, I_C = 5.0 Adc, I_{B1} = 0.7 Adc, t_p = 30 μs, Duty Cycle ≤2%, $V_{BE(off)}$ = 5.0 Vdc)		t_d	—	0.025	0.05	μs
Rise Time			t_r	—	0.10	0.50	
Storage Time			t_s	—	0.50	1.50	
Fall Time			t_f	—	0.15	0.50	
Inductive Load, Clamped (Table 1)							
Storage Time	($I_{C(pk)}$ = 5.0 A, I_{B1} = 0.7 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V)	(T_J = 100°C)	t_{sv}	—	0.75	2.20	μs
Crossover Time			t_c	—	0.22	0.40	
Fall Time			t_{fi}	—	0.175	0.35	
Storage Time		(T_J = 25°C)	t_{sv}	—	0.40	—	
Crossover Time			t_c	—	0.15	—	
Fall Time			t_{fi}	—	0.10	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

$$\beta_f = \frac{I_C}{I_B}$$

3

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

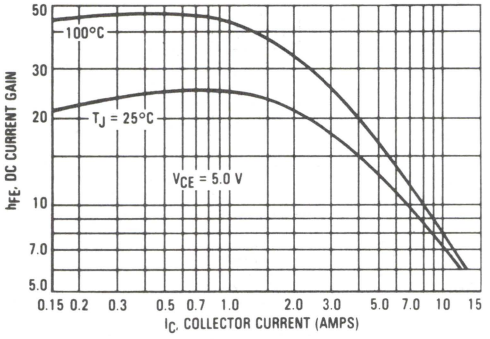

FIGURE 2 — COLLECTOR SATURATION REGION

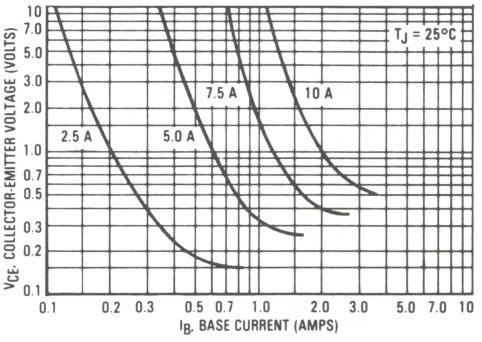

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

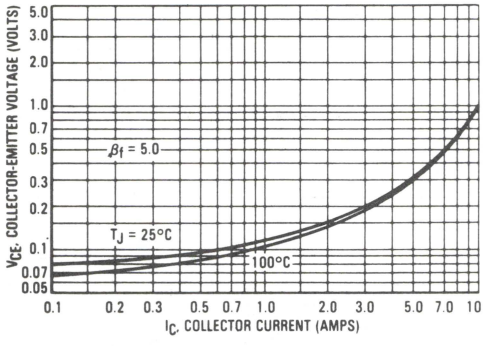

FIGURE 4 — BASE-EMITTER VOLTAGE

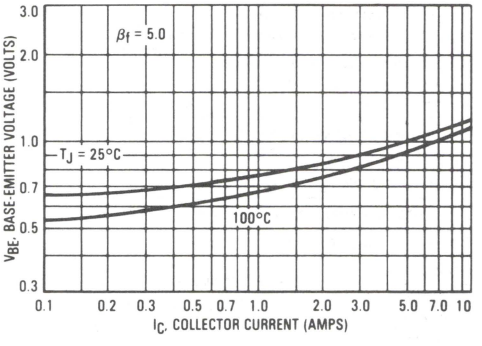

FIGURE 5 — COLLECTOR CUTOFF REGION

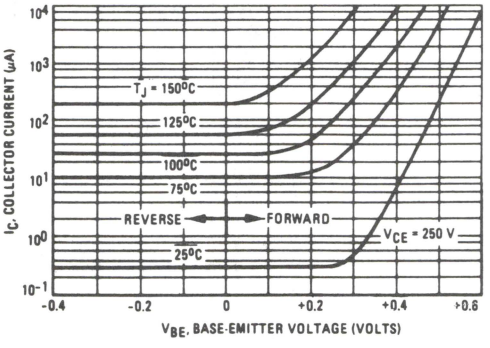

FIGURE 6 — CAPACITANCE

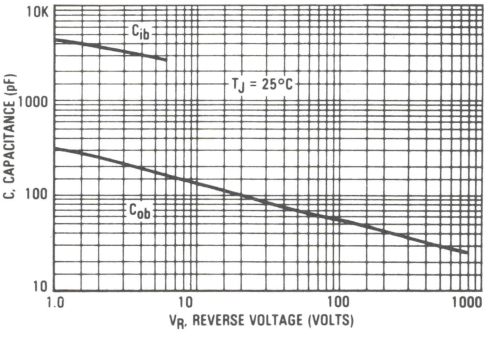

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	H.P. 214 or Equiv. P.G. 0.02 μF, 100, +V ≈ 11 V, 20, 2N6191, 10 μF, R_{B1}, A, R_{B2}, 0.02 μF, 1.0 μF, 2N5337, 50, 500, 100, -V, 0, ≈ -35 V Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN ON TIME 1, 2, I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 50 Ω Pulse Width = 30 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 2, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

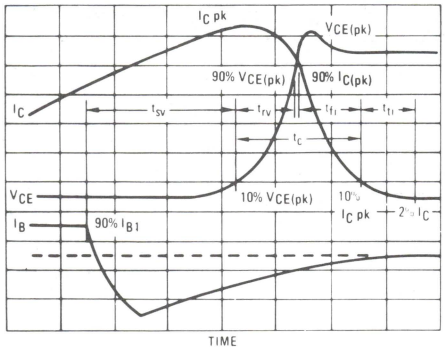

FIGURE 8 — PEAK REVERSE CURRENT

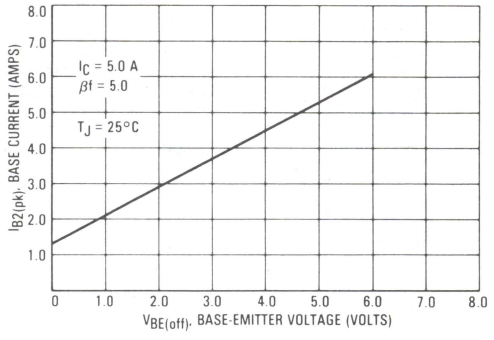

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 — STORAGE TIME

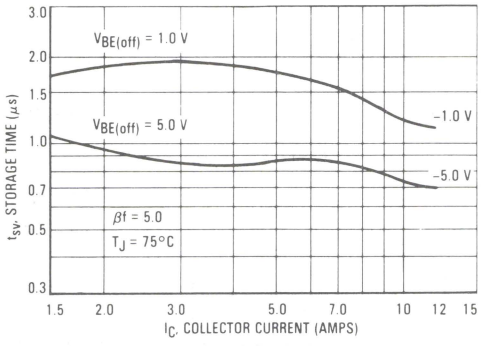

FIGURE 10 — CROSSOVER AND FALL TIMES

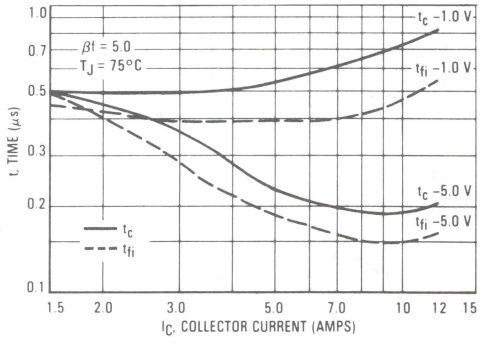

FIGURE 11 — THERMAL RESPONSE

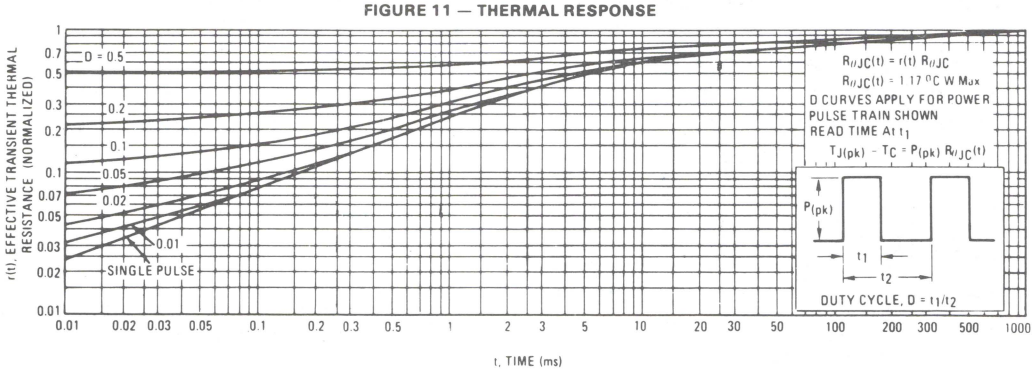

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 — FORWARD BIAS SAFE OPERATING AREA

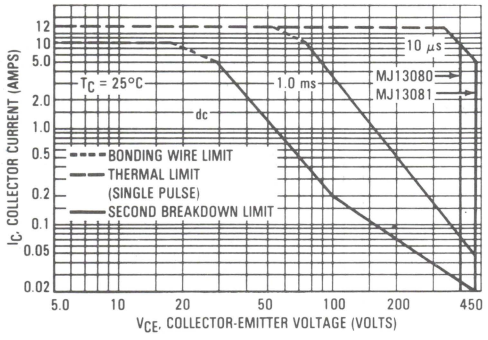

FIGURE 13 — REVERSE BIAS SAFE OPERATING AREA

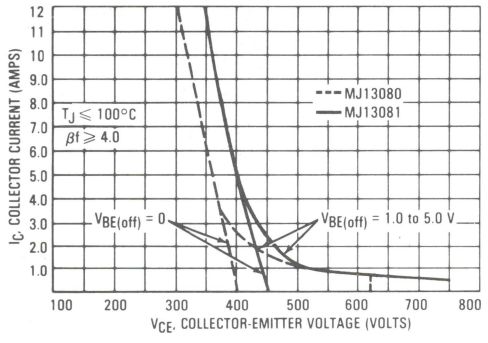

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

FIGURE 14 — POWER DERATING

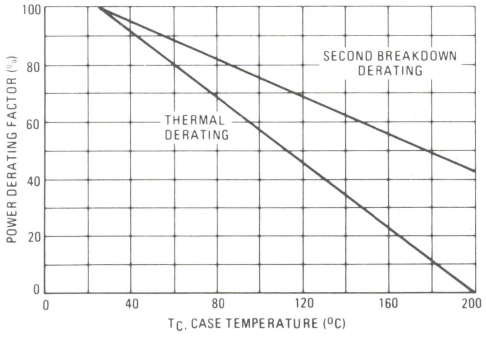

MJ13090 MJH13090
MJ13091 MJH13091

Designer's Data Sheet

15 AMPERE

NPN SILICON POWER TRANSISTORS

400 AND 450 VOLTS
125 and 175 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads — 150 ns Inductive Fall Time (Typ)
- Saturation Voltages
- Leakage Currents

MJ13090
MJ13091

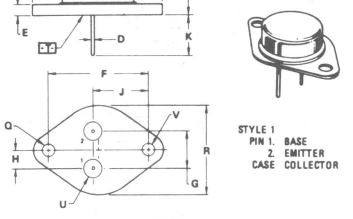

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ϕ.13 (0.005) M | T | V M |
   FOR LEADS:
   ⌖ | ϕ.13 (0.005) M T | V M | Q M |
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

MJH13090
MJH13091

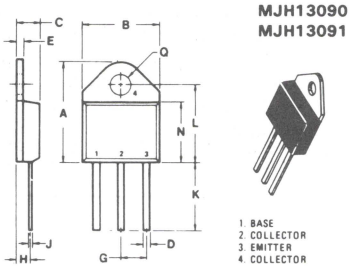

1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

MAXIMUM RATINGS

Rating	Symbol	MJ13090	MJ13091	MJH13090	MJH13091	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	650	750	650	750	Vdc
Emitter-Base Voltage	V_{EB}	6.0				Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	15 20				Adc
Base Current — Continous — Peak (1)	I_B I_{BM}	5.0 10				Adc
Total Device Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1.0		125 50 1.0		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to 200		-55 to 150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Lead Temperature for Soldering Purposes, 1/8" from Case for 5 Seconds.	T_L	275	°C

(1) Pulse Test: Pulse Width ≤ 5.0 μs, Duty Cycle ≥10%.

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)							
Collector-Emitter Sustaining Voltage (Table 1)			$V_{CEO(sus)}$				Vdc
(I_C = 100 mA, I_B = 0)	MJ13090, MJH13090			400	—	—	
	MJ13091, MJH13091			450	—	—	
Collector Cutoff Current			I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)				—	—	0.5	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)				—	—	2.5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)			I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)			I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with Base Forward Biased			$I_{S/b}$	See Figures 12 and 13			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figure 14			
ON CHARACTERISTICS (1)							
DC Current Gain (I_C = 10 Adc, V_{CE} = 3.0 Vdc			h_{FE}	8.0	—	—	—
Collector-Emitter Saturation Voltage			$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 2.0 Adc)				—	—	1.0	
(I_C = 15 Adc, I_B = 3.0 Adc)				—	—	3.0	
(I_C = 10 Adc, I_B = 2.0 Adc, T_C = 100°C)				—	—	2.0	
Base-Emitter Saturation Voltage			$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 2.0 Adc)				—	—	1.5	
(I_C = 10 Adc, I_B = 2.0 Adc, T_C = 100°C)				—	—	1.5	
DYNAMIC CHARACTERISTICS							
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)			C_{ob}	—	—	350	pF
SWITCHING CHARACTERISTICS							
Resistive Load (Table 1)							
Delay Time	(V_{CC} = 250 Vdc, I_C = 10 Adc, I_{B1} = 1.25 Adc, t_p = 30 μs, Duty Cycle ≤2%, $V_{BE(off)}$ = 5.0 Vdc)		t_d	—	0.03	0.05	μs
Rise Time			t_r	—	0.13	0.50	
Storage Time			t_s	—	0.55	2.50	
Fall Time			t_f	—	0.10	0.50	
Inductive Load, Clamped (Table 1)							
Storage Time	($I_{C(pk)}$ = 10 A, I_{B1} = 1.25 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V)	(T_J = 100°C)	t_{sv}	—	0.80	3.00	μs
Crossover Time			t_c	—	0.175	0.40	
Fall Time			t_{fi}	—	0.15	0.30	
Storage Time		(T_J = 25°C)	t_{sv}	—	0.50	—	
Crossover Time			t_c	—	0.15	—	
Fall Time			t_{fi}	—	0.10	—	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

*$\beta_f = \frac{I_C}{I_B}$

3

DC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

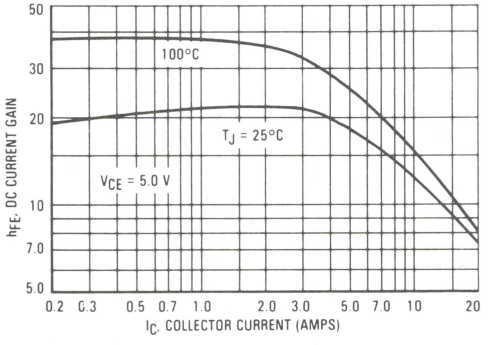

FIGURE 2 — COLLECTOR SATURATION REGION

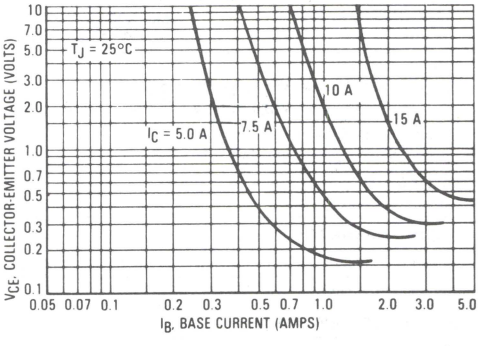

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

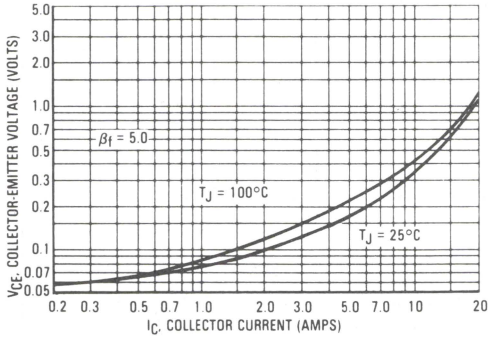

FIGURE 4 — BASE-EMITTER SATURATION VOLTAGE

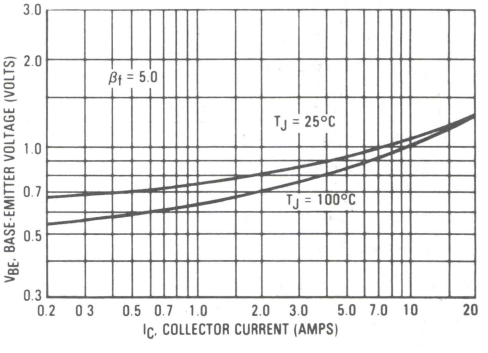

FIGURE 5 — COLLECTOR CUTOFF REGION

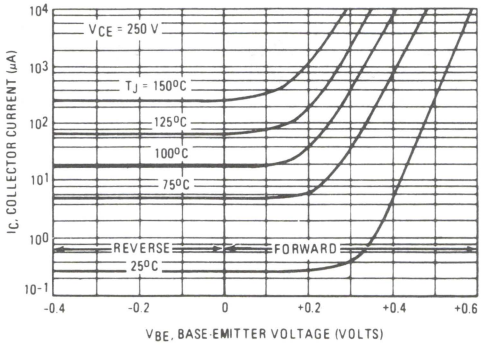

FIGURE 6 — CAPACITANCE

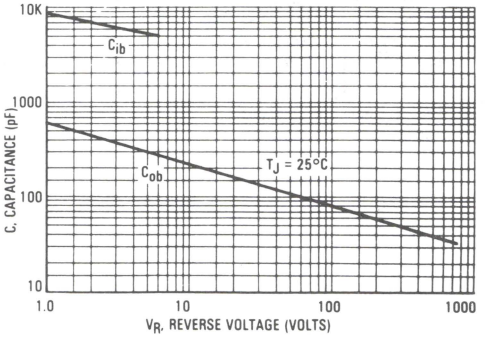

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	HP 214 or Equiv PG 0.02 μF, 100, +V ≈ 11 V, 20, 2N6191, 10 μF, R_{B1}, R_{B2}, A, 0.02 μF, 1.0 μF, 2N5337, 50, 500, 100, -V, 0, ≈ -35 V Connect Point A to base of TUT Adjust -V to obtain desired $V_{BE(off)}$ at Point A Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$ R2 = ∞	TURN ON TIME I_{B1} I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_{B1} adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 25 Ω Pulse Width = 30 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1N4937 or Equivalent, Input, See Above for Detailed Conditions, V_{clamp}, R_{coil}, L_{coil}, V_{CC}, R_S ≈ 0.1 Ω	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

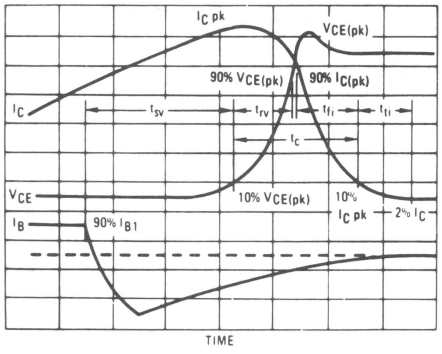

FIGURE 8 — PEAK REVERSE CURRENT

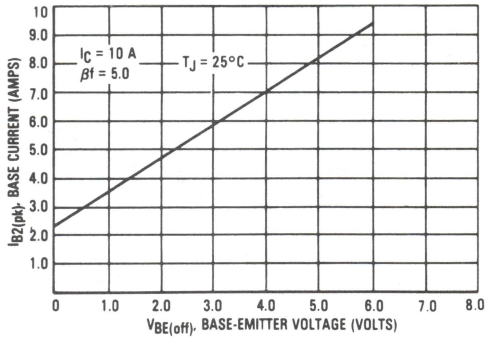

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10 % V_{clamp}
t_{rv} = Voltage Rise Time, 10—90% V_{clamp}
t_{fi} = Current Fall Time, 90—10% I_C
t_{ti} = Current Tail, 10—2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user-oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 — STORAGE TIME

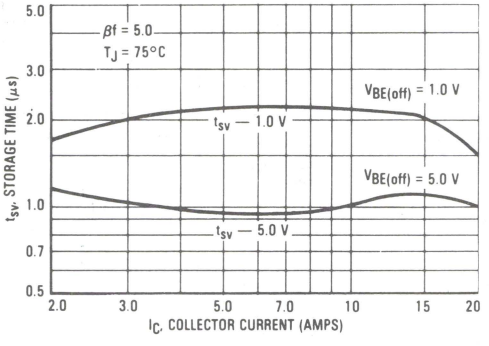

FIGURE 10 — CROSSOVER AND FALL TIMES

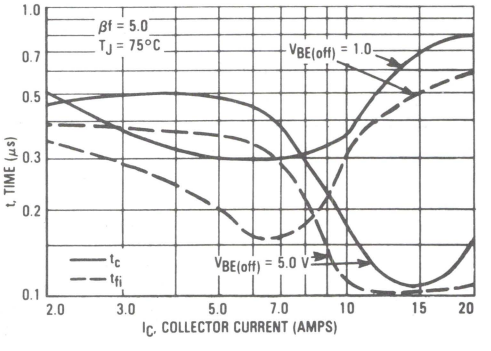

FIGURE 11 — THERMAL RESPONSE

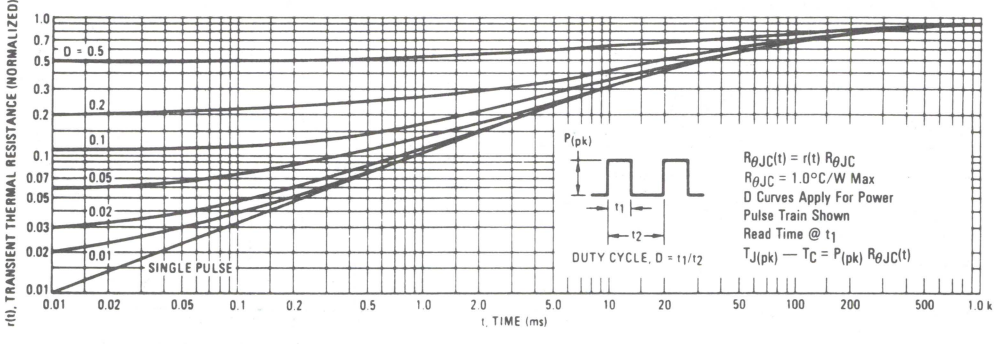

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 — FORWARD BIAS SAFE OPERATING AREA
MJ13090 and MJ13091

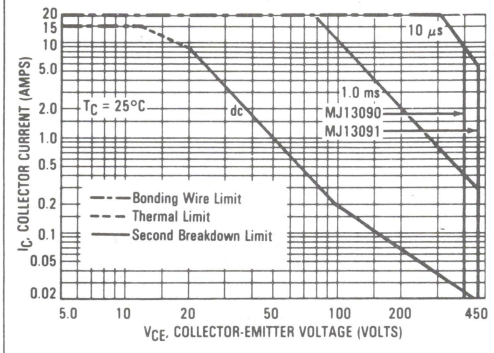

FIGURE 13 — FORWARD BIAS SAFE OPERATING AREA
MJH13090 and MJH13090

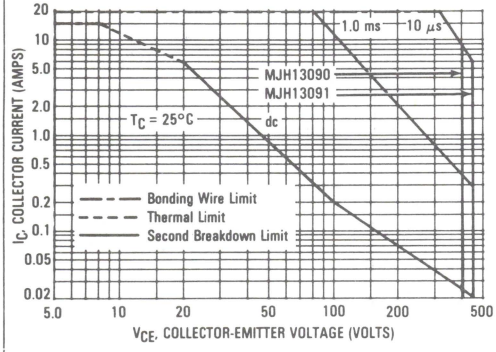

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 12 and 13 are based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 12 and 13 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse-biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives RBSOA characteristics.

3

FIGURE 14 — REVERSE BIAS SAFE OPERATING AREA

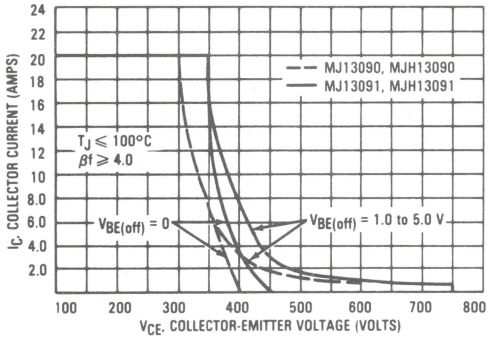

FIGURE 15 — POWER DERATING

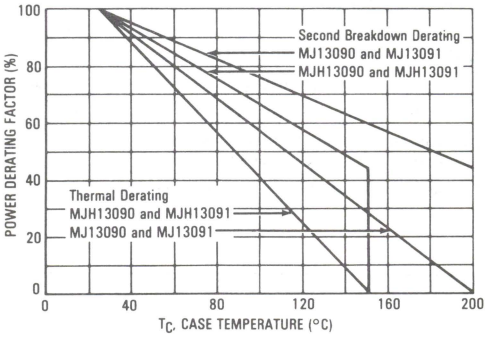

MJ13101

Designer's Data Sheet

SWITCHMODE II SERIES
NPN SILICON POWER TRANSISTOR

The MJ13101 transistor is designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. It is particularly suited for line-operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
- 30 ns Inductive Fall Time @ 25°C (Typ)
- 50 ns Inductive Crossover Time @ 25°C (Typ)
- 900 ns Inductive Storage Time @ 25°C (Typ)

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

20 AMPERE

NPN SILICON POWER TRANSISTOR

450 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJ13101	Unit
Collector-Emitter Voltage	V_{CEO}	450	Vdc
Collector-Emitter Voltage	V_{CEV}	750	Vdc
Emitter Base Voltage	V_{EB}	6.0	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	20 30	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	10 15	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1.0	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q.
   ⌖ ⌀0.13 (0.005) M T V M Q M
   FOR LEADS:
   ⌖ ⌀0.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0) MJ13101	$V_{CEO(sus)}$	 450	 —	 —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.5 2.5	mAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 13			
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 15 Adc, V_{CE} = 3.0 Vdc	h_{FE}	8.0	—	40	—
Collector-Emitter Saturation Voltage (I_C = 15 Adc, I_B = 3.0 Adc) (I_C = 20 Adc, I_B = 4.0 Adc) (I_C = 15 Adc, I_B = 3.0 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 1.0 3.0 2.0	Vdc
Base-Emitter Saturation Voltage (I_C = 15 Adc, I_B = 3.0 Adc) (I_C = 15 Adc, I_B = 3.0 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — —	 — —	 1.5 1.5	Vdc
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	450	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	t_d	—	0.02	0.05	μs
Rise Time	t_r	—	0.13	0.50	
Storage Time	t_s	—	0.90	3.5	
Fall Time	t_f	—	0.10	0.50	
Inductive Load, Clamped (Table 1)					
Storage Time	t_{sv}	—	1.25	4.0	μs
Crossover Time	t_c	—	0.15	0.50	
Fall Time	t_{fi}	—	0.13	0.40	
Storage Time	t_{sv}	—	0.90	—	
Crossover Time	t_c	—	0.05	—	
Fall Time	t_{fi}	—	0.03	—	

Resistive Load: V_{CC} = 250 Vdc, I_C = 15 Adc, I_{B1} = 2.0 Adc, t_p = 30 μs, Duty Cycle ≤2%, $V_{BE(off)}$ = 5.0 Vdc)

Inductive Load, Clamped: ($I_{C(pk)}$ = 15 A, I_{B1} = 2.0 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V); (T_J = 100°C); (T_J = 25°C)

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_B}$

DC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

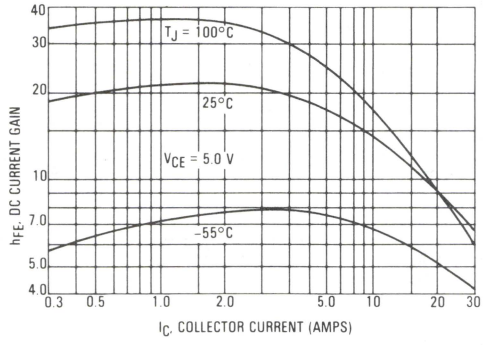

FIGURE 2 — COLLECTOR SATURATION REGION

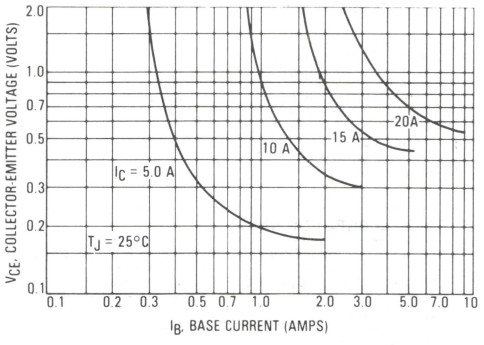

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

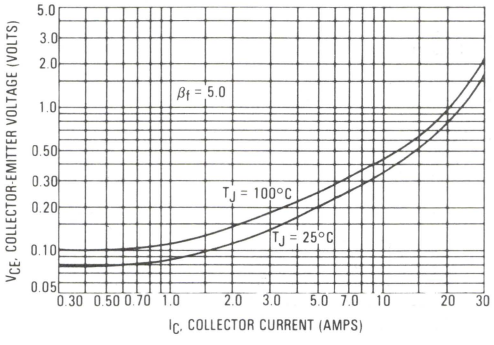

FIGURE 4 — BASE-EMITTER VOLTAGE

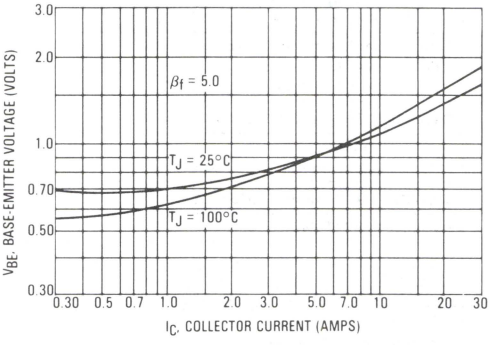

FIGURE 5 — COLLECTOR CUTOFF REGION

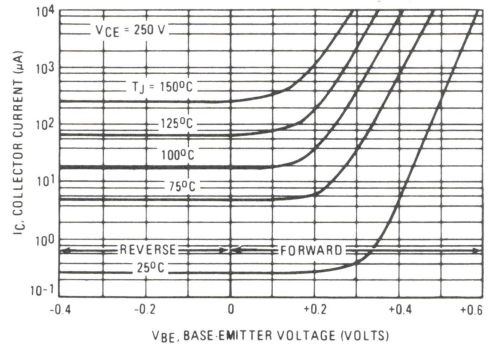

FIGURE 6 — CAPACITANCE

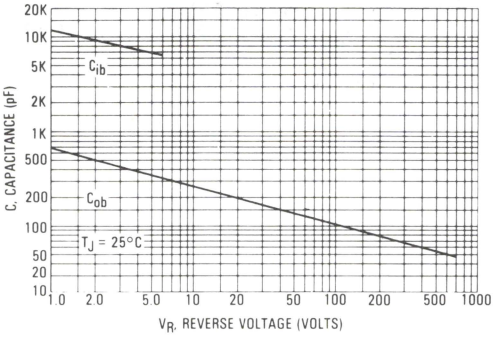

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	 PW Varied to Attain I_C = 100 mA	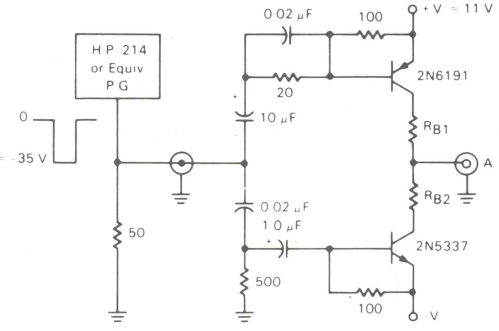 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}: R2 = 0 For $V_{CEO(sus)}$: R2 = ∞	 I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 16.6 Ω Pulse Width = 30 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT  See Above for Detailed Conditions OUTPUT WAVEFORMS  t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

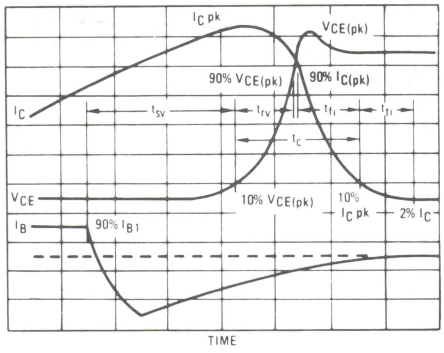

FIGURE 8 – PEAK REVERSE CURRENT

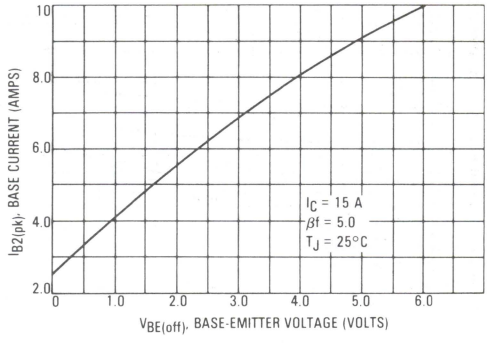

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 — STORAGE TIME

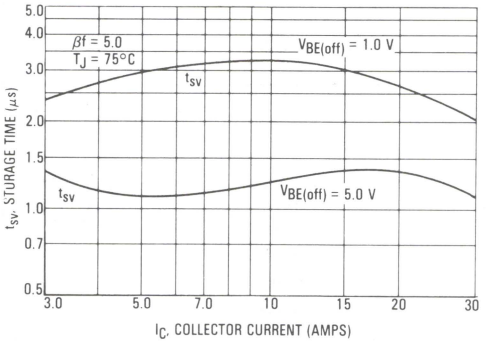

FIGURE 10 — CROSSOVER AND FALL TIMES

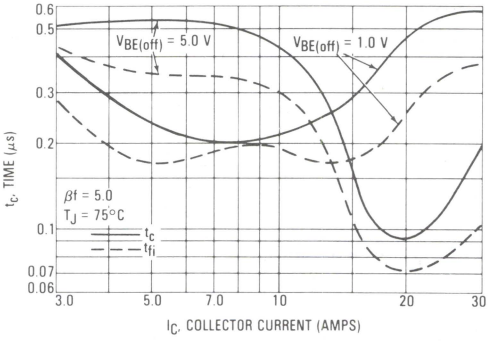

FIGURE 11 — THERMAL RESPONSE

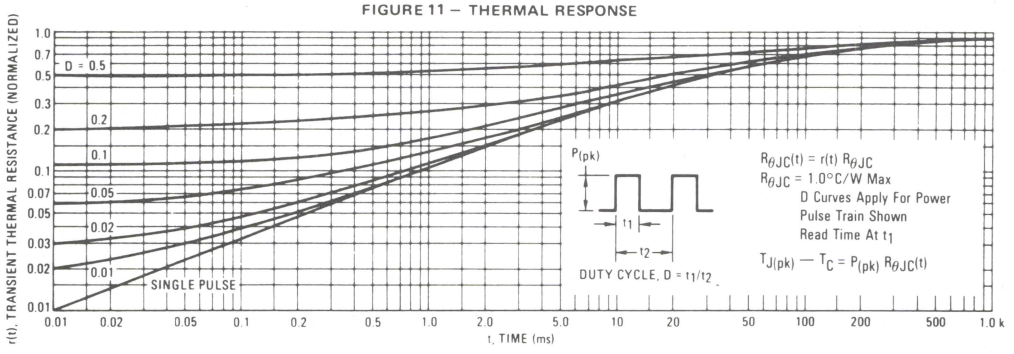

The Safe Operating Area figures shown in figure 12 and 13 are specified for these devices under the test conditions shown

FIGURE 12 — FORWARD BIAS SAFE OPERATING AREA

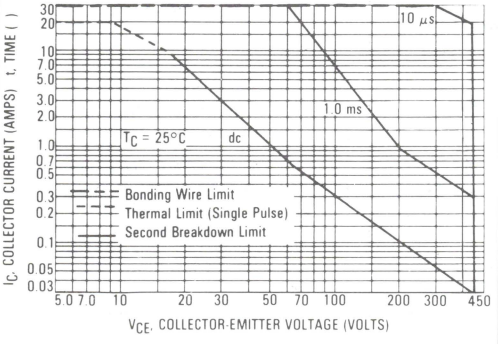

FIGURE 13 — REVERSE BIAS SAFE OPERATING AREA

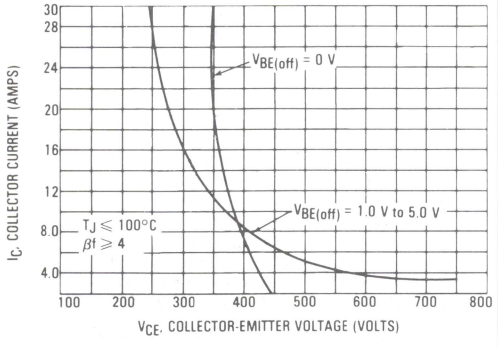

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the RBSOA characteristics.

FIGURE 14 — POWER DERATING

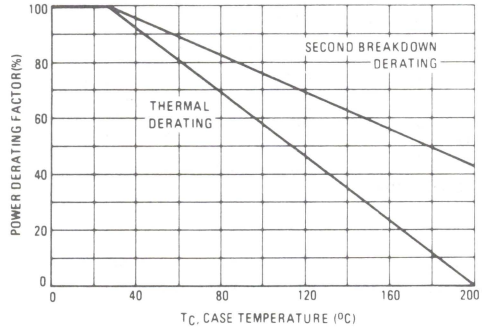

MJ13330
MJ13331

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJ13330 and MJ13331 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Time
- 75 ns Inductive Fall Time–25°C (Typ)
- 150 ns Inductive Crossover Time–25°C (Typ)
- 900 ns Inductive Storage Time–25°C (Typ)

Operating Temperature Range -65 to +200°C

100°C Performance Specified for:
- Reversed Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

MAXIMUM RATINGS

Rating	Symbol	MJ13330	MJ13331	Unit
Collector-Emitter Voltage	V_{CEO}	200	250	Vdc
Collector-Emitter Voltage	V_{CEV}	400	450	Vdc
Emitter Base Voltage	V_{EB}	6		Vdc
Collector Current – Continuous – Peak (1)	I_C I_{CM}	20 30		Adc
Base Current – Continuous – Peak (1)	I_B I_{BM}	10 20		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Similar device types with higher V_{CEO} ratings are: MJ13332 (350 V) thru MJ13335 (500 V).

20 AMPERE

NPN SILICON POWER TRANSISTORS

200 and 250 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ 0.13 (0.005) Ⓜ T V Ⓜ
   FOR LEADS:
   ⌖ 0.13 (0.005) Ⓜ T V Ⓜ Q Ⓜ
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted).

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1)		$V_{CEO(sus)}$				Vdc
(I_C = 100 mA, I_B = 0)	MJ13330		200	–	–	
	MJ13331		250	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5	
Collector Cutoff Current		I_{CER}	–	–	5	mAdc
(V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)						
Emitter Cutoff Current		I_{EBO}	–	–	0.5	mAdc
(V_{EB} = 6 Vdc, I_C = 0)						
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with base reverse biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				–
(I_C = 5 Adc, V_{CE} = 5 Vdc)			15	–	75	
(I_C = 10 Adc, V_{CE} = 5 Vdc)			8.0	–	40	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 1.5 Adc)			–	–	1.5	
(I_C = 20 Adc, I_B = 5 Adc)			–	–	3.5	
(I_C = 10 Adc, I_B = 1.8 Adc, T_C = 100°C)			–	–	2.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 1.5 Adc)			–	–	1.8	
(I_C = 10 Adc, I_B = 1.8 Adc, T_C = 100°C)			–	–	1.8	
DYNAMIC CHARACTERISTICS						
Current-Gain–Bandwidth Product		f_T	5	–	40	MHz
(I_C = 300 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)						
Output Capacitance		C_{ob}	100	–	400	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 100 kHz)						
SWITCHING CHARACTERSITICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 175 Vdc, I_C = 10 A, I_{B1} = 1.5 Adc, $V_{BE(off)}$ = 5 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%)	t_d	–	0.08	0.20	μs
Rise Time		t_r	–	0.55	1.0	μs
Storage Time		t_s	–	0.70	3.5	μs
Fall Time		t_f	–	0.11	0.7	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 10 A(pk), V_{clamp} = 200 Vdc, I_{B1} = 1.8 Adc, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_{sv}	–	1.35	4.5	μs
Crossover Time		t_c	–	0.45	1.8	μs
Storage Time	(I_C = 10 A(pk), V_{clamp} = 200 Vdc, I_{B1} = 1.5 Adc, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	0.90	–	μs
Crossover Time		t_c	–	0.15	–	μs
Fall Time		t_{fi}	–	0.075	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

DC CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

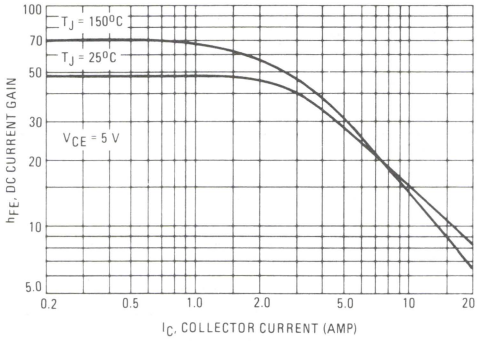

FIGURE 2 – COLLECTOR SATURATION REGION

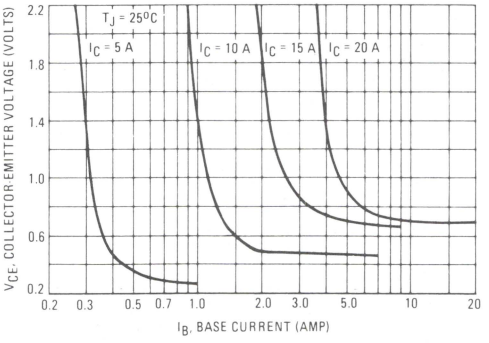

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

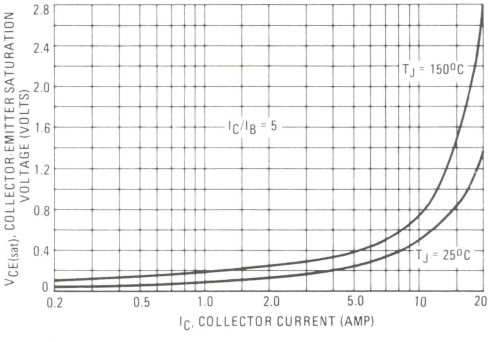

FIGURE 4 – BASE-EMITTER VOLTAGE

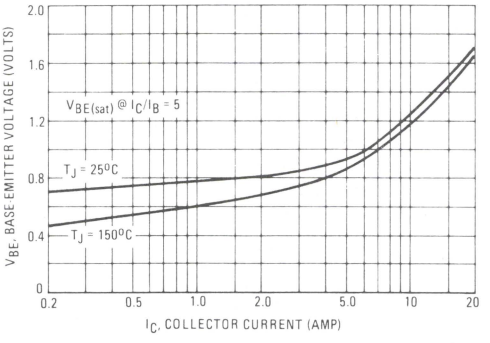

3

FIGURE 5 – COLLECTOR CUTOFF REGION

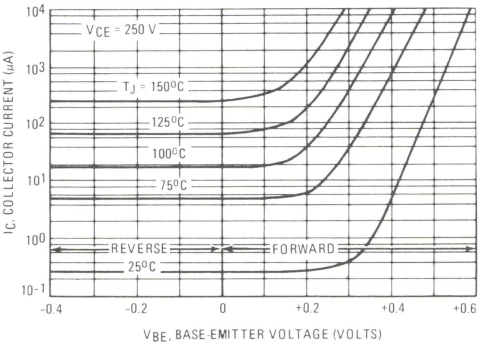

FIGURE 6 – OUTPUT CAPACITANCE

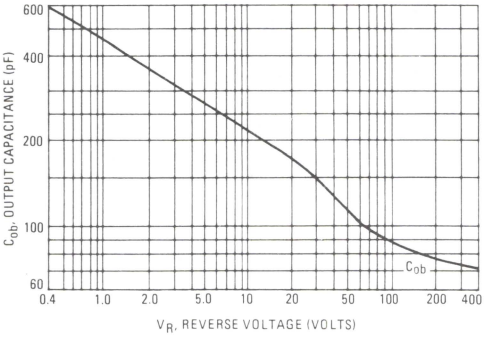

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

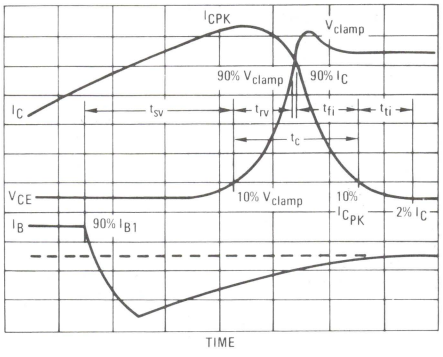

FIGURE 8 – REVERSE BASE CURRENT versus BASE EMITTER VOLTAGE

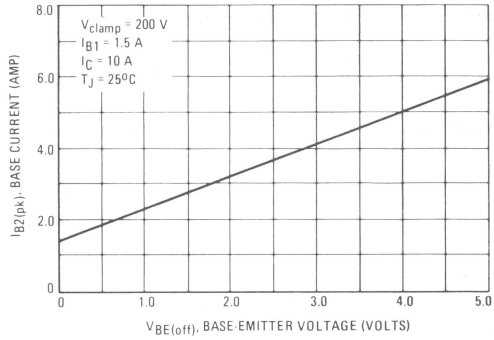

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING

FIGURE 9 – TURN-ON TIME

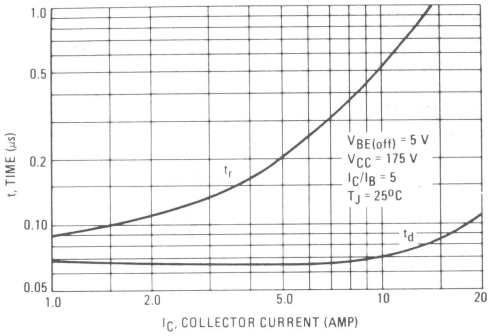

FIGURE 10 – TURN-OFF TIME

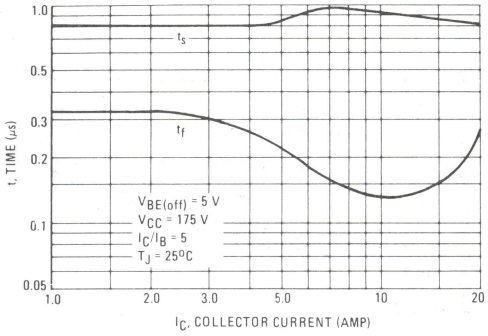

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	250 μF, 470 Ω 2 W, 47 Ω, R1, +15, 15 V, 0, 330 Ω, 5.1 Ω 5 W, R2, 50 Ω, 100 Ω, 430 Ω, 39 Ω, 250 μF, –5.2 All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RBSOA, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 200 V	V_{CC} = 175 V R_L = 17.5 Pulse Width = 25 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t, t_1, t_f, V_{CE}, V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, TUT, 2, R_L, V_{CC}

FIGURE 11 – THERMAL RESPONSE

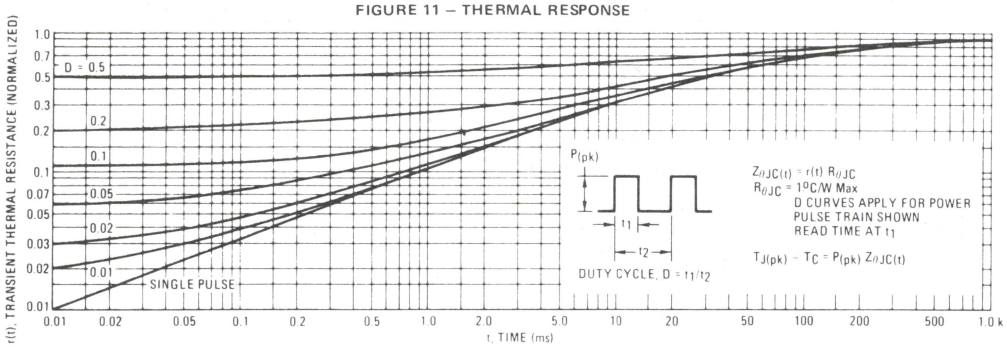

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

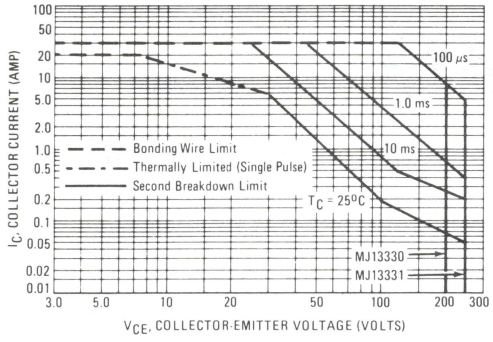

FIGURE 13 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

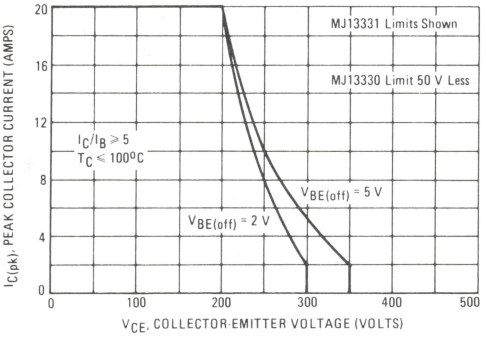

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

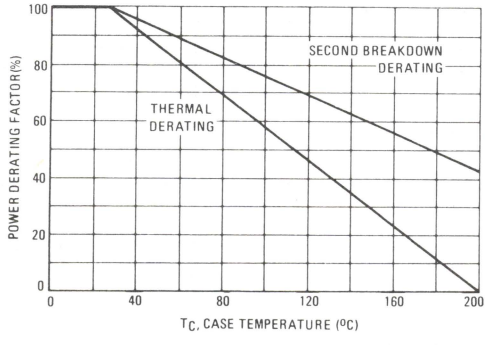

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ13333
MJ13335

Designers Data Sheet

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJ13333 and MJ13335 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
200 ns Inductive Fall Time–25°C (Typ)
1.8 μs Inductive Storage Time–25°C (Typ)

Operating Temperature Range –65 to +200°C

100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents



20 AMPERE

NPN SILICON
POWER TRANSISTORS

400–500 VOLTS
175 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJ13333	MJ13335	Unit
Collector-Emitter Voltage	V_{CEO}	400	500	Vdc
Collector-Emitter Voltage	V_{CEV}	700	800	Vdc
Emitter Base Voltage	V_{EB}	6.0		Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	20 30		Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	10 15		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	175 100 1.0		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Similar device types available with lower V_{CEO} ratings, see the MJ13330 (200 V) and MJ13331 (250 V).



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJ13335	$V_{CEO(sus)}$	500	–	–	Vdc
	MJ13333		400	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			–	–	5.0	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	10	–	60	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 2.0 Adc)			–	–	1.8	
(I_C = 20 Adc, I_B = 6.7 Adc)			–	–	5.0	
(I_C = 10 Adc, I_B = 2.0 Adc, T_C = 100°C)			–	–	2.4	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 2.0 Adc)			–	–	1.8	
(I_C = 10 Adc, I_B = 2.0 Adc, T_C = 100°C)			–	–	1.8	
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	125	–	500	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 10 A, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5.0 Vdc, t_p = 10 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.02	0.1	μs
Rise Time		t_r	–	0.3	0.7	μs
Storage Time		t_s	–	1.6	4.0	μs
Fall Time		t_f	–	0.3	0.7	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 10 A(pk), V_{clamp} = 250 Vdc, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_{sv}	–	2.5	5.0	μs
Crossover Time		t_c	–	0.8	2.0	μs
Storage Time	(I_C = 10 A(pk), V_{clamp} = 250 Vdc, I_{B1} = 2.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	1.8	–	μs
Crossover Time		t_c	–	0.4	–	μs
Fall Time		t_{fi}	–	0.2	–	μs

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – DC CURRENT GAIN

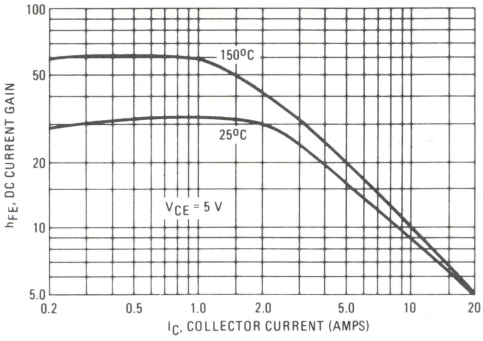

FIGURE 2 – COLLECTOR SATURATION REGION

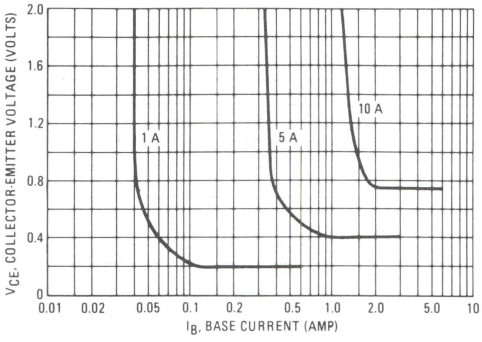

FIGURE 3 – COLLECTOR-EMITTER SATURATION REGION

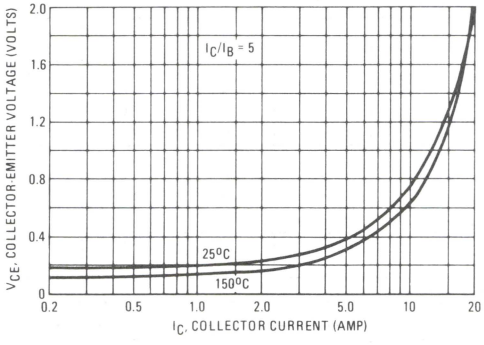

FIGURE 4 – BASE-EMITTER VOLTAGE

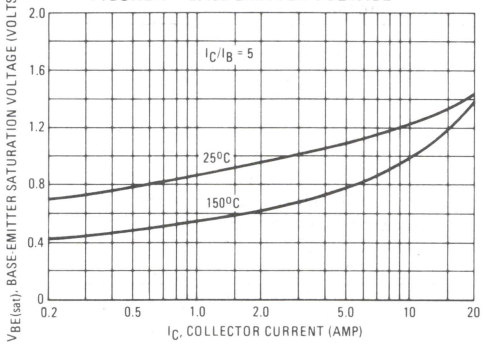

3

FIGURE 5 – COLLECTOR CUTOFF REGION

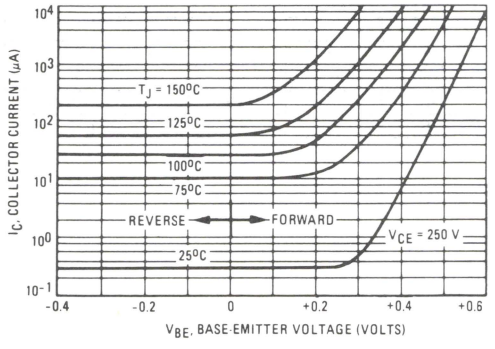

FIGURE 6 – CAPACITANCE

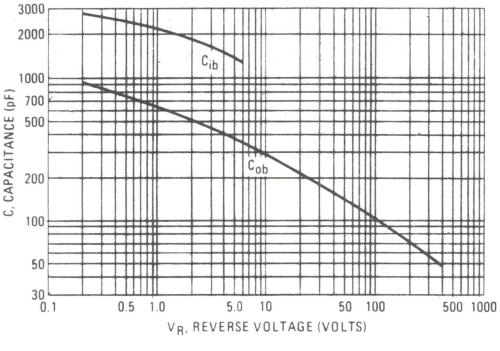

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

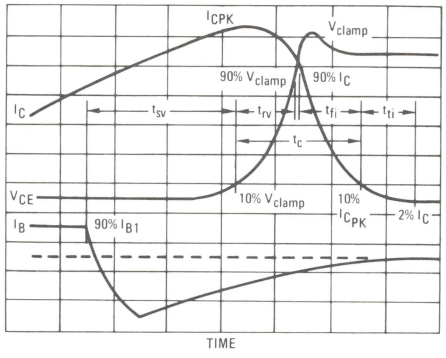

FIGURE 8 – REVERSE BASE CURRENT versus $V_{BE(off)}$ WITH NO EXTERNAL BASE RESISTANCE

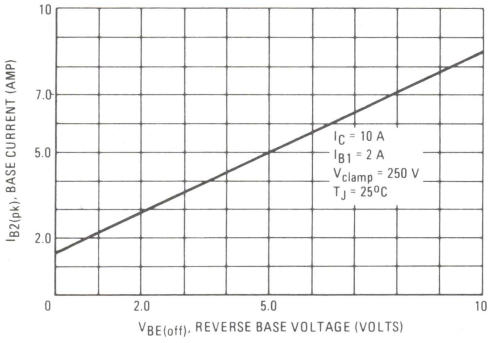

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN-ON SWITCHING TIMES

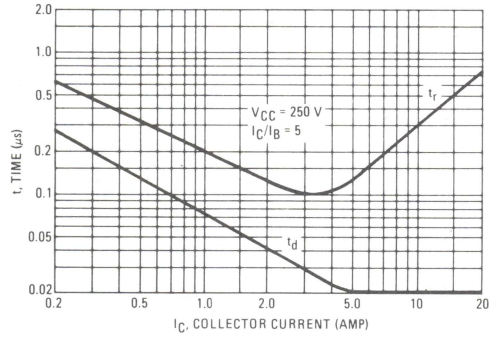

FIGURE 10 – TURN-OFF SWITCHING TIMES

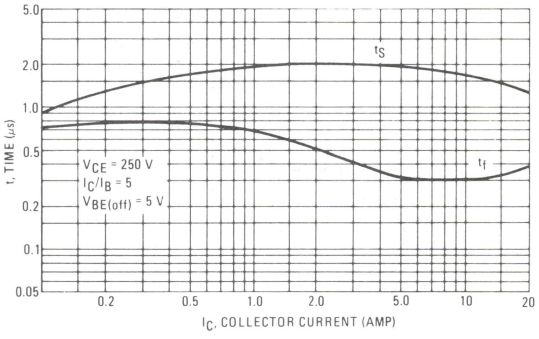

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	250 μF, 470 Ω 2 W, 47 Ω, R1, +15, 15 V, 0, 330 Ω, 5.1 Ω 5 W, R2, 1, 2, 50 Ω, 100 Ω, 430 Ω, 39 Ω, −5.2, 250 μF All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $V_{CEO(sus)}$, R2 = ∞	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 50 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, 2, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t, t_1, t_f V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

3

FIGURE 11 – THERMAL RESPONSE

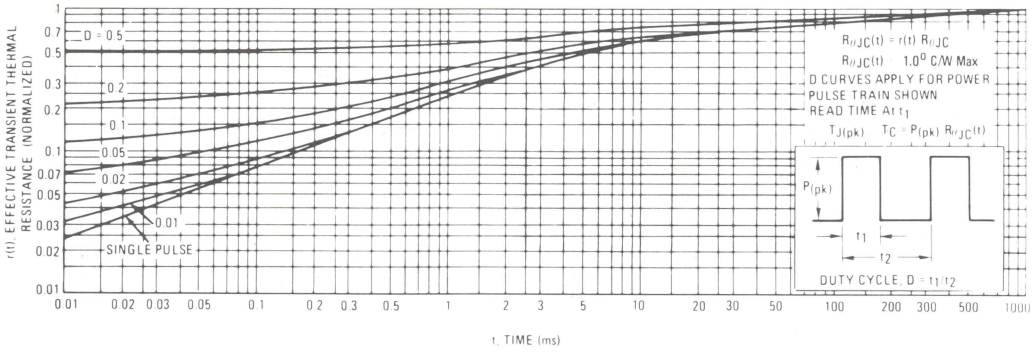

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

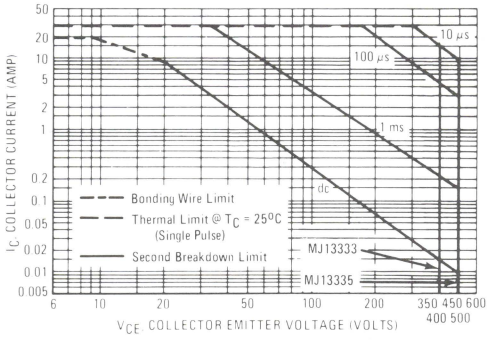

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

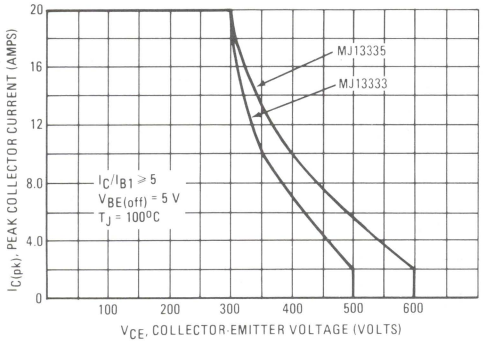

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

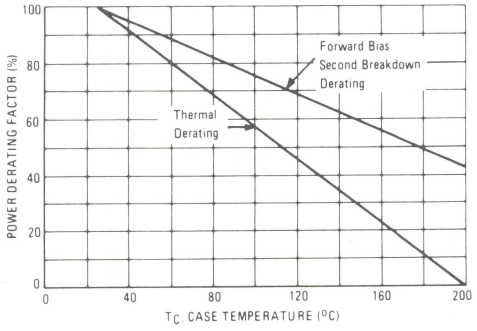

3

NPN
MJ14000, MJ14002
PNP
MJ14001, MJ14003

HIGH-CURRENT COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for use in high-power amplifier and switching circuit applications.

- High Current Capability — I_C Continuous = 60 Amperes
- DC Current Gain — h_{FE} = 15-100 @ I_C = 50 Adc
- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 2.5 Vdc (Max) @ I_C = 50 Adc

60 AMPERES

COMPLEMENTARY SILICON POWER TRANSITORS

60-80 VOLTS
300 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ14000 MJ14001	MJ14002 MJ14003	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CBO}	60	80	Vdc
Emitter-Base Voltage	V_{EBO}	5		Vdc
Collector Current — Continuous	I_C	60		Adc
Base Current — Continuous	I_B	15		Adc
Emitter Current — Continuous	I_E	75		
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	300 1.7		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.584	°C/W



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

FIGURE 1 — POWER DERATING

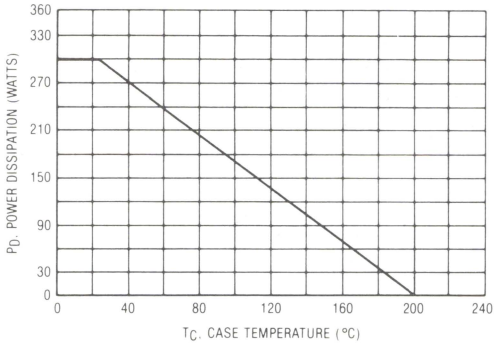

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	MJ14000, MJ14001		60	–	
	MJ14002, MJ14003		80	–	
Collector Cutoff Current		I_{CEO}			mA
(V_{CE} = 30 Vdc, I_B = 0)	MJ14000, MJ14001		–	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	MJ14402, MJ14003		–	1.0	
Collector Cutoff Current		I_{CEX}			mA
(V_{CE} = 60 Vdc, $V_{BE(off)}$ = 1.5 V)	MJ14000, MJ14001		–	1.0	
(V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 V)	MJ14002, MJ14003		–	1.0	
Collector Cutoff Current		I_{CBO}			mA
(V_{CB} = 60 Vdc, I_E = 0)	MJ14000, MJ14001		–	1.0	
(V_{CB} = 80 Vdc, I_E = 0)	MJ14002, MJ14003		–	1.0	
Emitter Cutoff Current		I_{EBO}	–	1.0	mA
(V_{BE} = 5 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 25 Adc, V_{CE} = 3.0 V)			30	–	
(I_C = 50 Adc, V_{CE} = 3.0 V)			15	100	
(I_C = 60 Adc, V_{CE} = 3.0 V)			5	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.5 Adc)			–	1	
(I_C = 50 Adc, I_B = 5.0 Adc)			–	2.5	
(I_C = 60 Adc, I_B = 12 Adc)			–	3	
Base-Emitter Saturation Voltage (1)		$V_{BE(sat)}$			Vdc
(I_C = 25 Adc, I_B = 2.5 Adc)			–	2	
(I_C = 50 Adc, I_B = 5.0 Adc)			–	3	
(I_C = 60 Adc, I_B = 12 Adc)			–	4	
DYNAMIC CHARACTERISTICS					
Output Capacitance		C_{ob}	–	2000	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)					

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 2 – MAXIMUM RATED FORWARD BIASED SAFE OPERATING AREA

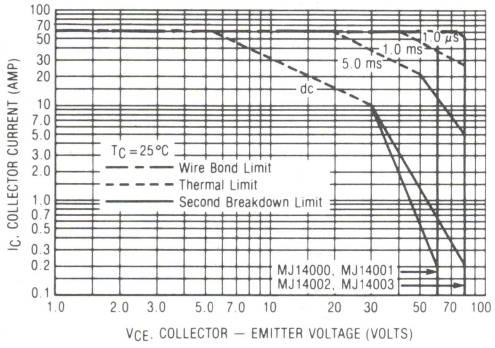

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200°C$. $T_{J(pk)}$ may be calculated from the data in Figure13. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415)

TYPICAL ELECTRICAL CHARACTERISTICS

NPN
MJ14000, MJ14002

FIGURE 3 — DC CURRENT GAIN

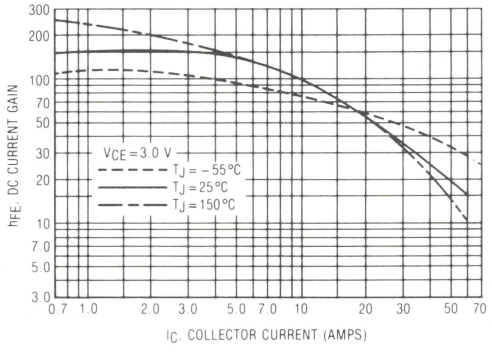

PNP
MJ14001, MJ14003

FIGURE 4 — DC CURRENT GAIN

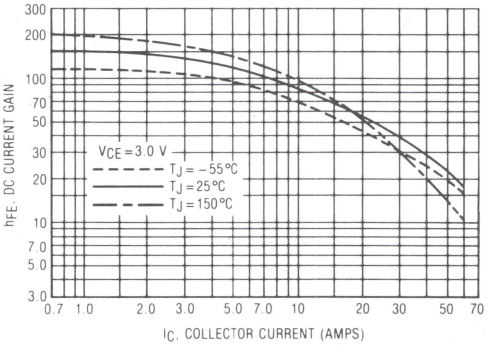

FIGURE 5 — COLLECTOR SATURATION REGION

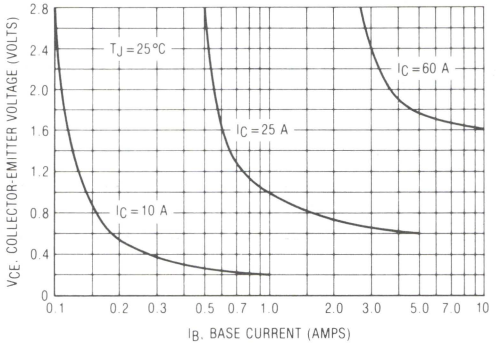

FIGURE 6 — COLLECTOR SATURATION REGION

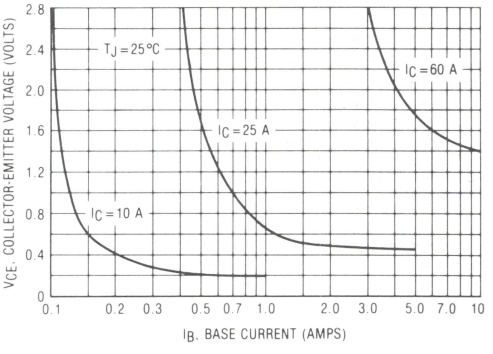

FIGURE 7 — "ON" VOLTAGES

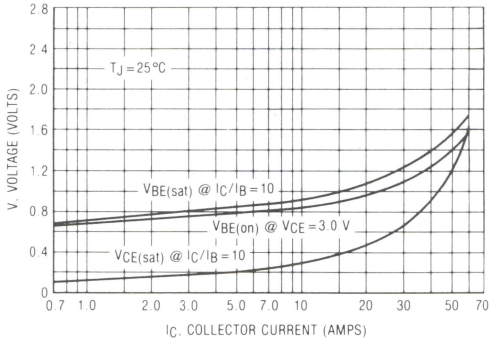

FIGURE 8 — "ON" VOLTAGES

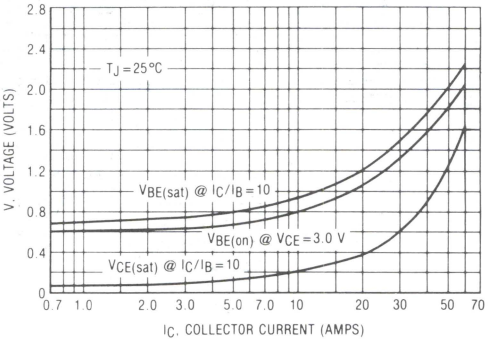

FIGURE 9 — TURN-ON SWITCHING TIMES

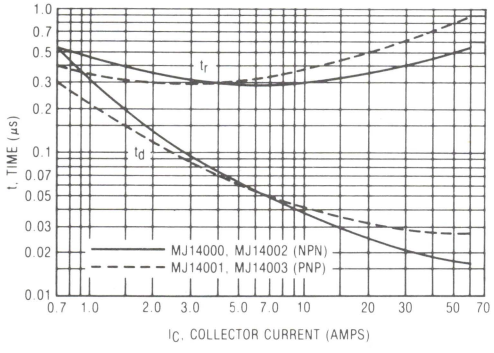

FIGURE 10 - TURN-OFF SWITCHING TIMES

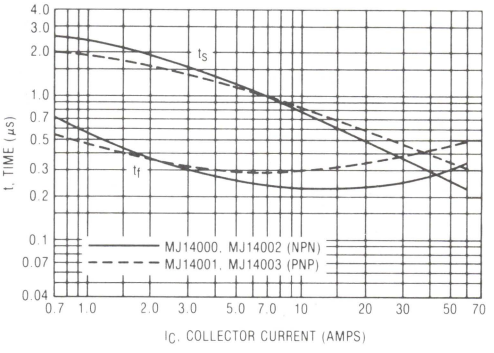

FIGURE 11 — CAPACITANCE VARIATION

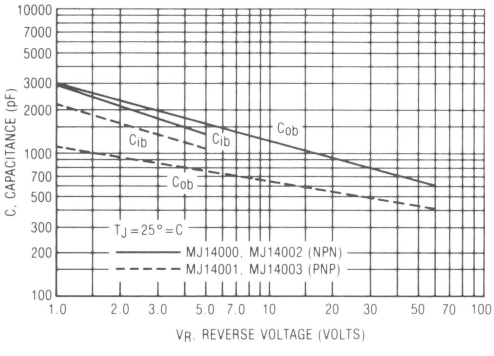

FIGURE 12 — SWITCHING TEST CIRCUIT

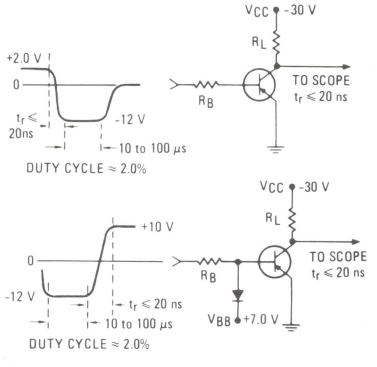

FOR CURVES OF FIGURES 3 & 6, R_B & R_L ARE VARIED.
INPUT LEVELS ARE APPROXIMATELY AS SHOWN.
FOR NPN CIRCUITS, REVERSE ALL POLARITIES.

FIGURE 13 — THERMAL RESPONSE

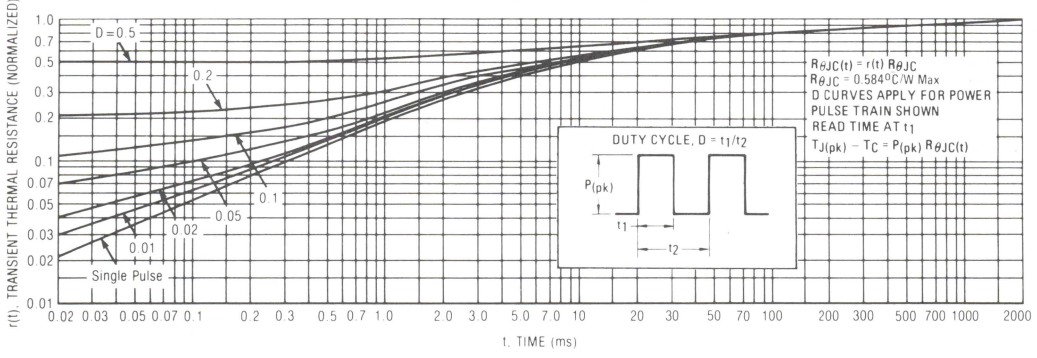

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN MJ15001 PNP MJ15002

COMPLEMENTARY SILICON POWER TRANSISTORS

The MJ15001 and MJ15002 are EpiBase power transistors designed for high power audio, disk head positioners and other linear applications.

- High Safe Operating Area (100% Tested) –
  200 W @ 40 V
  50 W @ 100 V
- For Low Distortion Complementary Designs
- High DC Current Gain –
  h_{FE} = 25 (Min) @ I_C = 4 Adc

15 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
140 VOLTS
200 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	140	Vdc
Collector-Base Voltage	V_{CBO}	140	Vdc
Emitter-Base Voltage	V_{EBO}	5	Vdc
Collector Current – Continuous	I_C	15	Adc
Base Current – Continuous	I_B	5	Adc
Emitter Current – Continuous	I_E	20	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.14	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	–65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.875	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/16" from Case for ≤10s.	T_L	265	°C



NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ ø 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ ø 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	$V_{CEO(sus)}$	140	–	Vdc
Collector Cutoff Current (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	I_{CEX}	–	100	μAdc
(V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			2	mAdc
Collector Cutoff Current (V_{CE} = 140 Vdc, I_B = 0)	I_{CEO}	–	250	μAdc
Emitter Cutoff Current (V_{EB} = 5 Vdc, I_C = 0)	I_{EBO}	–	100	μAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with Base Forward Biased (V_{CE} = 40 Vdc, t = 1 s (non-repetitive))	$I_{S/b}$	5	–	Adc
(V_{CE} = 100 Vdc, t = 1 s (non-repetitive))		0.5	–	
ON CHARACTERISTICS				
DC Current Gain (I_C = 4 Adc, V_{CE} = 2 Vdc)	h_{FE}	25	150	–
Collector-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 0.4 Adc)	$V_{CE(sat)}$	–	1	Vdc
Base-Emitter On Voltage (I_C = 4 Adc, V_{CE} = 2 Vdc)	$V_{BE(on)}$	–	2	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain – Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 0.5 MHz)	f_T	2	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)	C_{ob}	–	1000	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

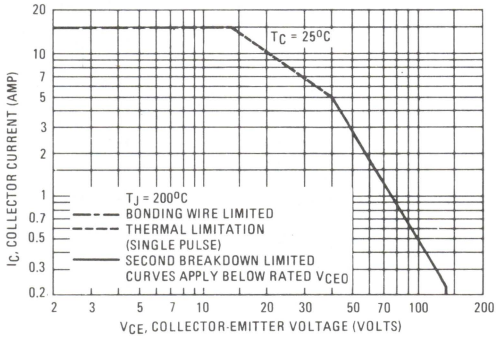

There are two limitations on the powerhandling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

TYPICAL CHARACTERISTICS

FIGURE 2 – CAPACITANCES

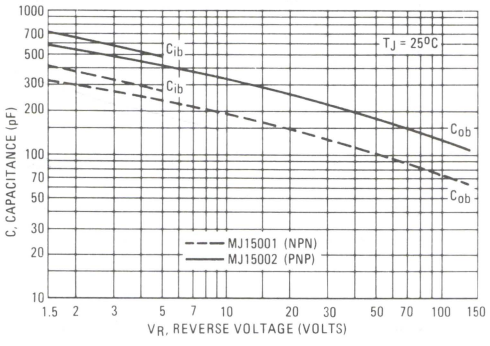

FIGURE 3 – CURRENT-GAIN – BANDWIDTH PRODUCT

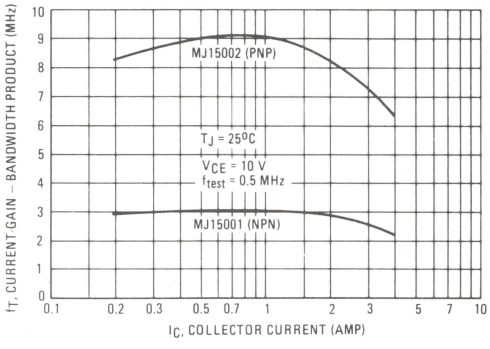

FIGURE 4 – DC CURRENT GAIN

MJ15001

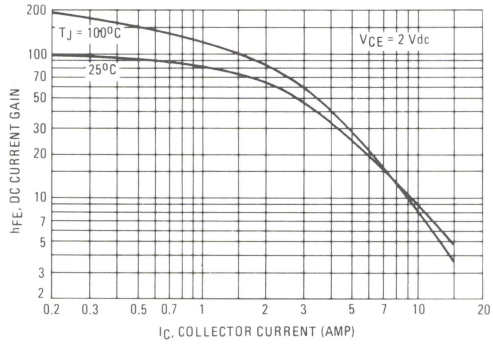

MJ15002

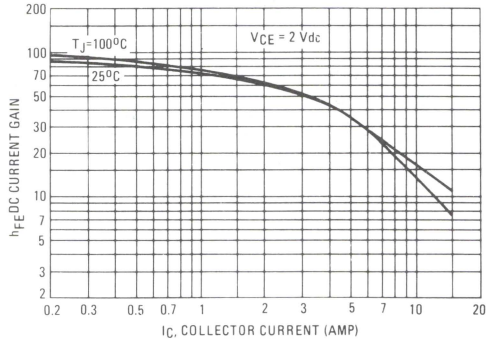

FIGURE 5 – "ON" VOLTAGE

MJ15001

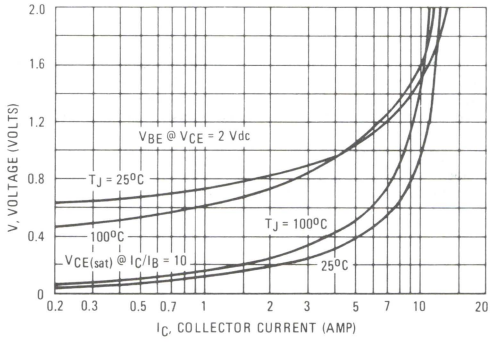

MJ15002

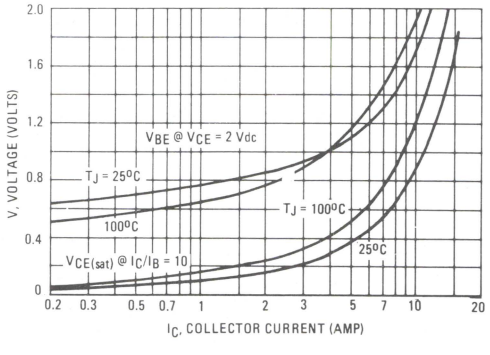

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
MJ15003
PNP
MJ15004

COMPLEMENTARY SILICON POWER TRANSISTORS

The MJ15003 and MJ15004 are PowerBase power transistors designed for high power audio, disk head positioners and other linear applications.

- High Safe Operating Area (100% Tested) – 250 W @ 50 V
- For Low Distortion Complementary Designs
- High DC Current Gain – h_{FE} = 25 (Min) @ I_C = 5 Adc

20 AMPERE

POWER TRANSISTORS COMPLEMENTARY SILICON

140 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	140	Vdc
Collector-Base Voltage	V_{CBO}	140	Vdc
Emitter-Base Voltage	V_{EBO}	5	Vdc
Collector Current – Continuous	I_C	20	Adc
Base Current – Continuous	I_B	5	Adc
Emitter Current – Continuous	I_E	25	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	250 1.43	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.70	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/16" from Case for ≤10s.	T_L	265	°C



NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ Ø 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   Ø Ø 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	$V_{CEO(sus)}$	140	–	Vdc
Collector Cutoff Current (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 140 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	– –	100 2	μAdc mAdc
Collector Cutoff Current (V_{CE} = 140 Vdc, I_B = 0)	I_{CEO}	–	250	μAdc
Emitter Cutoff Current (V_{EB} = 5 Vdc, I_C = 0)	I_{EBO}	–	100	μAdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with Base Forward Biased (V_{CE} = 50 Vdc, t = 1 s (non-repetitive) (V_{CE} = 100 Vdc, t = 1 s (non-repetitive)	$I_{S/b}$	 5 1	 – –	Adc
ON CHARACTERISTICS				
DC Current Gain (I_C = 5 Adc, V_{CE} = 2 Vdc)	h_{FE}	25	150	
Collector-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 0.5 Adc)	$V_{CE(sat)}$	–	1	Vdc
Base-Emitter On Voltage (I_C = 5 Adc, V_{CE} = 2 Vdc)	$V_{BE(on)}$	–	2	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain – Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f_{test} = 0.5 MHz)	f_T	2	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)	C_{ob}	–	1000	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

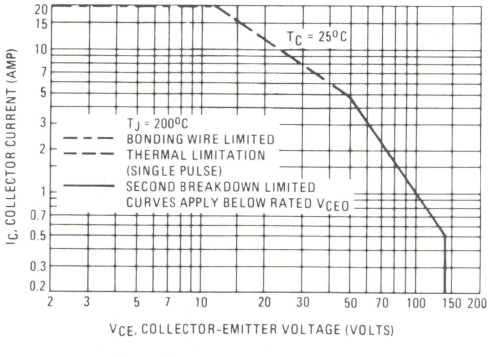

There are two limitations on the powerhandling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

TYPICAL CHARACTERISTICS

FIGURE 2 – CAPACITANCES

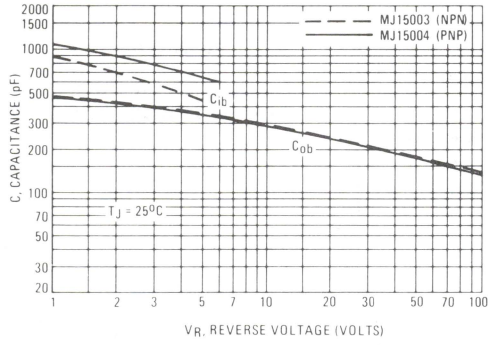

FIGURE 3 – CURRENT GAIN – BANDWIDTH PRODUCT

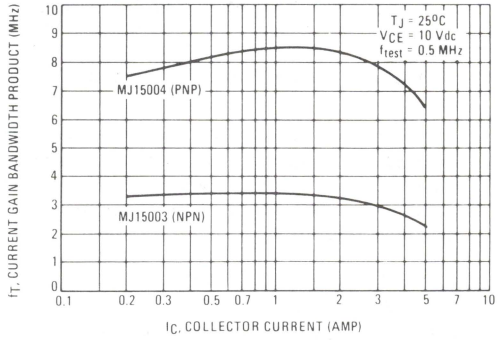

FIGURE 4 – DC CURRENT GAIN

MJ15003

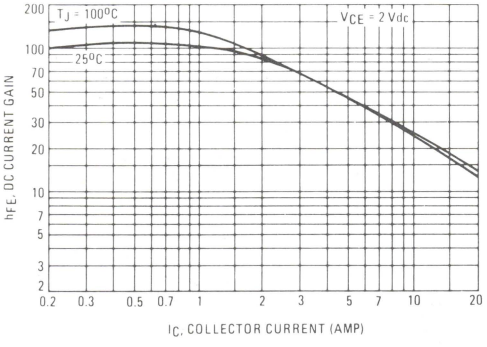

MJ15004

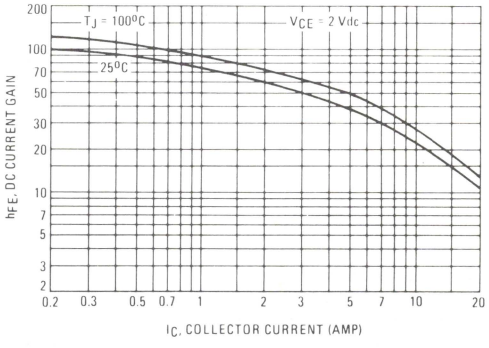

FIGURE 5 – "ON" VOLTAGE

MJ15003

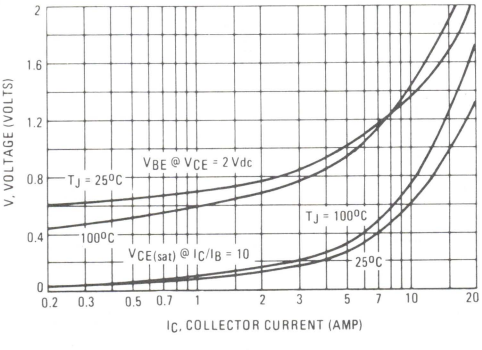

MJ15004

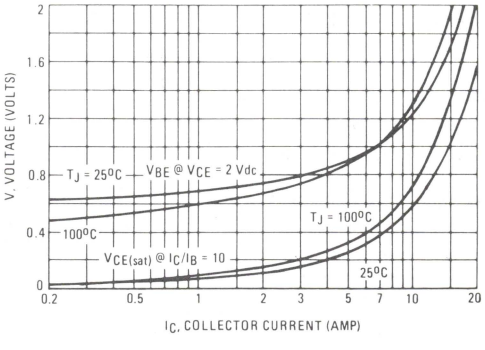

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
MJ15011
PNP
MJ15012

Advance Information

COMPLEMENTARY SILICON POWER TRANSISTORS

The MJ15011 and MJ15012 are PowerBase power transistors designed for high-power audio, disk head positioners, and other linear applications. These devices can also be used in power switching circuits such as relay or solenoid drivers, dc-to-dc converters or inverters.

- High Safe Operating Area (100% Tested)
  1.2 A @ 100 V
- Completely Characterized for Linear Operation
- High DC Current Gain and Low Saturation Voltage
  h_{FE} = 20 (Min) @ 2 A, 2 V
  $V_{CE(sat)}$ = 2.5 V (Max) @ I_C = 4 A, I_B = 0.4 A
- For Low Distortion Complementary Designs

10 AMPERE

COMPLEMENTARY POWER TRANSISTORS

250 VOLTS
200 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	250	Vdc
Collector-Emitter Voltage	V_{CEX}	250	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	10 15	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2 5	Adc
Emitter Current — Continuous — Peak (1)	I_E I_{EM}	12 20	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	200 1.14	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.875	°C/W
Maximum Lead Temperature for Soldering Purposes	T_L	265	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

(1) These ratings are applicable when surface mounted on the minimum pad size recommended.



NOTES:
1. DIAMETERS Q, V AND SURFACE T ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ Ø 0.25 (0.010) Ⓜ | T | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ Ø 0.30 (0.012) Ⓜ | T | V Ⓜ | Q Ⓜ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.99	1.09	0.039	0.043
E	–	3.43	–	0.135
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	–	26.67	–	1.050
V	3.84	4.09	0.151	0.161

CASE 11-01
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (1) (I_C = 100 mA)	$V_{(BR)CEO}$	250	–	Vdc
Collector Cutoff Current (V_{CE} = 200 Vdc)	I_{CEO}	–	1	mAdc
Collector Cutoff Current (V_{CE} = 250 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	I_{CEX}	–	500	μAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc)	I_{EBO}	–	500	μAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 2 Adc, V_{CE} = 2 Vdc) (I_C = 4 Adc, V_{CE} = 2 Vdc)	h_{FE}	 20 5	 100 –	–
Collector-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 0.2 Adc) (I_C = 4 Adc, I_B = 0.4 Adc)	$V_{CE(sat)}$	 – –	 0.8 2.5	Vdc
Base-Emitter On Voltage (I_C = 4 Adc, V_{CE} = 2 Vdc)	$V_{BE(on)}$	–	2	Vdc
DYNAMIC CHARACTERISTICS				
Output Capacitance (V_{CB} = 10 Vdc, f = 1 MHz)	C_{ob}	–	750	pF
SECOND BREAKDOWN				
Second Breakdown Collector Current with Base Forward Biased (V_{CE} = 40 Vdc, t = 0.5 s) (V_{CE} = 100 Vdc, t = 0.5 s)	$I_{S/b}$	 5 1.4	 – –	Adc

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

FIGURE 1 – DC CURRENT GAIN

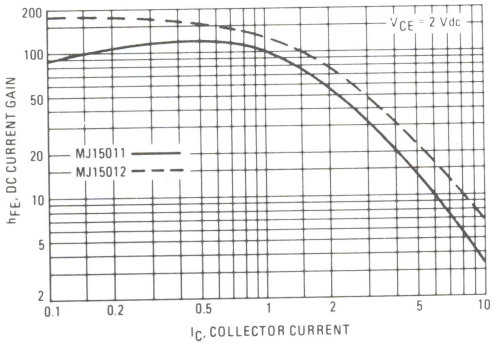

FIGURE 2 – ACTIVE REGION SAFE OPERATING AREA

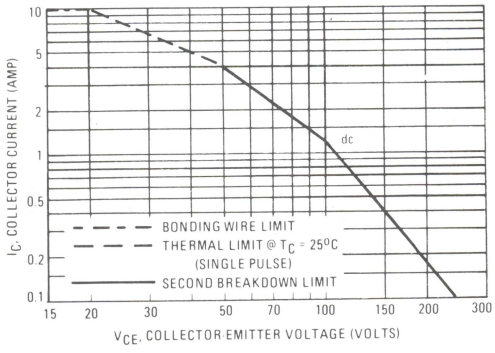

3

MJ15015, MJ15016
See Page 3-9

NPN
MJ15022, MJ15024

16 AMPERE

SILICON
POWER TRANSISTORS

200 and 250 VOLTS
250 WATTS

SILICON POWER TRANSISTORS

The MJ15022 and MJ15024 are PowerBase power transistors designed for high power audio, disk head positioners and other linear applications.

- High Safe Operating Area (100% Tested) – 2 A @ 80 V
- High DC Current Gain – h_{FE} = 15 (Min) @ I_C = 8 Adc



MAXIMUM RATINGS

Rating	Symbol	MJ15022	MJ15024	Unit
Collector-Emitter Voltage	V_{CEO}	200	250	Vdc
Collector-Base Voltage	V_{CBO}	350	400	Vdc
Emitter-Base Voltage	V_{EBO}	5		Vdc
Collector-Emitter Voltage	V_{CEX}	400		Vdc
Collector Current – Continuous Peak (1)	I_C	16 30		Adc
Base Current – Continuous	I_B	5		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	250 1.43		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.70	°C/W

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIAMETER V AND SURFACE W ARE DATUMS.
2. POSITIONAL TOLERANCE FOR HOLE Q:
   ⌖ | ϕ 0.25 (0.010) Ⓜ | W | V Ⓜ
3. POSITIONAL TOLERANCE FOR LEADS:
   ⌖ | ϕ 0.30 (0.012) Ⓜ | W | V Ⓜ | Q Ⓜ

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.151	0.165

CASE 1-04
TO-204AA

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			
(I_C = 100 mAdc, I_B = 0)	MJ15022		200	–	
	MJ15024		250	–	
Collector Cutoff Current		I_{CEX}			
(V_{CE} = 200 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	MJ15022		–	250	μAdc
(V_{CE} = 250 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	MJ15024		–	250	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 150 Vdc, I_B = 0)	MJ15022		–	500	
(V_{CE} = 200 Vdc, I_B = 0)	MJ15024		–	500	
Emitter Cutoff Current		I_{EBO}	–	500	μAdc
(V_{CE} = 5 Vdc, I_B = 0)					
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$			Adc
(V_{CE} = 50 Vdc, t = 0.5 s (non-repetitive))			5	–	
(V_{CE} = 80 Vdc, t = 0.5 s (non-repetitive))			2	–	
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 8 Adc, V_{CE} = 4 Vdc)			15	60	
(I_C = 16 Adc, V_{CE} = 4 Vdc)			5	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 8 Adc, I_B = 0.8 Adc)			–	1.4	
(I_C = 16 Adc, I_B = 3.2 Adc)			–	4.0	
Base-Emitter On Voltage		$V_{BE(on)}$	–	2.2	Vdc
(I_C = 8 Adc, V_{CE} = 4 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T	4	–	MHz
(I_C = 1 Adc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)					
Output Capacitance		C_{ob}	–	500	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)					

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

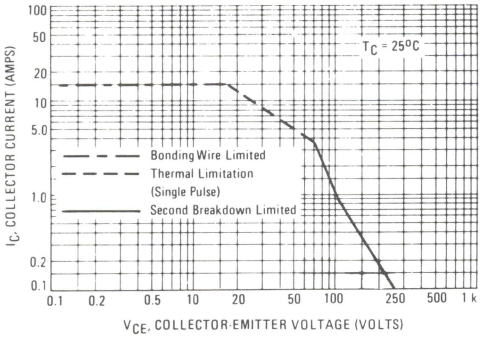

There are two limitations on the powerhandling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

TYPICAL CHARACTERISTICS

FIGURE 2 – CAPACITANCES

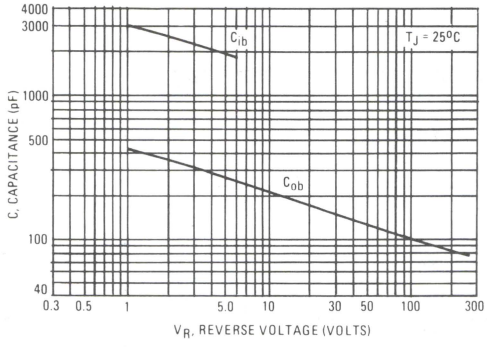

FIGURE 3 – CURRENT-GAIN–BANDWIDTH PRODUCT

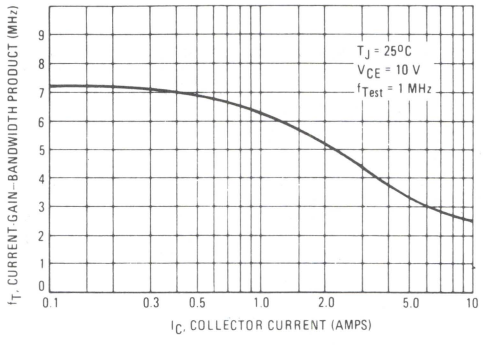

FIGURE 4 – DC CURRENT GAIN

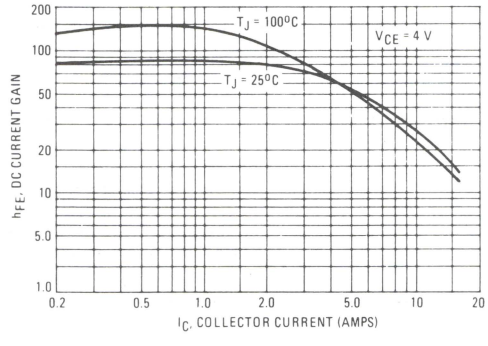

FIGURE 5 – "ON" VOLTAGE

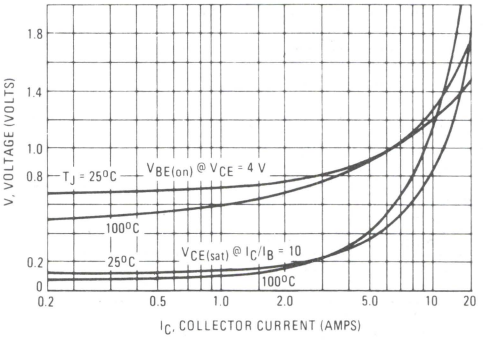

3

FIGURE 6 – COLLECTOR SATURATION REGION

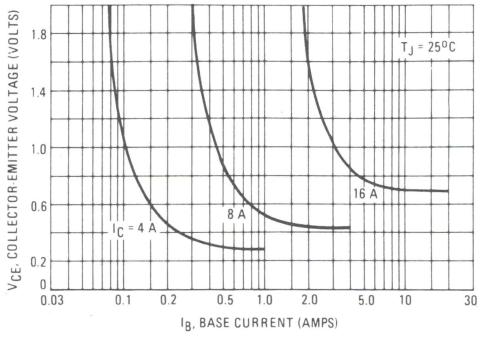

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

PNP
MJ15023
MJ15025

SILICON POWER TRANSISTORS

The MJ15023 and MJ15025 are PowerBase power transistors designed for high power audio, disk head positioners and other linear applications.

- High Safe Operating Area (100% Tested) – 2 A @ 80 V
- High DC Current Gain – h_{FE} = 15 (Min) @ I_C = 8 Adc

16 AMPERE

SILICON POWER TRANSISTORS

200 and 250 VOLTS
250 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJ15023	MJ15025	Unit
Collector-Emitter Voltage	V_{CEO}	200	250	Vdc
Collector-Base Voltage	V_{CBO}	350	400	Vdc
Emitter-Base Voltage	V_{EBO}	5		Vdc
Collector-Emitter Voltage	V_{CEX}	400		Vdc
Collector Current – Continuous Peak (1)	I_C	16 30		Adc
Base Current – Continuous	I_B	5		Adc
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	250 1.43		Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.70	$^oC/W$

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

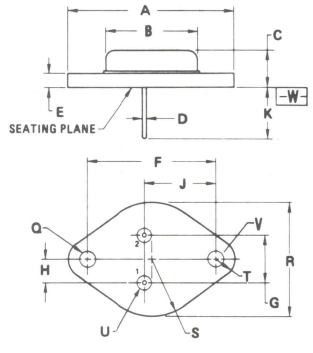

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

NOTE:
1. DIM "Q" IS DIA.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	2.54	3.05	0.100	0.120
V	3.81	4.19	0.150	0.165

CASE 1-04
TO-204AA

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			
(I_C = 100 mAdc, I_B = 0)	MJ15023		200	–	
	MJ15025		250	–	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 200 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	MJ15023		–	250	
(V_{CE} = 250 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	MJ15025		–	250	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 150 Vdc, I_B = 0)	MJ15023		–	500	
(V_{CE} = 200 Vdc, I_B = 0)	MJ15025		–	500	
Emitter Cutoff Current		I_{EBO}	–	500	μAdc
(V_{CE} = 5 Vdc, I_B = 0)	Both				
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$			Adc
(V_{CE} = 50 Vdc, t = 0.5 s (non-repetitive))			5	–	
(V_{CE} = 80 Vdc, t = 0.5 s (non-repetitive))			2	–	
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 8 Adc, V_{CE} = 4 Vdc)			15	60	
(I_C = 16 Adc, V_{CE} = 4 Vdc)			5	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 8 Adc, I_B = 0.8 Adc)			–	1.4	
(I_C = 16 Adc, I_B = 3.2 Adc)			–	4.0	
Base-Emitter On Voltage		$V_{BE(on)}$	–	2.2	Vdc
(I_C = 8 Adc, V_{CE} = 4 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product		f_T	4	–	MHz
(I_C = 1 Adc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)					
Output Capacitance		C_{ob}	–	600	pF
(V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)					

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

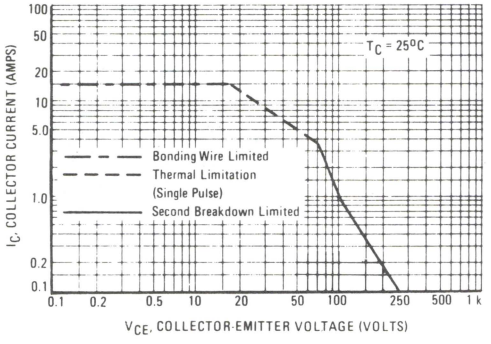

There are two limitations on the powerhandling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 200°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

TYPICAL CHARACTERISTICS

FIGURE 2 – CAPACITANCES

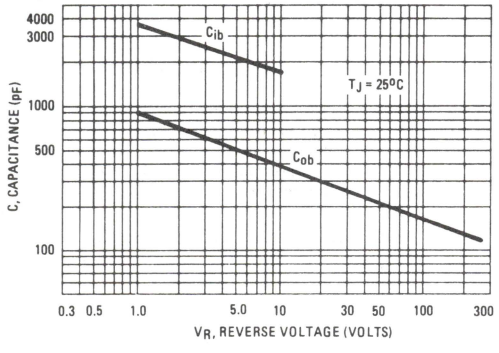

FIGURE 3 – CURRENT-GAIN–BANDWIDTH PRODUCT

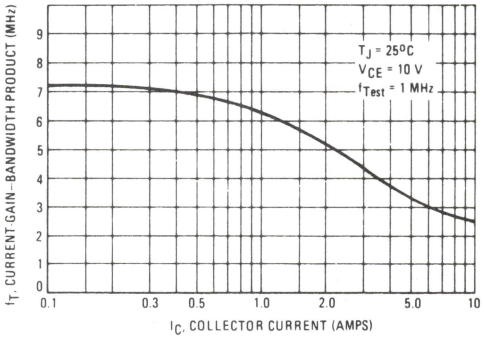

FIGURE 4 – DC CURRENT GAIN

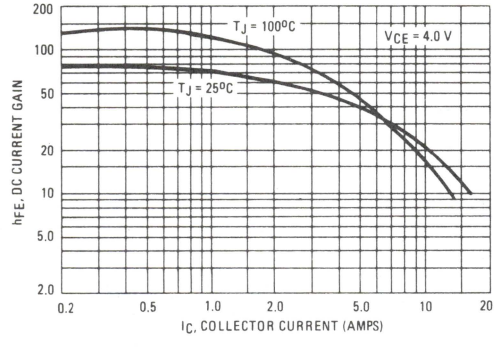

FIGURE 5 – "ON" VOLTAGE

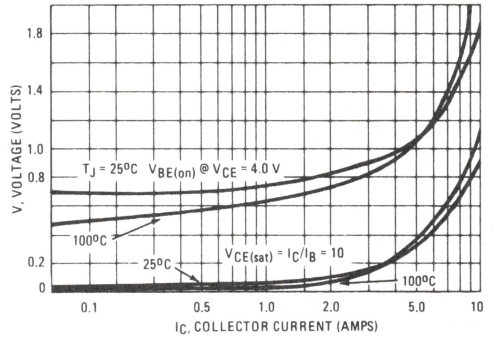

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ16002
MJ16004

Designers Data Sheet

SWITCHMODE III SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications. The MJ16004 is a selected high-gain version of the MJ16002 for applications where drive current is limited.

Typical Applications:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  - 50 ns Inductive Fall Time — 75°C (Typ)
  - 70 ns Inductive Crossover Time — 75°C (Typ)
  - 500 ns Inductive Storage Time — 75°C (Typ)
- Operating Temperature Range -65 to +200°C
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents

5 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
125 WATTS

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	V_{CEO}	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	6.0	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	5.0 10	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	4.0 8.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	125 71.5 0.714	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ ⌀0.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ ⌀0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.150	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.150	0.165

CASE 1-05
TO-204AA

3

MJ16002

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 0.2 Adc) (I_C = 3.0 Adc, I_B = 0.4 Adc) (I_C = 3.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	— — —	1.0 2.5 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.4 Adc) (I_C = 3.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	— —	1.5 1.5	Vdc
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc	h_{FE}	5.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	200	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 3.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.4 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 0.8 Adc, R_{B2} = 8.0 Ω)	t_d	—	30	100	ns
Rise Time			t_r	—	100	300	
Storage Time			t_s	—	1000	3000	
Fall Time			t_f	—	60	300	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	400	—	
Fall Time			t_f	—	130	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 3.0 Adc, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	500	1600	ns
Fall Time			t_{fi}	—	100	200	
Crossover Time			t_c	—	120	250	
Storage Time		(T_J = 150°C)	t_{sv}	—	600	—	
Fall Time			t_{fi}	—	120	—	
Crossover Time			t_c	—	160	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_{B1}}$

3

MJ16004

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 0.15 Adc) (I_C = 3.0 Adc, I_B = 0.3 Adc) (I_C = 3.0 Adc, I_B = 0.3 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	— — —	1.0 2.5 2.5	Vdc
Base-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.3 Adc) (I_C = 3.0 Adc, I_B = 0.3 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	— —	1.5 1.5	Vdc
DC Current Gain (I_C = 5.0 Adc, V_{CE} = 5.0 Vdc	h_{FE}	7.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	200	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 3.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.3 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 0.6 Adc, R_{B2} = 8.0 Ω)	t_d	—	30	100	ns
Rise Time			t_r	—	130	300	
Storage Time			t_s	—	800	2700	
Fall Time			t_f	—	80	350	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	250	—	
Fall Time			t_f	—	60	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 3.0 Adc, I_{B1} = 0.3 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	400	1300	ns
Fall Time			t_{fi}	—	80	150	
Crossover Time			t_c	—	90	200	
Storage Time		(T_J = 150°C)	t_{sv}	—	450	—	
Fall Time			t_{fi}	—	100	—	
Crossover Time			t_c	—	110	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_{B1}}$

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

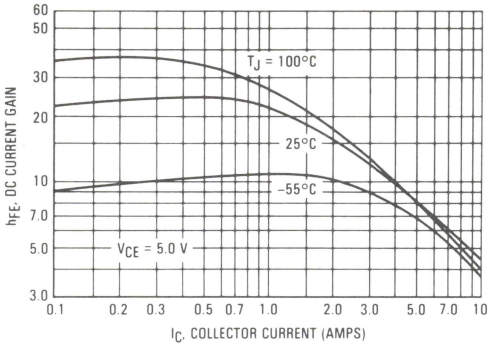

FIGURE 2 — COLLECTOR SATURATION REGION

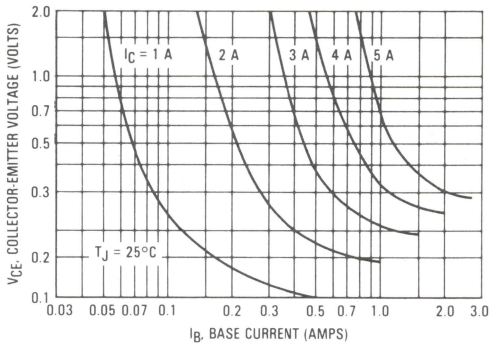

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

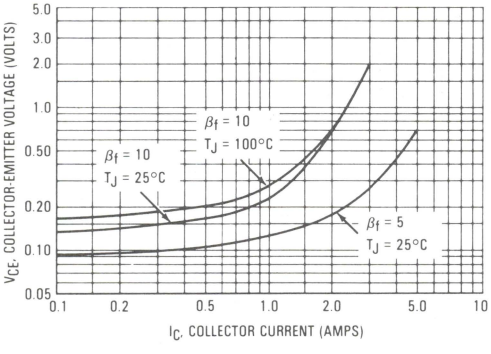

FIGURE 4 — BASE-EMITTER VOLTAGE

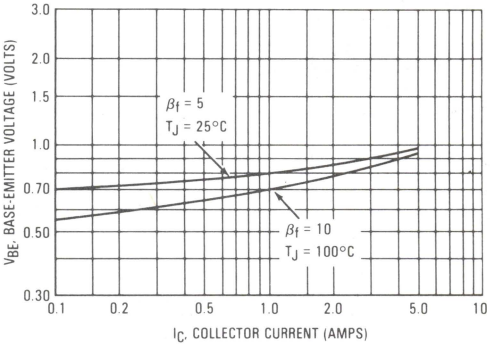

FIGURE 5 — COLLECTOR CUTOFF REGION

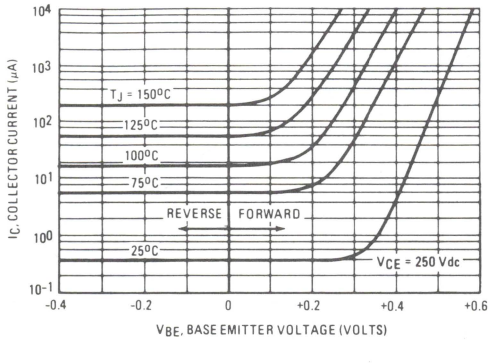

FIGURE 6 — CAPACITANCE

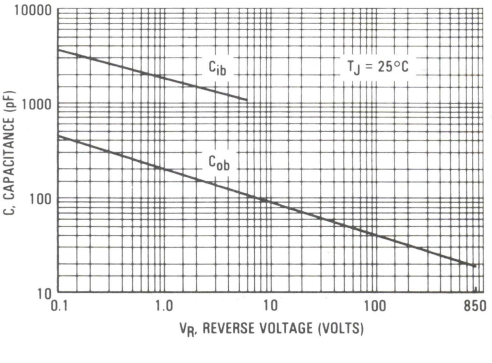

3

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

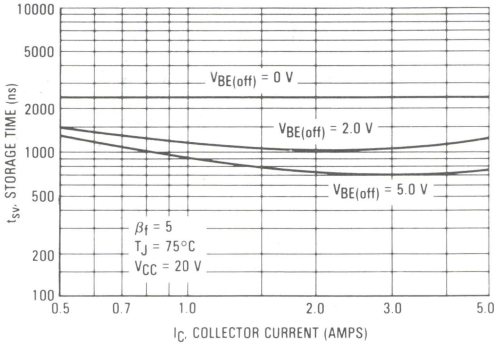

FIGURE 8 — STORAGE TIME

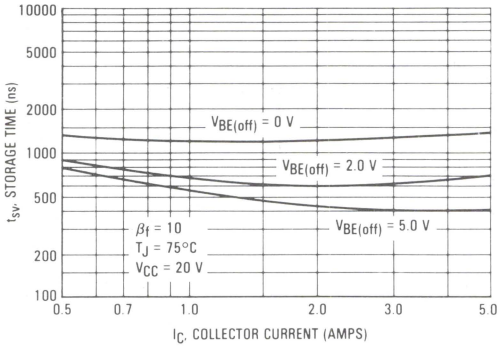

FIGURE 9 — COLLECTOR CURRENT FALL TIME

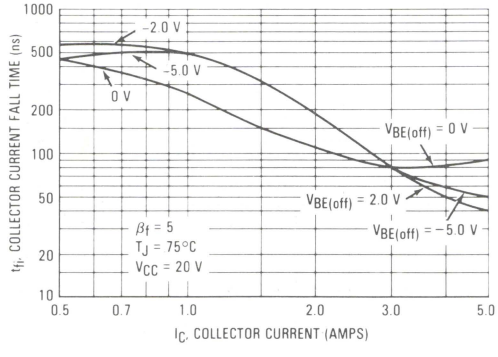

FIGURE 10 — COLLECTOR CURRENT FALL TIME

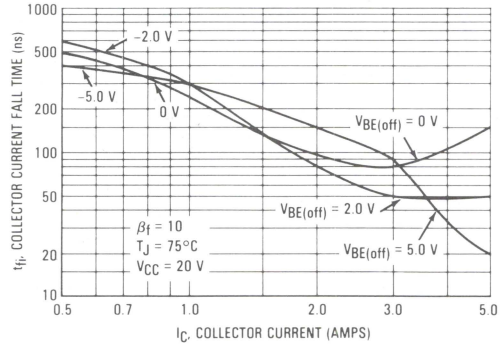

FIGURE 11 — CROSSOVER TIME

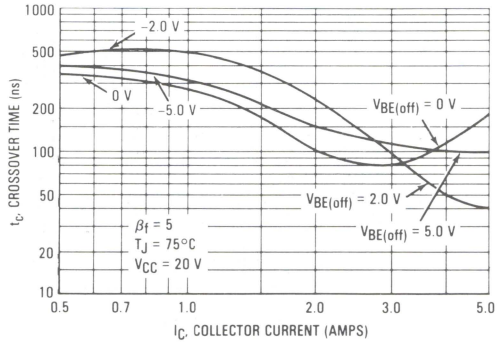

FIGURE 12 — CROSSOVER TIME

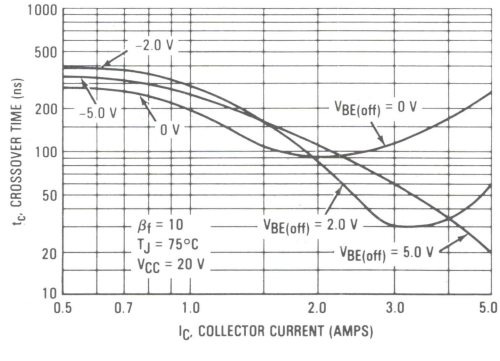

3

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

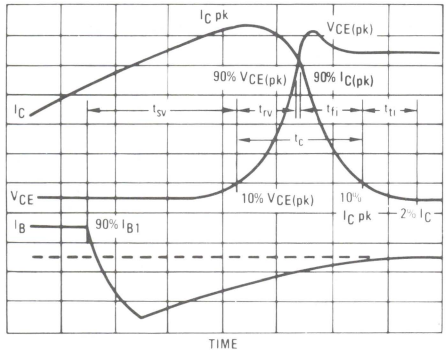

FIGURE 14 — PEAK REVERSE BASE CURRENT

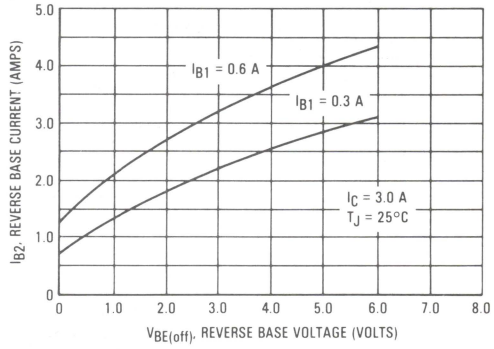

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

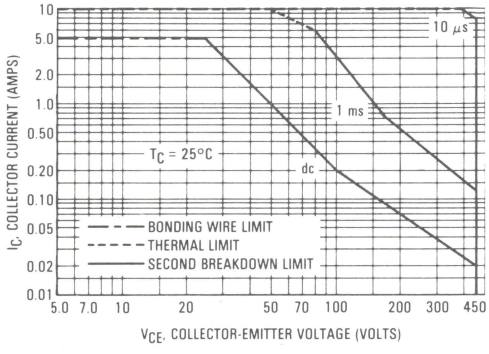

FIGURE 16 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

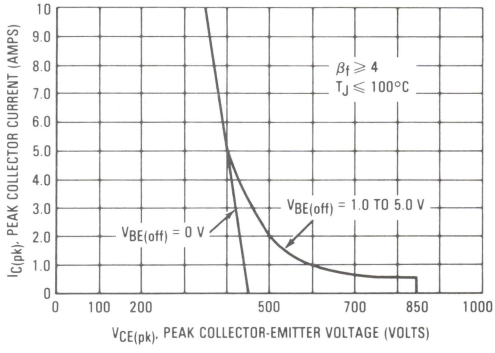

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq$ 25°C. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 17. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

FIGURE 17 — THERMAL RESPONSE

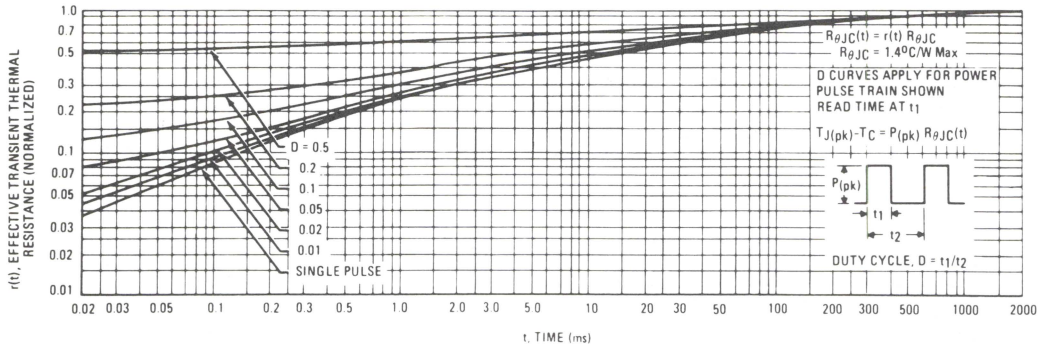

FIGURE 18 — POWER DERATING

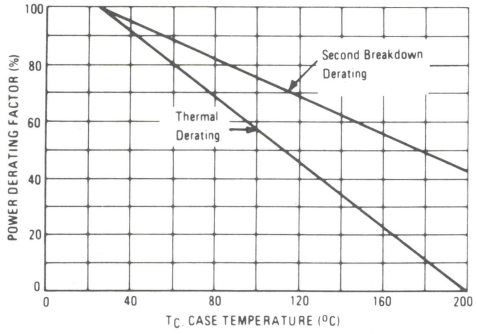

TABLE 1 — RESISTIVE LOAD SWITCHING

t_d and t_r

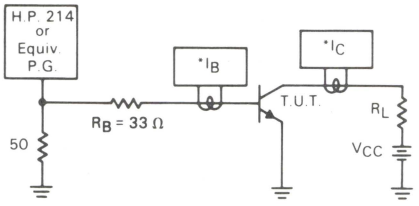

V_{CC} = 250 Vdc
R_L = 83 Ω
I_C = 3.0 Adc
I_B = 0.3 Adc



*Tektronix P-6042 or Equivalent

t_s and t_f

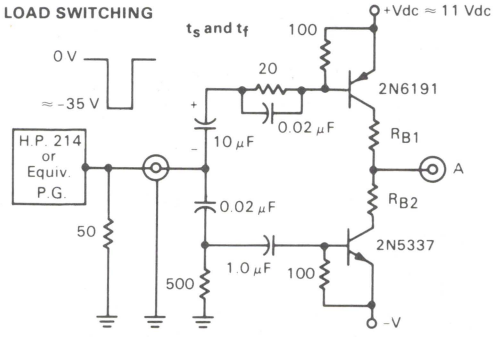

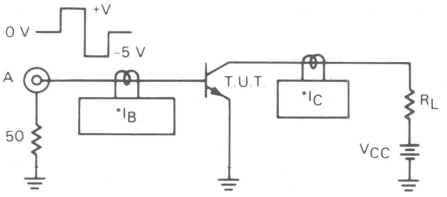

V_{CC} = 250
R_L = 83 Ω
I_C = 3.0 Adc

I_{B1} = 0.3 Adc
I_{B2} = 0.6 Adc
For $V_{BE(off)}$ = 5.0 V R_{B2} = 0 Ω

R_{B1} = 33 Ω
R_{B2} = 8.0 Ω

*Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

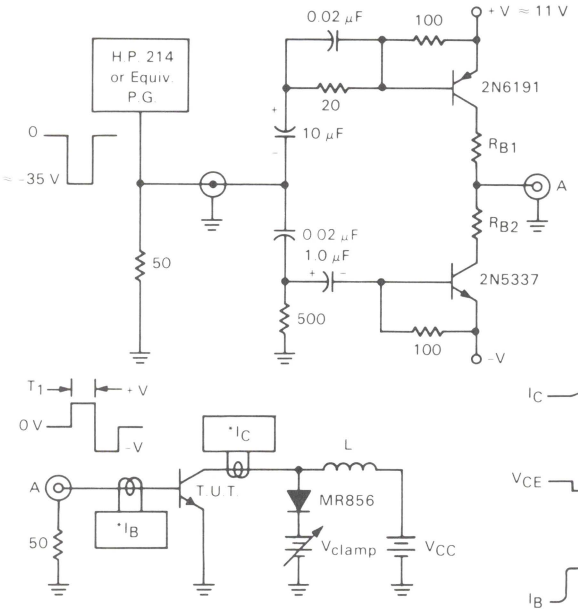



$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{CEO(sus)}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

*Tektronix
P-6042 or
Equivalent

Scope - Tektronix
7403 or
Equivalent

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

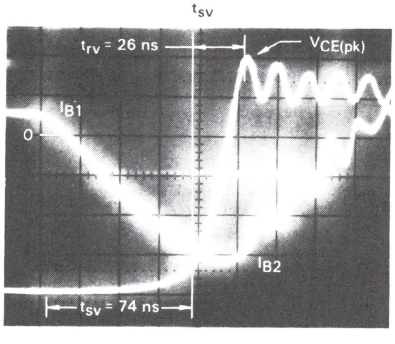

$I_{C(pk)}$ = 3.0 Amps
I_{B1} = 0.3 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 300 Volts
T_C = 25°C
Time Base =
20 ns/cm

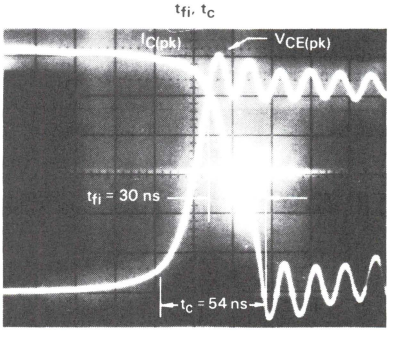

$I_{C(pk)}$ = 3.0 Amps
I_{B1} = 0.3 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 300 Volts
T_C = 25°C
Time Base =
20 ns/cm

3

MJ16002A
MJH16002A

Designer's Data Sheet

NPN Silicon Power Transistors
1 kV Switchmode III Series

POWER TRANSISTORS
5 AMPERES
500 VOLTS
125 and 100 WATTS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits

Features:
- Collector-Emitter Voltage — V_{CEV} = 1000 Vdc
- Fast Turn-Off Times
  100 ns Inductive Fall Time – 100°C (Typ)
  120 ns Inductive Crossover Time – 100°C (Typ)
  500 ns Inductive Storage Time – 100°C (Typ)
- 100°C Performance Specified for:
  Reverse-Biased SOA with Inductive Load
  Switching Times with Inductive Loads
  Saturation Voltages
  Leakage Currents
- Extended FBSOA Rating Using Ultra-fast Rectifiers
- Extremely High RBSOA Capability



CASE 1-05
TO-204AA
MJ16002A



CASE 340-01
TO-218AC
MJH16002A

MAXIMUM RATINGS

Rating	Symbol	MJ16002A	MJH16002A	Unit
Collector-Emitter Voltage	V_{CEO}	500		Vdc
Collector-Emitter Voltage	V_{CEV}	1000		Vdc
Emitter-Base Voltage	V_{EB}	6		Vdc
Collector Current — Continuous — Peak(1)	I_C I_{CM}	5 10		Adc
Base Current — Continuous — Peak(1)	I_B I_{BM}	4 8		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above T_C = 25°C	P_D	125 71.5 0.714	100 40 0.833	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	−55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.40	1.25	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS(1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	500	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 1000 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 1000 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	0.003 0.020	0.15 1.0	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	0.020	1.0	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)	I_{EBO}	—	—	0.15	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 14a or 14b			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 15			
ON CHARACTERISTICS(1)					
Collector-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 0.2 Adc) (I_C = 3 Adc, I_B = 0.4 Adc) (I_C = 3 Adc, I_B = 0.4 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	0.3 0.5 0.6	0.7 1 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 3 Adc, I_B = 0.4 Adc) (I_C = 3 Adc, I_B = 0.4 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	1 1	1.5 1.5	Vdc
DC Current Gain (I_C = 5 Adc, V_{CE} = 5 Vdc)	h_{FE}	5	8	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)	C_{ob}	—	—	200	pF

SWITCHING CHARACTERISTICS

Inductive Load (Table 1)							
Storage Time	(I_C = 3 Adc, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	500	1600	ns
Fall Time			t_{fi}	—	100	200	
Crossover Time			t_c	—	120	250	
Storage Time		(T_J = 150°C)	t_{sv}	—	600	—	
Fall Time			t_{fi}	—	120	—	
Crossover Time			t_c	—	160	—	
Resistive Load (Table 2)							
Delay Time	(I_C = 3 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.4 Adc, PW = 30 μs, Duty Cycle ≤ 2%)	(I_{B2} = 0.8 Adc, R_{B2} = 8 Ω)	t_d	—	30	100	ns
Rise Time			t_r	—	100	300	
Storage Time			t_s	—	1000	3000	
Fall Time			t_f	—	60	300	
Storage Time		($V_{BE(off)}$ = 5 Vdc)	t_s	—	400	—	
Fall Time			t_f	—	130	—	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL STATIC CHARACTERISTICS

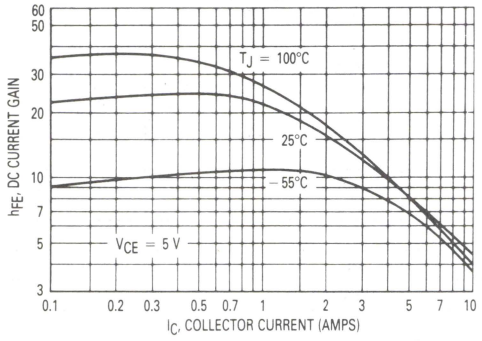

Figure 1. DC Current Gain

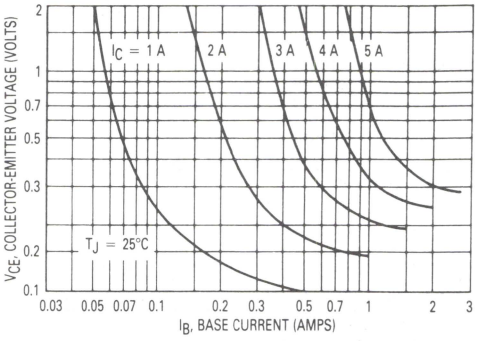

Figure 2. Collector Saturation Region

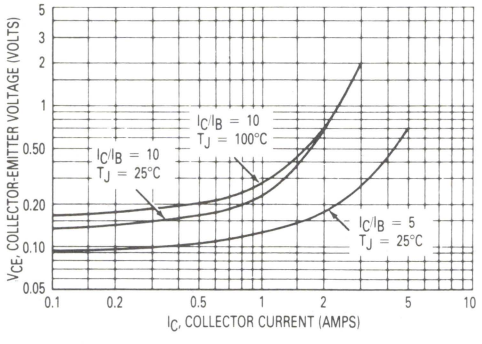

Figure 3. Collector-Emitter Saturation Region

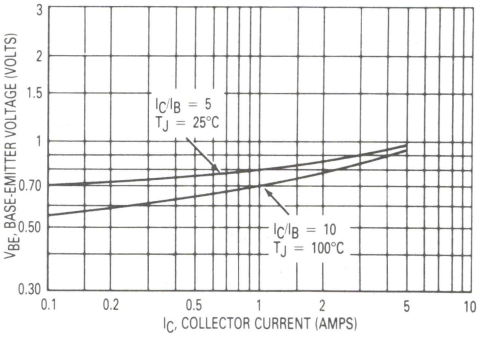

Figure 4. Base-Emitter Saturation Region

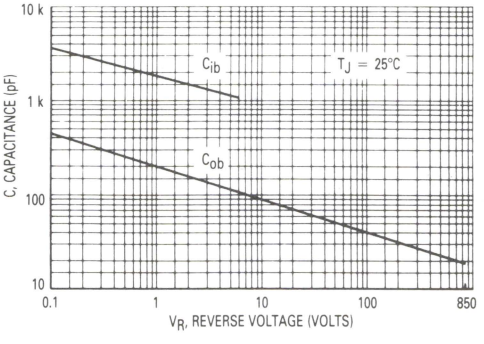

Figure 5. Capacitance

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

I_C/I_{B1} = 5, T_C = 75°C, $V_{CE(pk)}$ = 400 V

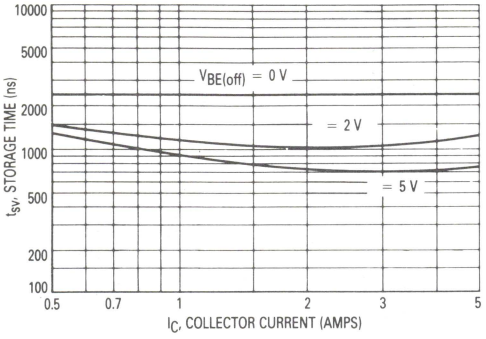

Figure 6. Storage Time

I_C/I_{B1} = 10, T_C = 75°C, $V_{CE(pk)}$ = 400 V

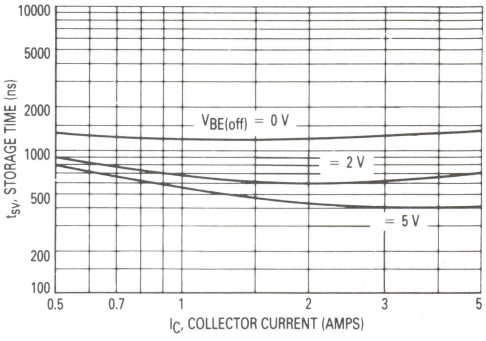

Figure 7. Storage Time

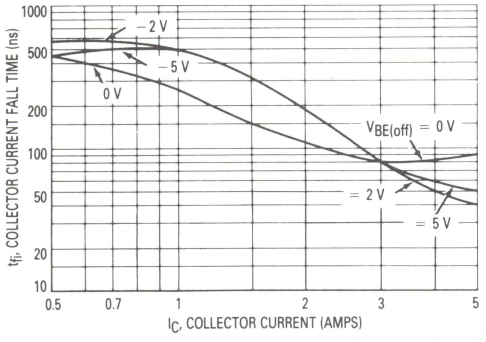

Figure 8. Collector Current Fall Time

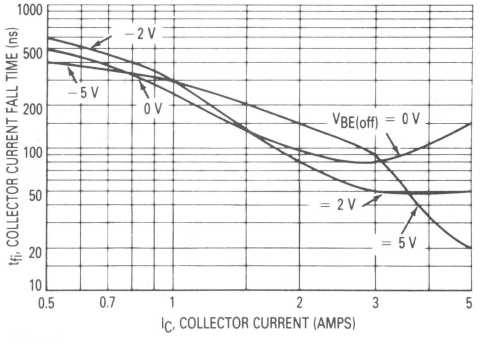

Figure 9. Collector Current Fall Time

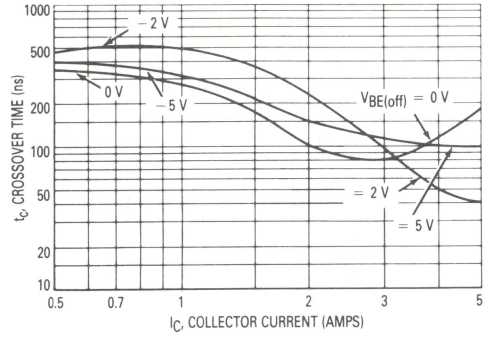

Figure 10. Crossover Time

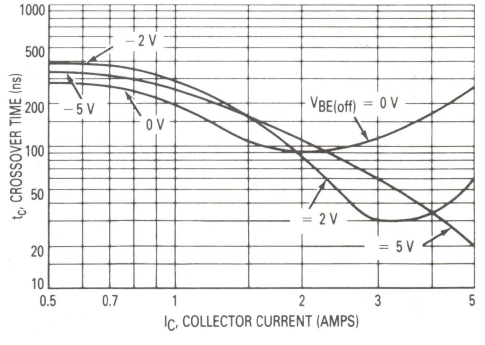

Figure 11. Crossover Time

3

Table 1. Inductive Load Switching

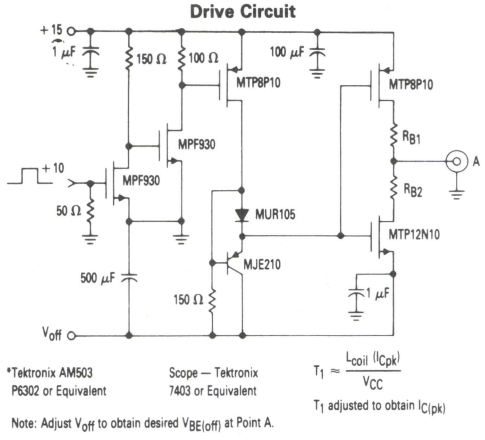

$V_{CEO(sus)}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts
$I_{C(pk)}$ = 100 mA

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}



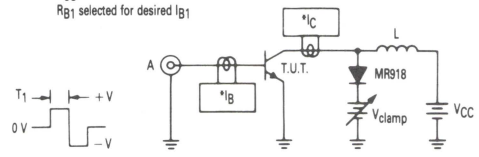

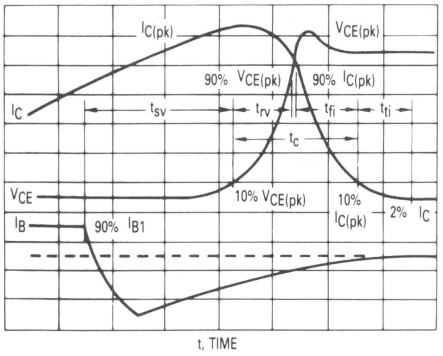

Figure 12. Inductive Switching Measurements

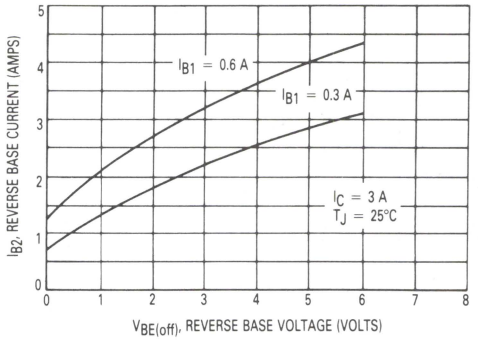

Figure 13. Peak Reverse Base Current

Table 2. Resistive Load Switching

t_d and t_r



V_{CC}	250 Vdc
R_L	83 Ω
I_C	3 Adc
I_B	0.4 Adc



*Tektronix AM503
P6302 or Equivalent

t_s and t_f

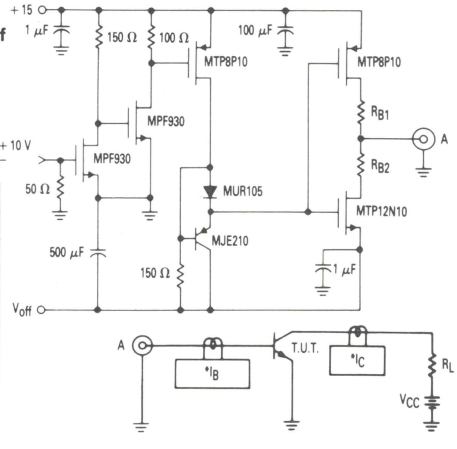

V_{CC}	250 V
R_L	83 Ω
I_C	3 Adc
I_{B1}	0.4 Adc
I_{B2}	0.8 Adc
R_{B1}	37.5 Ω
R_{B2}	8 Ω

FOR $V_{BE(off)}$ = 5 V
R_{B2} = 0 Ω

GUARANTEED OPERATING AREA INFORMATION

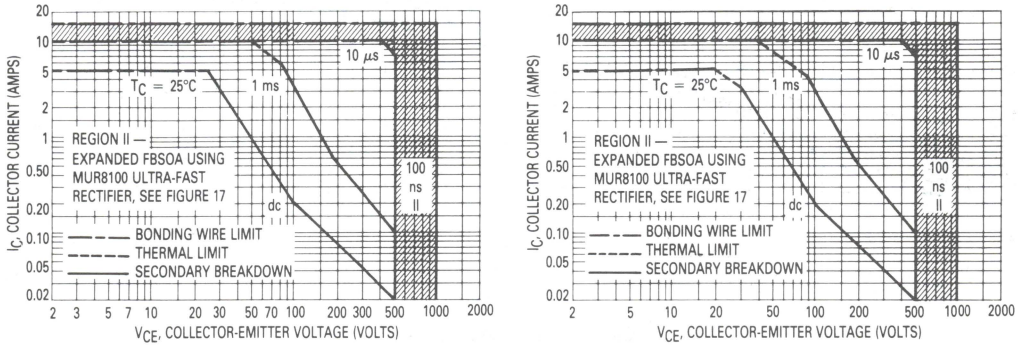

a. MJ16002A **b. MJH16002A**

Figure 14. Maximum Rated Forward Biased Safe Operating Area

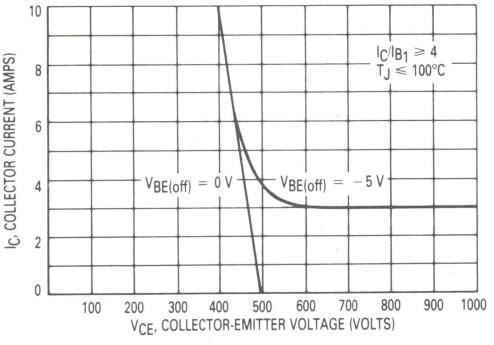

Figure 15. Maximum Reverse Biased Safe Operating Area

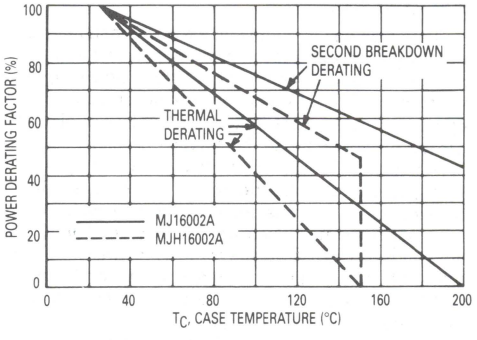

Figure 16. Power Derating

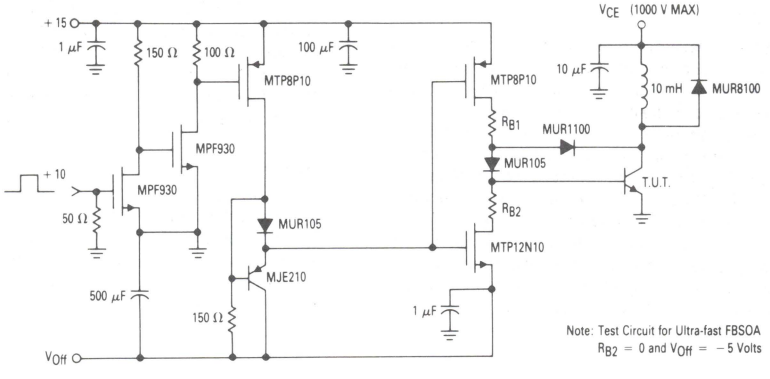

Figure 17. Switching Safe Operating Area

3

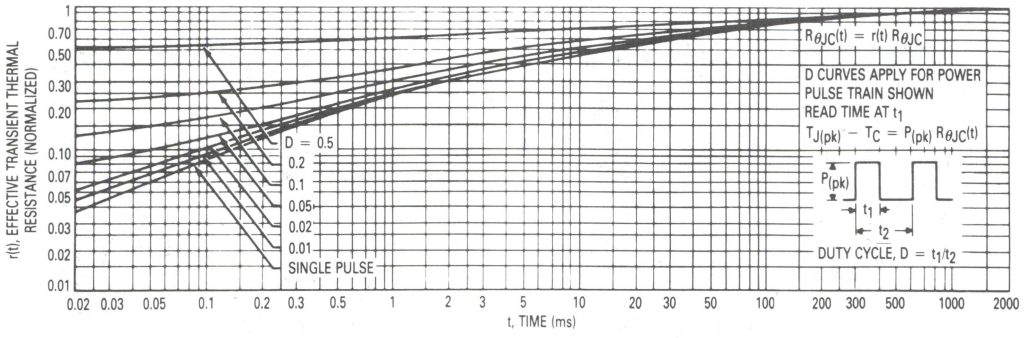

Figure 18. Thermal Response

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 14a or 14b is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 14a or 14b may be found at any case temperature by using the appropriate curve on Figure 16.

$T_{J(pk)}$ may be calculated from the data in Figure 18. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Biased Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 15 gives the RBSOA characteristics.

SWITCHMODE III DESIGN CONSIDERATIONS

1. FBSOA —

Allowable dc power dissipation in bipolar power transistors decreases dramatically with increasing collector-emitter voltage. A transistor which safely dissipates 100 watts at 10 volts will typically dissipate less than 10 watts at its rated $V_{CEO(sus)}$. From a power handling point of view, current and voltage are not interchangeable (see Application Note AN875).

2. TURN-ON —

Safe turn-on load line excursions are bounded by pulsed FBSOA curves. The 10 μs curve applies for resistive loads, most capacitive loads, and inductive loads that are clamped by standard or fast recovery rectifiers. Similarly, the 100 ns curve applies to inductive loads which are clamped by ultra-fast recovery rectifiers, and are valid for turn-on crossover times less than 100 ns (see Application Note AN952).

At voltages above 75% of $V_{CEO(sus)}$, it is essential to provide the transistor with an adequate amount of base drive VERY RAPIDLY at turn-on. More specifically, safe operation according to the curves is dependent upon base current rise time being less than collector current rise time. As a general rule, a base drive compliance voltage in excess of 10 volts is required to meet this condition (see Application Note AN875).

3. TURN-OFF —

A bipolar transistor's ability to withstand turn-off stress is dependent upon its forward base drive. Gross overdrive violates the RBSOA curve and risks transistor failure. For this reason, circuits which use fixed base drive are often more likely to fail at light loads due to heavy overdrive (see Application Note AN875).

SWITCHMODE III DESIGN CONSIDERATIONS (Cont.)

4. OPERATION ABOVE $V_{(BR)CEO(sus)}$ —

When bipolars are operated above collector-emitter breakdown, base drive is crucial. A rapid application of adequate forward base current is needed for safe turn-on, as a stiff negative bias is needed for safe turn-off. Any hiccup in the base-drive circuitry that even momentarily violates either of these conditions will likely cause the transistor to fail. Therefore, it is important to design the driver so that its output is negative in the absence of anything but a clean crisp input signal (see Application Note AN952).

5. RBSOA —

Reverse Biased Safe Operating Area has a first order dependency on circuit configuration and drive parameters. The RBSOA curves in this data sheet are valid only for the conditions specified. For a comparison of RBSOA results in several types of circuits (see Application Note AN951).

6. DESIGN SAMPLES —

Transistor parameters tend to vary much more from wafer lot to wafer lot, over long periods of time, than from one device to the next in the same wafer lot. For design evaluation it is advisable to use transistors from several different date codes.

7. BAKER CLAMPS —

Many unanticipated pitfalls can be avoided by using Baker Clamps. MUR105 and MUR1100 diodes are recommended for base drives less than 1 amp. Similarly, MUR405 and MUR4100 types are well-suited for higher drive requirements (see Article Reprint AR131).

OUTLINE DIMENSIONS



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:

⌖	⌀.13 (0.005) Ⓜ	T	V Ⓜ

FOR LEADS:

⌖	⌀.13 (0.005) Ⓜ T	V Ⓜ	Q Ⓜ

4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

CASE 1-05
TO-204AA
MJ16002A



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 340-01
TO-218AC
MJH16002A

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ16006 MJH16006
MJ16008 MJH16008

Designers Data Sheet

SWITCHMODE III SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications. The MJ16008 and MJH16008 are selected high gain versions of the MJ16006 and MJH16006 for applications where drive current is limited.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits



Features:
- Fast Turn-Off Times
  - 70 ns Inductive Fall Time – 100°C (Typ)
  - 100 ns Inductive Crossover Time – 100°C (Typ)
  - 500 ns Inductive Storage Time – 100°C (Typ)
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Load
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents

8.0 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
125 AND 150 WATTS



MJ16006
MJ16008

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀0.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀0.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

CASE 1-05
TO-204AA



MJH16006
MJH16008

1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

MAXIMUM RATINGS

Rating	Symbol	MJ16006 MJ16008	MJH16006 MJH16008	Unit
Collector-Emitter Voltage	V_{CEO}	450		Vdc
Collector-Emitter Voltage	V_{CEV}	850		Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	8.0 16		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	6.0 12		Adc
Total Device Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	150 85.5 0.86	125 50 1.0	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	−65 to 200	−55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	1.0	°C/W
Lead Temperature for Soldering Purposes, 1/8" from Case for 5 Seconds.	T_L	275		°C

(1) Pulse Test: Pulse Width ≤ 5.0 μs, Duty Cycle ≥ 10%.

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit Curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

3

MJ16006
MJH16006

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.4 Adc) (I_C = 5.0 Adc, I_B = 0.66 Adc) (I_C = 5.0 Adc, I_B = 0.66 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 2.5 3.0 3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.66 Adc) (I_C = 5.0 Adc, I_B = 0.66 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — —	 — —	 1.5 1.5	Vdc
DC Current Gain (I_C = 8.0 Adc, V_{CE} = 5.0 Vdc	h_{FE}	5.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	350	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 5.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.66 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 1.3 Adc, R_{B2} = 4.0 Ω)	t_d	—	20	50	ns
Rise Time			t_r	—	85	250	
Storage Time			t_s	—	1000	2500	
Fall Time			t_f	—	70	250	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	500	—	
Fall Time			t_f	—	100	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 5.0 Adc, I_{B1} = 0.66 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	700	1800	ns
Fall Time			t_{fi}	—	80	200	
Crossover Time			t_c	—	150	250	
Storage Time		(T_J = 150°C)	t_{sv}	—	800	—	
Fall Time			t_{fi}	—	80	—	
Crossover Time			t_c	—	200	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

3

MJ16008
MJH16008

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 0.3 Adc) (I_C = 5.0 Adc, I_B = 0.5 Adc) (I_C = 5.0 Adc, I_B = 0.5 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	— — —	2.5 3.0 3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.5 Adc) (I_C = 5.0 Adc, I_B = 0.5 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	— —	1.5 1.5	Vdc
DC Current Gain (I_C = 8.0 Adc, V_{CE} = 5.0 Vdc	h_{FE}	7.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	350	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 5.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.5 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 1.0 Adc, R_{B2} = 4.0 Ω)	t_d	—	20	50	ns
Rise Time			t_r	—	100	250	
Storage Time			t_s	—	900	2200	
Fall Time			t_f	—	70	250	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	400	—	
Fall Time			t_f	—	50	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 5.0 Adc, I_{B1} = 0.5 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	500	1400	ns
Fall Time			t_{fi}	—	70	150	
Crossover Time			t_c	—	100	200	
Storage Time		(T_J = 150°C)	t_{sv}	—	600	—	
Fall Time			t_{fi}	—	100	—	
Crossover Time			t_c	—	150	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

3

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

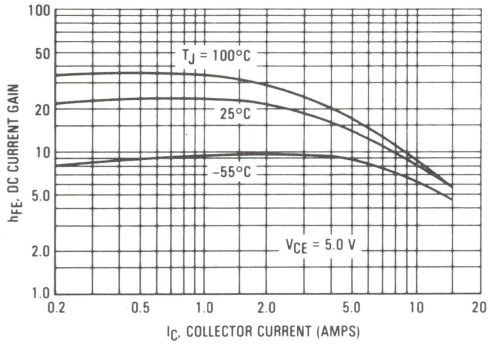

FIGURE 2 — COLLECTOR SATURATION REGION

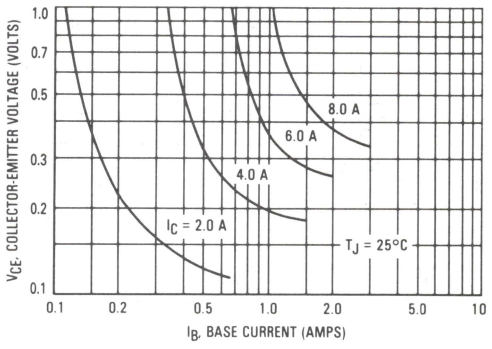

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

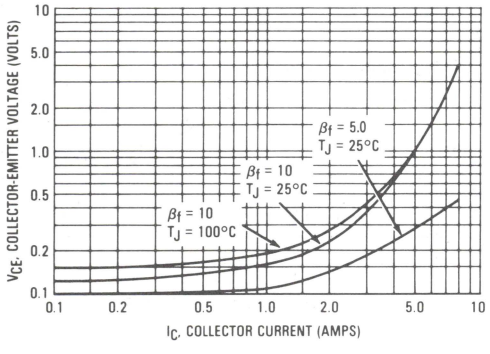

FIGURE 4 — BASE-EMITTER VOLTAGE

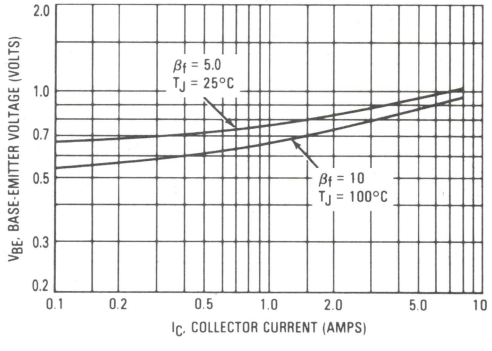

FIGURE 5 — COLLECTOR CUTOFF REGION

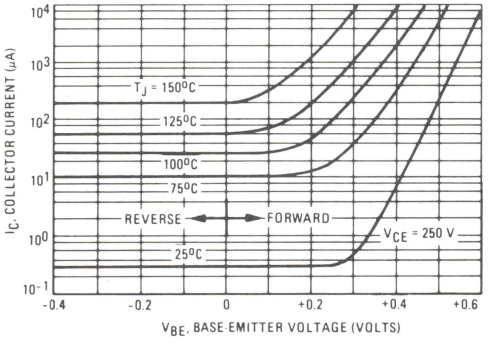

FIGURE 6 — CAPACITANCE

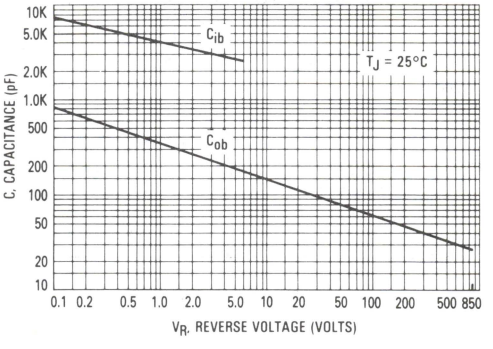

3

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

FIGURE 7 — STORAGE TIME

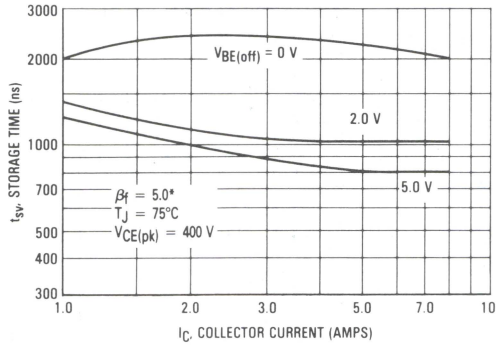

FIGURE 8 — STORAGE TIME

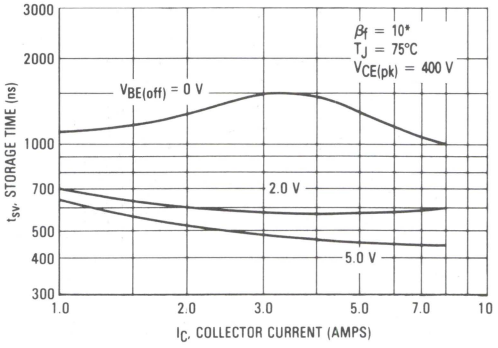

FIGURE 9 — COLLECTOR CURRENT FALL TIME

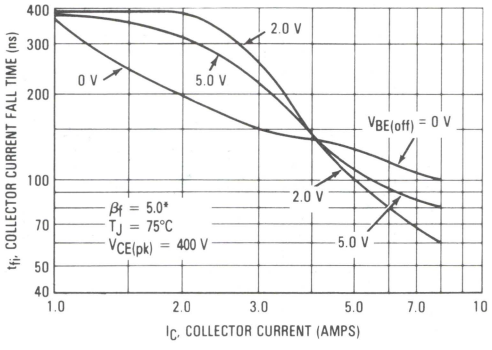

FIGURE 10 — COLLECTOR CURRENT FALL TIME

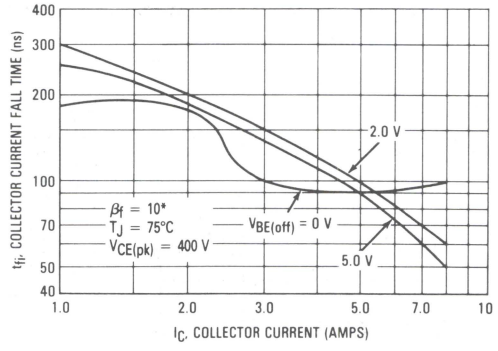

FIGURE 11 — CROSSOVER TIME

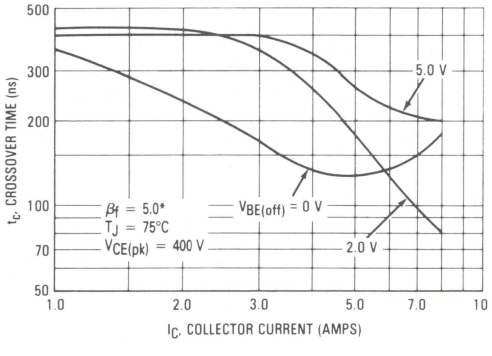

FIGURE 12 — CROSSOVER TIME

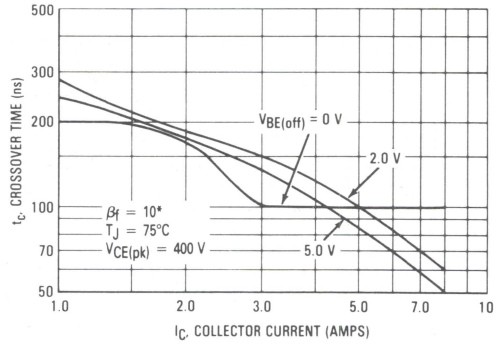

$$*\beta_f = \frac{I_C}{I_{B1}}$$

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

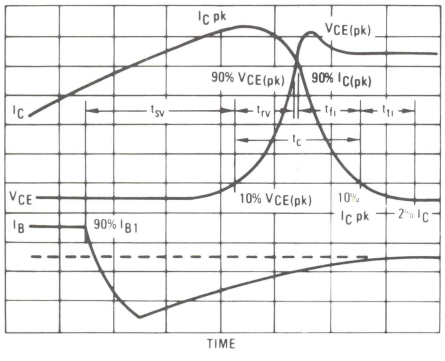

FIGURE 14 — PEAK REVERSE BASE CURRENT

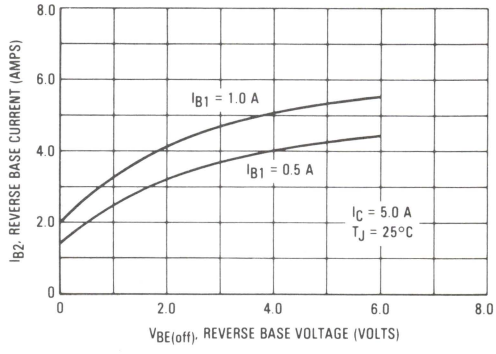

TABLE 1 — RESISTIVE LOAD SWITCHING

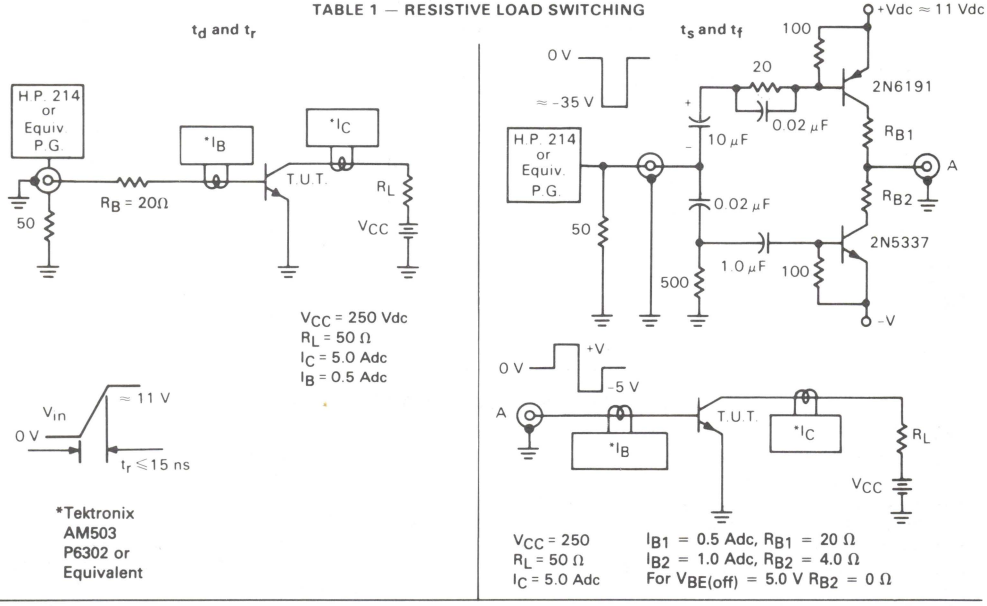

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

3

TABLE 2 — INDUCTIVE LOAD SWITCHING

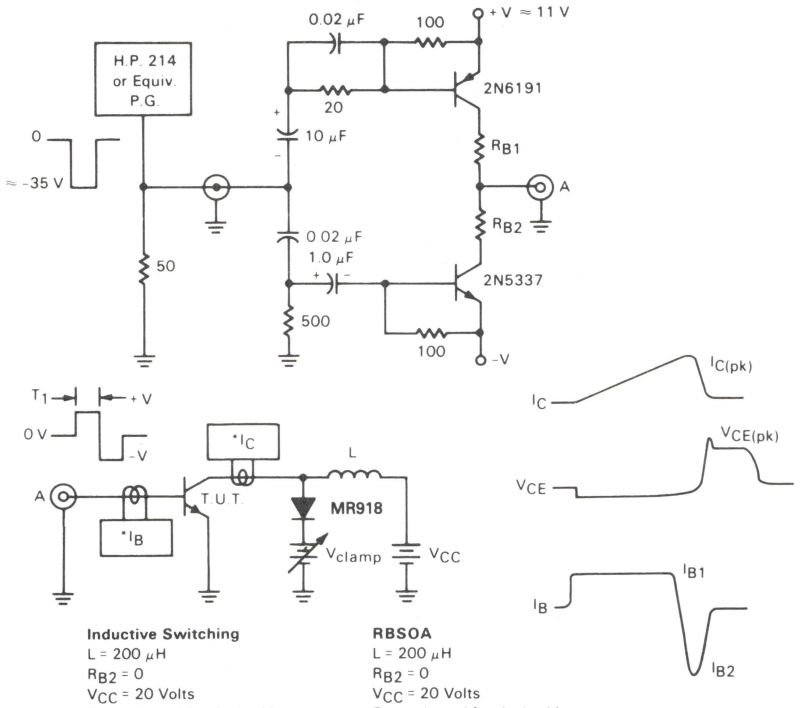

$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{CEO(sus)}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts
$I_{C(pk)}$ = 100 mA
*Tektronix
AM503
P6302 or
Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope - Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

3

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C — V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 and 15A are based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 and 15A may be found at any case temperature by using the appropriate curve on Figure 17.

$T_{J(pk)}$ may be calculated from the data in Figure 18. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA, MJ16006 & MJ16008

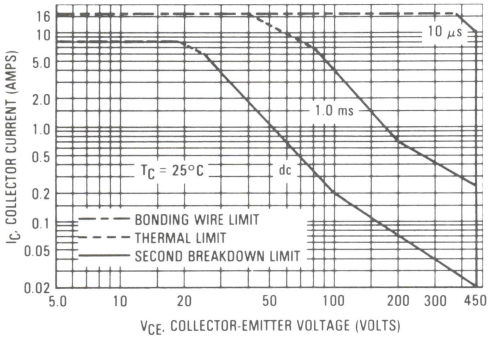

FIGURE 15A — SAFE OPERATING AREA, MJH16006 & MJH16008

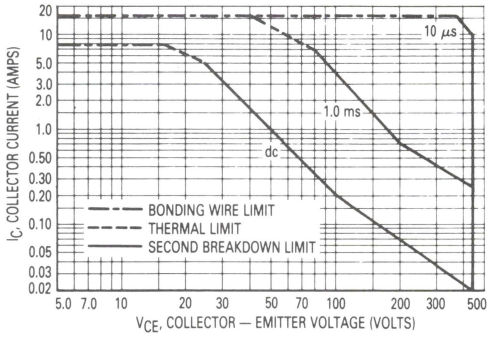

FIGURE 16 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

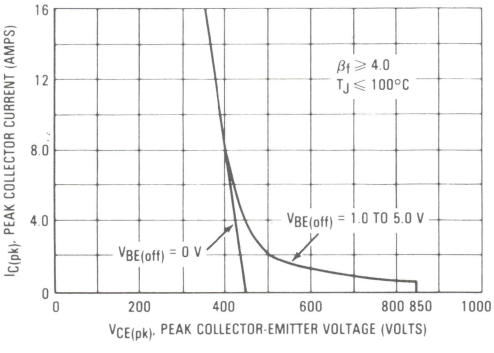

FIGURE 17 — POWER DERATING

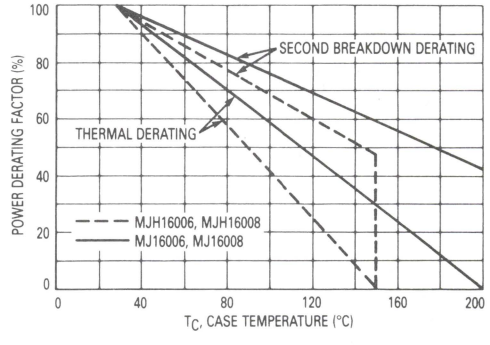

FIGURE 18 — THERMAL RESPONSE

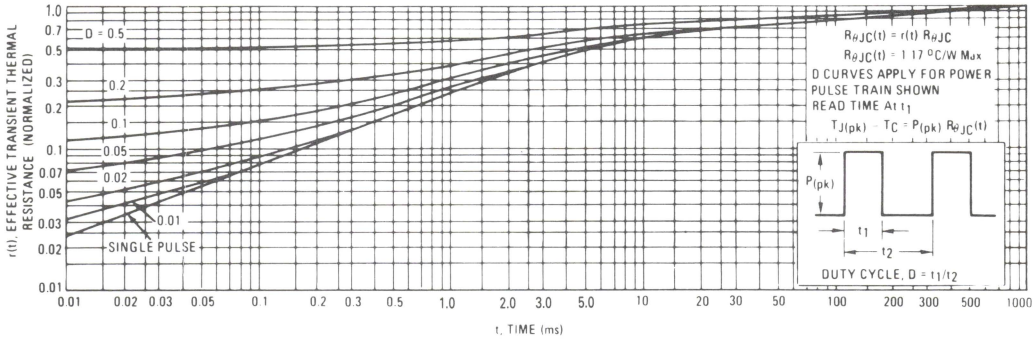

3

MJ16006A
MJH16006A

POWER TRANSISTORS
8 AMPERES
500 VOLTS
125 and 150 WATTS

Designer's Data Sheet

NPN Silicon Power Transistors

1 kV Switchmode III Series

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits

Features:
- Collector-Emitter Voltage — V_{CEV} = 1000 Vdc
- Fast Turn-Off Times
  80 ns Inductive Fall Time – 100°C (Typ)
  120 ns Inductive Crossover Time – 100°C (Typ)
  800 ns Inductive Storage Time – 100°C (Typ)
- 100°C Performance Specified for:
  Reverse-Biased SOA with Inductive Load
  Switching Times with Inductive Loads
  Saturation Voltages
  Leakage Currents
- Extended FBSOA Rating Using Ultra-fast Rectifiers
- Extremely High RBSOA Capability



CASE 1-05
TO-204AA
MJ16006A



CASE 340-01
TO-218AC
MJH16006A

MAXIMUM RATINGS

Rating	Symbol	MJ16006A	MJH16006A	Unit
Collector-Emitter Voltage	V_{CEO}	500		Vdc
Collector-Emitter Voltage	V_{CEV}	1000		Vdc
Emitter-Base Voltage	V_{EB}	6		Vdc
Collector Current — Continuous — Peak(1)	I_C I_{CM}	8 16		Adc
Base Current — Continuous — Peak(1)	I_B I_{BM}	6 12		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above T_C = 25°C	P_D	150 85 0.86	125 50 1	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to 200	−55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.17	1	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS(1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	500	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 1000 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 1000 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	0.003 0.020	0.15 1.0	mAdc
Collector Cutoff Current (V_{CE} = 1000 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	0.020	1.0	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)	I_{EBO}	—	0.005	0.15	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 14a or 14b			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 15			
ON CHARACTERISTICS(1)					
Collector-Emitter Saturation Voltage (I_C = 3 Adc, I_B = 0.6 Adc) (I_C = 5 Adc, I_B = 1 Adc) (I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	0.35 0.50 0.60	0.7 1 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 1 Adc) (I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	1 1	1.5 1.5	Vdc
DC Current Gain (I_C = 8 Adc, V_{CE} = 5 Vdc)	h_{FE}	5	8	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)	C_{ob}	—	—	350	pF
SWITCHING CHARACTERISTICS					
Inductive Load (Table 1)					
Storage Time	(I_C = 5 Adc, I_{B1} = 0.66 Adc, $V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 400 Vdc) (T_J = 100°C)	t_{sv}	—	800	2000	ns
Fall Time		t_{fi}	—	80	200	
Crossover Time		t_c	—	120	300	
Storage Time	(T_J = 150°C)	t_{sv}	—	1000	—	
Fall Time		t_{fi}	—	90	—	
Crossover Time		t_c	—	150	—	
Resistive Load (Table 2)						
Delay Time	(I_C = 5 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.66 Adc, PW = 30 μs, Duty Cycle ≤ 2%) (I_{B2} = 1.3 Adc, R_{B2} = 4 Ω)	t_d	—	25	100	ns
Rise Time		t_r	—	400	700	
Storage Time		t_s	—	1400	3000	
Fall Time		t_f	—	175	400	
Storage Time	($V_{BE(off)}$ = 5 Vdc)	t_s	—	475	—	
Fall Time		t_f	—	100	—	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL STATIC CHARACTERISTICS

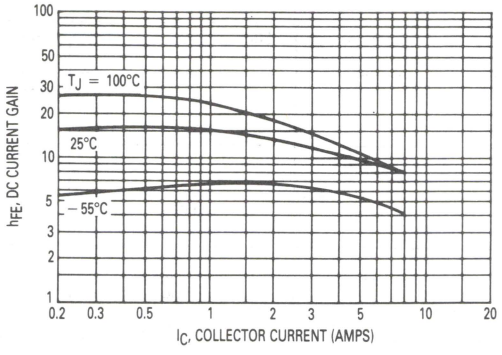

Figure 1. DC Current Gain

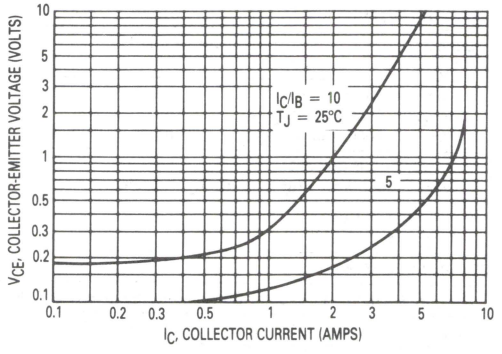

Figure 2. Collector-Emitter Saturation Region

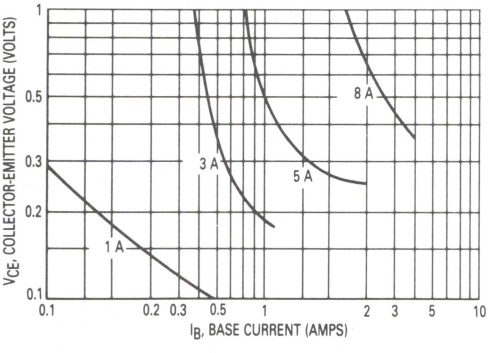

Figure 3. Collector-Emitter Saturation Region

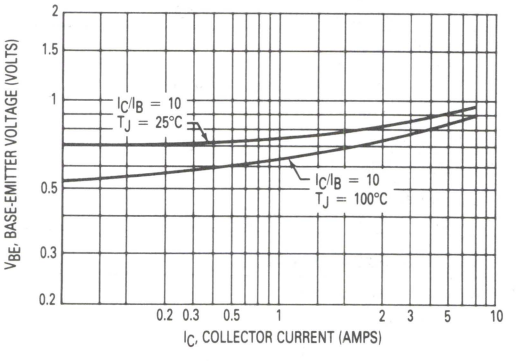

Figure 4. Base-Emitter Saturation Region

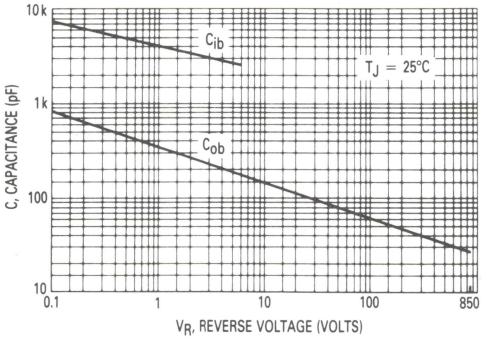

Figure 5. Capacitance

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

I_C/I_{B1} = 5, T_C = 75°C, $V_{CE(pk)}$ = 400 V

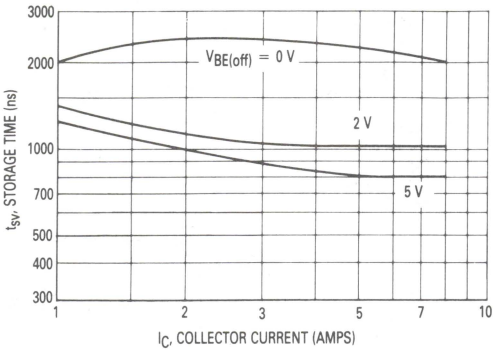

Figure 6. Storage Time

I_C/I_{B1} = 10, T_C = 75°C, $V_{CE(pk)}$ = 400 V

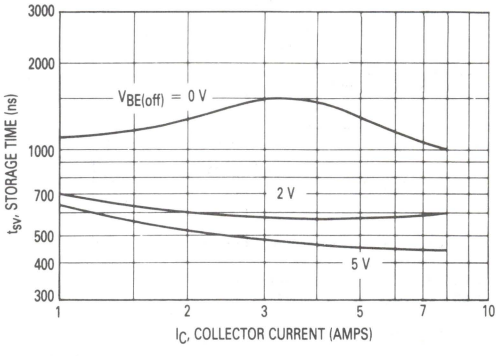

Figure 7. Storage Time

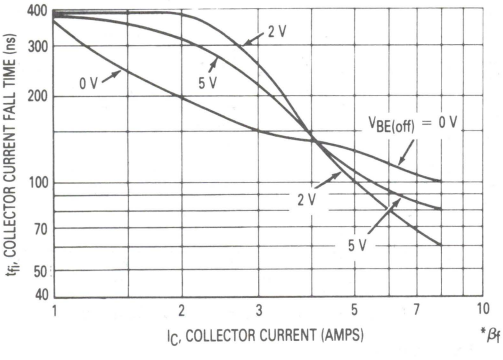

Figure 8. Collector Current Fall Time

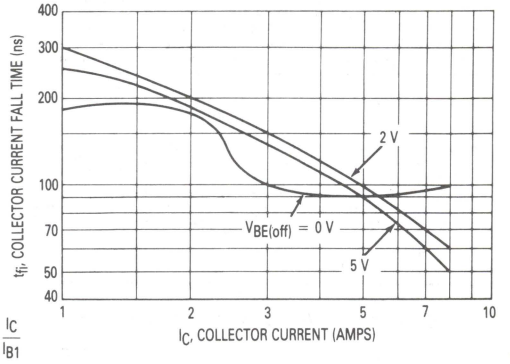

Figure 9. Collector Current Fall Time

*$\beta f = \frac{I_C}{I_{B1}}$

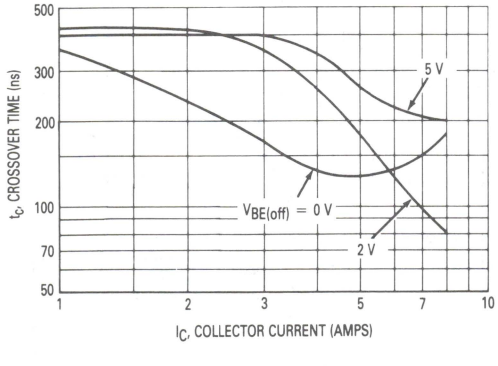

Figure 10. Crossover Time

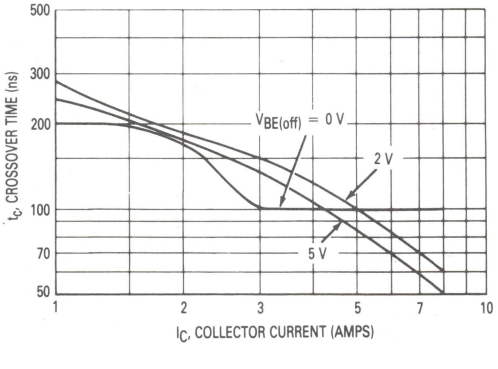

Figure 11. Crossover Time

3

Table 1. Inductive Load Switching

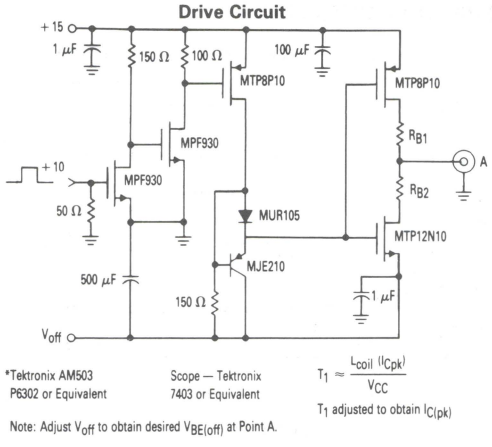

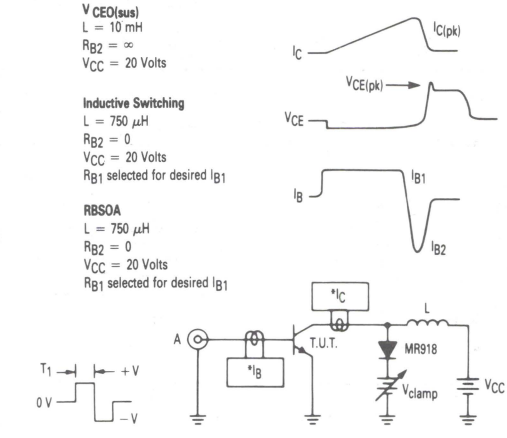

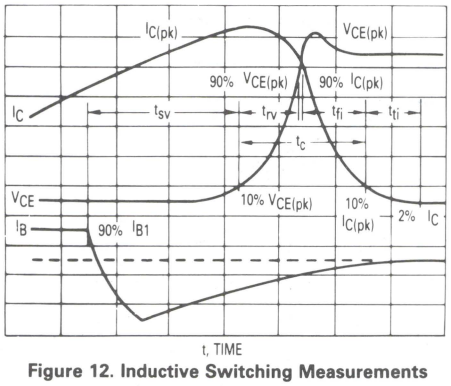

Figure 12. Inductive Switching Measurements

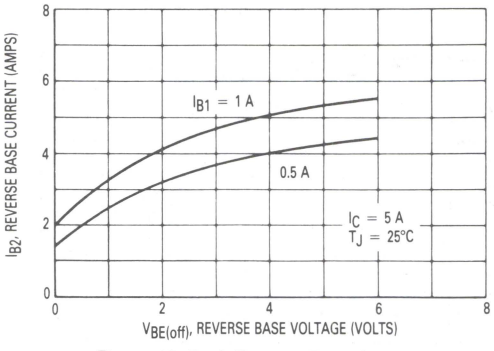

Figure 13. Peak Reverse Base Current

Table 2. Resistive Load Switching



V_{CC}	250 V
R_L	50 Ω
I_C	5 A
I_B	0.66 A

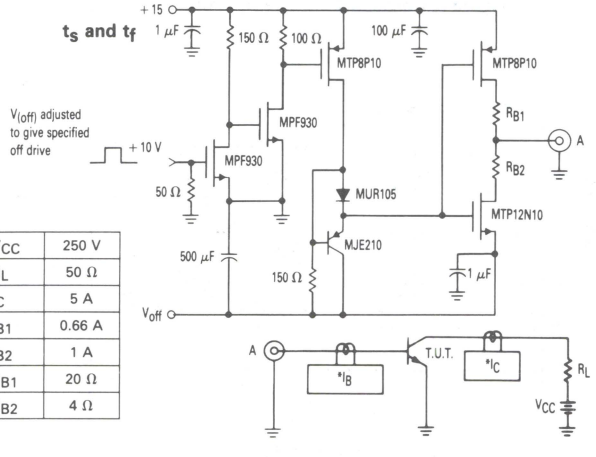

V_{CC}	250 V
R_L	50 Ω
I_C	5 A
I_{B1}	0.66 A
I_{B2}	1 A
R_{B1}	20 Ω
R_{B2}	4 Ω

GUARANTEED SAFE OPERATING AREA LIMITS

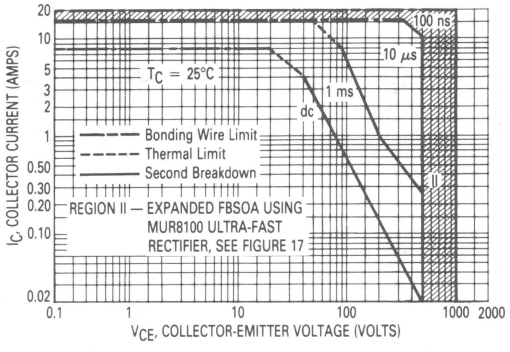

a. MJ16006A

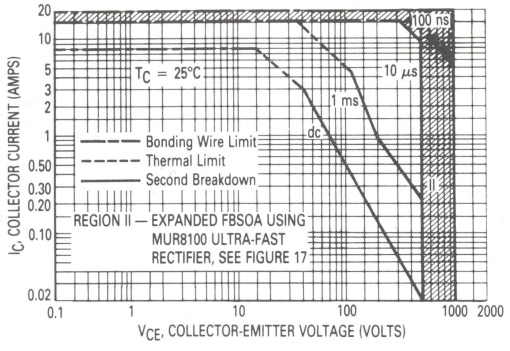

b. MJH16006A

Figure 14. Maximum Rated Forward Biased Safe Operating Area

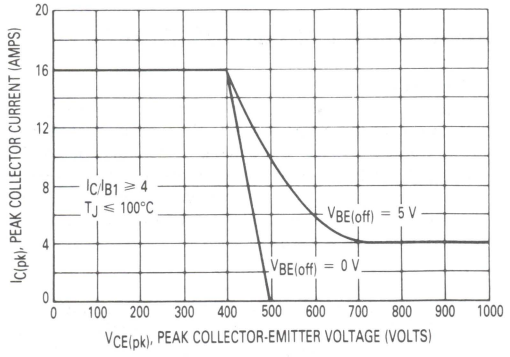

Figure 15. Maximum Reverse Biased Safe Operating Area

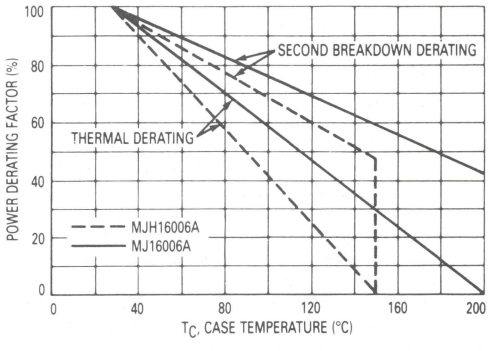

Figure 16. Power Derating

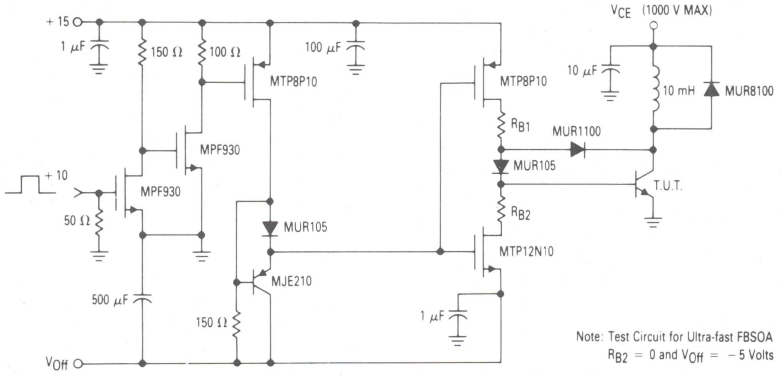

Figure 17. Switching Safe Operating Area

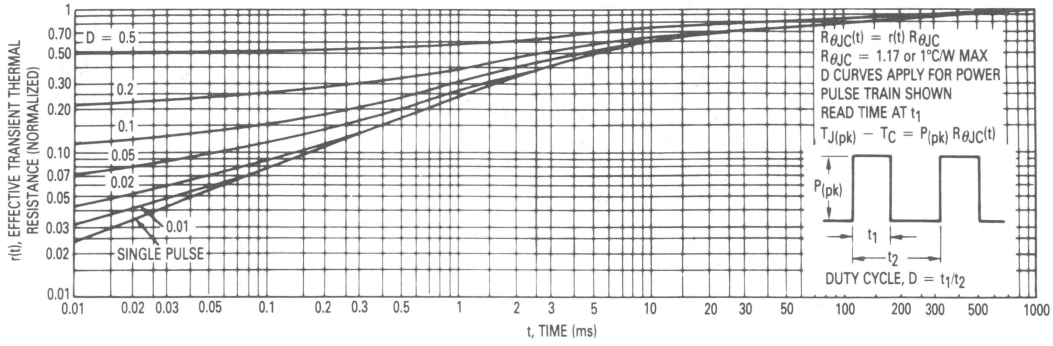

Figure 18. Thermal Response

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 14a and 14b is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 14a and 14b may be found at any case temperature by using the appropriate curve on Figure 16.

$T_{J(pk)}$ may be calculated from the data in Figure 18. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Biased Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 15 gives the RBSOA characteristics.

SWITCHMODE III DESIGN CONSIDERATIONS

1. FBSOA —

Allowable dc power dissipation in bipolar power transistors decreases dramatically with increasing collector-emitter voltage. A transistor which safely dissipates 100 watts at 10 volts will typically dissipate less than 10 watts at its rated $V_{CEO(sus)}$. From a power handling point of view, current and voltage are not interchangeable (see Application Note AN875).

2. TURN-ON —

Safe turn-on load line excursions are bounded by pulsed FBSOA curves. The 10 μs curve applies for resistive loads, most capacitive loads, and inductive loads that are clamped by standard or fast recovery rectifiers. Similarly, the 100 ns curve applies to inductive loads which are clamped by ultra-fast recovery rectifiers, and are valid for turn-on crossover times less than 100 ns (see Application Note AN952).

At voltages above 75% of $V_{CEO(sus)}$, it is essential to provide the transistor with an adequate amount of base drive VERY RAPIDLY at turn-on. More specifically, safe operation according to the curves is dependent upon base current rise time being less than collector current rise time. As a general rule, a base drive compliance voltage in excess of 10 volts is required to meet this condition (see Application Note AN875).

3. TURN-OFF —

A bipolar transistor's ability to withstand turn-off stress is dependent upon its forward base drive. Gross overdrive violates the RBSOA curve and risks transistor failure. For this reason, circuits which use fixed base drive are often more likely to fail at light loads due to heavy overdrive (see Application Note AN875).

SWITCHMODE III DESIGN CONSIDERATIONS (Cont.)

4. OPERATION ABOVE $V_{CEO(sus)}$ —

When bipolars are operated above collector-emitter breakdown, base drive is crucial. A rapid application of adequate forward base current is needed for safe turn-on, as is a stiff negative bias needed for safe turn-off. Any hiccup in the base-drive circuitry that even momemtarily violates either of these conditions will likely cause the transistor to fail. Therefore, it is important to design the driver so that its output is negative in the absence of anything but a clean crisp input signal (see Application Note AN952).

5. RBSOA —

Reverse Biased Safe Operating Area has a first order dependency on circuit configuration and drive parameters. The RBSOA curves in this data sheet are valid only for the conditions specified. For a comparison of RBSOA results in several types of circuits (see Application Note AN951).

6. DESIGN SAMPLES —

Transistor parameters tend to vary much more from wafer lot to wafer lot, over long periods of time, than from one device to the next in the same wafer lot. For design evaluation it is advisable to use transistors from several different date codes.

7. BAKER CLAMPS —

Many unanticipated pitfalls can be avoided by using Baker Clamps. MUR105 and MUR1100 diodes are recommended for base drives less than 1 amp. Similarly, MUR405 and MUR4100 types are well-suited for higher drive requirements (see Article Reprint AR131).

OUTLINE DIMENSIONS



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | ⌀.13 (0.005) M | T | V M
   FOR LEADS:
   ⌖ | ⌀.13 (0.005) M T | V M | Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

CASE 1-05
TO-204AA
MJ16006A



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 340-01
TO-218AC
MJH16006A

MJ16010 MJH16010
MJ16012 MJH16012

Designer's Data Sheet

SWITCHMODE III SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications. The MJ16012 and MJH16012 are selected high gain versions of the MJ16010 and MJH16010 for applications where drive current is limited.

Typical Applications:

- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits



Features:

- Fast Turn-Off Times — T_C = 100°C
  - 50 ns Inductive Fall Time (Typ)
  - 90 ns Inductive Crossover Time (Typ)
  - 800 ns Inductive Storage Time (Typ)
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents

15 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
135 AND 175 WATTS



MJ16010
MJ16012

STYLE 1
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. T IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ Ø0.13 (0.005) M T V M
   FOR LEADS:
   ⌖ Ø0.13 (0.005) M T V M Q M
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	–	39.37	–	1.550
B	–	21.08	–	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	–	26.67	–	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

CASE 1-05
TO-204AA

MJH16010
MJH16012



1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

MAXIMUM RATINGS

Rating	Symbol	MJ16010 MJ16012	MJH16010 MJH16012	Unit
Collector-Emitter Voltage	V_{CEO}	450		Vdc
Collector-Emitter Voltage	V_{CEV}	850		Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	15 20		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	10 15		Adc
Total Device Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	 175 100 1.0	 135 53.8 1.11	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 200	-55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	0.93	°C/W
Lead Temperature for Soldering Purposes, 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width ≤ 5.0 μs, Duty Cycle ≥ 10%.

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

3

MJ16010
MJH16010

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.7 Adc) (I_C = 10 Adc, I_B = 1.3 Adc) (I_C = 10 Adc, I_B = 1.3 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	— — —	2.5 3.0 3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.3 Adc) (I_C = 10 Adc, I_B = 1.3 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	— —	1.5 1.5	Vdc
DC Current Gain (I_C = 15 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	5.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	400	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 10 Adc, V_{CC} = 250 Vdc, I_{B1} = 1.3 Adc, PW = 30 μs, Duty Cycle ≤2.0%) (I_{B2} = 2.6 Adc, R_B = 1.6 Ω)	t_d	—	20	—	ns
Rise Time		t_r	—	200	—	
Storage Time		t_s	—	1200	—	
Fall Time		t_f	—	200	—	
Storage Time	($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	650	—	
Fall Time		t_f	—	80	—	
Inductive Load (Table 2)						
Storage Time	(I_C = 10 Adc, I_{B1} = 1.3 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc) (T_C = 100°C)	t_{sv}	—	800	1800	ns
Fall Time		t_{fi}	—	50	200	
Crossover Time		t_c	—	90	250	
Storage Time	(T_C = 150°C)	t_{sv}	—	1050	—	
Fall Time		t_{fi}	—	70	—	
Crossover Time		t_c	—	120	—	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

3

MJ16012
MJH16012

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 5.0 Adc, I_B = 0.5 Adc) (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 10 Adc, I_B = 1.0 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 2.5 3.0 3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 10 Adc, I_B = 1.0 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — —	 — —	 1.5 1.5	Vdc
DC Current Gain (I_C = 15 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	7.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	400	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 10 Adc, V_{CC} = 250 Vdc, I_{B1} = 1.0 Adc, PW = 30 μs, Duty Cycle ≤2.0%) (I_{B2} = 2.0 Adc, R_B = 1.6 Ω)	t_d	—	20	—	ns
Rise Time		t_r	—	200	—	
Storage Time		t_s	—	900	—	
Fall Time		t_f	—	150	—	
Storage Time	($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	500	—	
Fall Time		t_f	—	40	—	
Inductive Load (Table 2)						
Storage Time	(I_C = 10 Adc, I_{B1} = 1.0 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc) (T_C = 100°C)	t_{sv}	—	650	1500	ns
Fall Time		t_{fi}	—	30	150	
Crossover Time		t_c	—	50	200	
Storage Time	(T_C = 150°C)	t_{sv}	—	850	—	
Fall Time		t_{fi}	—	30	—	
Crossover Time		t_c	—	70	—	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

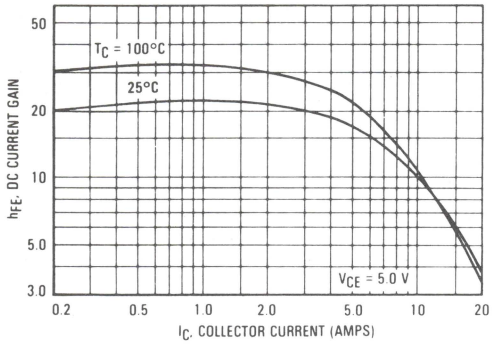

FIGURE 2 — COLLECTOR SATURATION REGION

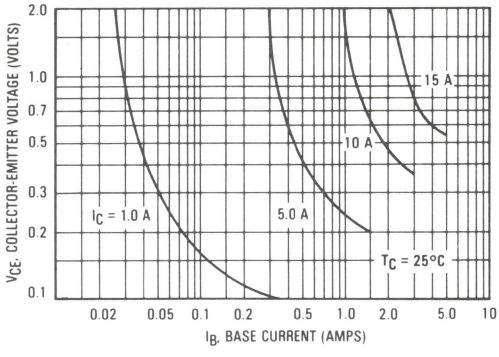

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

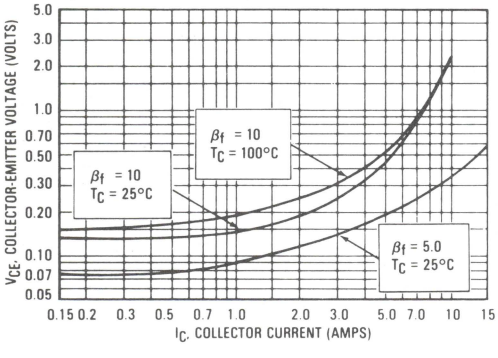

FIGURE 4 — BASE-EMITTER VOLTAGE

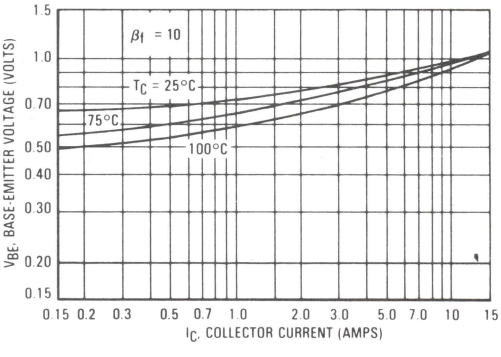

FIGURE 5 — COLLECTOR CUTOFF REGION

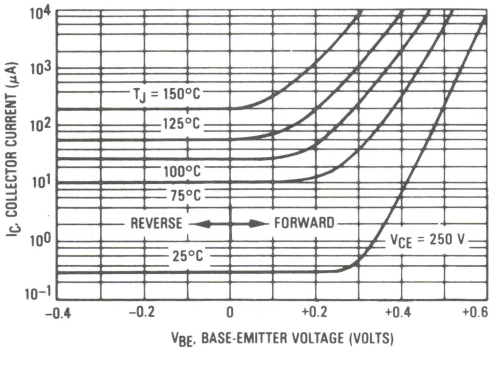

FIGURE 6 — CAPACITANCE

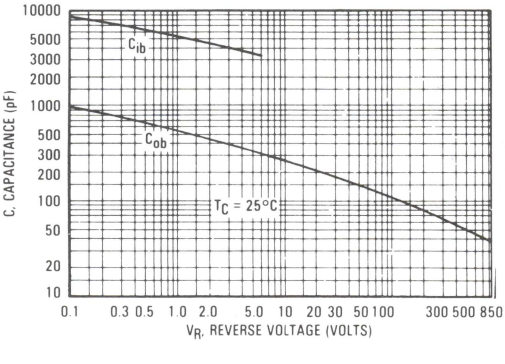

3

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

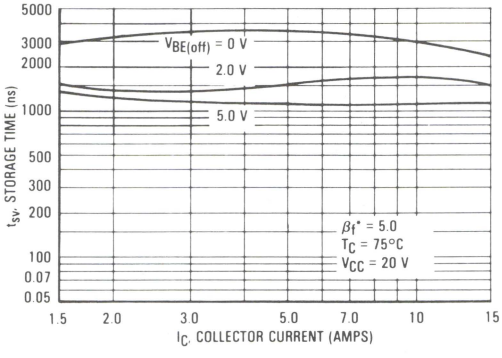

FIGURE 8 — STORAGE TIME

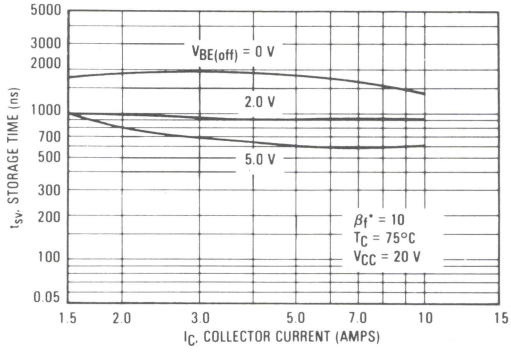

FIGURE 9 — COLLECTOR CURRENT FALL TIME

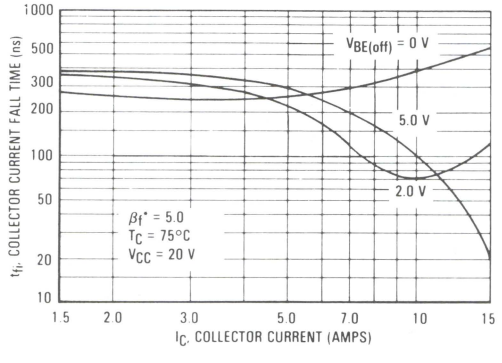

FIGURE 10 — COLLECTOR CURRENT FALL TIME

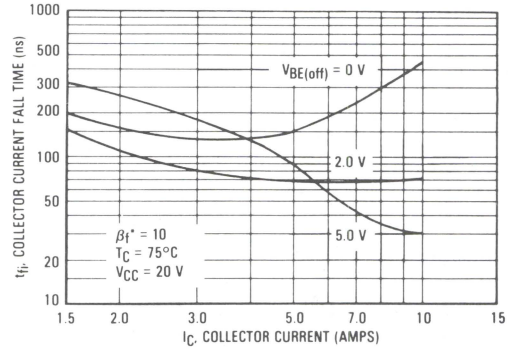

FIGURE 11 — CROSSOVER TIME

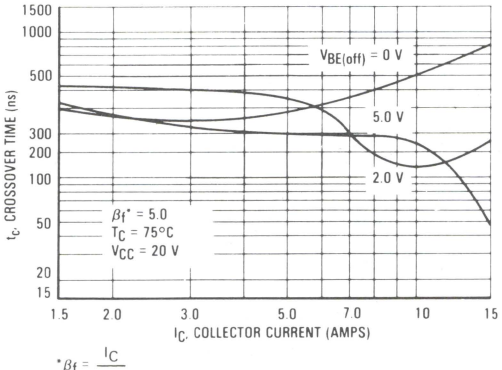

FIGURE 12 — CROSSOVER TIME

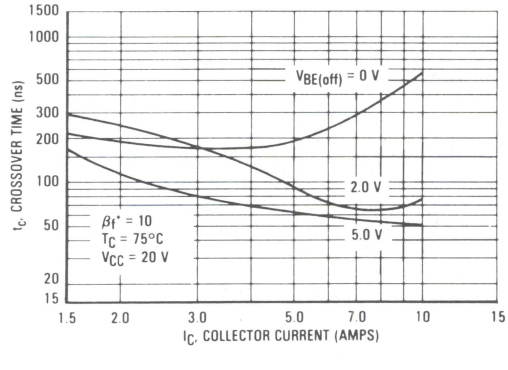

$^*\beta_f = \frac{I_C}{I_{B1}}$

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

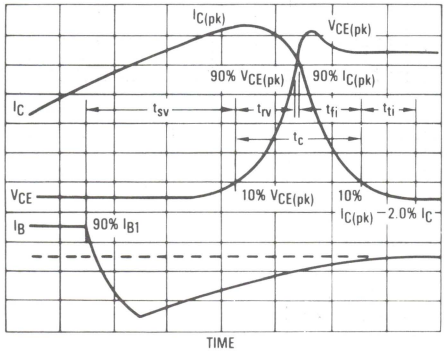

FIGURE 14 — PEAK REVERSE BASE CURRENT

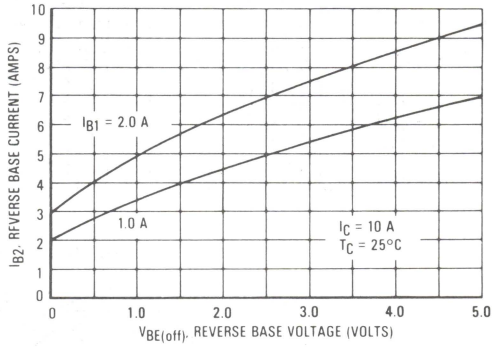

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

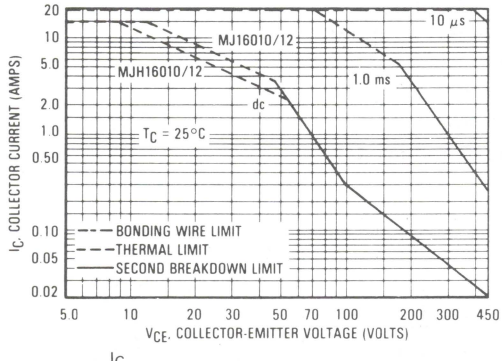

$^*\beta_f = \frac{I_C}{I_{B1}}$

FIGURE 16 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

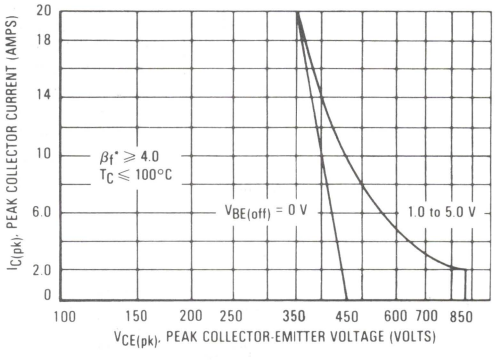

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 17. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

3

FIGURE 17 — THERMAL RESPONSE

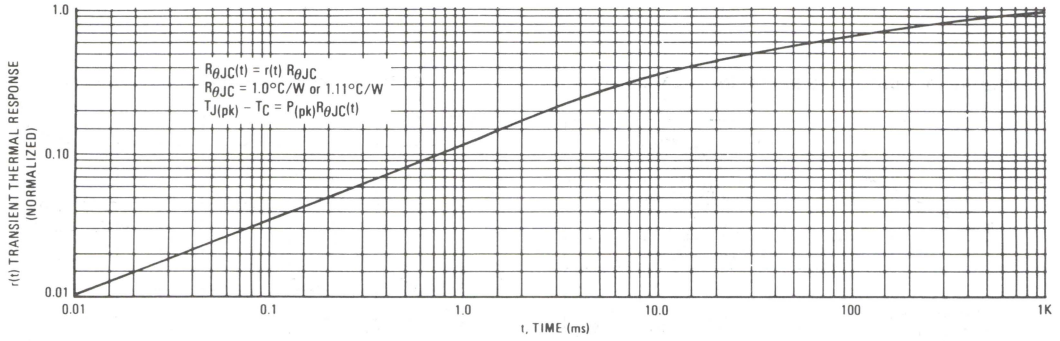

FIGURE 18 — POWER DERATING

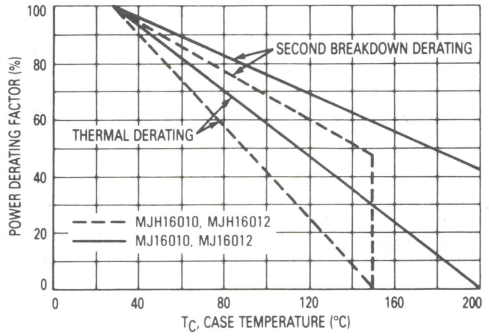

TABLE 1 — RESISTIVE LOAD SWITCHING

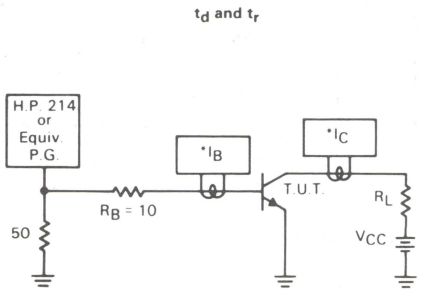

V_{CC} = 250 Vdc
R_L = 25 Ω
I_C = 10 Adc
I_B = 1.0 Adc



*Tektronix AM503
P6302 or Equivalent

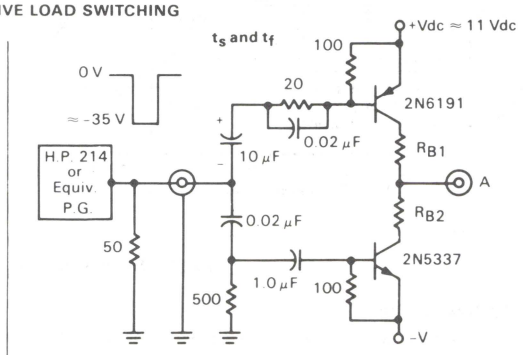

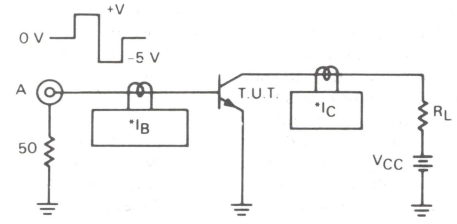

V_{CC} = 250 Vdc
R_L = 25 Ω
I_C = 10 Adc

I_{B1} = 1.0 Adc
I_{B2} = 2.0 Adc
For $V_{BE(off)}$ = 5.0 V, R_{B2} = 0 Ω

R_{B1} = 10 Ω
$R_{B2} \doteq 1.6$ Ω

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

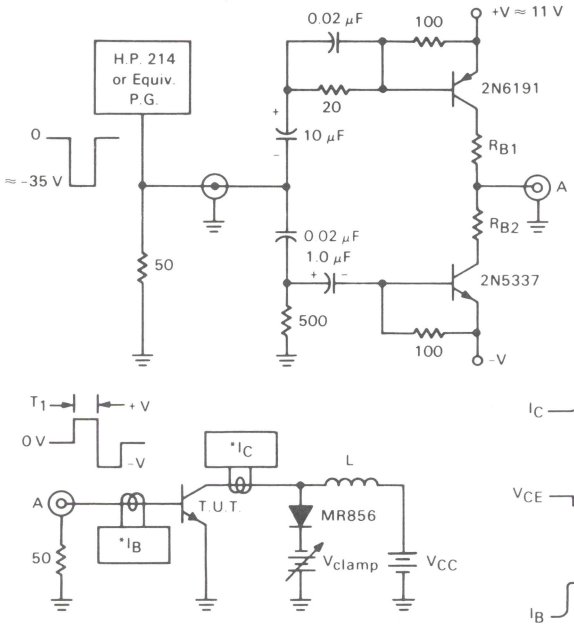



$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{CEO(sus)}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 V lts

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 V
R_{B1} selected for desired I_{B1}

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 V
R_{B1} selected for desired I_{B1}

*Tektronix AM503
P6302 or Equivalent

Scope — Tektronix
7403 or Equivalent

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

3

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

$I_{C(pk)}$ = 10 A
I_{B1} = 1.0 A
$V_{BE(off)}$ = 5.0 V
$V_{CE(pk)}$ = 400 V
T_C = 25°C
Time Base =
100 ns/cm



t_{fi}, t_c

$I_{C(pk)}$ = 10 A
I_{B1} = 1.0 A
$V_{BE(off)}$ = 5.0 V
$V_{CE(pk)}$ = 400 V
T_C = 25°C
Time Base =
20 ns/cm



MJ16010A
MJH16010A

POWER TRANSISTORS
15 AMPERES
500 VOLTS
125 and 175 WATTS

Designer's Data Sheet

NPN Silicon Power Transistors

1 kV Switchmode III Series

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits

Features:
- Collector-Emitter Voltage — V_{CEV} = 1000 Vdc
- Fast Turn-Off Times
  - 50 ns Inductive Fall Time – 100°C (Typ)
  - 90 ns Inductive Crossover Time – 100°C (Typ)
  - 900 ns Inductive Storage Time – 100°C (Typ)
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Load
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents
- Extended FBSOA Rating Using Ultra-fast Rectifiers
- Extremely High RBSOA Capability



CASE 1-05
TO-204AA
MJ16010A



CASE 340-01
TO-218AC
MJH16010A

MAXIMUM RATINGS

Rating	Symbol	MJ16010A	MJH16010A	Unit
Collector-Emitter Voltage	V_{CEO}	500		Vdc
Collector-Emitter Voltage	V_{CEV}	1000		Vdc
Emitter-Base Voltage	V_{EB}	6		Vdc
Collector Current — Continuous — Peak(1)	I_C I_{CM}	15 20		Adc
Base Current — Continuous — Peak(1)	I_B I_{BM}	10 15		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above T_C = 25°C	P_D	175 100 1	135 54 1.09	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to 200	–55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	0.92	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS(1)					
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	500	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 1000 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 1000 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	0.003 0.020	0.15 1.0	mAdc
Collector Cutoff Current (V_{CE} = 1000 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	0.020	1.0	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)	I_{EBO}	—	0.005	0.15	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 14a or 14b			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 15			
ON CHARACTERISTICS(1)					
Collector-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 1 Adc) (I_C = 10 Adc, I_B = 2 Adc) (I_C = 10 Adc, I_B = 2 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — —	 0.25 0.45	 0.7 1	Vdc
		—	0.60	1.5	
Base-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 2 Adc) (I_C = 10 Adc, I_B = 2 Adc, T_C = 100°C)	$V_{BE(sat)}$	 —	 1.2	 1.5	Vdc
		—	1.2	1.5	
DC Current Gain (I_C = 15 Adc, V_{CE} = 5 Vdc)	h_{FE}	5	8	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)	C_{ob}	—	—	400	pF

SWITCHING CHARACTERISTICS

Inductive Load (Table 1)							
Storage Time	(I_C = 10 Adc, I_{B1} = 1.3 Adc, $V_{BE(off)}$ = 5 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	900	2000	ns
Fall Time			t_{fi}	—	50	250	
Crossover Time			t_c	—	90	300	
Storage Time		(T_J = 150°C)	t_{sv}	—	1100	—	
Fall Time			t_{fi}	—	70	—	
Crossover Time			t_c	—	120	—	
Resistive Load (Table 2)							
Delay Time	(I_C = 10 Adc, V_{CC} = 250 Vdc, I_{B1} = 1.3 Adc, PW = 30 μs, Duty Cycle ≤ 2%)	(I_{B2} = 2.6 Adc, R_{B2} = 1.6 Ω)	t_d	—	25	100	ns
Rise Time			t_r	—	325	600	
Storage Time			t_s	—	1300	3000	
Fall Time			t_f	—	175	400	
Storage Time		($V_{BE(off)}$ = 5 Vdc)	t_s	—	700	—	
Fall Time			t_f	—	80	—	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

TYPICAL STATIC CHARACTERISTICS

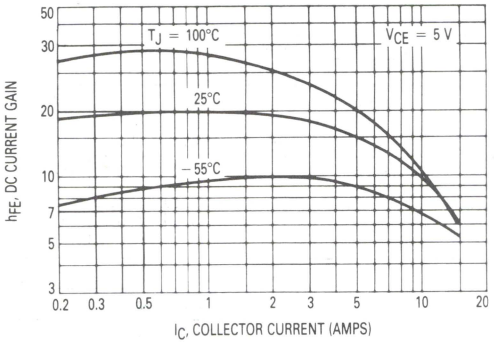

Figure 1. DC Current Gain

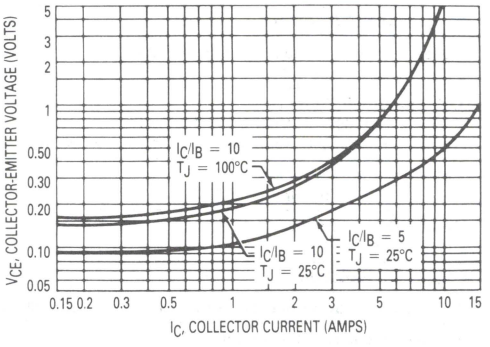

Figure 2. Collector-Emitter Saturation Region

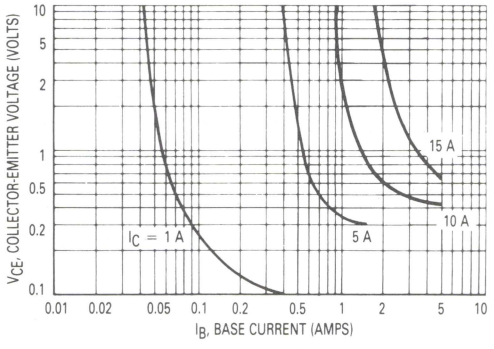

Figure 3. Collector-Emitter Saturation Region

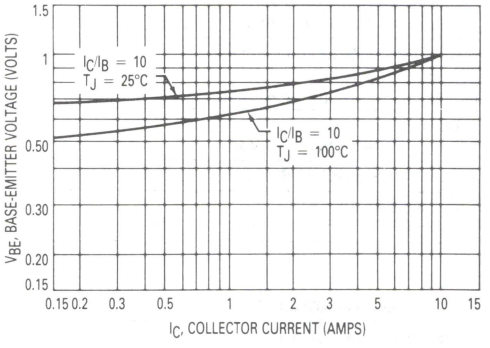

Figure 4. Base-Emitter Saturation Region

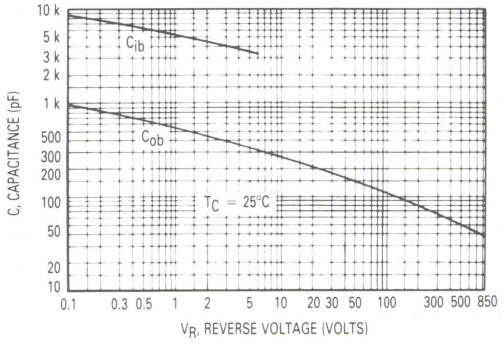

Figure 5. Capacitance

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

I_C/I_{B1} = 5, T_C = 75°C, $V_{CE(pk)}$ = 400 V

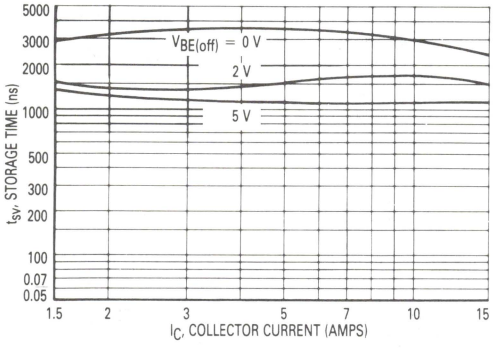

Figure 6. Storage Time

I_C/I_{B1} = 10, T_C = 75°C, $V_{CE(pk)}$ = 400 V

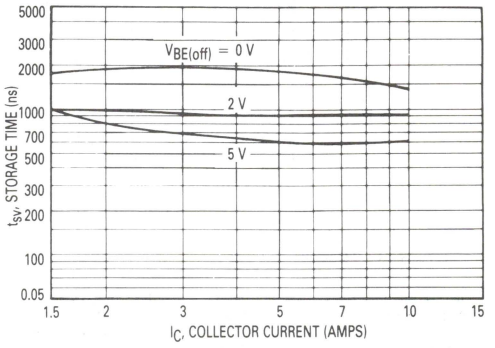

Figure 7. Storage Time

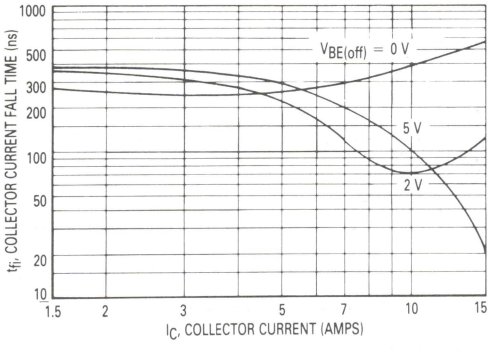

Figure 8. Collector Current Fall Time

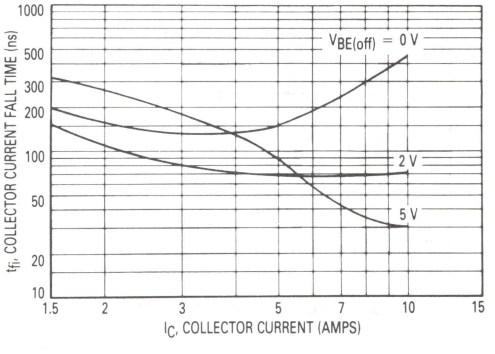

Figure 9. Collector Current Fall Time

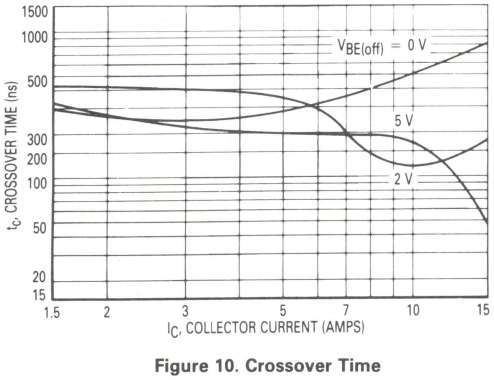

Figure 10. Crossover Time

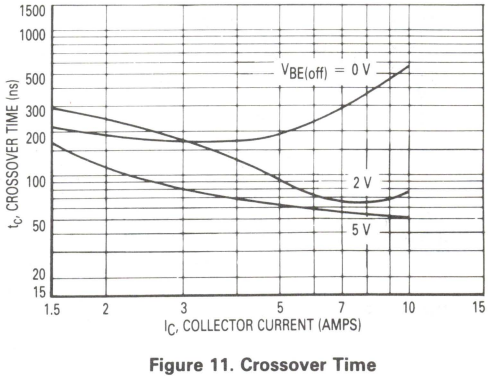

Figure 11. Crossover Time

3

Table 1. Inductive Load Switching

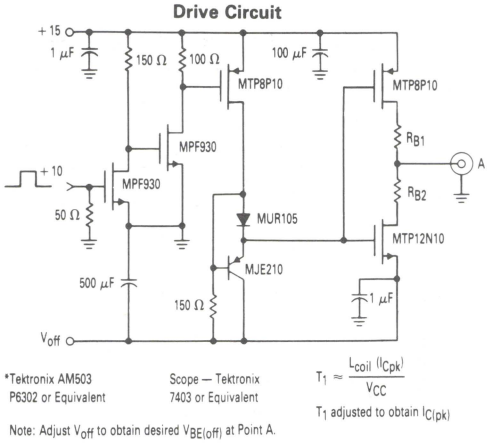

$V_{CEO(sus)}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts
$I_{C(pk)}$ = 100 mA

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}



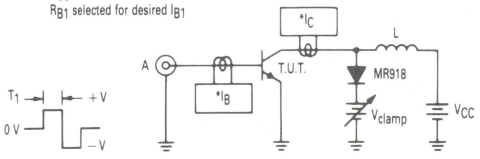

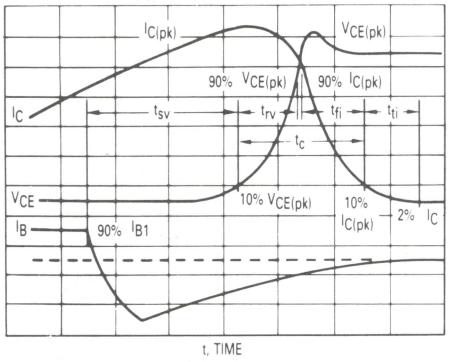

Figure 12. Inductive Switching Measurements

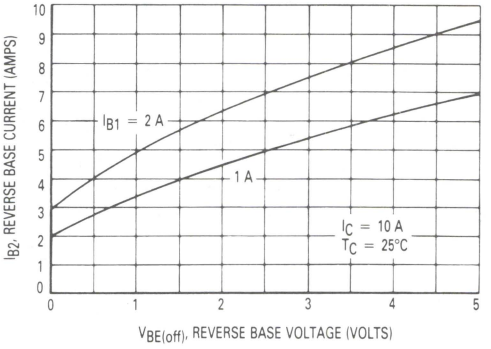

Figure 13. Peak Reverse Base Current

Table 2. Resistive Load Switching

t_d and t_r



V_{CC}	250 V
R_L	25 Ω
I_C	10 A
I_B	1.3 A



*Tektronix AM503
P6302 or Equivalent

t_s and t_f

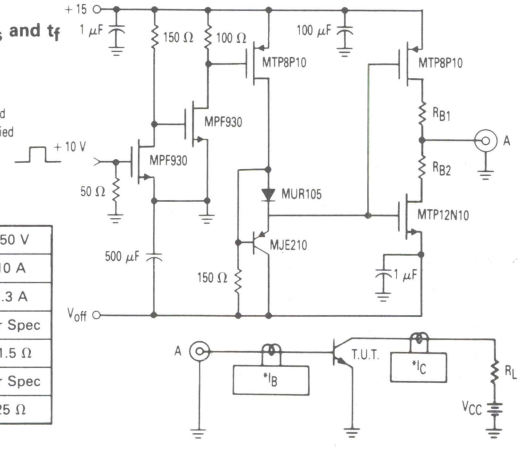

V_{CC}	250 V
I_C	10 A
I_{B1}	1.3 A
I_{B2}	Per Spec
R_{B1}	11.5 Ω
R_{B2}	Per Spec
R_L	25 Ω

GUARANTEED OPERATING AREA INFORMATION

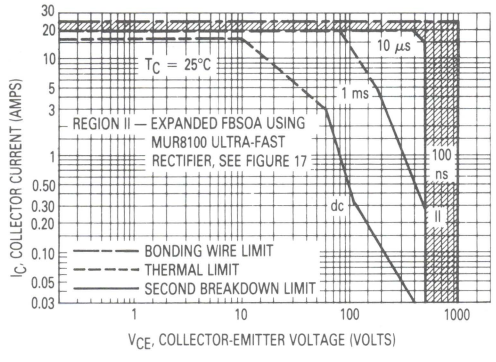

a. MJ16010A

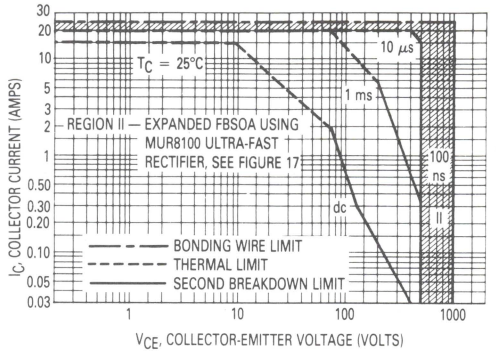

b. MJH16010A

Figure 14. Maximum Rated Forward Biased Safe Operating Area

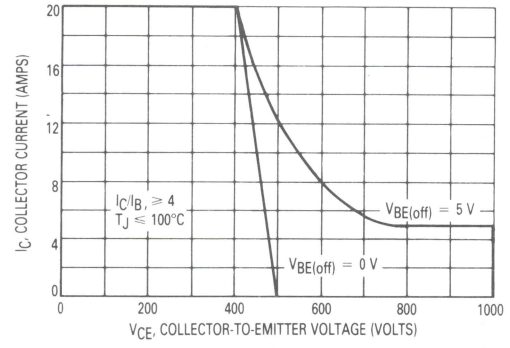

Figure 15. Maximum Reverse Biased Safe Operating Area

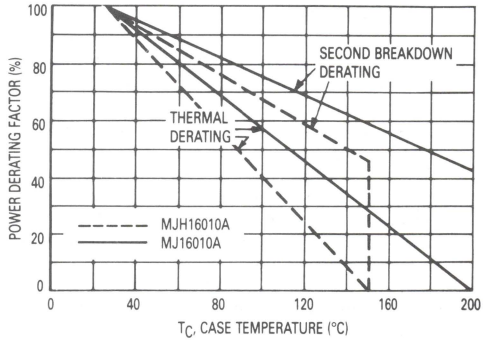

Figure 16. Power Derating

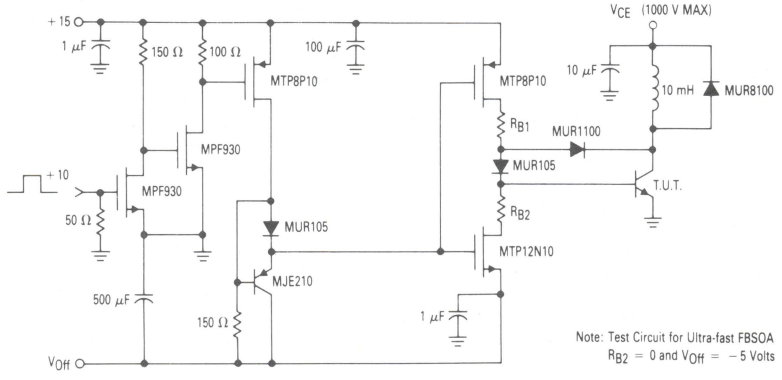

Figure 17. Switching Safe Operating Area

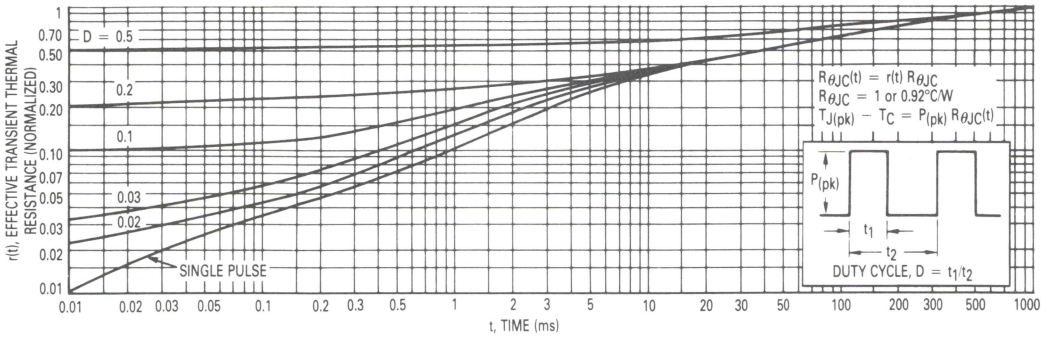

Figure 18. Thermal Response

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 14a and 14b is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 14a and 14b may be found at any case temperature by using the appropriate curve on Figure 16.

$T_{J(pk)}$ may be calculated from the data in Figure 18. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Biased Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 15 gives the RBSOA characteristics.

SWITCHMODE III DESIGN CONSIDERATIONS

1. FBSOA —

Allowable dc power dissipation in bipolar power transistors decreases dramatically with increasing collector-emitter voltage. A transistor which safely dissipates 100 watts at 10 volts will typically dissipate less than 10 watts at its rated $V_{CEO(sus)}$. From a power handling point of view, current and voltage are not interchangeable (see Application Note AN875).

2. TURN-ON —

Safe turn-on load line excursions are bounded by pulsed FBSOA curves. The 10 μs curve applies for resistive loads, most capacitive loads, and inductive loads that are clamped by standard or fast recovery rectifiers. Similarly, the 100 ns curve applies to inductive loads which are clamped by ultra-fast recovery rectifiers, and are valid for turn-on crossover times less than 100 ns (see Application Note AN952).

At voltages above 75% of $V_{CEO(sus)}$, it is essential to provide the transistor with an adequate amount of base drive VERY RAPIDLY at turn-on. More specifically, safe operation according to the curves is dependent upon base current rise time being less than collector current rise time. As a general rule, a base drive compliance voltage in excess of 10 volts is required to meet this condition (see Application Note AN875).

3. TURN-OFF —

A bipolar transistor's ability to withstand turn-off stress is dependent upon its forward base drive. Gross overdrive violates the RBSOA curve and risks transistor failure. For this reason, circuits which use fixed base drive are often more likely to fail at light loads due to heavy overdrive (see Application Note AN875).

SWITCHMODE III DESIGN CONSIDERATIONS (Cont.)

4. OPERATION ABOVE $V_{CEO(sus)}$ —

When bipolars are operated above collector-emitter breakdown, base drive is crucial. A rapid application of adequate forward base current is needed for safe turn-on, as is a stiff negative bias needed for safe turn-off. Any hiccup in the base-drive circuitry that even momentarily violates either of these conditions will likely cause the transistor to fail. Therefore, it is important to design the driver so that its output is negative in the absence of anything but a clean crisp input signal (see Application Note AN952).

5. RBSOA —

Reverse Biased Safe Operating Area has a first order dependency on circuit configuration and drive parameters. The RBSOA curves in this data sheet are valid only for the conditions specified. For a comparison of RBSOA results in several types of circuits (see Application Note AN951).

6. DESIGN SAMPLES —

Transistor parameters tend to vary much more from wafer lot to wafer lot, over long periods of time, than from one device to the next in the same wafer lot. For design evaluation it is advisable to use transistors from several different date codes.

7. BAKER CLAMPS —

Many unanticipated pitfalls can be avoided by using Baker Clamps. MUR105 and MUR1100 diodes are recommended for base drives less than 1 amp. Similarly, MUR405 and MUR4100 types are well-suited for higher drive requirements (see Article Reprint AR131).

OUTLINE DIMENSIONS



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	—	39.37	—	1.550
B	—	21.08	—	0.830
C	6.35	7.62	0.250	0.300
D	0.97	1.09	0.038	0.043
E	1.40	1.78	0.055	0.070
F	30.15 BSC		1.187 BSC	
G	10.92 BSC		0.430 BSC	
H	5.46 BSC		0.215 BSC	
J	16.89 BSC		0.665 BSC	
K	11.18	12.19	0.440	0.480
Q	3.81	4.19	0.151	0.165
R	—	26.67	—	1.050
U	4.83	5.33	0.190	0.210
V	3.81	4.19	0.151	0.165

NOTES:
1. DIMENSIONS Q AND V ARE DATUMS.
2. -T- IS SEATING PLANE AND DATUM.
3. POSITIONAL TOLERANCE FOR MOUNTING HOLE Q:
   ⌖ | 0.13 (0.005) Ⓜ | T | V Ⓜ |
   FOR LEADS:
   ⌖ | 0.13 (0.005) Ⓜ | T | V Ⓜ | Q Ⓜ |
4. DIMENSIONS AND TOLERANCES PER ANSI Y14.5, 1973.

CASE 1-05
TO-204AA
MJ16010A



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE COLLECTOR

CASE 340-01
TO-218AC
MJH16010A

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJ16014
MJ16016

Designer's Data Sheet

20 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
250 WATTS

SWITCHMODE III SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications. The MJ16016 is a selected high-gain version of the MJ16014 for applications where drive current is limited.

Typical Applications:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  - 40 ns Inductive Fall Time — 75°C (Typ)
  - 40 ns Inductive Crossover Time — 75°C (Typ)
  - 800 ns Inductive Storage Time — 75°C (Typ)
- Operating Temperature Range -65 to +200°C
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.



STYLE 1:
PIN 1. BASE
2. EMITTER
CASE. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	38.35	39.37	1.510	1.550
B	19.30	21.08	0.760	0.830
C	6.35	7.62	0.250	0.300
D	1.45	1.60	0.057	0.063
E	–	3.43	–	0.135
F	29.90	30.40	1.177	1.197
G	10.67	11.18	0.420	0.440
H	5.21	5.72	0.205	0.225
J	16.64	17.15	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.09	0.151	0.161
R	24.89	26.67	0.980	1.050

CASE 197-01

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	V_{CEO}	450	Vdc
Collector-Emitter Voltage	V_{CEV}	850	Vdc
Emitter Base Voltage	V_{EB}	6.0	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	20 30	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	10 20	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	250 143 1.43	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.7	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

3

MJ16014

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current	I_{CEV}				mAdc
(V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc)		—	—	0.25	
(V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		—	—	1.5	
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 10 Adc, I_B = 1.3 Adc)		—	—	2.5	
(I_C = 15 Adc, I_B = 2.0 Adc)		—	—	3.0	
(I_C = 15 Adc, I_B = 2.0 Adc, T_C = 100°C)		—	—	3.0	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$				Vdc
(I_C = 15 Adc, I_B = 2.0 Adc)		—	—	1.5	
(I_C = 15 Adc, I_B = 2.0 Adc, T_C = 100°C)		—	—	1.5	
DC Current Gain (I_C = 20 Adc, V_{CE} = 5.0 Vdc	h_{FE}	5.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	500	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)							
Delay Time	(I_C = 15 Adc, V_{CC} = 250 Vdc, I_{B1} = 2.0 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 4.0 Adc, R_B = 1.6 Ω)	t_d	—	20	50	ns
Rise Time			t_r	—	200	500	
Storage Time			t_s	—	1200	2700	
Fall Time			t_f	—	200	350	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	650	—	
Fall Time			t_f	—	80	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 15 Adc, I_{B1} = 2.0 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_C = 100°C)	t_{sv}	—	800	2700	ns
Fall Time			t_{fi}	—	50	200	
Crossover Time			t_c	—	90	250	
Storage Time		(T_C = 150°C)	t_{sv}	—	1050	—	
Fall Time			t_{fi}	—	70	—	
Crossover Time			t_c	—	120	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_{B1}}$

MJ16016

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)	$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)	I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 16			
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 10 Adc, I_B = 1.0 Adc) (I_C = 15 Adc, I_B = 1.5 Adc) (I_C = 15 Adc, I_B = 1.5 Adc, T_C = 100°C)	$V_{CE(sat)}$	— — —	— — —	2.5 3.0 3.0	Vdc
Base-Emitter Saturation Voltage (I_C = 15 Adc, I_B = 1.5 Adc) (I_C = 15 Adc, I_B = 1.5 Adc, T_C = 100°C)	$V_{BE(sat)}$	— —	— —	1.5 1.5	Vdc
DC Current Gain (I_C = 20 Adc, V_{CE} = 5.0 Vdc	h_{FE}	7.0	—	—	—
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)	C_{ob}	—	—	500	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	(I_C = 15 Adc, V_{CC} = 250 Vdc, I_{B1} = 1.5 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 3.0 Adc, R_B = 1.6 Ω)	t_d	—	20	50	ns
Rise Time			t_r	—	200	500	
Storage Time			t_s	—	900	2200	
Fall Time			t_f	—	100	250	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	500	—	
Fall Time			t_f	—	40	—	
Inductive Load (Table 2)							
Storage Time	(I_C = 15 Adc, I_{B1} = 1.5 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_C = 100°C)	t_{sv}	—	750	2500	ns
Fall Time			t_{fi}	—	30	150	
Crossover Time			t_c	—	50	200	
Storage Time		(T_C = 150°C)	t_{sv}	—	900	—	
Fall Time			t_{fi}	—	30	—	
Crossover Time			t_c	—	70	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_{B1}}$

TYPICAL STATIC CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

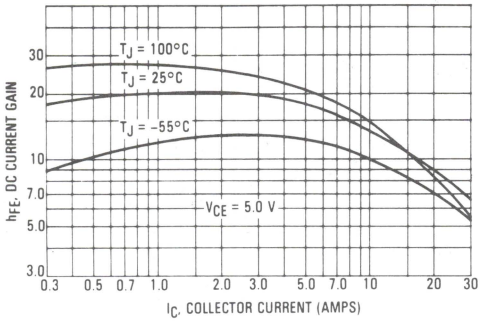

FIGURE 2 — COLLECTOR SATURATION REGION

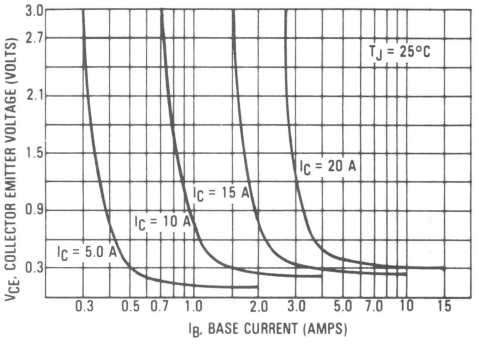

FIGURE 3 — COLLECTOR-EMITTER SATURATION REGION

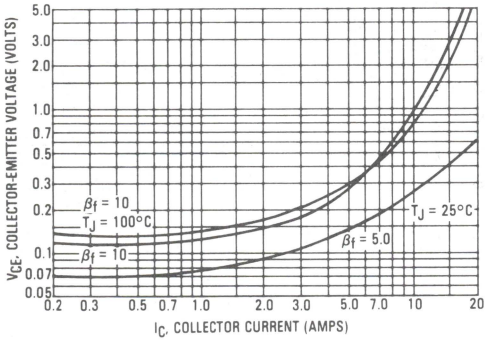

FIGURE 4 — BASE-EMITTER VOLTAGE

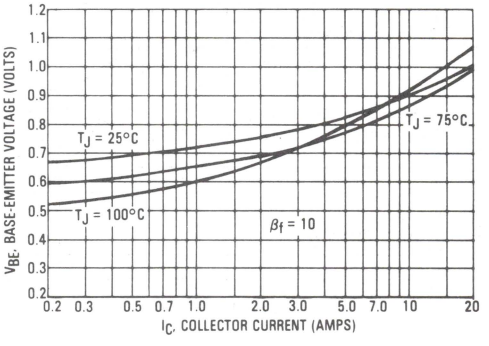

FIGURE 5 — COLLECTOR CUTOFF REGION

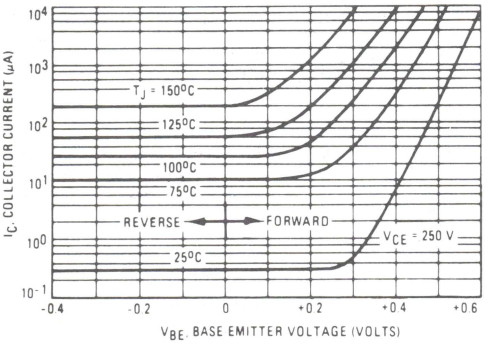

FIGURE 6 — CAPACITANCE

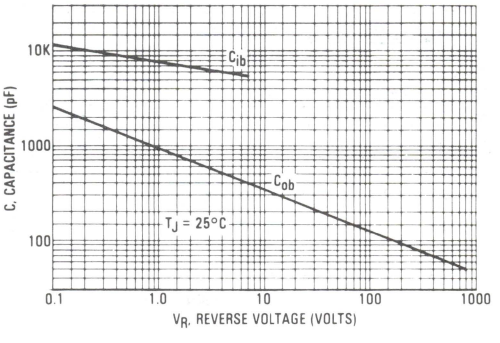

3

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

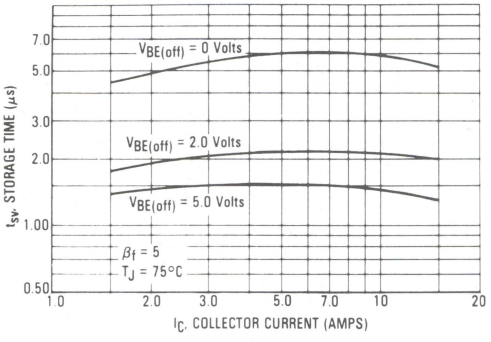

FIGURE 8 — STORAGE TIME

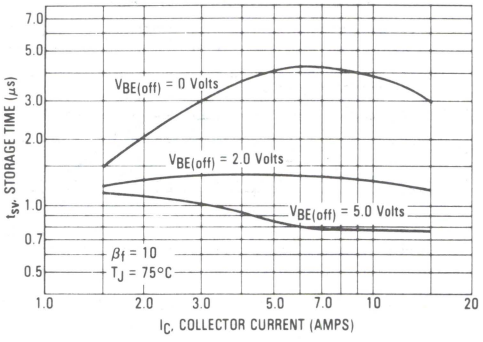

FIGURE 9 — COLLECTOR CURRENT FALL TIME

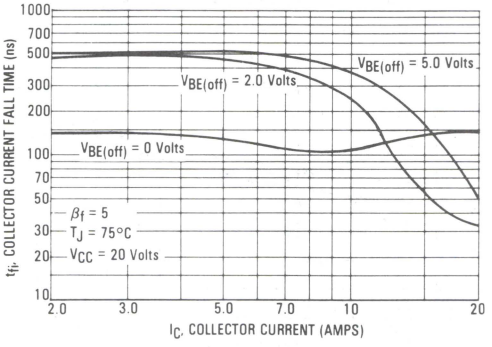

FIGURE 10 — COLLECTOR CURRENT FALL TIME

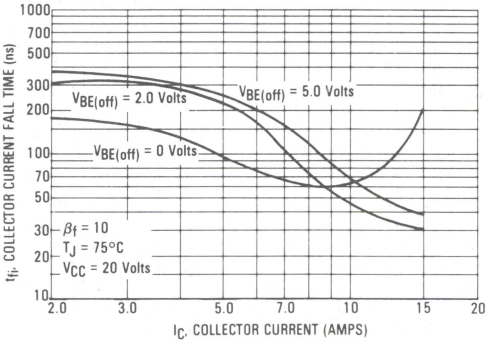

FIGURE 11 — CROSSOVER TIME

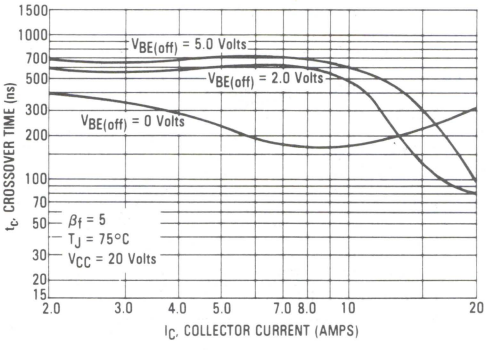

FIGURE 12 — CROSSOVER TIME

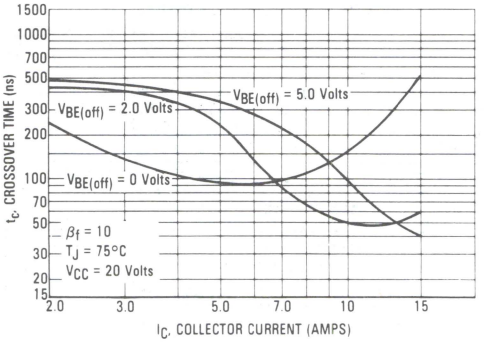

3

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

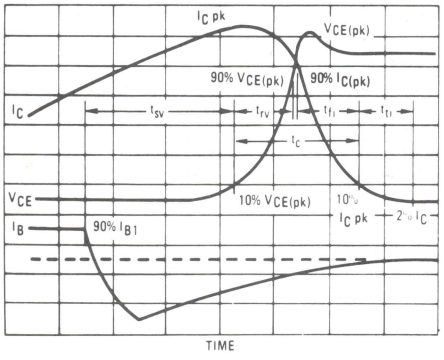

FIGURE 14 — REVERSE BASE CURRENT

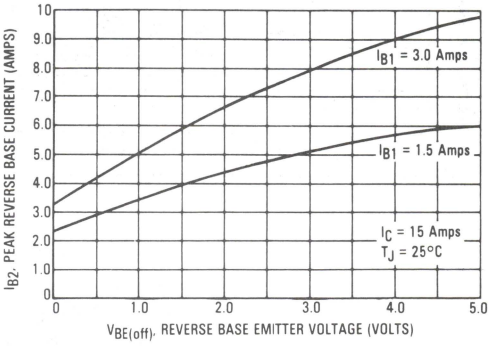

GUARANTEED SAFE OPERATING AREA LIMITS

FIGURE 15 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

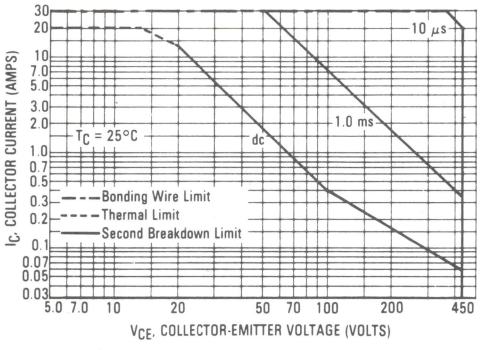

FIGURE 16 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

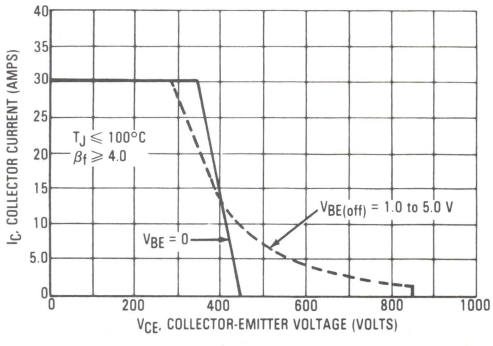

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geqslant 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 18.

$T_{J(pk)}$ may be calculated from the data in Figure 17. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

FIGURE 17 — THERMAL RESPONSE

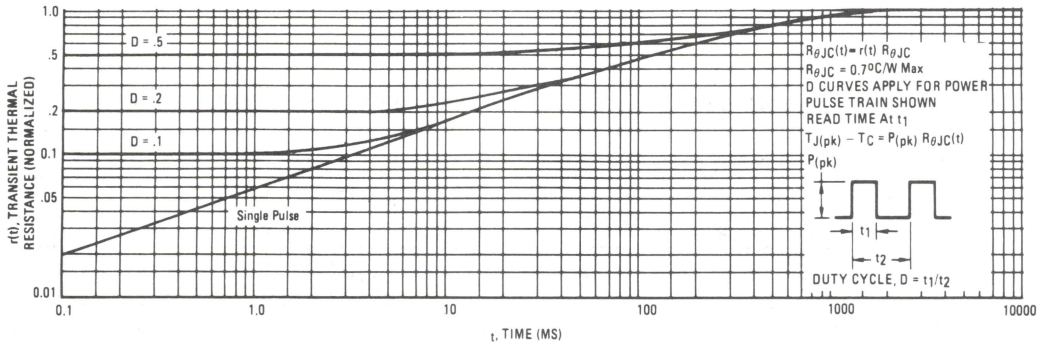

FIGURE 18 — POWER DERATING

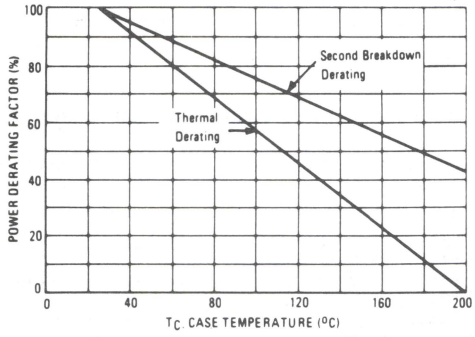

TABLE 1 — RESISTIVE LOAD SWITCHING

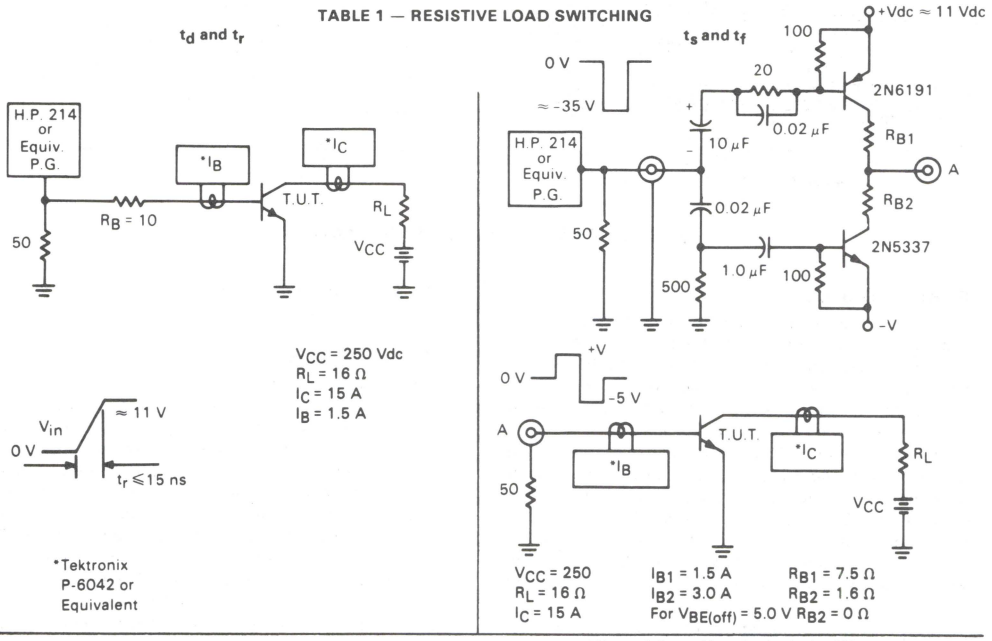

*Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

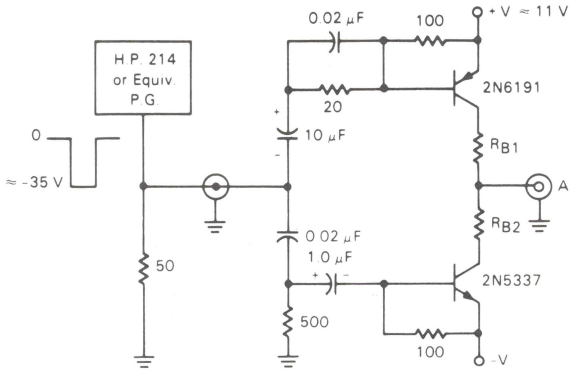

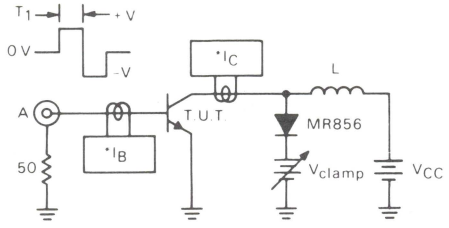

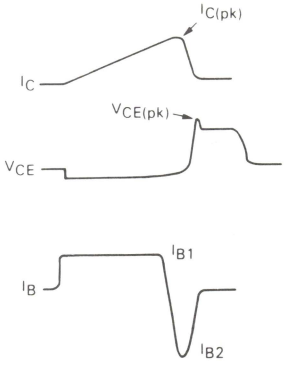

$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{CEO(sus)}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

*Tektronix
P-6042 or
Equivalent

Scope - Tektronix
7403 or
Equivalent

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

3

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

$I_{C(pk)}$ = 15 A
I_{B1} = 1.5 A
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base = 100 ns/cm



t_{fi}, t_c

$I_{C(pk)}$ = 15 A
I_{B1} = 1.5 A
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 400 Volts
T_C = 25°C
Time Base = 10 ns/cm



MJ16018
MJH16018

Designer's Data Sheet

NPN Silicon Power Transistors

1.5 kV Switchmode III Series

POWER TRANSISTORS
10 AMPERES
800 VOLTS
125 and 175 WATTS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoids
- Relay Drivers
- Motor Controls
- Deflection Circuits

Features:
- Collector-Emitter Voltage — V_{CEV} = 1500 Vdc
- Fast Turn-Off Times
  - 80 ns Inductive Fall Time – 100°C (Typ)
  - 110 ns Inductive Crossover Time – 100°C (Typ)
  - 4.5 μs Inductive Storage Time – 100°C (Typ)
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Load
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents



CASE 1-05
TO-204AA
MJ16018

CASE 340-01
TO-218AC
MJH16018

MAXIMUM RATINGS

Rating	Symbol	MJ16018	MJH16018	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	800		Vdc
Collector-Emitter Voltage	V_{CEV}	1500		Vdc
Emitter-Base Voltage	V_{EB}	6		Vdc
Collector Current — Continuous — Peak(1)	I_C I_{CM}	10 15		Adc
Base Current — Continuous — Peak(1)	I_B I_{BM}	8 12		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above T_C = 25°C	P_D	175 100 1	125 50 1	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to 200	–55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1	1	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5 μs, Duty Cycle ≤ 10%.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS(1)							
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 50 mA, I_B = 0)			$V_{CEO(sus)}$	800	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 1500 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 1500 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			I_{CEV}	 — —	 — —	 0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, R_{BE} = 50 Ω, T_C = 100°C)			I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6 Vdc, I_C = 0)			I_{EBO}	—	—	0.1	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with Base Forward Biased			$I_{S/b}$	See Figure 13			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figure 14			
ON CHARACTERISTICS(1)							
Collector-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 2 Adc) (I_C = 10 Adc, I_B = 5 Adc) (I_C = 5 Adc, I_B = 2 Adc, T_C = 100°C)			$V_{CE(sat)}$	 — — —	 — — —	 1 5 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 2 Adc) (I_C = 5 Adc, I_B = 2 Adc, T_C = 100°C)			$V_{BE(sat)}$	 — —	 — —	 1.5 1.5	Vdc
DC Current Gain (I_C = 5 Adc, V_{CE} = 5 Vdc)			h_{FE}	4	—	—	—
DYNAMIC CHARACTERISTICS							
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 kHz)			C_{ob}	—	—	450	pF
SWITCHING CHARACTERISTICS							
Inductive Load (Table 1)							
Storage Time	Baker Clamped (I_C = 5 Adc, I_{B1} = 2 Adc, $V_{BE(off)}$ = 2 Vdc, $V_{CE(pk)}$ = 400 Vdc) PW = 25 μs	(T_J = 25°C)	t_{sv}	—	4000	8000	ns
Fall Time			t_{fi}	—	60	200	
Crossover Time			t_c	—	90	300	
Storage Time		(T_J = 100°C)	t_{sv}	—	4500	9000	
Fall Time			t_{fi}	—	80	250	
Crossover Time			t_c	—	110	375	
Resistive Load (Table 1)							
Delay Time	(I_C = 5 Adc, V_{CC} = 250 Vdc, I_{B1} = 2 Adc, I_{B2} = 2 Adc, R_{B2} = 3 Ω, PW = 25 μs, Duty Cycle ≤ 2%)		t_d	—	85	200	ns
Rise Time			t_r	—	900	2000	
Storage Time			t_s	—	4500	9000	
Fall Time			t_f	—	200	400	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

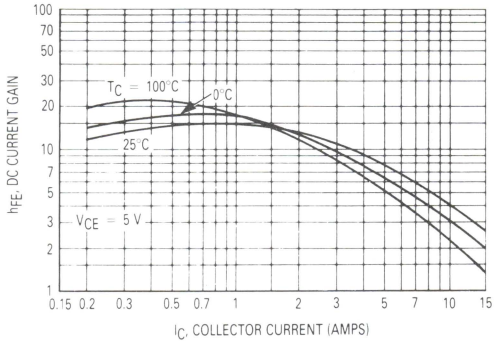

Figure 1. DC Current Gain

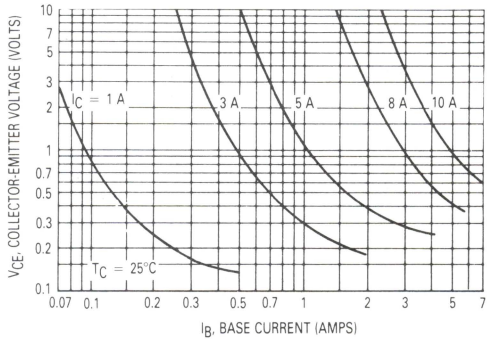

Figure 2. Collector Saturation Region

TYPICAL STATIC CHARACTERISTICS

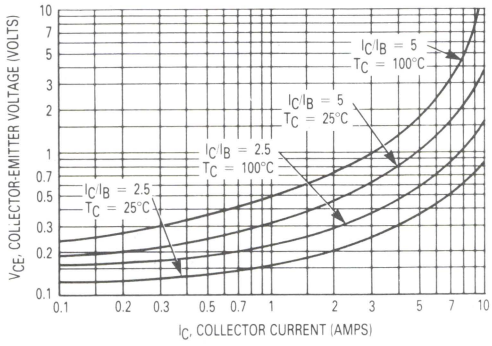

Figure 3. Collector-Emitter Saturation Region

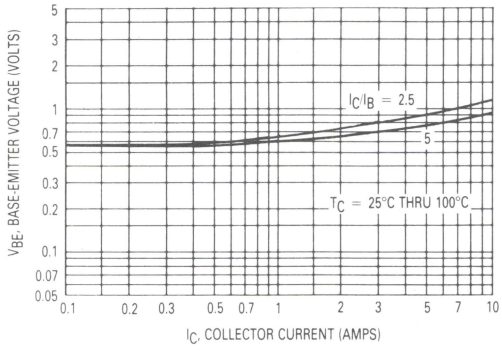

Figure 4. Base-Emitter Saturation Region

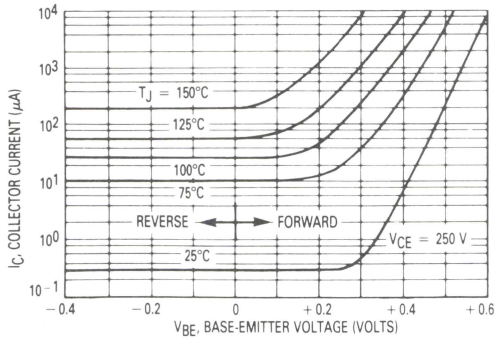

Figure 5. Collector Cutoff Region

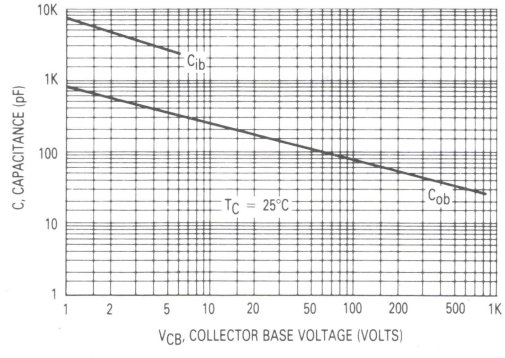

Figure 6. Typical Capacitance

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

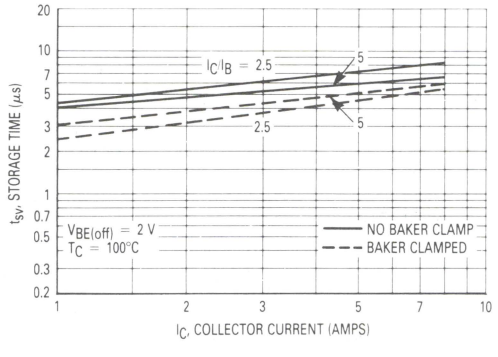

Figure 7. Storage Time

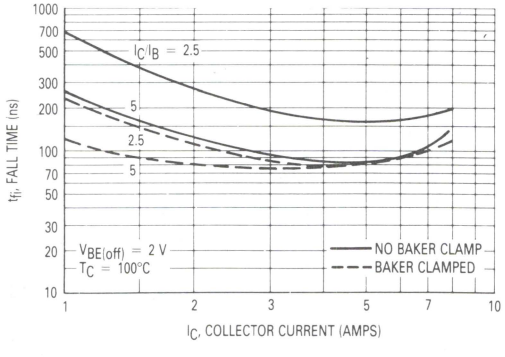

Figure 8. Inductive Switching Fall Time

TYPICAL INDUCTIVE SWITCHING CHARACTERISTICS

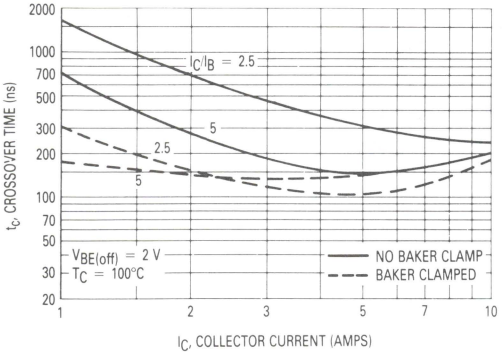

Figure 9. Inductive Switching Crossover Time

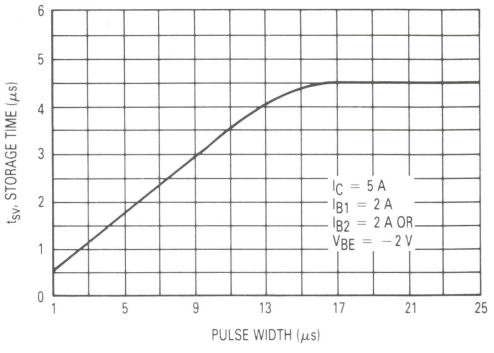

Figure 10. (t_{sv}) Storage Time versus I_{B1} Pulse Width

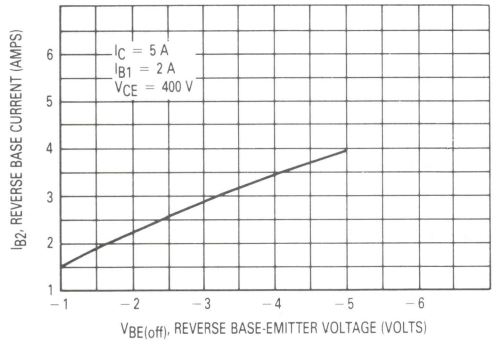

Figure 11. Reverse Base Current versus Off Voltage

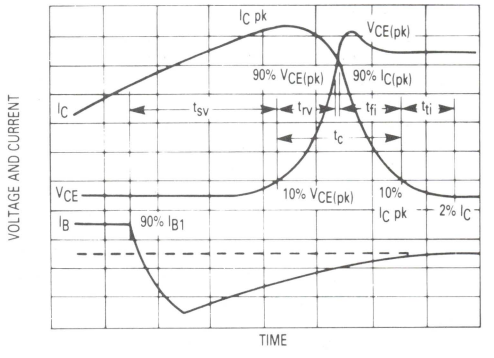

Figure 12. Inductive Switching Measurements

3

GUARANTEED SAFE OPERATING AREA LIMITS

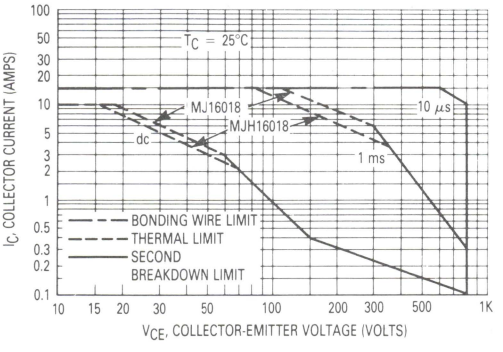

Figure 13. Maximum Forward Bias Safe Operating Area

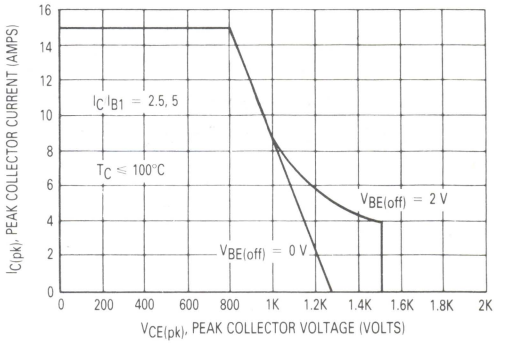

Figure 14. Maximum Reverse Bias Safe Operating Area

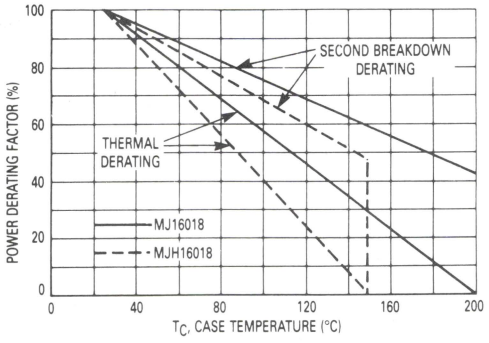

Figure 15. Power Derating

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq$ 25°C. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 13 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 16. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives the RBSOA characteristics.

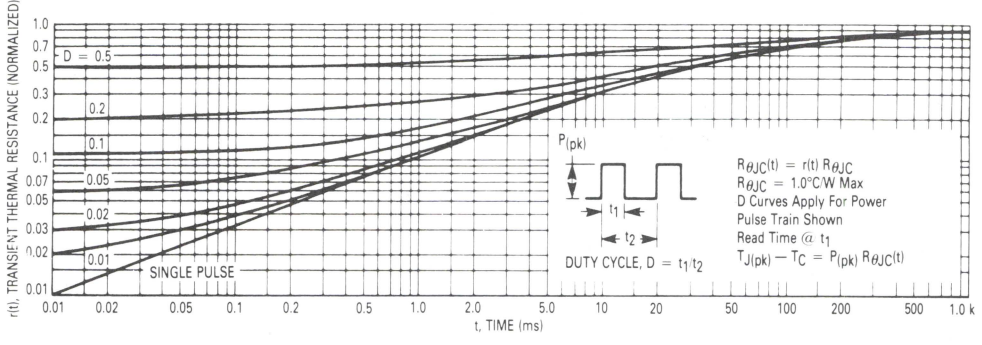

Figure 16. Thermal Response

Table 1. Test Conditions for Dynamic Performance

	$V_{CEO(sus)}$	RBSOA	Inductive Switching	Resistive Switching
Input Conditions	**Drive Circuit** 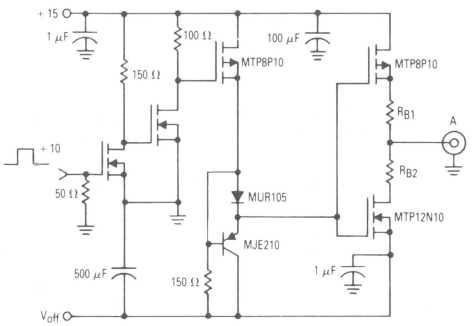 Note: Adjust V_{off} to obtain desired $V_{BE(off)}$ at Point A.			**For t_d and t_f:**   **For t_s and t_f:** Use Inductive Switching Drive Circuit
Circuit Values	L = 10 mH R_{B2} = ∞ V_{CC} = 20 Volts $I_{C(pk)}$ = 50 mA S_1 Closed	L = 200 μH R_{B2} = 0 V_{CC} = 20 Volts R_{B1} selected for desired I_{B1} S_1 Closed	L = 200 μH R_{B2} = 0 when $V_{BE(off)}$ is specified or selected for desired I_{B2} V_{CC} ≈ 20 Volts, Adjusted to obtain desired IC R_{B1} selected for desired I_{B1} S_1 = Open for baker clamp condition	**for t_d and t_r** V_{CC} = 250 Volts R_B selected for desired I_{B1} R_L selected for desired I_C **for t_s and t_f** V_{CC} = 250 Volts R_B = 0 R_{B1} & R_{B2} selected for I_{B1} & I_{B2} R_L selected for desired I_C
Test Circuit	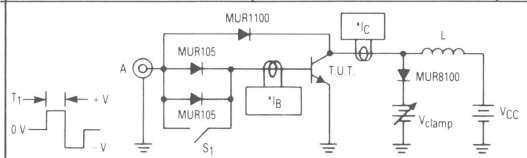 $T_1 = \frac{L_{coil}\, I_{C(pk)}}{V_{CC}}$ T_1 adjusted to obtain $I_{C(pk)}$ *Tektronix AM503 P6302 or Equivalent Scope — Tektronix 7403 or Equivalent		 	 *Tektronix AM503 P6302 or Equivalent

Complementary Power Transistors

DPAK For Surface Mount Applications

NPN
MJD29,C
PNP
MJD30,C

Designed for general purpose amplifier and low speed switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Electrically Similar to Popular TIP29 and TIP30 Series

SILICON
POWER TRANSISTORS
1 AMPERE
40 and 100 VOLTS
15 WATTS

CASE 369A-04



CASE 369-03

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



MAXIMUM RATINGS

Rating	Symbol	MJD29 MJD30	MJD29C MJD30C	Unit
Collector-Emitter Voltage	V_{CEO}	40	100	Vdc
Collector-Base Voltage	V_{CB}	40	100	Vdc
Emitter-Base Voltage	V_{EB}	5		Vdc
Collector Current — Continuous Peak	I_C	1 3		Adc
Base Current	I_B	0.4		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.56 0.012		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.3	°C/W
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	80	°C/W
Lead Temperature for Soldering Purposes	T_L	260	°C

ELECTRICAL CHARACTERISTCS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	MJD29, MJD30 MJD29C, MJD30C	$V_{CEO(sus)}$	40 100	— —	Vdc
Collector Cutoff Current (V_{CE} = 40 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0)	 MJD29, MJD30 MJD29C, MJD30C	I_{CEO}	—	50	μAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, V_{EB} = 0)		I_{CES}	—	20	μAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)		I_{EBO}	—	1	mAdc

* These ratings are applicable when surface mounted on the minimum pad size recommended. (continued)
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

ELECTRICAL CHARACTERISTCS — continued (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 0.2 Adc, V_{CE} = 4 Vdc) (I_C = 1 Adc, V_{CE} = 4 Vdc)	h_{FE}	 40 15	 — 75	—
Collector-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 125 mAdc)	$V_{CE(sat)}$	—	0.7	Vdc
Base-Emitter On Voltage (I_C = 1 Adc, V_{CE} = 4 Vdc)	$V_{BE(on)}$	—	1.3	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain — Bandwidth Product (2) (I_C = 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)	f_T	3	—	MHz
Small-Signal Current Gain (I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 1 kHz)	$\|h_{fe}\|$	20	—	—

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
(2) $f_T = |h_{fe}| \cdot f_{test}$.

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

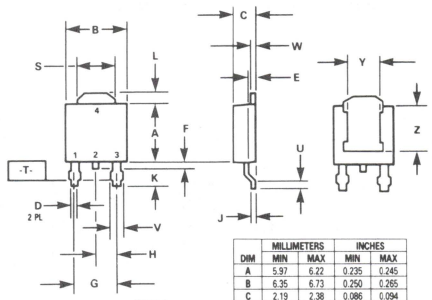

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	6.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD29-1)

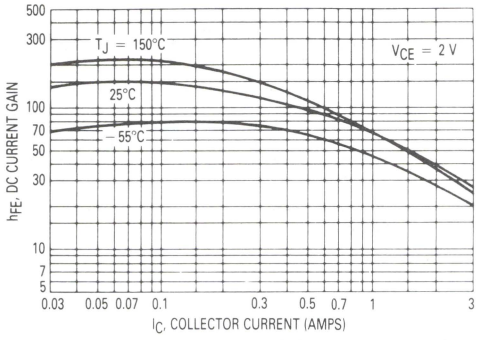

Figure 1. DC Current Gain

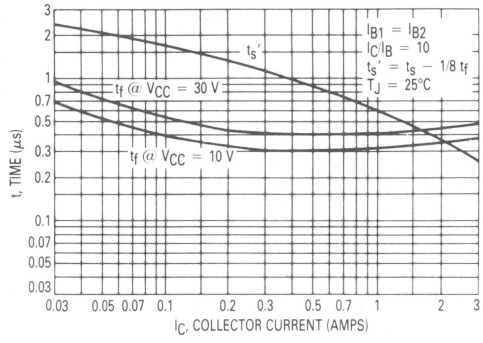

Figure 2. Turn-Off Time

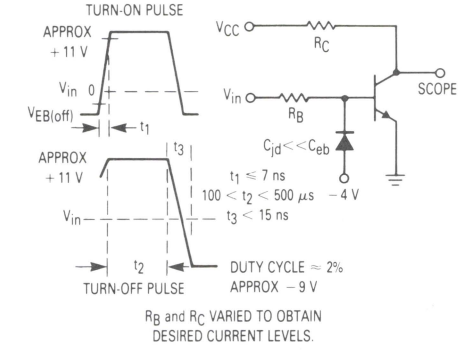

Figure 3. Switching Time Equivalent Circuit

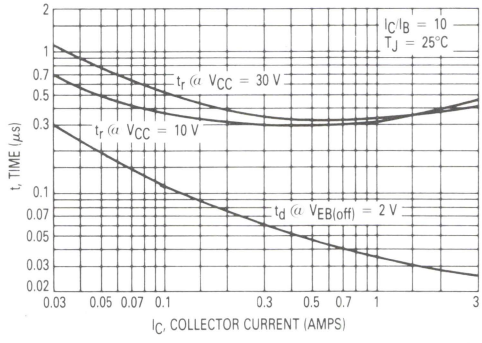

Figure 4. Turn-On Time

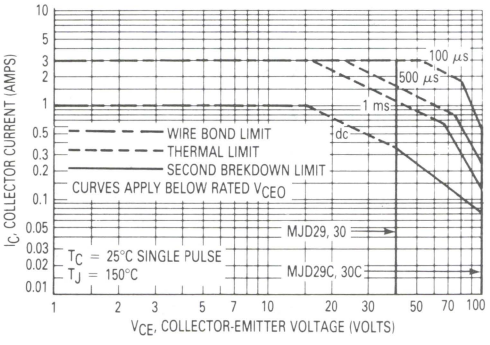

Figure 5. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

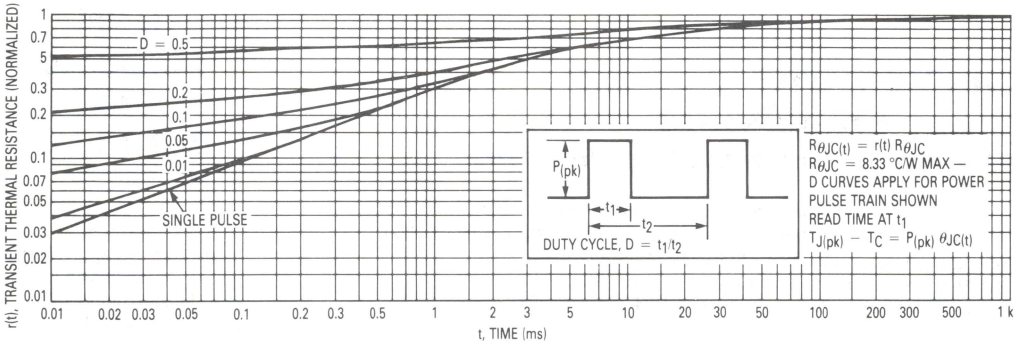

Figure 6. Thermal Response

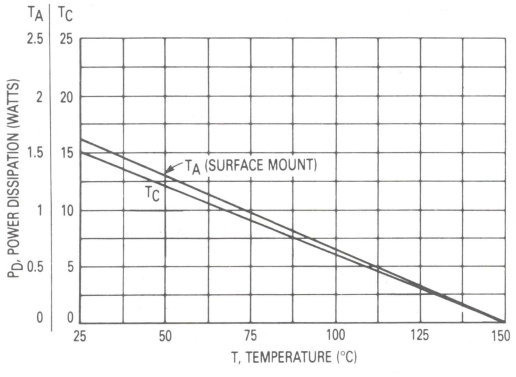

Figure 7. Power Derating

3

Complementary Power Transistors

DPAK For Surface Mount Applications

NPN
MJD31,C
PNP
MJD32,C

Designed for general purpose amplifier and low speed switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Electrically Similar to Popular TIP31 and TIP32 Series

SILICON
POWER TRANSISTORS
3 AMPERES
40 and 100 VOLTS
15 WATTS

CASE 369A-04



CASE 369-03

MAXIMUM RATINGS

Rating	Symbol	MJD31 MJD32	MJD31C MJD32C	Unit
Collector-Emitter Voltage	V_{CEO}	40	100	Vdc
Collector-Base Voltage	V_{CB}	40	100	Vdc
Emitter-Base Voltage	V_{EB}	5		Vdc
Collector Current — Continuous Peak	I_C	3 5		Adc
Base Current	I_B	1		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.56 0.012		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.3	°C/W
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	80	°C/W
Lead Temperature for Soldering Purposes	T_L	260	°C

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



ELECTRICAL CHARACTERISTCS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	MJD31, MJD32 MJD31C, MJD32C	$V_{CEO(sus)}$	40 100	— —	Vdc
Collector Cutoff Current (V_{CE} = 40 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0)	 MJD31, MJD32 MJD31C, MJD32C	I_{CEO}	—	50	μAdc
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, V_{EB} = 0)		I_{CES}	—	20	μAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)		I_{EBO}	—	1	mAdc

* These ratings are applicable when surface mounted on the minimum pad size recommended. (continued)
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 1 Adc, V_{CE} = 4 Vdc) (I_C = 3 Adc, V_{CE} = 4 Vdc)	h_{FE}	 25 10	 — 50	—
Collector-Emitter Saturation Voltage (I_C = 3 Adc, I_B = 375 mAdc)	$V_{CE(sat)}$	—	1.2	Vdc
Base-Emitter On Voltage (I_C = 3 Adc, V_{CE} = 4 Vdc)	$V_{BE(on)}$	—	1.8	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain — Bandwidth Product (2) (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)	f_T	3	—	MHz
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1 kHz)	$\|h_{fe}\|$	20	—	—

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
(2) $f_T = |h_{fe}| \cdot f_{test}$.

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

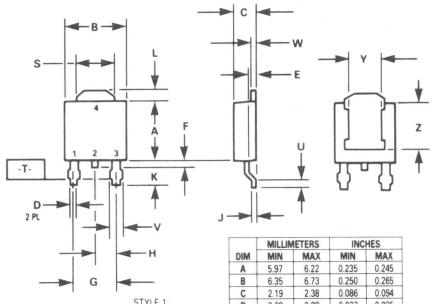

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD31-1)

TYPICAL CHARACTERISTICS

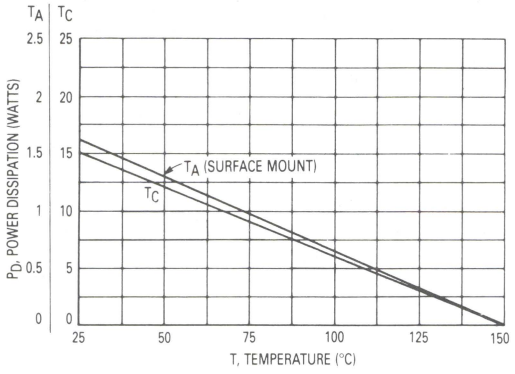

Figure 1. Power Derating

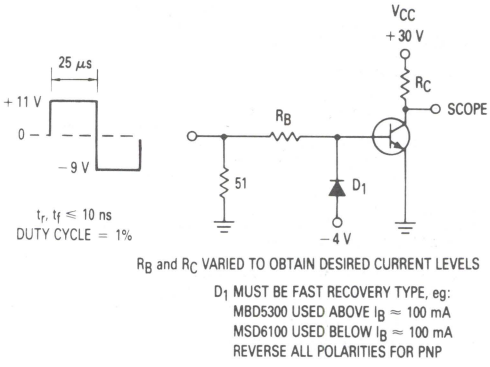

Figure 2. Switching Time Test Circuit

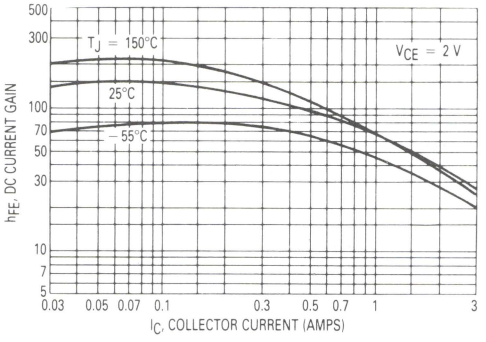

Figure 3. DC Current Gain

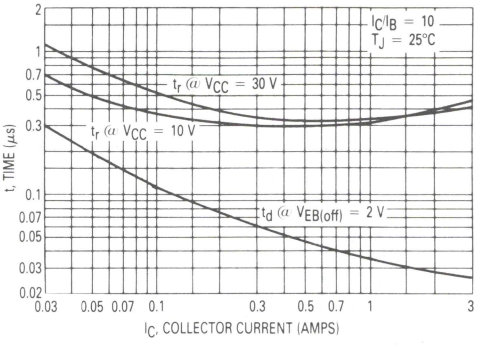

Figure 4. Turn-On Time

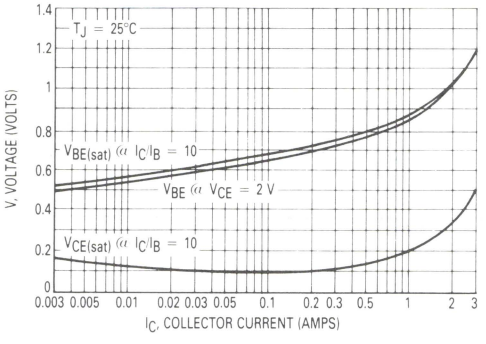

Figure 5. "On" Voltages

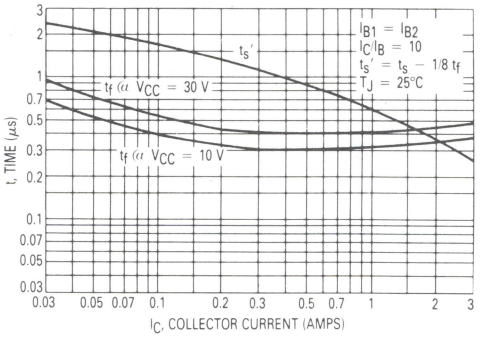

Figure 6. Turn-Off Time

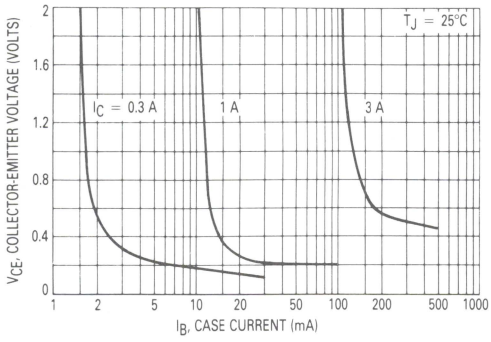

Figure 7. Collector Saturation Region

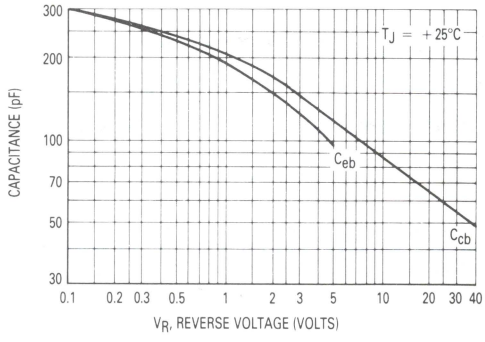

Figure 8. Capacitance

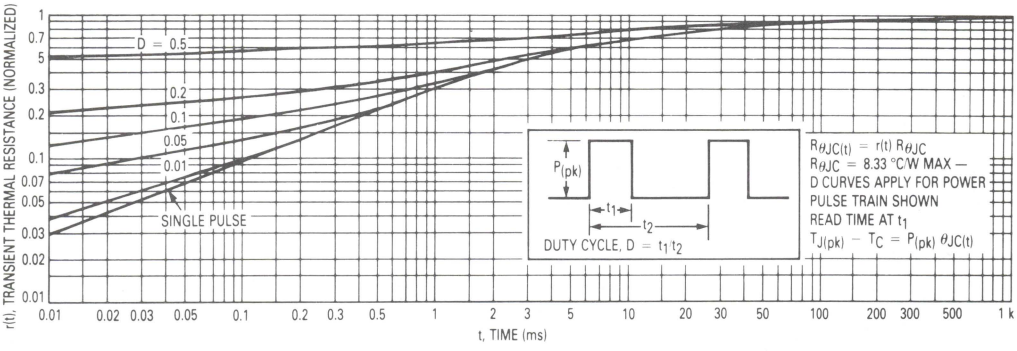

Figure 9. Thermal Response

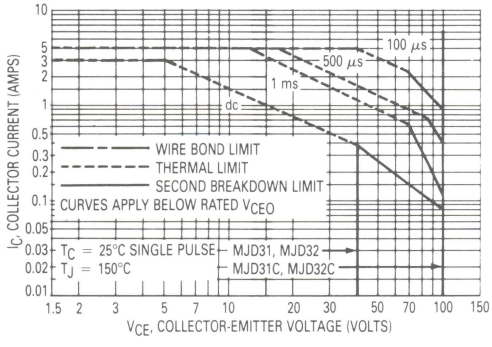

Figure 10. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 9. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

Complementary Power Transistors

DPAK For Surface Mount Applications

NPN
MJD41C
PNP
MJD42C

Designed for general purpose amplifier and low speed switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Electrically Similar to Popular TIP41 and TIP42 Series
- Monolithic Construction With Built-in Base-Emitter Resistors

SILICON
POWER TRANSISTORS
6 AMPERES
100 VOLTS
20 WATTS

CASE 369A-04



CASE 369-03

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



MAXIMUM RATINGS

Rating	Symbol	MJD41C MJD42C	Unit
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous Peak	I_C	6 10	Adc
Base Current	I_B	2	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.16	Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.75 0.014	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.25	°C/W
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	71.4	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	$V_{CEO(sus)}$	100	—	Vdc
Collector Cutoff Current (V_{CE} = 60 Vdc, I_B = 0)	I_{CEO}	—	50	μAdc
Collector Cutoff Current (V_{CE} = 100 Vdc, V_{EB} = 0)	I_{CES}	—	10	μAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)	I_{EBO}	—	0.5	mAdc

* These ratings are applicable when surface mounted on the minimum pad size recommended.

(continued)

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 0.3 Adc, V_{CE} = 4 Vdc) (I_C = 3 Adc, V_{CE} = 4 Vdc)	h_{FE}	 30 15	 — 75	—
Collector-Emitter Saturation Voltage (I_C = 6 Adc, I_B = 600 mAdc)	$V_{CE(sat)}$	—	1.5	Vdc
Base-Emitter On Voltage (I_C = 6 Adc, V_{CE} = 4 Vdc)	$V_{BE(on)}$	—	2	Vdc
DYNAMIC CHARACTERISTICS				
Current Gain — Bandwidth Product (2) (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)	f_T	3	—	MHz
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1 kHz)	$\|h_{fe}\|$	20	—	—

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
(2) $f_T = |h_{fe}| \bullet f_{test}$

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

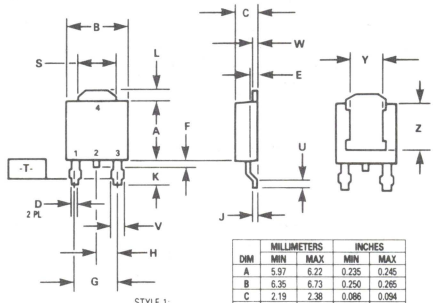

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD41C-1)

TYPICAL CHARACTERISTICS

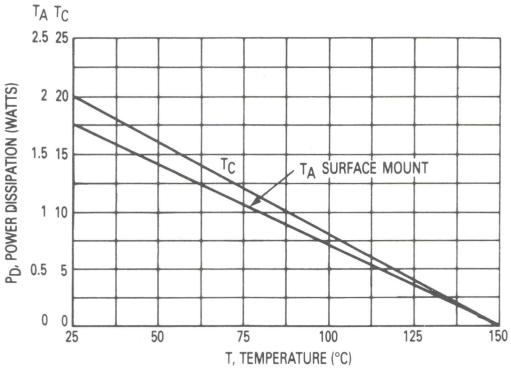

Figure 1. Power Derating

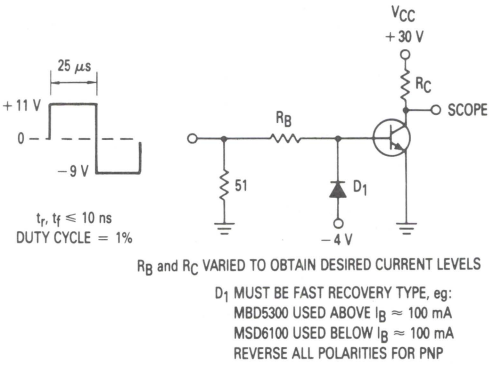

Figure 2. Switching Time Test Circuit

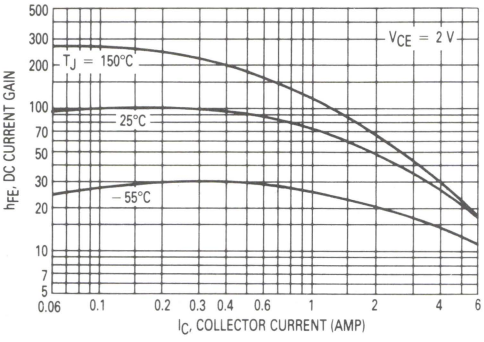

Figure 3. DC Current Gain

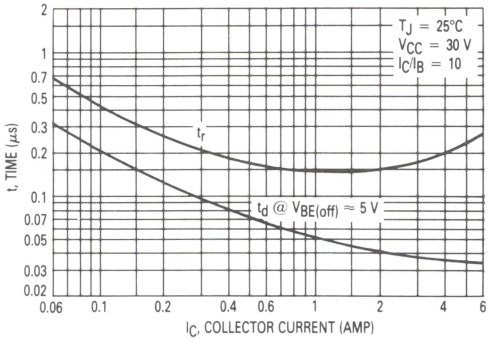

Figure 4. Turn-On Time

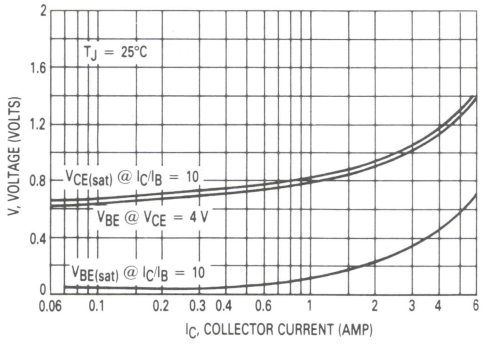

Figure 5. "On" Voltages

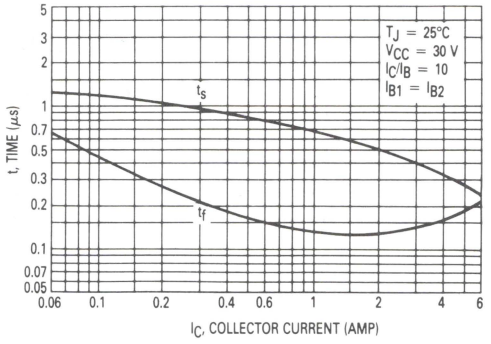

Figure 6. Turn-Off Time

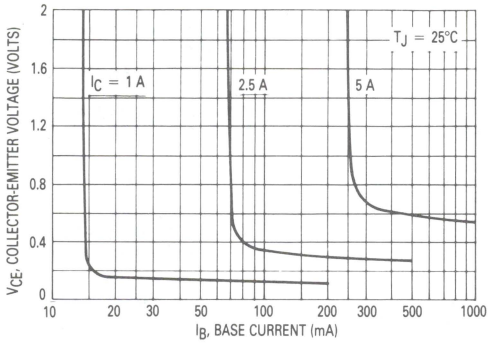

Figure 7. Collector Saturation Region

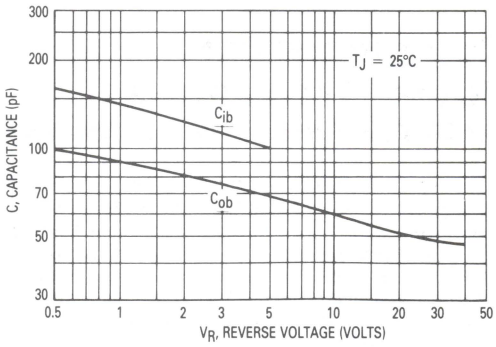

Figure 8. Capacitance

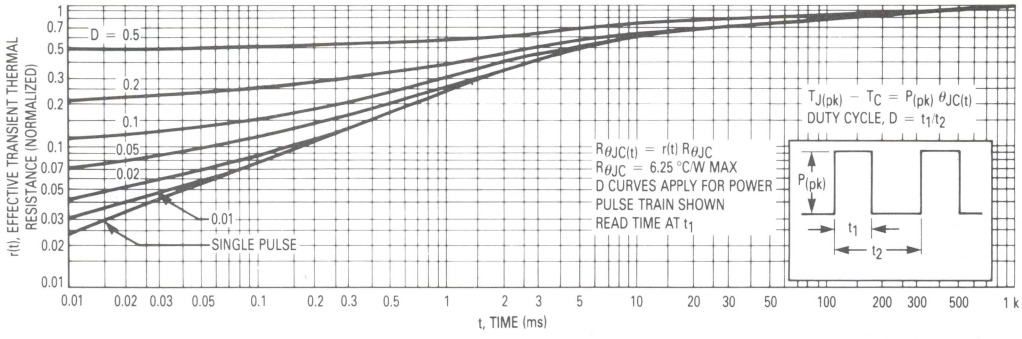

Figure 9. Thermal Response

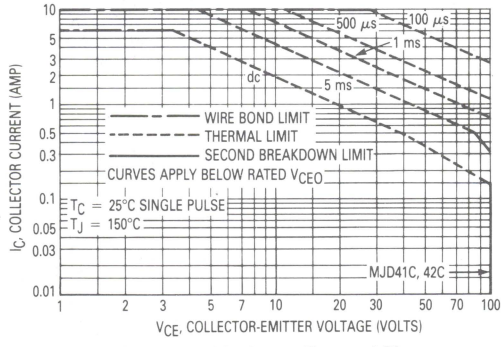

Figure 10. Maximum Forward Bias Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in Figure 9. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

Complementary Power Transistors

DPAK For Surface Mount Applications

NPN
MJD44H11
PNP
MJD45H11

SILICON
POWER TRANSISTORS
8 AMPERES
80 VOLTS
20 WATTS

. . . for general purpose power and switching such as output or driver stages in applications such as switching regulators, converters, and power amplifiers.

- Lead Formed for Surface Mount Application in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel for Surface Mount ("RL" Suffix)
- Electrically Similar to Popular D44H/D45H Series
- Low Collector Emitter Saturation Voltage — $V_{CE(sat)}$ = 1 Volt Max @ 8 Amperes
- Fast Switching Speeds
- Complementary Pairs Simplifies Designs

CASE 369A-04



CASE 369-03

MAXIMUM RATINGS

Rating	Symbol	D44H11 or D45H11	Unit
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous Peak	I_C	8 16	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	 20 0.16	 Watts W/°C
Total Power Dissipation (1) @ T_A = 25°C Derate above 25°C	P_D	 1.75 0.014	 Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to 150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.25	°C/W
Thermal Resistance, Junction to Ambient (1)	$R_{\theta JA}$	71.4	°C/W
Lead Temperature for Soldering	T_L	260	°C

(1) These ratings are applicable when surface mounted on the minimum pad size recommended.

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (I_C = 30 mA, I_B = 0)		$V_{CEO(sus)}$	80	—	—	Vdc
Collector Cutoff Current (V_{CE} = Rated V_{CEO}, V_{BE} = 0)		I_{CES}	—	—	10	μA
Emitter Cutoff Current (V_{EB} = 5 Vdc)		I_{EBO}	—	—	50	μA
ON CHARACTERISTICS						
Collector-Emitter Saturation Voltage (I_C = 8 Adc, I_B = 0.4 Adc)		$V_{CE(sat)}$	—	—	1	Vdc
Base-Emitter Saturation Voltage (I_C = 8 Adc, I_B = 0.8 Adc)		$V_{BE(sat)}$	—	—	1.5	Vdc
DC Current Gain (V_{CE} = 1 Vdc, I_C = 2 Adc)		h_{FE}	60	—	—	—
DC Current Gain (V_{CE} = 1 Vdc, I_C = 4 Adc)			40	—	—	
DYNAMIC CHARACTERISTICS						
Collector Capacitance (V_{CB} = 10 Vdc, f_{test} = 1 MHz)	MJD44H11	C_{cb}	—	130	—	pF
	MJD45H11		—	230	—	
Gain Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 20 MHz)	MJD44H11	f_T	—	50	—	MHz
	MJD45H11		—	40	—	
SWITCHING TIMES						
Delay and Rise Times (I_C = 5 Adc, I_{B1} = 0.5 Adc)	MJD44H11	$t_d + t_r$	—	300	—	ns
	MJD45H11		—	135	—	
Storage Time (I_C = 5 Adc, I_{B1} = I_{B2} = 0.5 Adc)	MJD44H11	t_s	—	500	—	ns
	MJD45H11		—	500	—	
Fall Time (I_C = 5 Adc, I_{B1} = I_{B2} = 0.5 Adc)	MJD44H11	t_f	—	140	—	ns
	MJD45H11		—	100	—	

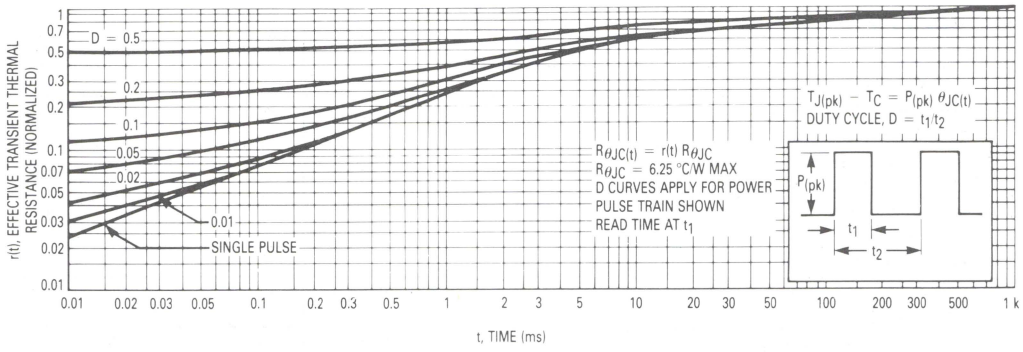

Figure 1. Thermal Response

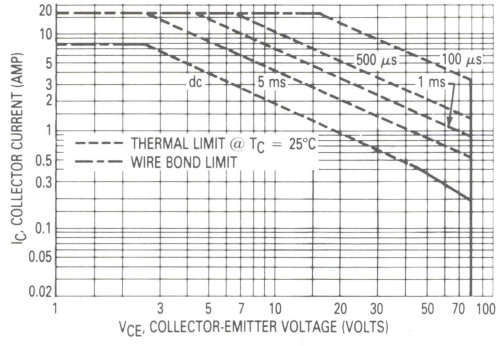

Figure 2. Maximum Forward Bias Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in Figure 1. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

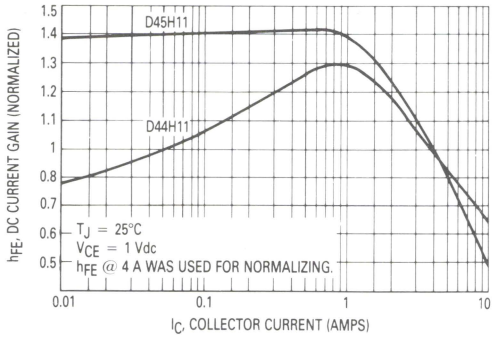

Figure 3. Normalized DC Current Gain

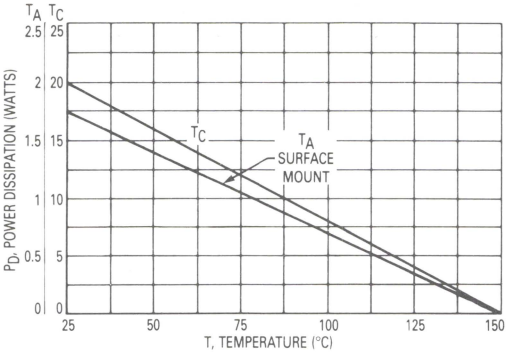

Figure 4. Power Derating

OUTLINE DIMENSIONS

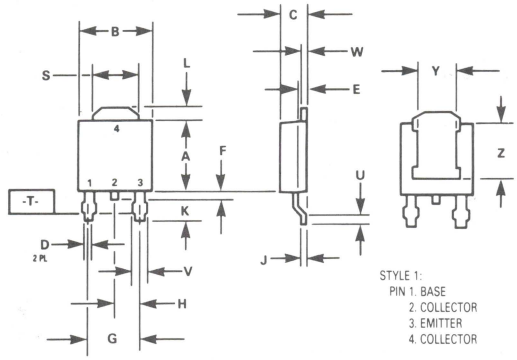

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
   ⌖ | 0.13 (0.005) Ⓜ | T |
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	6.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

CASE 369A-04

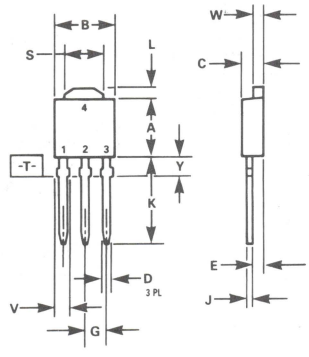

NOTES
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
   ⌖ | 0.13 (0.005) Ⓜ | T |
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

CASE 369-03

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD44H11-1)

3

High Voltage Power Transistors

DPAK For Surface Mount Applications

MJD47
MJD50

NPN SILICON
POWER TRANSISTORS
1 AMPERE
250, 400 VOLTS
15 WATTS

Designed for line operated audio output amplifier, switchmode power supply drivers and other switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Electrically Similar to Popular TIP47, and TIP50
- 250 and 400 V (Min) — $V_{CEO(sus)}$
- 1 A Rated Collector Current

CASE 369A-04

CASE 369-03

MAXIMUM RATINGS

Rating	Symbol	MJD47	MJD50	Unit
Collector-Emitter Voltage	V_{CEO}	250	400	Vdc
Collector-Base Voltage	V_{CB}	350	500	Vdc
Emitter-Base Voltage	V_{EB}	5		Vdc
Collector Current — Continuous Peak	I_C	1 2		Adc
Base Current	I_B	0.6		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.56 0.0125		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit	
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.33	°C/W	
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	80	°C/W	
Lead Temperature for Soldering Purpose	T_L	260	°C	

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	MJD47 MJD50	$V_{CEO(sus)}$	250 400	— —	Vdc
Collector Cutoff Current (V_{CE} = 150 Vdc, I_B = 0) (V_{CE} = 300 Vdc, I_B = 0)	 MJD47 MJD50	I_{CEO}	 — —	 0.2 0.2	mAdc

* When surface mounted on minimum pad sizes recommended.
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

(continued)

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS — continued					
Collector Cutoff Current		I_{CES}			mAdc
(V_{CE} = 350 Vdc, V_{BE} = 0)	MJD47		—	0.1	
(V_{CE} = 500 Vdc, V_{BE} = 0)	MJD50		—	0.1	
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)		I_{EBO}	—	1	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 0.3 Adc, V_{CE} = 10 Vdc)			30	150	
(I_C = 1 Adc, V_{CE} = 10 Vdc)			10	—	
Collector-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.2 Adc)		$V_{CE(sat)}$	—	1	Vdc
Base-Emitter On Voltage (I_C = 1 Adc, V_{CE} = 10 Vdc)		$V_{BE(on)}$	—	1.5	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain — Bandwidth Product (I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 2 MHz)		f_T	10	—	MHz
Small-Signal Current Gain (I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		h_{fe}	25	—	—

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS

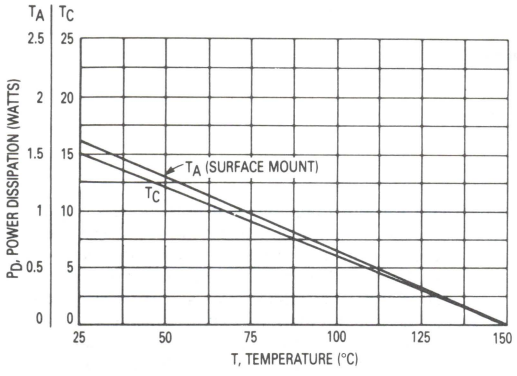

Figure 1. Power Derating

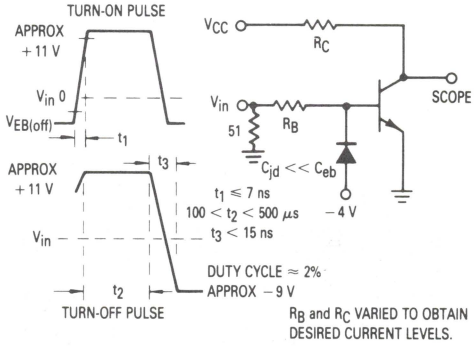

Figure 2. Switching Time Equivalent Circuit

3

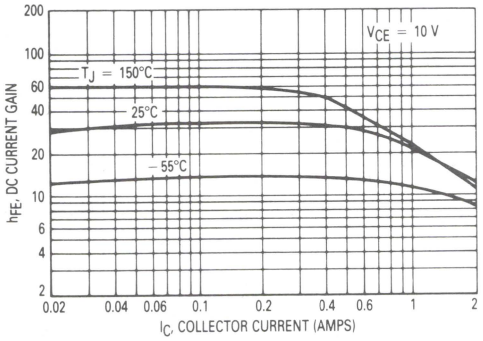

Figure 3. DC Current Gain

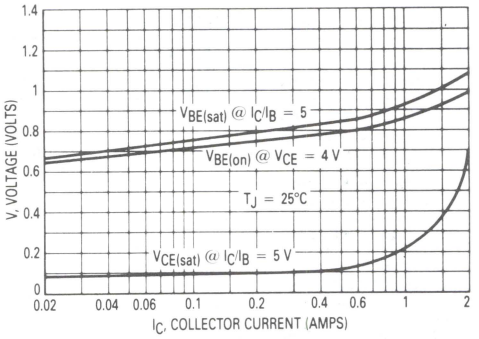

Figure 4. "On" Voltages

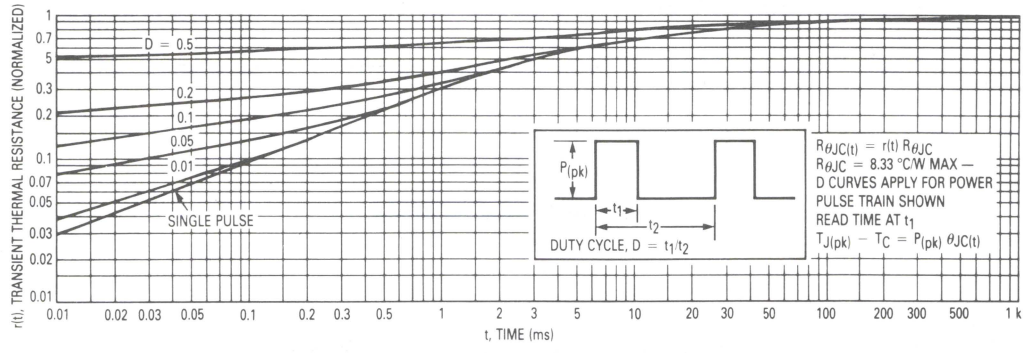

Figure 5. Thermal Response

3

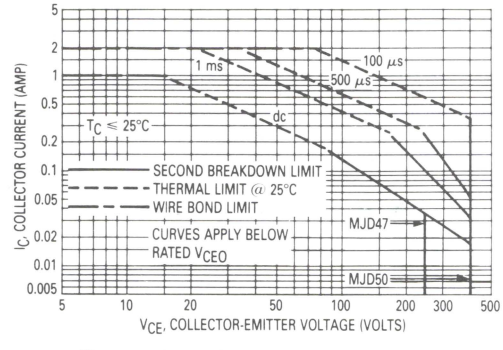

Figure 6. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

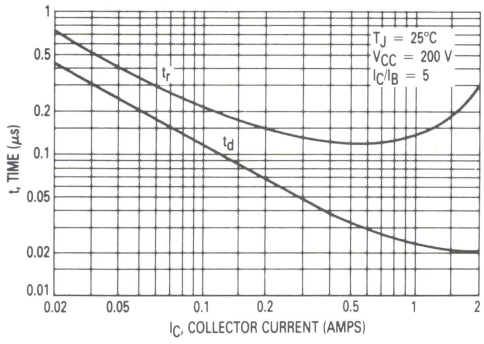

Figure 7. Turn-On Time

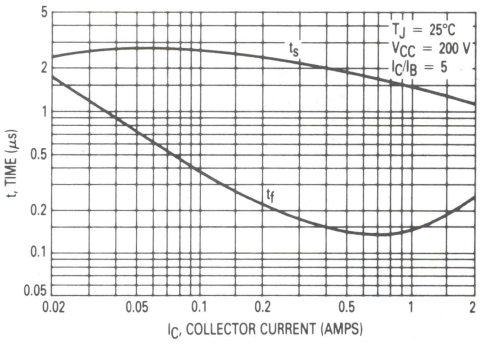

Figure 8. Turn-Off Time

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ | 0.13 (0.005) Ⓜ | T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

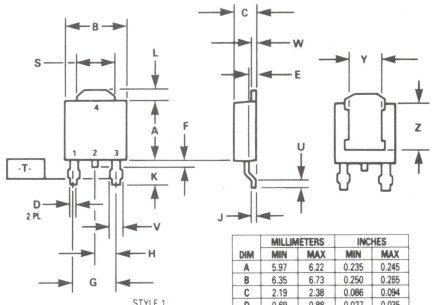

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	6.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ | 0.13 (0.005) Ⓜ | T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD47-1)

3

Complementary Darlington Power Transistors

DPAK For Surface Mount Applications

NPN
MJD112
PNP
MJD117

SILICON
POWER TRANSISTORS
2 AMPERES
100 VOLTS
20 WATTS

Designed for general purpose power and switching such as output or driver stages in applications such as switching regulators, convertors, and power amplifiers.

- Lead Formed for Surface Mount Application in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Surface Mount Replacements for TIP110–TIP117 Series
- Monolithic Construction With Built-in Base-Emitter Shunt Resistors
- High DC Current Gain — h_{FE} = 2500 (Typ) @ I_C = 2 Adc
- Complementary Pairs Simplifies Designs

CASE 369A-04



CASE 369-03

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



MAXIMUM RATINGS

Rating	Symbol	MJD112 MJD117	Unit
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous Peak	I_C	2 4	Adc
Base Current	I_B	50	mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.16	Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.75 0.014	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.25	°C/W
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	71.4	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	$V_{CEO(sus)}$	100	—	Vdc
Collector Cutoff Current (V_{CE} = 50 Vdc, I_B = 0)	I_{CEO}	—	20	μAdc
Collector Cutoff Current (V_{CB} = 100 Vdc, I_E = 0)	I_{CBO}	—	20	μAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)	I_{EBO}	—	2	mAdc

* These ratings are applicable when surface mounted on the minimum pad sizes recommended. (continued)
(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

***ELECTRICAL CHARACTERISTICS — continued** (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS — continued				
Collector-Cutoff Current (V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)	I_{CEX}	 — —	 10 500	μAdc
Collector-Cutoff Current (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	—	10	μAdc
Emitter-Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)	I_{EBO}	—	2	mAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 0.5 Adc, V_{CE} = 3 Vdc) (I_C = 2 Adc, V_{CE} = 3 Vdc) (I_C = 4 Adc, V_{CE} = 3 Vdc)	h_{FE}	 500 1000 200	 — 12,000 —	—
Collector-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 8 mAdc) (I_C = 4 Adc, I_B = 40 mAdc)	$V_{CE(sat)}$	 — —	 2 3	Vdc
Base-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 40 mAdc)	$V_{BE(sat)}$	—	4	Vdc
Base-Emitter On Voltage (I_C = 2 Adc, V_{CE} = 3 Vdc)	$V_{BE(on)}$	—	2.8	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain — Bandwidth Product (I_C = 0.75 Adc, V_{CE} = 10 Vdc, f = 1 MHz)	f_T	25	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz) MJD117 MJD112	C_{ob}	 — —	 200 100	pF

*Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

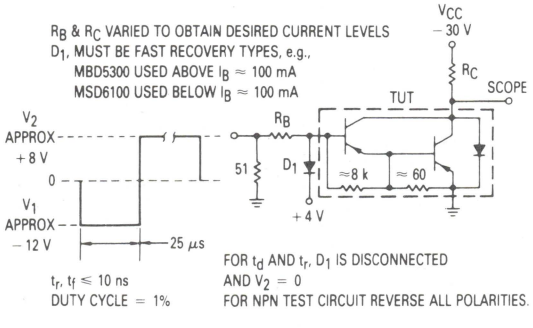

Figure 1. Switching Times Test Circuit

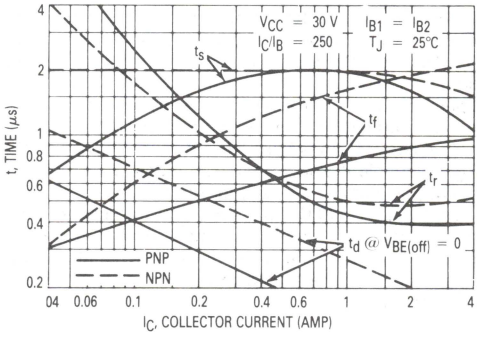

Figure 2. Switching Times

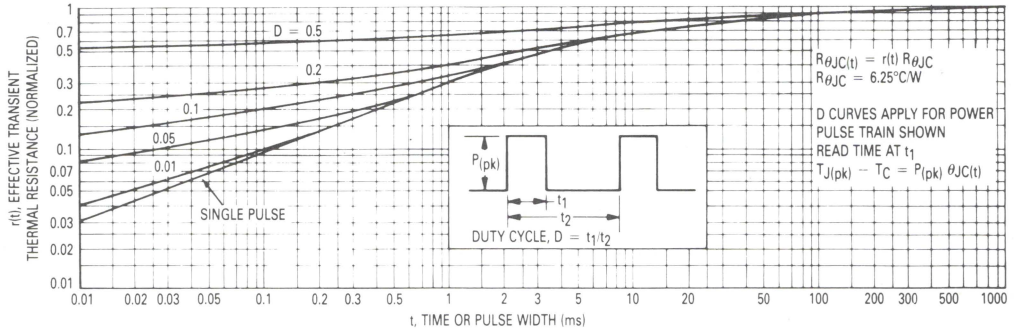

Figure 3. Thermal Response

ACTIVE-REGION SAFE-OPERATING AREA

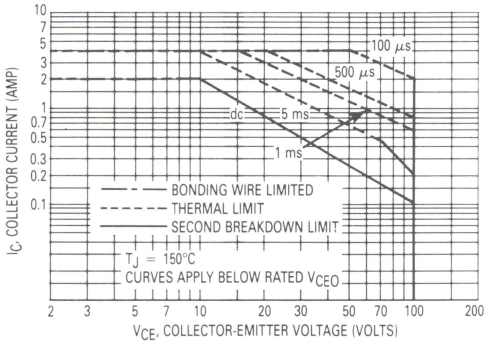

Figure 4. Maximum Rated Forward Biased Safe Operating Area

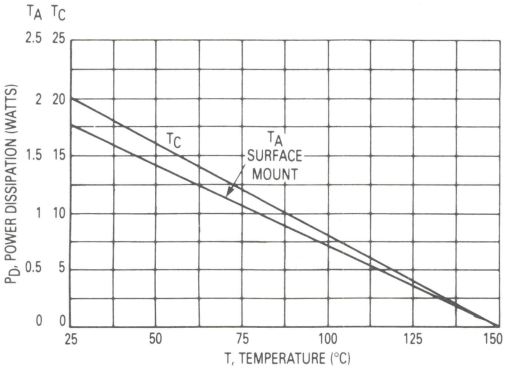

Figure 5. Power Derating

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 5 and 6 is based on $T_{J(pk)} = 150°C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

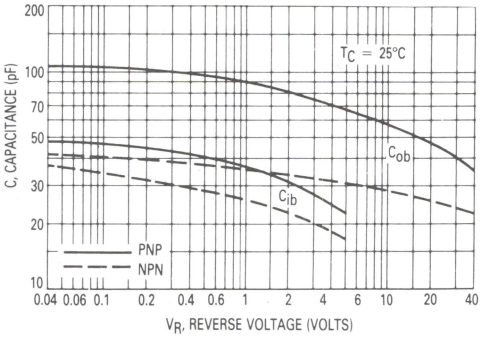

Figure 6. Capacitance

TYPICAL ELECTRICAL CHARACTERISTICS

NPN MJD112

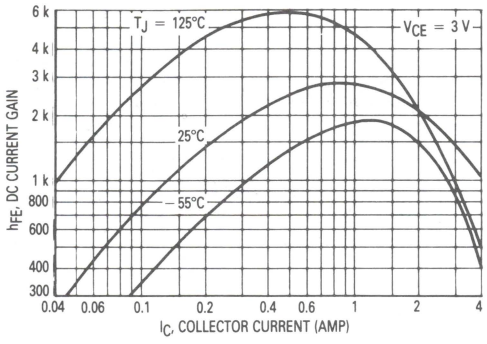

PNP MJD117

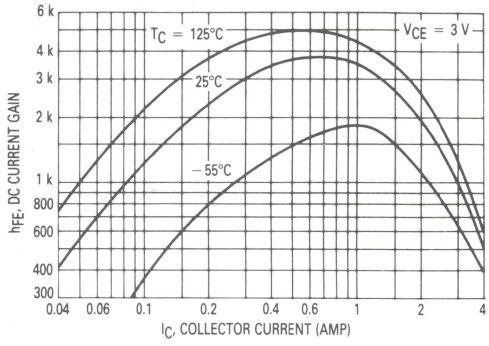

Figure 7. DC Current Gain

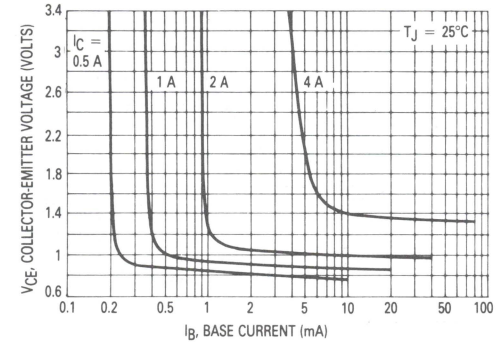

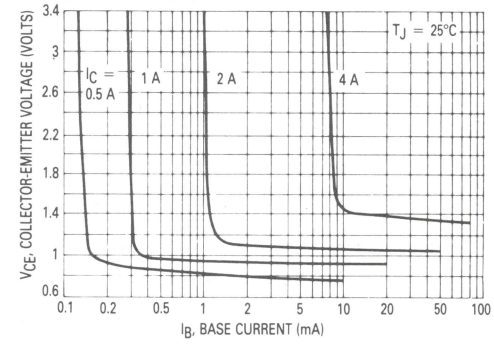

Figure 8. Collector Saturation Region

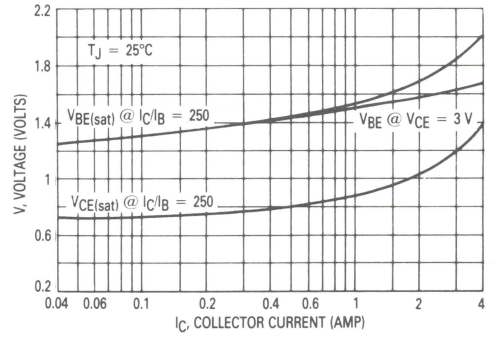

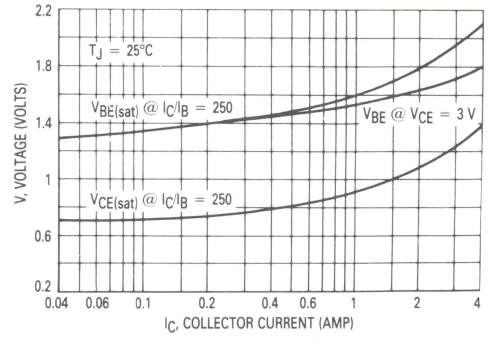

Figure 9. "On" Voltages

3

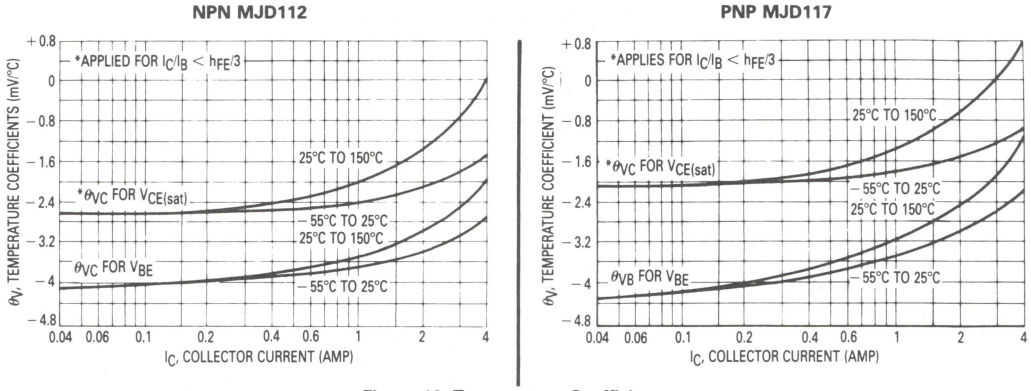

Figure 10. Temperature Coefficients

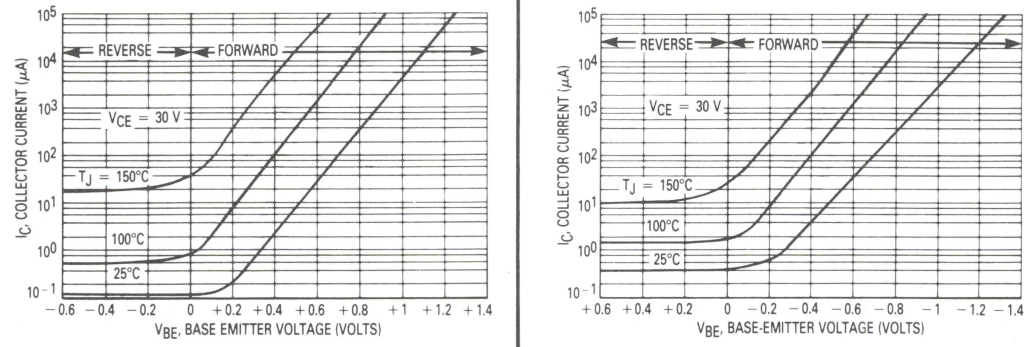

Figure 11. Collector Cut-Off Region

Figure 12. Darlington Schematic

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER:
⌖ | 0.13 (0.005) Ⓜ | T |
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

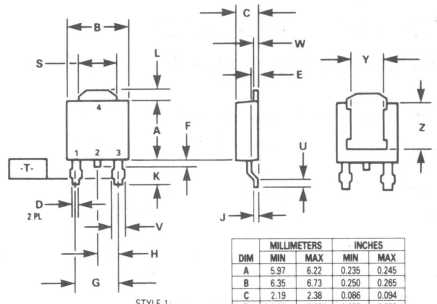

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER:
⌖ | 0.13 (0.005) Ⓜ | T |
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD112-1)

3

Complementary Darlington Power Transistors

DPAK For Surface Mount Applications

NPN
MJD122
PNP
MJD127

SILICON
POWER TRANSISTORS
8 AMPERES
100 VOLTS
20 WATTS

Designed for general purpose amplifier and low speed switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version Available in 16 mm Tape and Reel ("RL" Suffix)
- Surface Mount Replacements for 2N6040–2N6045 Series, TIP120–TIP122 Series, and TIP125–TIP127 Series
- Monolithic Construction With Built-in Base-Emitter Shunt Resistors
- High DC Current Gain — h_{FE} = 2500 (Typ) @ I_C = 4 Adc
- Complementary Pairs Simplifies Designs

CASE 369A-04

CASE 369-03

MAXIMUM RATINGS

Rating	Symbol	MJD122 MJD127	Unit
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous Peak	I_C	8 16	Adc
Base Current	I_B	120	mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.16	Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.75 0.014	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.25	°C/W
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	71.4	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (I_C = 30 mAdc, I_B = 0)	$V_{CEO(sus)}$	100	—	Vdc
Collector Cutoff Current (V_{CE} = 50 Vdc, I_B = 0)	I_{CEO}	—	10	μAdc

* These ratings are applicable when surface mounted on the minimum pad sizes recommended.

(continued)

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS — continued					
Collector Cutoff Current (V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 125°C)		I_{CEX}	 — —	 10 500	μAdc
Collector Cutoff Current (V_{CB} = 100 Vdc, I_E = 0)		I_{CBO}	—	10	μAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)		I_{EBO}	—	2	mAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 4 Adc, V_{CE} = 4 Vdc) (I_C = 8 Adc, V_{CE} = 4 Vdc)		h_{FE}	 1000 100	 12,000 —	—
Collector-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 16 mAdc) (I_C = 8 Adc, I_B = 80 mAdc)		$V_{CE(sat)}$	 — —	 2 4	Vdc
Base-Emitter Saturation Voltage (1) (I_C = 8 Adc, I_B = 80 mAdc)		$V_{BE(sat)}$	—	4.5	Vdc
Base-Emitter On Voltage (I_C = 4 Adc, V_{CE} = 4 Vdc)		$V_{BE(on)}$	—	2.8	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain-Bandwidth Product (I_C = 3 Adc, V_{CE} = 4 Vdc, f = 1 MHz)		$\|h_{fe}\|$	4	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	MJD127 MJD122	C_{ob}	 — —	 300 200	pF
Small-Signal Current Gain (I_C = 3 Adc, V_{CE} = 4 Vdc, f = 1 kHz)		h_{fe}	300	—	—

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

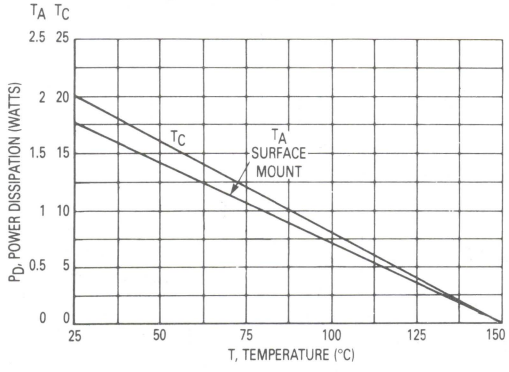

Figure 1. Power Derating

TYPICAL ELECTRICAL CHARACTERISTICS

PNP MJD127

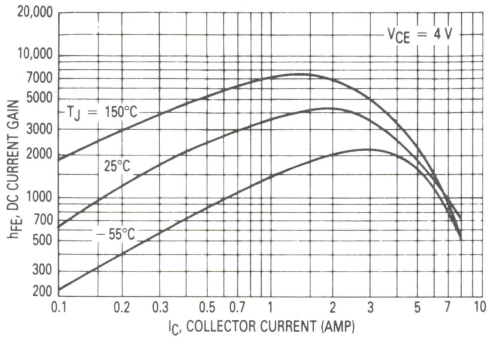

NPN MJD122

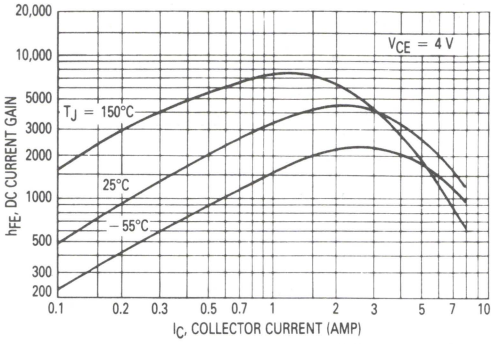

Figure 2. DC Current Gain

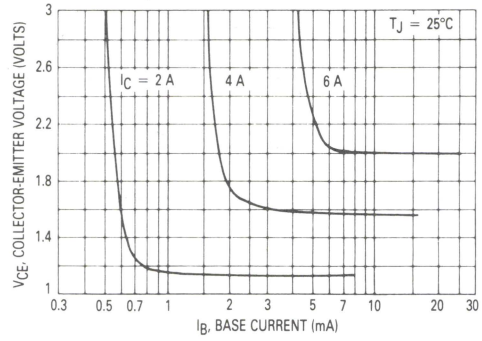

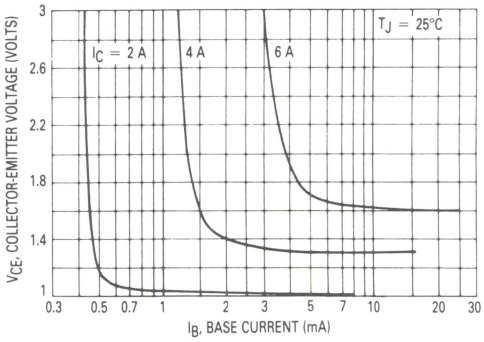

Figure 3. Collector Saturation Region

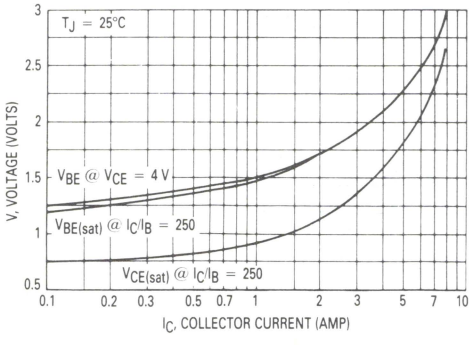

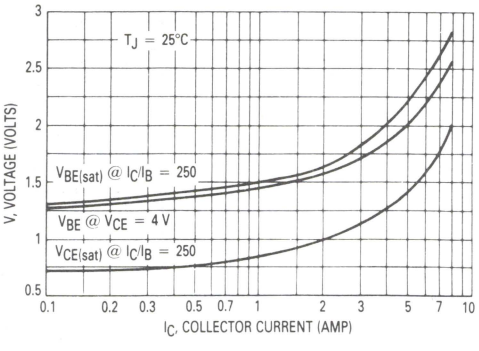

Figure 4. "On" Voltages

3

TYPICAL ELECTRICAL CHARACTERISTICS

PNP MJD127

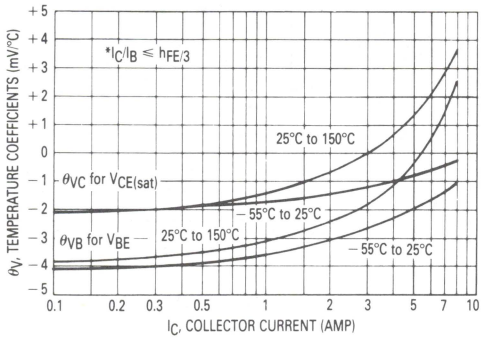

NPN MJD122

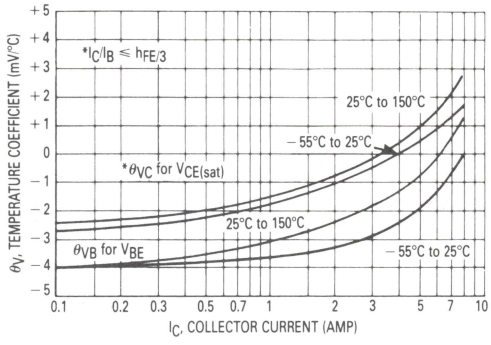

Figure 5. Temperature Coefficients

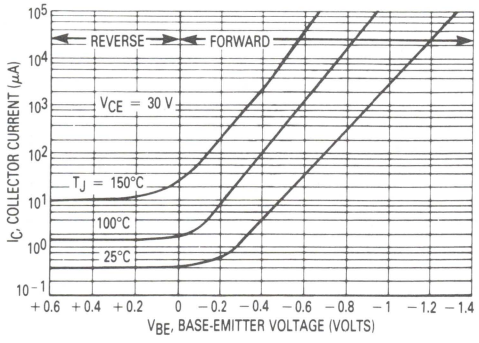

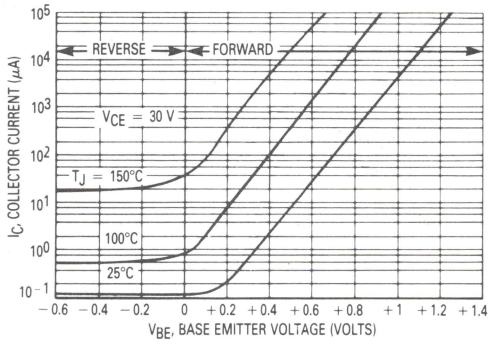

Figure 6. Collector Cut-Off Region

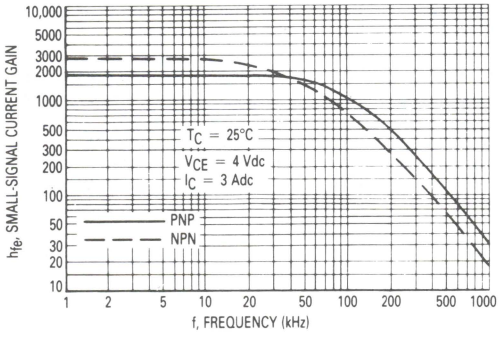

Figure 7. Small-Signal Current Gain

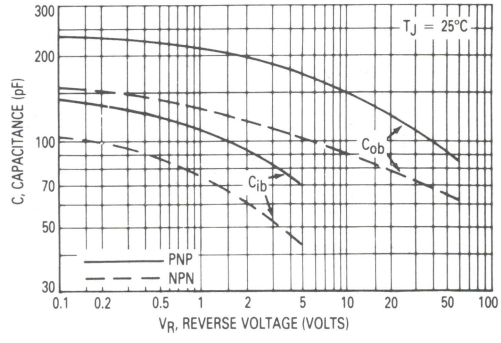

Figure 8. Capacitance

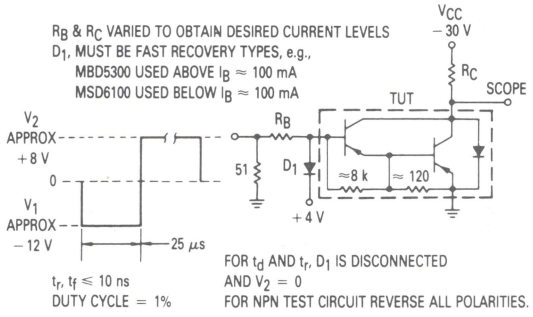

Figure 9. Switching Times Test Circuit

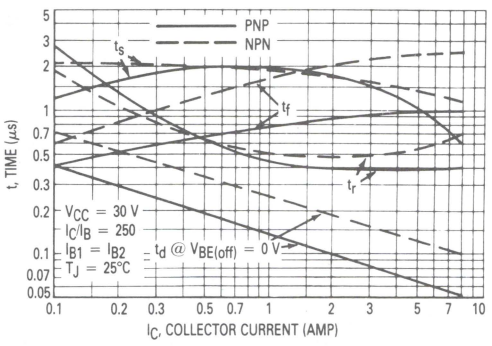

Figure 10. Switching Times

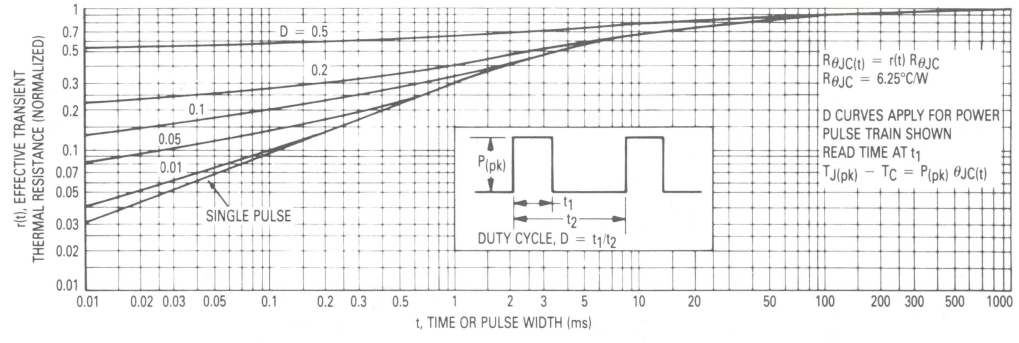

Figure 11. Thermal Response

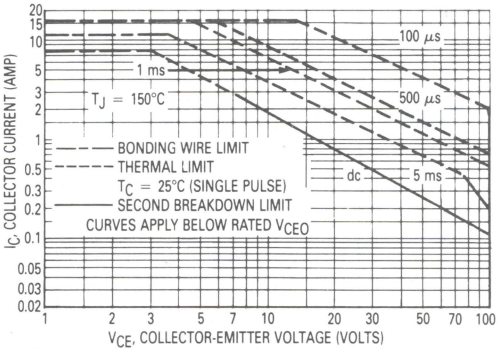

Figure 12. Maximum Forward Bias Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Figure 13. Darlington Schematic

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER: ⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

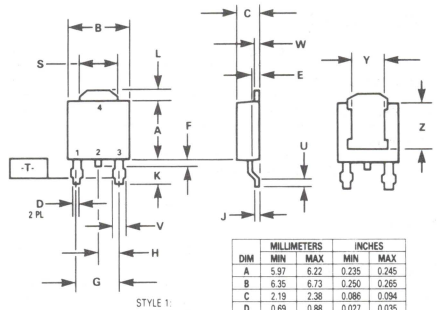

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER: ⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD122-1)

Complementary Plastic Power Transistors

NPN/PNP Silicon
DPAK For Surface Mount Applications

NPN
MJD200
PNP
MJD210

SILICON
POWER TRANSISTORS
5 AMPERES
25 VOLTS
12.5 WATTS

. . . designed for low voltage, low-power, high-gain audio amplifier applications.

- Collector-Emitter Sustaining Voltage — $V_{CEO(sus)}$ = 25 Vdc (Min) @ I_C = 10 mAdc
- High DC Current Gain — h_{FE} = 70 (Min) @ I_C = 500 mAdc
  = 45 (Min) @ I_C = 2 Adc
  = 10 (Min) @ I_C = 5 Adc
- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 0.3 Vdc (Max) @ I_C = 500 mAdc
  = 0.75 Vdc (Max) @ I_C = 2 Adc
- High Current-Gain — Bandwidth Product — f_T = 65 MHz (Min) @ I_C = 100 mAdc
- Annular Construction for Low Leakage — I_{CBO} = 100 nAdc @ Rated V_{CB}

CASE 369A-04



CASE 369-03

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Base Voltage	V_{CB}	40	Vdc
Collector-Emitter Voltage	V_{CEO}	25	Vdc
Emitter-Base Voltage	V_{EB}	8	Vdc
Collector Current — Continuous Peak	I_C	5 10	Adc
Base Current	I_B	1	Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	12.5 0.1	Watts W/°C
Total Device Dissipation @ T_A = 25°C* Derate above 25°C	P_D	1.4 0.011	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case Junction to Ambient*	$R_{\theta JC}$ $R_{\theta JA}$	10 89.3	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 10 mAdc, I_B = 0)	$V_{CEO(sus)}$	25	—	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0) (V_{CB} = 40 Vdc, I_E = 0, T_J = 125°C)	I_{CBO}	— —	100 100	nAdc μAdc
Emitter Cutoff Current (V_{BE} = 8 Vdc, I_C = 0)	I_{EBO}	—	100	nAdc

* When surface mounted on minimum pad sizes recommended.

(continued)

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≈ 2%.

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			—
(I_C = 500 mAdc, V_{CE} = 1 Vdc)			70	—	
(I_C = 2 Adc, V_{CE} = 1 Vdc)			45	180	
(I_C = 5 Adc, V_{CE} = 2 Vdc)			10	—	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			—	0.3	
(I_C = 2 Adc, I_B = 200 mAdc)			—	0.75	
(I_C = 5 Adc, I_B = 1 Adc)			—	1.8	
Base-Emitter Saturation Voltage (1) (I_C = 5 Adc, I_B = 1 Adc)		$V_{BE(sat)}$	—	2.5	Vdc
Base-Emitter On Voltage (1) (I_C = 2 Adc, V_{CE} = 1 Vdc)		$V_{BE(on)}$	—	1.6	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain — Bandwidth Product (2) (I_C = 100 mAdc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)		f_T	65	—	MHz
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	MJD200		—	80	
	MJD210		—	120	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≈ 2%.
(2) $f_T = |h_{FE}| \cdot f_{test}$

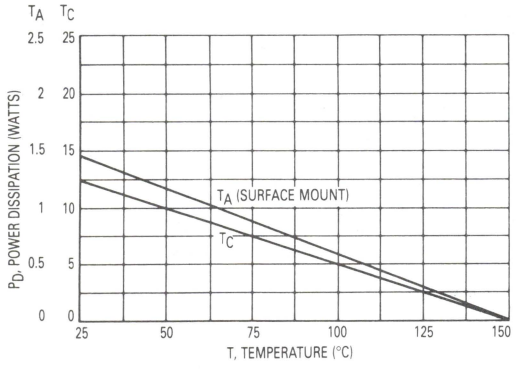

Figure 1. Power Derating

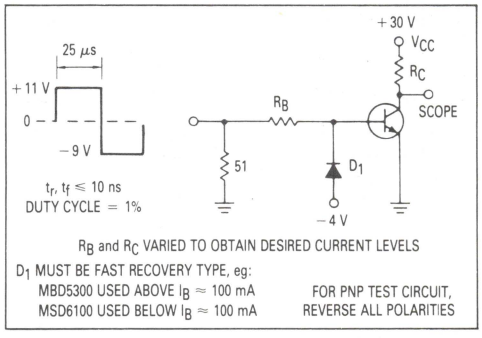

Figure 2. Switching Time Test Circuit

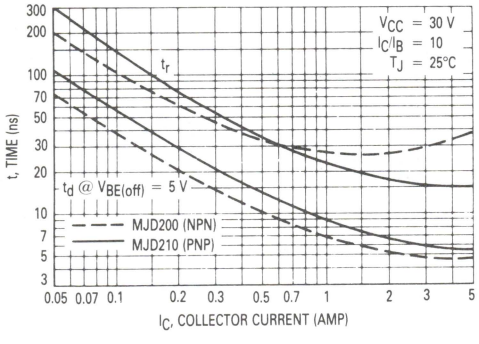

Figure 3. Turn-On Time

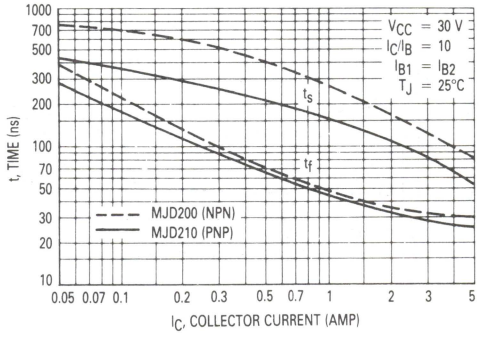

Figure 4. Turn-Off Time

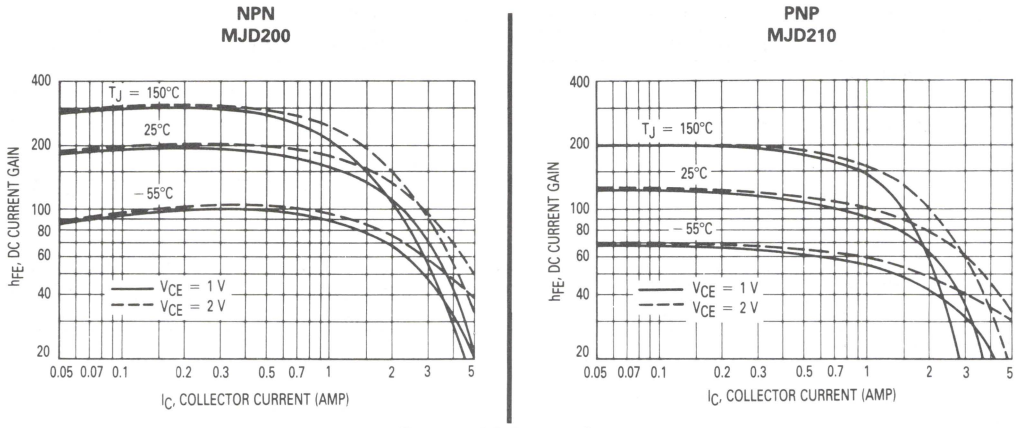

Figure 5. DC Current Gain

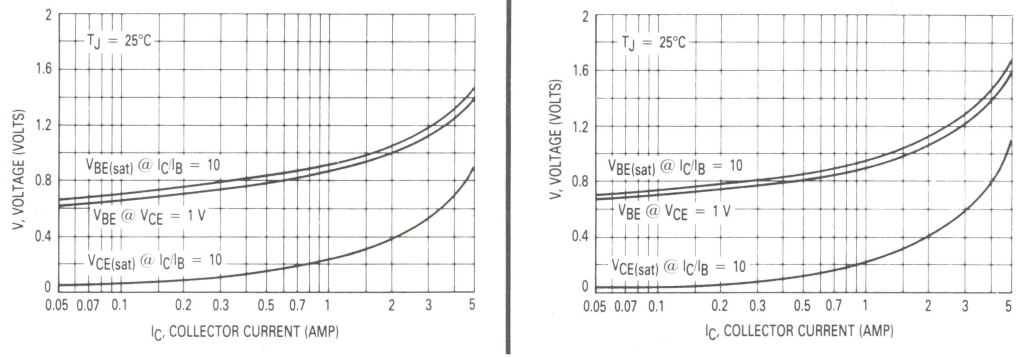

Figure 6. "On" Voltage

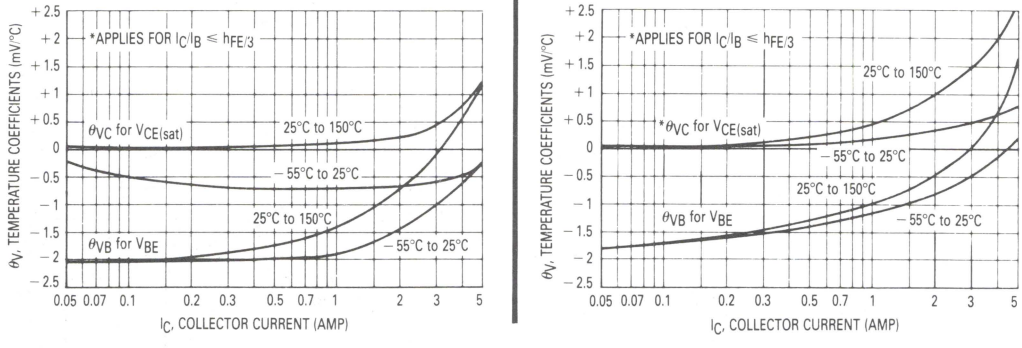

Figure 7. Temperature Coefficients

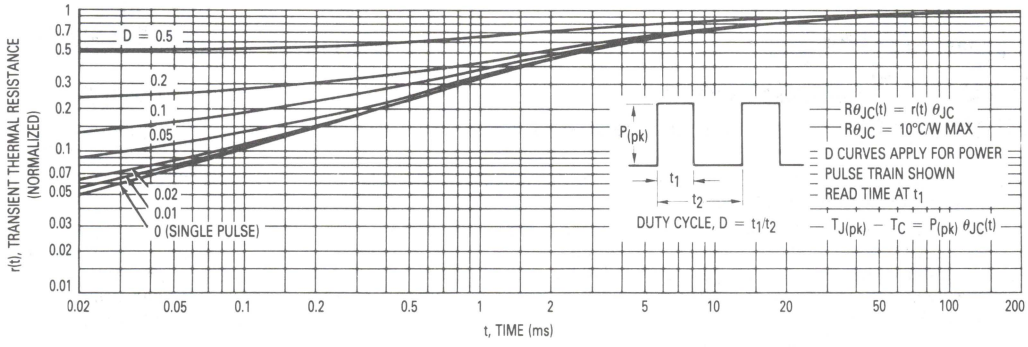

Figure 8. Thermal Response

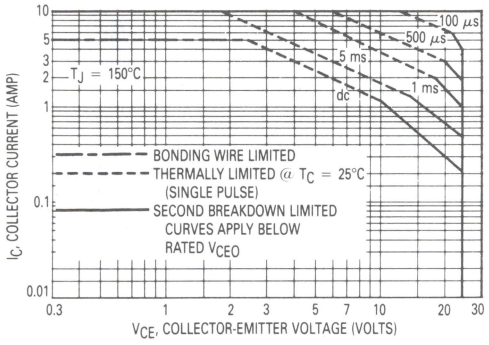

Figure 9. Active Region Safe Operating Area

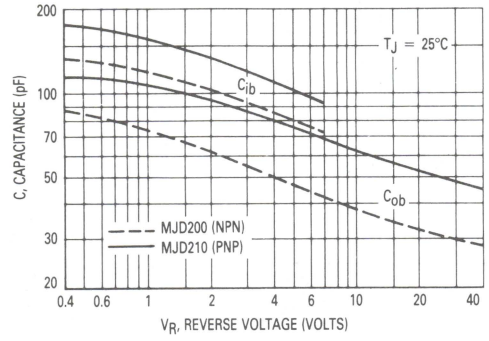

Figure 10. Capacitance

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 9 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 8. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

OUTLINE DIMENSIONS

CASE 369-03



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

CASE 369A-04



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	6.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD200-1)

3

High Voltage Power Transistors

DPAK For Surface Mount Applications

NPN
MJD340

PNP
MJD350

Designed for line operated audio output amplifier, switchmode power supply drivers and other switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Electrically Similar to Popular MJE340 and MJE350
- 300 V (Min) — $V_{CEO(sus)}$
- 0.5 A Rated Collector Current

SILICON
POWER TRANSISTORS
0.5 AMPERE
300 VOLTS
15 WATTS

CASE 369A-04



CASE 369-03

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	300	Vdc
Collector-Base Voltage	V_{CB}	300	Vdc
Emitter-Base Voltage	V_{EB}	3	Vdc
Collector Current — Continuous — Peak	I_C	0.5 0.75	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12	Watts W/°C
Total Power Dissipation* @ T_A = 25°C Derate above 25°C	P_D	1.56 0.012	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.33	°C/W
Thermal Resistance, Junction to Ambient*	$R_{\theta JA}$	80	°C/W
Lead Temperature for Soldering Purpose	T_L	260	°C

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 1 mAdc, I_B = 0)	$V_{CEO(sus)}$	300	—	Vdc
Collector Cutoff Current (V_{CB} = 300 Vdc, I_E = 0)	I_{CBO}	—	0.1	mAdc
Emitter Cutoff Current (V_{BE} = 3 Vdc, I_C = 0)	I_{EBO}	—	0.1	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 50 mAdc, V_{CE} = 10 Vdc)	h_{FE}	30	240	—

* When surface mounted on minimum pad sizes recommended.

(continued)

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS

MJD340

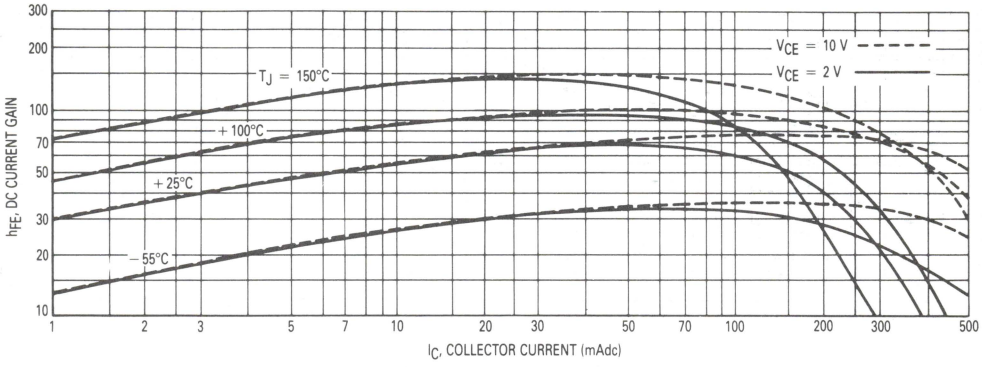

Figure 1. DC Current Gain

MJD340

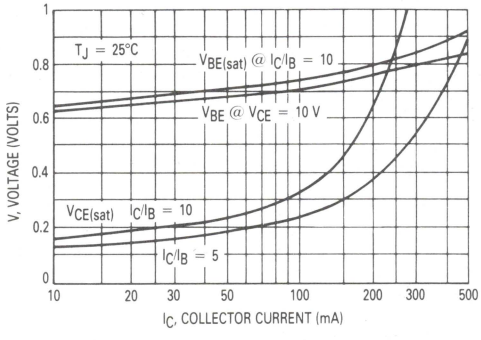

Figure 2. "On" Voltages

MJD350

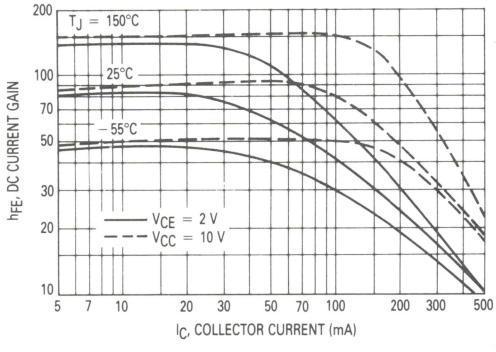

Figure 3. DC Current Gain

MJD350

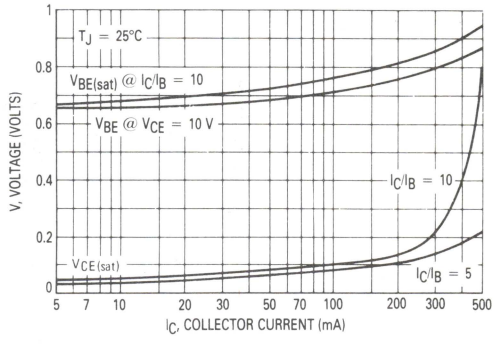

Figure 4. "On" Voltages

3

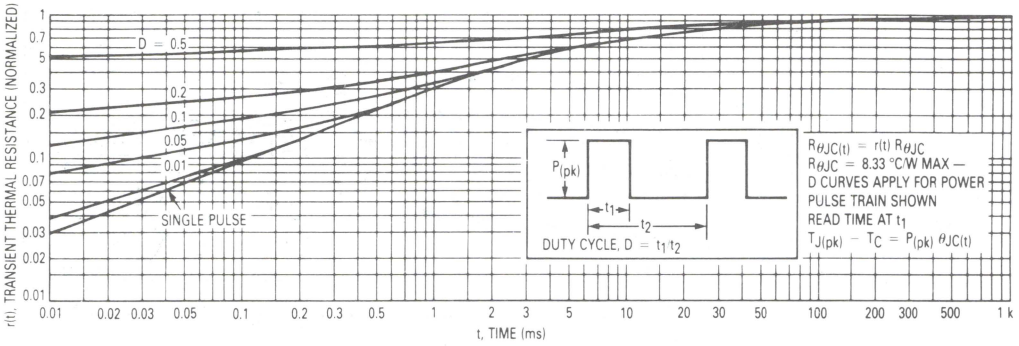

Figure 5. Thermal Response

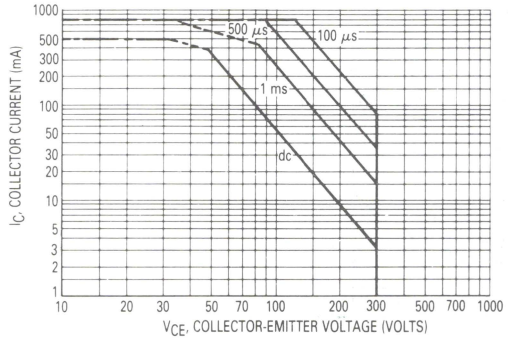

Figure 6. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

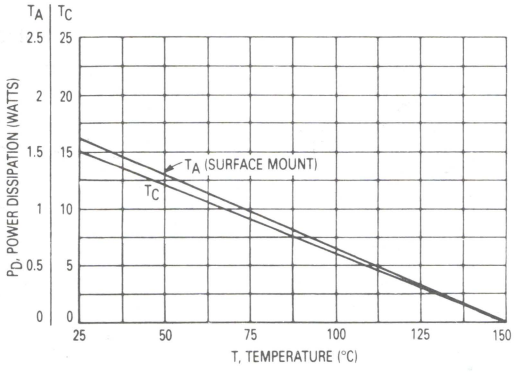

Figure 7. Power Derating

OUTLINE DIMENSIONS

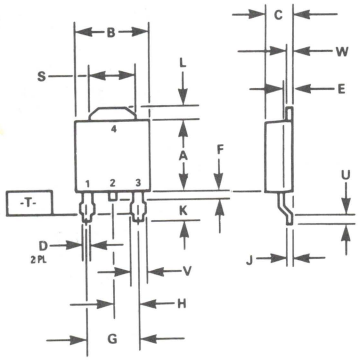

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
   ⌖ | 0.13 (0.005) Ⓜ | T |
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	6.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

CASE 369A-04

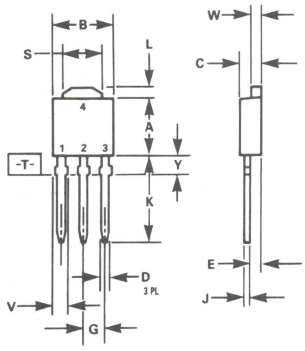

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
   ⌖ | 0.13 (0.005) Ⓜ | T |
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

CASE 369-03

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD340-1)

3

Complementary Power Transistors

DPAK For Surface Mount Applications

PNP
MJD2955
NPN
MJD3055

Designed for general purpose amplifier and low speed switching applications.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version Available in 16 mm Tape and Reel ("RL" Suffix)
- Electrically Similar to MJE2955 and MJE3055
- DC Current Gain Specified to 10 Amperes
- High Current Gain-Bandwidth Product — f_T = 2 MHz (Min) @ I_C = 500 mAdc

SILICON
POWER TRANSISTORS
10 AMPERES
60 VOLTS
20 WATTS

CASE 369A-04



CASE 369-03

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Base Voltage	V_{CB}	70	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current	I_C	10	Adc
Base Current	I_B	6	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D†	20 0.16	Watts W/°C
Total Power Dissipation (1) @ T_A = 25°C Derate above 25°C	P_D	1.75 0.014	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.25	°C/W
Thermal Resistance, Junction to Ambient (1)	$R_{\theta JA}$	71.4	°C/W

(1) These ratings are applicable when surface mounted on the minimum pad sizes recommended.
† Safe Area Curves are indicated by Figure 1. Both limits are applicable and must be observed.

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	$V_{CEO(sus)}$	60	—	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0)	I_{CEO}	—	50	μAdc
Collector Cutoff Current (V_{CE} = 70 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 70 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	 — —	 0.02 2	mAdc
Collector Cutoff Current (V_{CB} = 70 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0, T_C = 150°C)	I_{CBO}	 — —	 0.02 2	mAdc
Emitter Cutoff Current (V_{BE} = 5 Vdc, I_C = 0)	I_{EBO}	—	0.5	mAdc
ON CHARACTERISTICS				
DC Current Gain (1) (I_C = 4 Adc, V_{CE} = 4 Vdc) (I_C = 10 Adc, V_{CE} = 4 Vdc)	h_{FE}	 20 5	 100 —	—
Collector-Emitter Saturation Voltage (1) (I_C = 4 Adc, I_B = 0.4 Adc) (I_C = 10 Adc, I_B = 3.3 Adc)	$V_{CE(sat)}$	 — —	 1.1 8	Vdc
Base-Emitter On Voltage (1) (I_C = 4 Adc, V_{CE} = 4 Vdc)	$V_{BE(on)}$	—	1.8	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain-Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 500 kHz)	f_T	2	—	MHz

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

OUTLINE DIMENSIONS



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

CASE 369A-04

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD3055-1)

TYPICAL CHARACTERISTICS

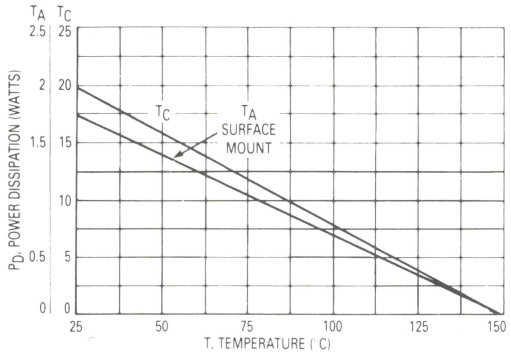

Figure 1. Power Derating

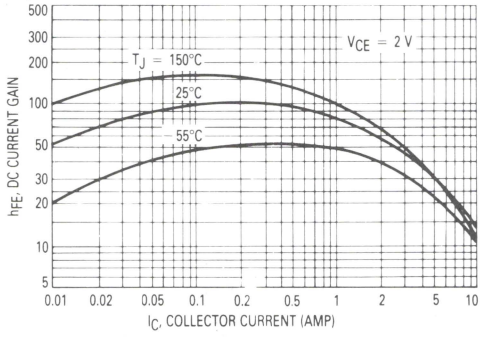

Figure 2. DC Current Gain

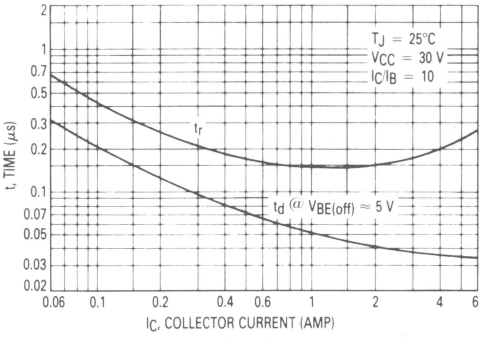

Figure 3. Turn-On Time

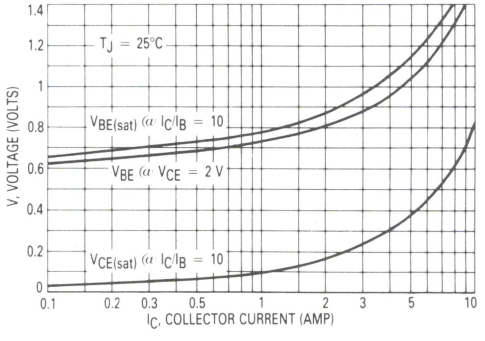

Figure 4. "On" Voltages, MJD3055

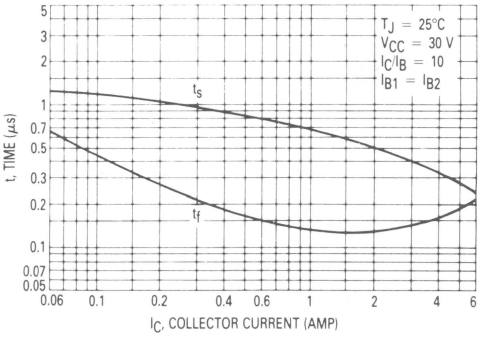

Figure 5. Turn-Off Time

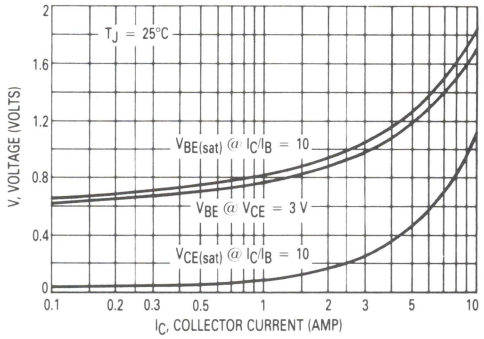

Figure 6. "On" Voltages, MJD2955

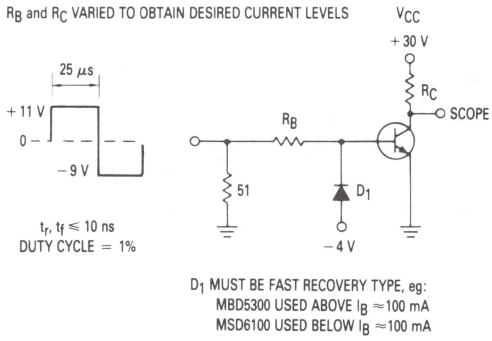

Figure 7. Switching Time Test Circuit

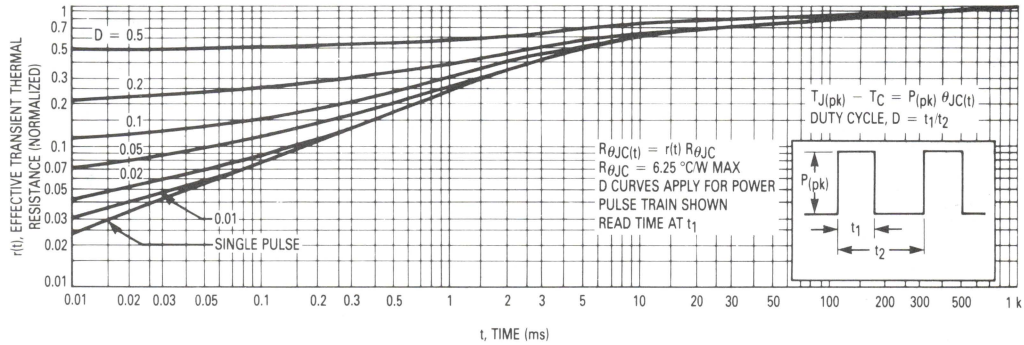

Figure 8. Thermal Response

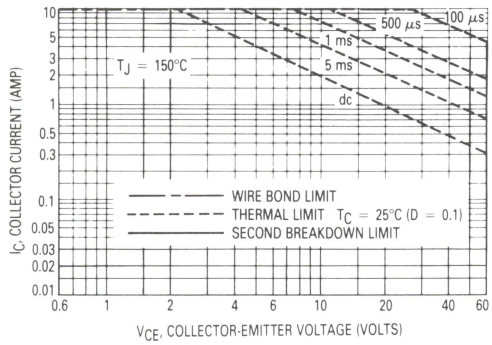

Figure 9. Maximum Forward Bias Safe Operating Area

FORWARD BIAS SAFE OPERATING AREA INFORMATION

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 9 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in Figure 8. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

Complementary Darlington Power Transistors

DPAK For Surface Mount Applications

PNP
MJD6036
NPN
MJD6039

SILICON
POWER TRANSISTORS
4 AMPERES
80 VOLTS
20 WATTS

Designed for general purpose power and switching such as output or driver stages in applications such as switching regulators, convertors, and power amplifiers.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Available on 16 mm Tape and Reel for Automatic Handling ("RL" Suffix)
- Surface Mount Replacements for 2N6034–2N6039 Series
- Monolithic Construction With Built-in Base-Emitter Shunt Resistors
- High DC Current Gain — h_{FE} = 2500 (Typ) @ I_C = 4 Adc
- Complementary Pairs Simplifies Designs

CASE 369A-04



CASE 369-03

MAXIMUM RATINGS

Rating	Symbol	MJD6036 MJD6039	Unit
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CB}	80	Vdc
Emitter-Base Voltage	V_{EB}	5	Vdc
Collector Current — Continuous Peak	I_C	4 8	Adc
Base Current	I_B	100	mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.16	Watts W/°C
Total Power Dissipation (1) @ T_A = 25°C Derate above 25°C	P_D	1.75 0.014	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.25	°C/W
Thermal Resistance, Junction to Ambient (1)	$R_{\theta JA}$	71.4	°C/W

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (I_C = 30 mAdc, I_B = 0)	$V_{CEO(sus)}$	80	—	Vdc
Collector-Cutoff Current (V_{CE} = 40 Vdc, I_B = 0)	I_{CEO}	—	10	μAdc

(1) These ratings are applicable when surface mounted on the minimum pad sizes recommended. (continued)
* Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



3

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 1 Adc, V_{CE} = 4 Vdc) (I_C = 2 Adc, V_{CE} = 4 Vdc)		h_{FE}	 1000 500	 — —	—
Collector-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 8 mAdc)		$V_{CE(sat)}$	—	2.5	Vdc
Base-Emitter On Voltage (I_C = 2 Adc, V_{CE} = 4 Vdc)		$V_{BE(on)}$	—	2.8	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 0.75 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		$\|h_{fe}\|$	25	—	—
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	MJD6036 MJD6039	C_{ob}	 — —	 200 100	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

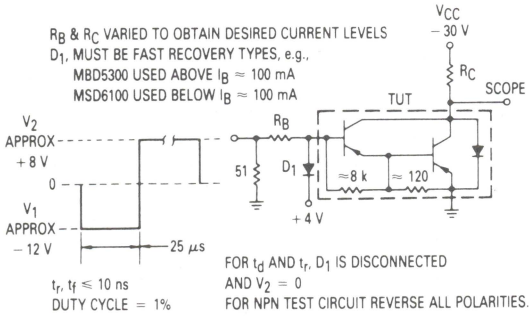

Figure 1. Switching Times Test Circuit

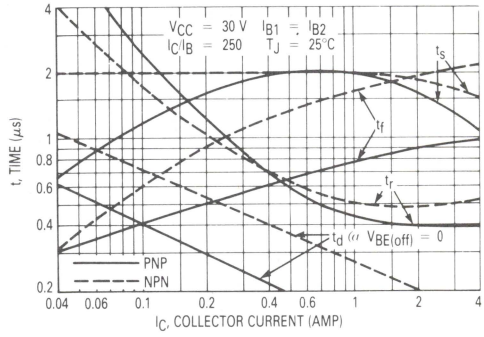

Figure 2. Switching Times

3

TYPICAL ELECTRICAL CHARACTERISTICS

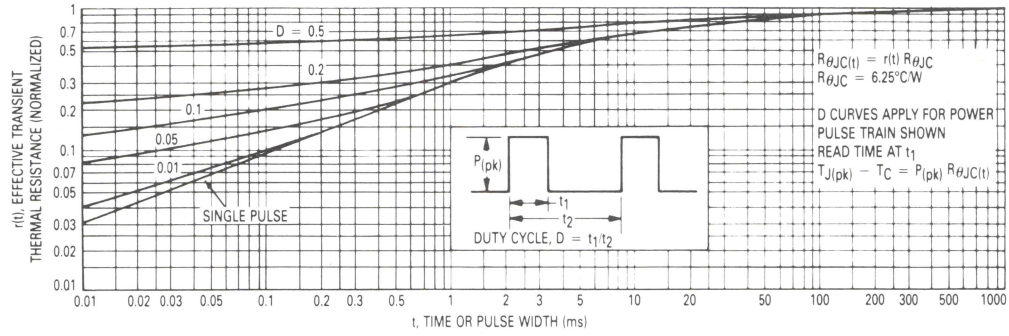

Figure 3. Thermal Response

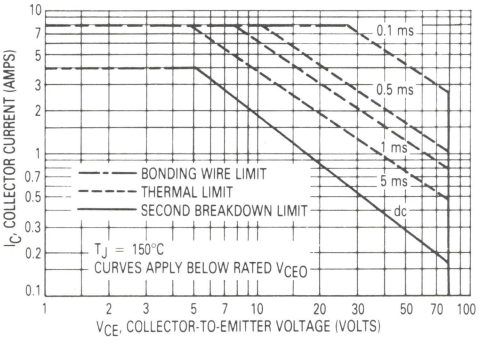

Figure 4. Maximum Rated Forward Biased Safe Operating Area

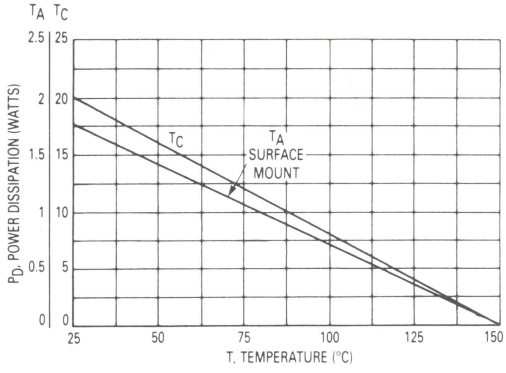

Figure 5. Power Derating

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 6 and 7 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415).

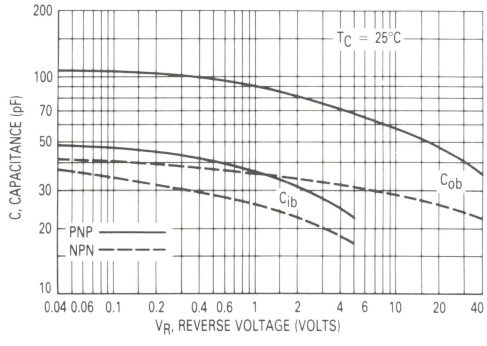

Figure 6. Capacitance

TYPICAL ELECTRICAL CHARACTERISTICS

PNP MJD6036

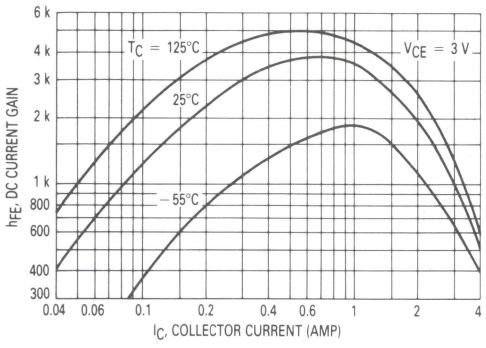

NPN MJD6039

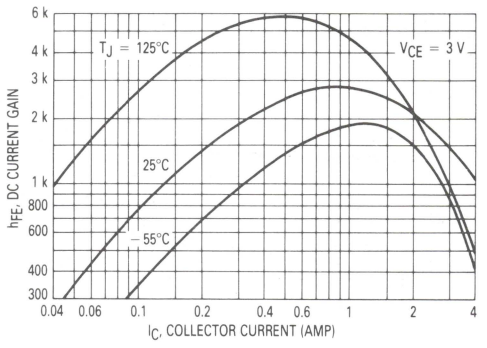

Figure 7. DC Current Gain

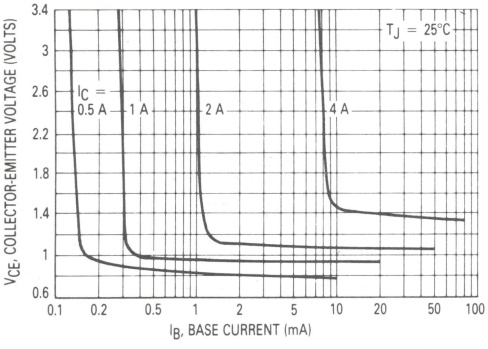

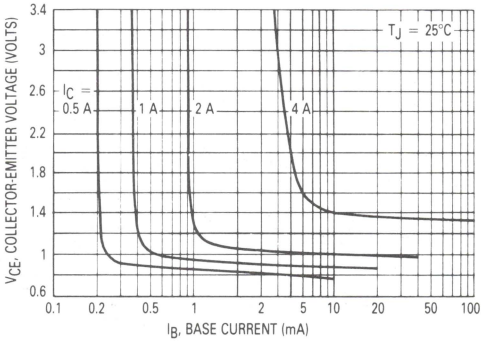

Figure 8. Collector Saturation Region

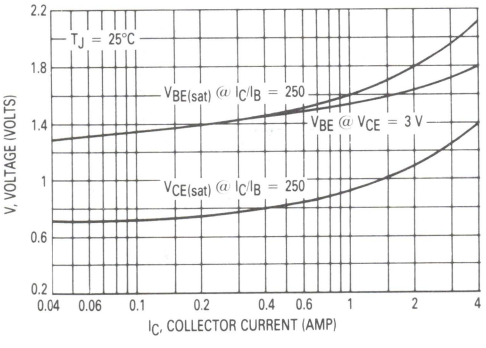

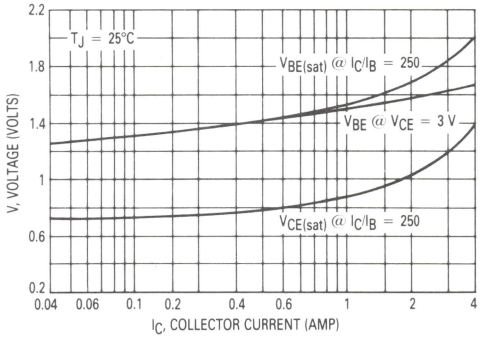

Figure 9. "On" Voltages

3

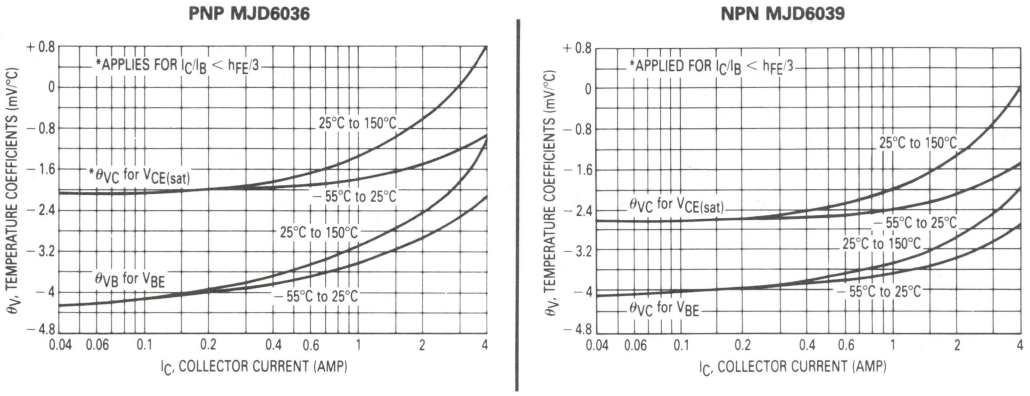

Figure 10. Temperature Coefficients

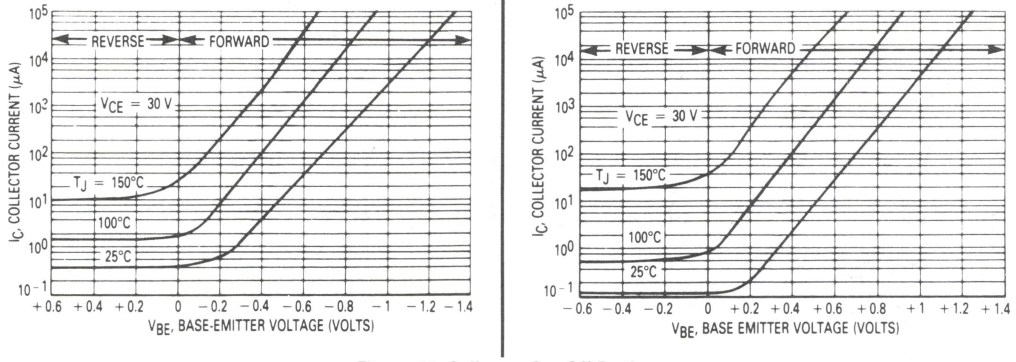

Figure 11. Collector Cut-Off Region

Figure 12. Darlington Schematic

OUTLINE DIMENSIONS

CASE 369-03



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

NOTES
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
   ⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

CASE 369A-04

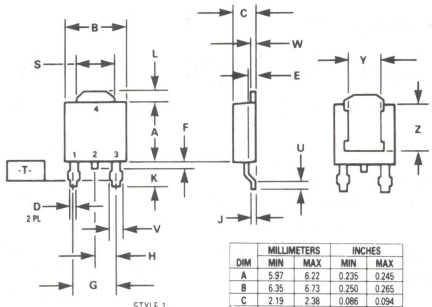

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER.
   ⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD6036-1)

3

Designer's Data Sheet

High Voltage Switchmode Series

DPAK For Surface Mount Applications

MJD13003

**NPN SILICON
POWER TRANSISTOR
1.5 AMPERES
400 VOLTS
15 WATTS**

This device is designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. It is particularly suited for 115 and 220 V SWITCHMODE applications such as switching regulators, inverters, motor controls, solenoid/relay drivers and deflection circuits.

- Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)
- Straight Lead Version in Plastic Sleeves ("-1" Suffix)
- Lead Formed Version in 16 mm Tape and Reel ("RL" Suffix)
- Reverse Biased SOA with Inductive Loads @ T_C = 100°C
- Inductive Switching Matrix 0.5 to 1.5 Amp, 25 and 100°C . . . t_c @ 1 A, 100°C is 290 ns (Typ)
- 700 V Blocking Capability
- Switching and SOA Applications Information
- Electrically Similar to the Popular MJE13003

CASE 369A-04



CASE 369-03

MINIMUM PAD SIZES RECOMMENDED FOR SURFACE MOUNTED APPLICATIONS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	Vdc
Collector-Emitter Voltage	V_{CEV}	700	Vdc
Emitter Base Voltage	V_{EBO}	9	Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	1.5 3	Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	0.75 1.5	Adc
Emitter Current — Continuous — Peak (1)	I_E I_{EM}	2.25 4.5	Adc
Total Power Dissipation @ T_A = 25°C (2) Derate above 25°C	P_D	1.56 0.0125	Watts W/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.33	°C/W
Thermal Resistance, Junction to Ambient (2)	$R_{\theta JA}$	80	°C/W
Maximum Lead Temperature for Soldering Purposes	T_L	260	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.
(2) When surface mounted on minimum pad sizes recommended.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 10 mA, I_B = 0)	$V_{CEO(sus)}$	400	—	—	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)	I_{CEV}	 — —	 — —	 0.1 2	mAdc
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)	I_{EBO}	—	—	1	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with Base Forward Biased	$I_{S/b}$	See Figure 11			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 12			
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 0.5 Adc, V_{CE} = 2 Vdc) (I_C = 1 Adc, V_{CE} = 2 Vdc)	h_{FE}	8 5	— —	40 25	—
Collector-Emitter Saturation Voltage (I_C = 0.5 Adc, I_B = 0.1 Adc) (I_C = 1 Adc, I_B = 0.25 Adc) (I_C = 1.5 Adc, I_B = 0.5 Adc) (I_C = 1 Adc, I_B = 0.25 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — — —	 — — — —	 0.5 1 3 1	Vdc
Base-Emitter Saturation Voltage (I_C = 0.5 Adc, I_B = 0.1 Adc) (I_C = 1 Adc, I_B = 0.25 Adc) (I_C = 1 Adc, I_B = 0.25 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — — —	 — — —	 1 1.2 1.1	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain — Bandwidth Product (I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 1 MHz)	f_T	4	10	—	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	—	21	—	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	V_{CC} = 125 Vdc, I_C = 1 A, I_{B1} = I_{B2} = 0.2 A, t_p = 25 μs, Duty Cycle ≤ 1%	t_d	—	0.05	0.1	μs
Rise Time		t_r	—	0.5	1	μs
Storage Time		t_s	—	2	4	μs
Fall Time		t_f	—	0.4	0.7	μs
Inductive Load, Clamped (Table 1, Figure 13)						
Storage Time	I_C = 1 A, V_{clamp} = 300 Vdc, I_{B1} = 0.2 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C	t_{sv}	—	1.7	4	μs
Crossover Time		t_c	—	0.29	0.75	μs
Fall Time		t_{fi}	—	0.15	—	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

OUTLINE DIMENSIONS

CASE 369-03



NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER: ⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.64	0.88	0.025	0.035
E	0.97	1.06	0.038	0.042
G	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	1.91	2.28	0.075	0.090

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 369A-04

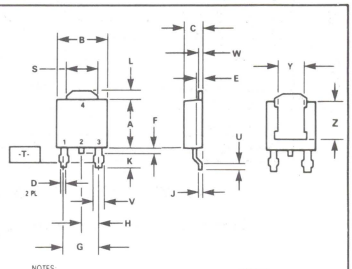

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.97	1.06	0.038	0.042
F	0.64	0.88	0.025	0.035
G	4.58 BSC		0.180 BSC	
H	2.29 BSC		0.090 BSC	
J	0.46	0.58	0.018	0.023
K	2.59	2.89	0.102	0.114
L	0.89	1.27	0.035	0.050
S	5.21	5.46	0.205	0.215
U	0.51	—	0.020	—
V	0.77	1.14	0.030	0.045
W	0.84	0.94	0.033	0.037
Y	4.32	—	0.170	—
Z	3.69	—	0.145	—

NOTES:
1. SURFACE "T" IS BOTH A DATUM AND A MOUNTING SURFACE.
2. POSITIONAL TOLERANCE FOR "D" DIAMETER: ⌖ 0.13 (0.005) Ⓜ T
3. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

Case 369-03 may be ordered by adding a "-1" suffix to the device title (i.e. MJD13003-1)

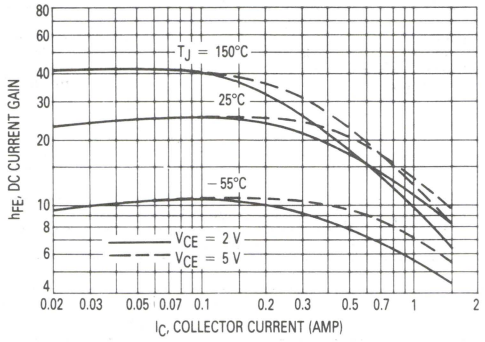

Figure 1. DC Current Gain

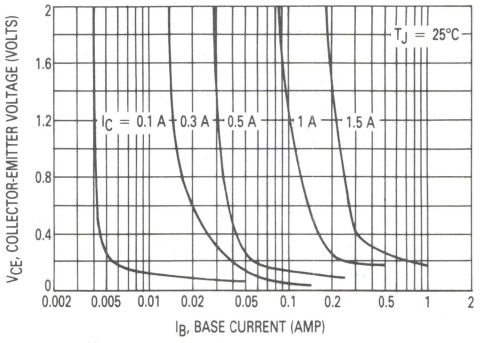

Figure 2. Collector Saturation Region

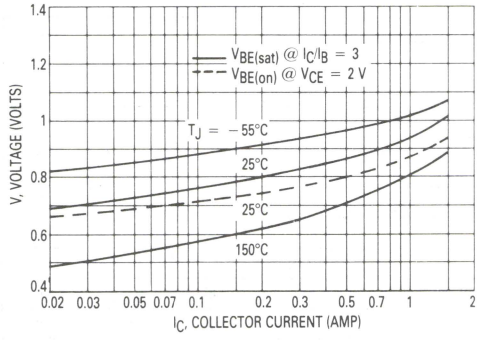

Figure 3. Base-Emitter Voltage

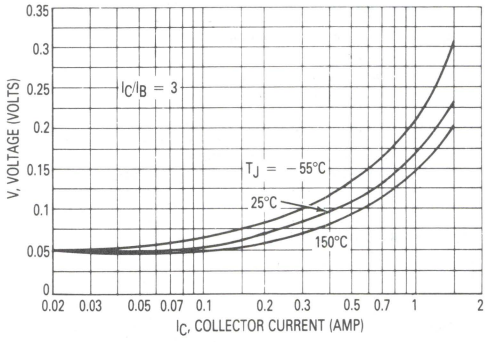

Figure 4. Collector-Emitter Saturation Region

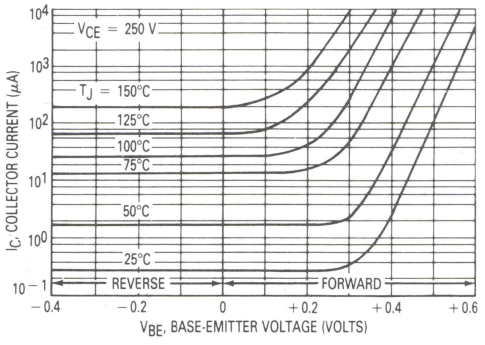

Figure 5. Collector Cutoff Region

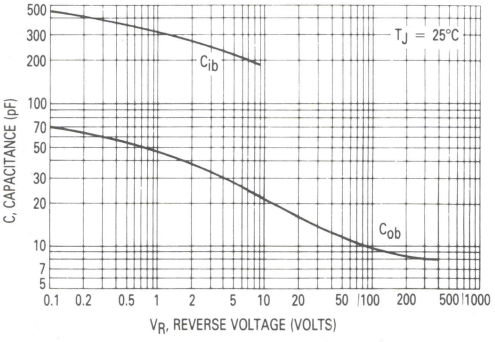

Figure 6. Capacitance

Table 1. Test Conditions For Dynamic Performance

	REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
TEST CIRCUITS	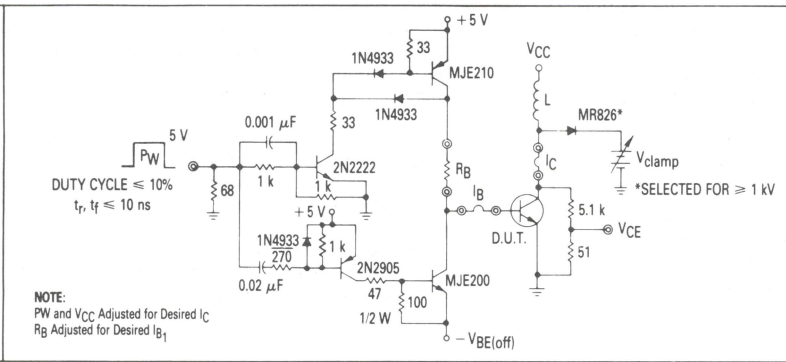	
CIRCUIT VALUES	COIL DATA: FERROXCUBE CORE #6656 FULL BOBBIN (~200 TURNS) #20 GAP FOR 30 mH/2 A L_{coil} = 50 mH V_{CC} = 20 V V_{clamp} = 300 Vdc	V_{CC} = 125 V R_C = 125 Ω D1 = 1N5820 OR EQUIV. R_B = 47 Ω
TEST WAVEFORMS	OUTPUT WAVEFORMS  t_1 ADJUSTED TO OBTAIN I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ TEST EQUIPMENT SCOPE-TEKTRONICS 475 OR EQUIVALENT	 t_r, t_f < 10 ns DUTY CYCLE = 1.0% R_B AND R_C ADJUSTED FOR DESIRED I_B AND I_C

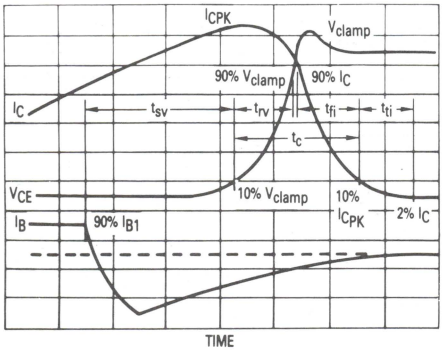

Figure 7. Inductive Switching Measurements

Table 2. Typical Inductive Switching Performance

I_C AMP	T_C °C	t_{sv} μs	t_{rv} μs	t_{fi} μs	t_{ti} μs	t_c μs
0.5	25	1.3	0.23	0.30	0.35	0.30
	100	1.6	0.26	0.30	0.40	0.36
1	25	1.5	0.10	0.14	0.05	0.16
	100	1.7	0.13	0.26	0.06	0.29
1.5	25	1.8	0.07	0.10	0.05	0.16
	100	3	0.08	0.22	0.08	0.28

NOTE: All Data Recorded in the Inductive Switching Circuit in Table 1

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the equation:

$$P_{SWT} = 1/2\ V_{CC} I_C(t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

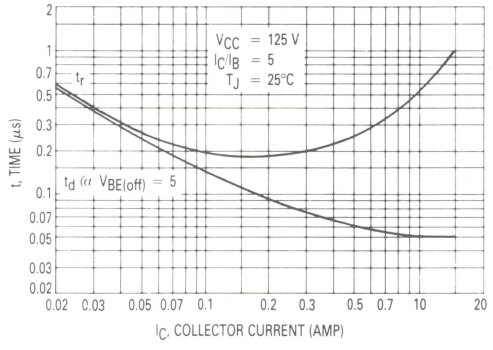

Figure 8. Turn-On Time

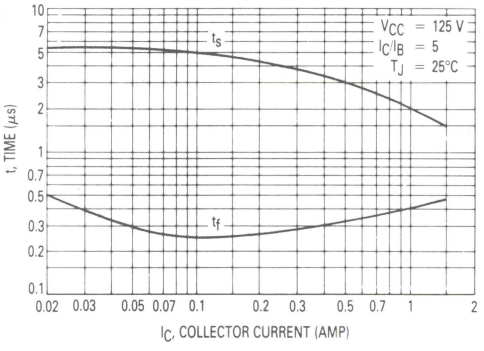

Figure 9. Turn-Off Time

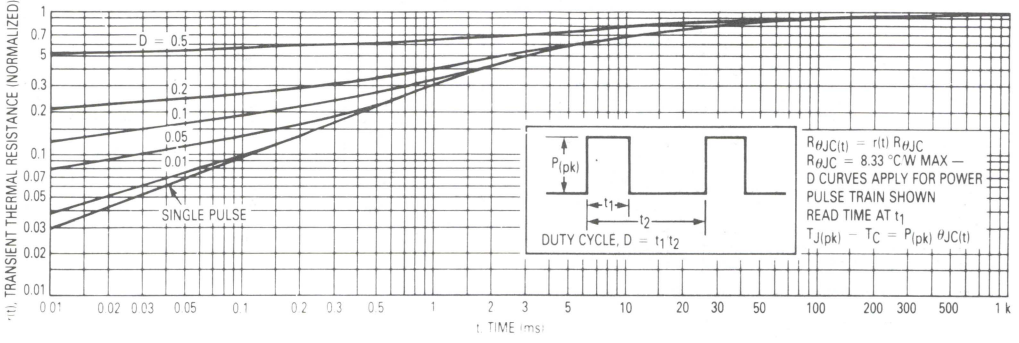

Figure 10. Thermal Response

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

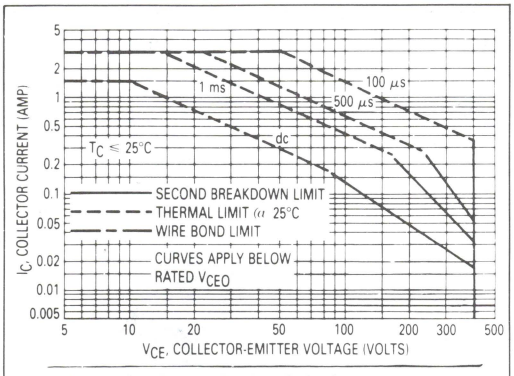

Figure 11. Active Region Safe Operating Area

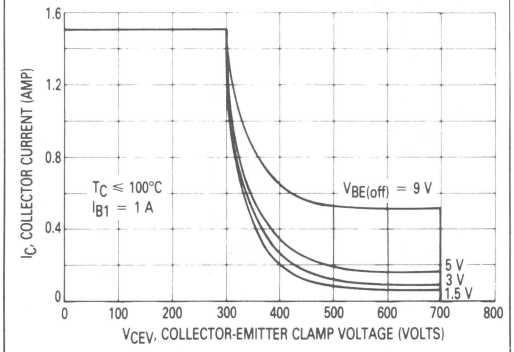

Figure 12. Reverse Bias Safe Operating Area

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by applying curves on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives RBSOA characteristics.

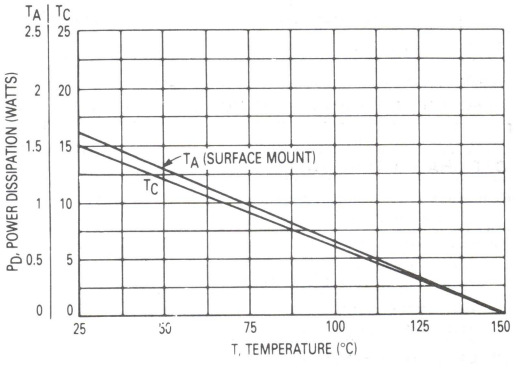

Figure 13. Power Derating

3

MJE105

MEDIUM-POWER PNP SILICON TRANSISTOR

. . . for use as an output device in complementary audio amplifiers up to 20-Watts music power per channel.

- High DC Current Gain – h_{FE} = 25-100 @ I_C = 2.0 A
- Thermopad High-Efficiency Compact Package
- Complementary to NPN MJE205

5 AMPERE
POWER TRANSISTOR
PNP SILICON

50 VOLTS
65 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	50	Vdc
Collector-Base Voltage	V_{CB}	50	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current	I_C	5.0	Adc
Base Current	I_B	2.5	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D(1)	65 0.522	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.92	°C/W

(1) Safe Area Curves are indicated by Figure 1. Both limits are applicable and must be observed.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (2) (I_C = 100 mAdc, I_B = 0)	BV_{CEO}	50	–	Vdc
Collector Cutoff Current (V_{CB} = 50 Vdc, I_E = 0) (V_{CB} = 50 Vdc, I_E = 0, T_C = 150°C)	I_{CBO}	– –	0.1 2.0	mAdc
Emitter Cutoff Current (V_{BE} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)	h_{FE}	25	100	–
Base-Emitter Voltage (I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)	V_{BE}	–	1.2	Vdc

(2) Pulse Test: Pulse Width ≤300 μs, Duty Cycle ≤2.0%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	16.13	16.38	0.635	0.645
B	12.57	12.83	0.495	0.505
C	3.18	3.43	0.125	0.135
D	1.09	1.24	0.043	0.049
F	3.51	3.76	0.138	0.148
G	4.22 BSC		0.166 BSC	
H	2.67	2.92	0.105	0.115
J	0.813	0.864	0.032	0.034
K	15.11	16.38	0.595	0.645
M	9° TYP		9° TYP	
Q	4.70	4.95	0.185	0.195
R	1.91	2.16	0.075	0.085
U	6.22	6.48	0.245	0.255
V	2.03	–	0.080	–

CASE 90-05
TO-225AB

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

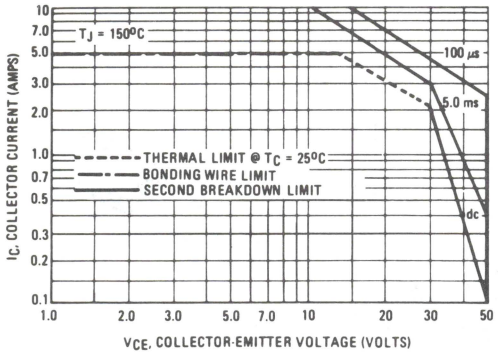

There are two limitations on the power handling ability of a transistor; average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate. The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)}$ ≤150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 2 – "ON" VOLTAGES

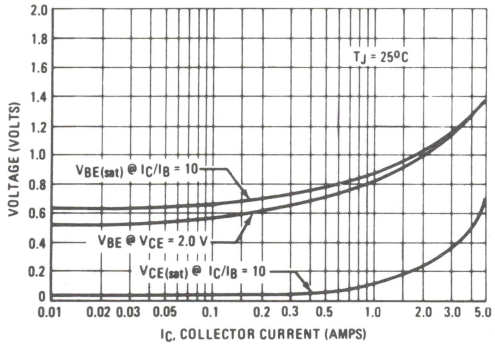

FIGURE 3 – DC CURRENT GAIN

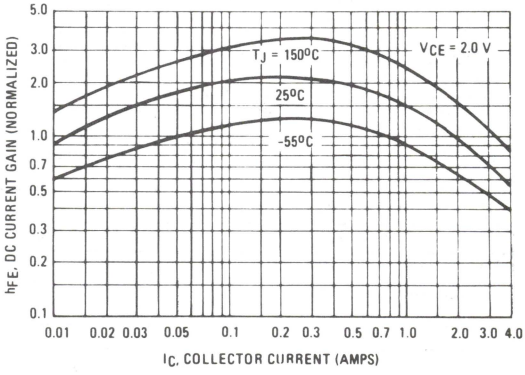

FIGURE 4 – POWER DERATING

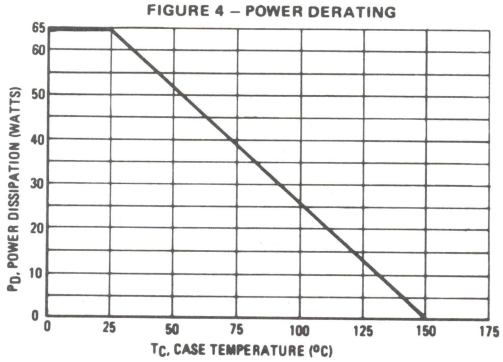

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

PNP
MJE170 thru MJE172
NPN
MJE180 thru MJE182

COMPLEMENTARY PLASTIC SILICON POWER TRANSISTORS

. . . designed for low power audio amplifier and low current, high speed switching applications.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 40 Vdc – MJE170, MJE180
  = 60 Vdc – MJE171, MJE181
  = 80 Vdc – MJE172, MJE182
- DC Current Gain –
  h_{FE} = 30 (Min) @ I_C = 0.5 Adc
  = 12 (Min) @ I_C = 1.5 Adc
- Current-Gain – Bandwidth Product –
  f_T = 50 MHz (Min) @ I_C = 100 mAdc
- Annular Construction for Low Leakages –
  I_{CBO} = 100 nA (Max) @ Rated V_{CB}

3 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
40-60-80 VOLTS
12.5 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE170 MJE180	MJE171 MJE181	MJE172 MJE182	Unit
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Collector-Emitter Voltage	V_{CEO}	40	60	80	Vdc
Emitter-Base Voltage	V_{EB}	← 7.0 →			Vdc
Collector Current — Continuous Peak	I_C	← 3.0 → ← 6.0 →			Adc
Base Current	I_B	← 1.0 →			Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	← 1.5 → ← 0.012 →			Watts W/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	← 12.5 → ← 0.1 →			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← -65 to +150 →			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	10	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	83.4	°C/W

3

FIGURE 1 – POWER DERATING

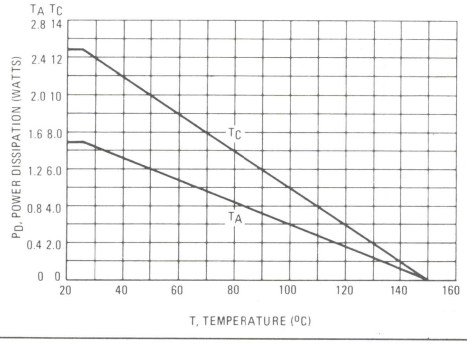



NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 10 mAdc, I_B = 0)	MJE170, MJE180	$V_{CEO(sus)}$	40	–	Vdc
	MJE171, MJE181		60	–	
	MJE172, MJE182		80	–	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 60 Vdc, I_E = 0)	MJE170, MJE180		–	0.1	
(V_{CB} = 80 Vdc, I_E = 0)	MJE171, MJE181		–	0.1	
(V_{CB} = 100 Vdc, I_E = 0)	MJE172, MJE182		–	0.1	
(V_{CB} = 60 Vdc, I_E = 0, T_C = 150°C)	MJE170, MJE180		–	0.1	mAdc
(V_{CB} = 80 Vdc, I_E = 0, T_C = 150°C)	MJE171, MJE181		–	0.1	
(V_{CB} = 100 Vdc, I_E = 0, T_C = 150°C)	MJE172, MJE182		–	0.1	
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)		I_{EBO}	–	0.1	μAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 100 mAdc, V_{CE} = 1.0 Vdc)			50	250	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)			30	–	
(I_C = 1.5 Adc, V_{CE} = 1.0 Vdc)			12	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)			–	0.3	
(I_C = 1.5 Adc, I_B = 150 mAdc)			–	0.9	
(I_C = 3.0 Adc, I_B = 600 mAdc)			–	1.7	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I_C = 1.5 Adc, I_B = 150 mAdc)			–	1.5	
(I_C = 3.0 Adc, I_B = 600 mAdc)			–	2.0	
Base-Emitter On Voltage (I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	–	1.2	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (1) (I_C = 100 mAdc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)		f_T	50	–	MHz
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	MJE170/MJE172		–	60	
	MJE180/MJE182		–	40	

(1) $f_T = |h_{fe}| \cdot f_{test}$

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

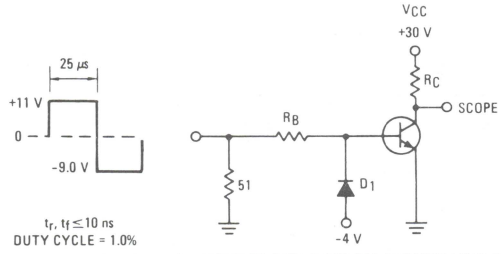

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

For PNP test circuit, reverse all polarities.

FIGURE 3 – TURN-ON TIME

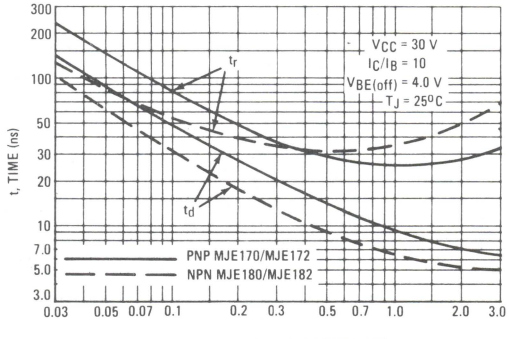

FIGURE 4 – THERMAL RESPONSE

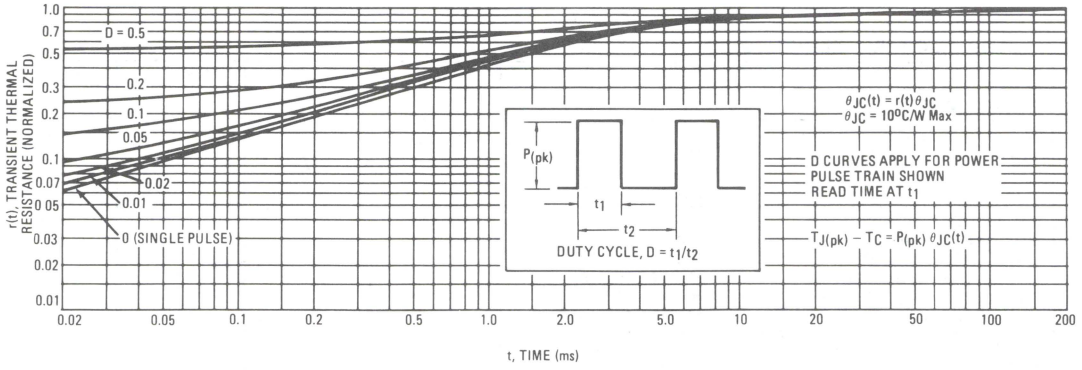

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 5 – MJE170, MJE171, MJE172

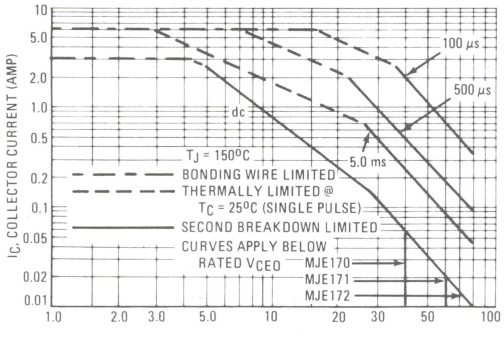

FIGURE 6 – MJE180, MJE181, MJE182

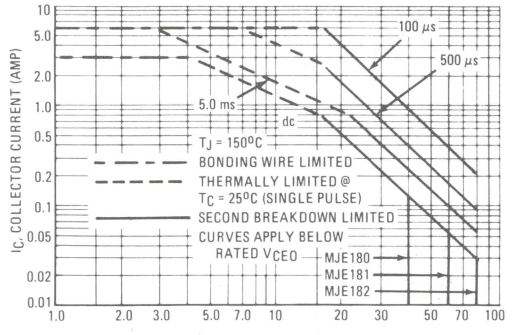

There are two limitations on the power handling ability of a transistor – average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 5 and 6 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperature, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 7 – TURN-OFF TIME

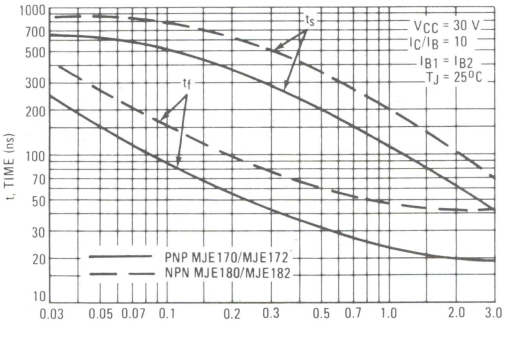

FIGURE 8 – CAPACITANCE

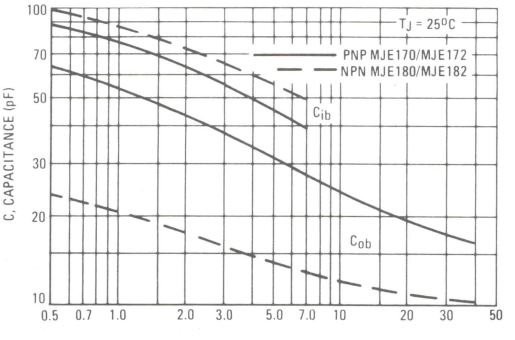

3

PNP
MJE170, MJE171, MJE172

NPN
MJE180, MJE181, MJE182

FIGURE 9 – DC CURRENT GAIN

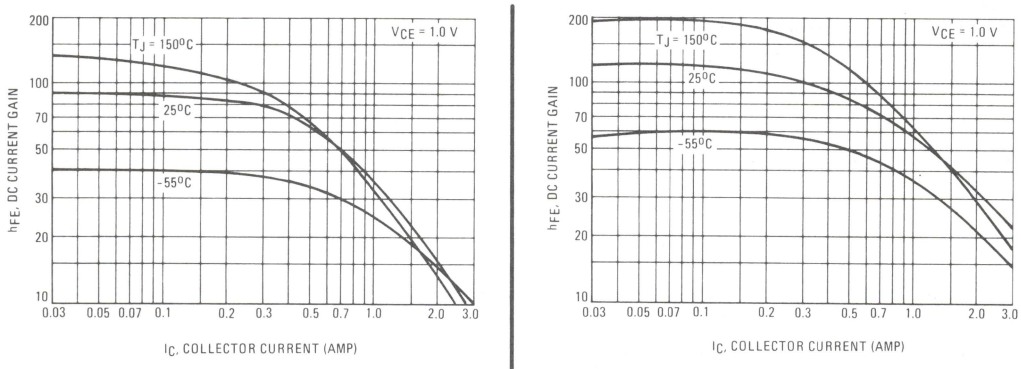

FIGURE 10 – "ON" VOLTAGES

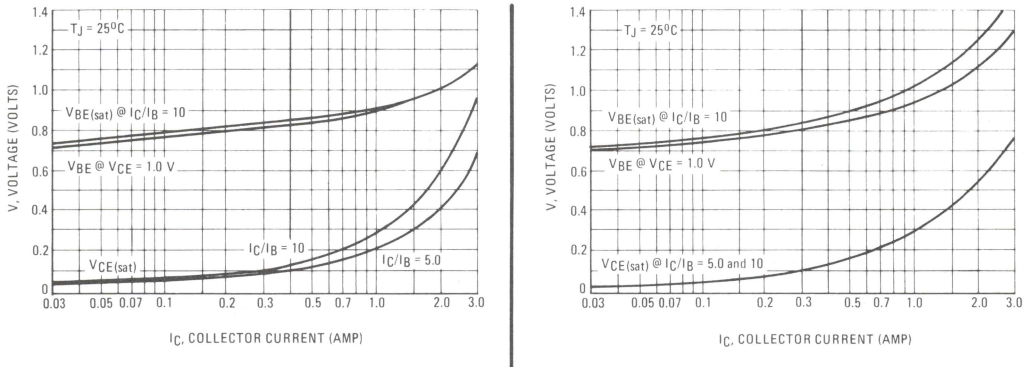

FIGURE 11 – TEMPERATURE COEFFICIENTS

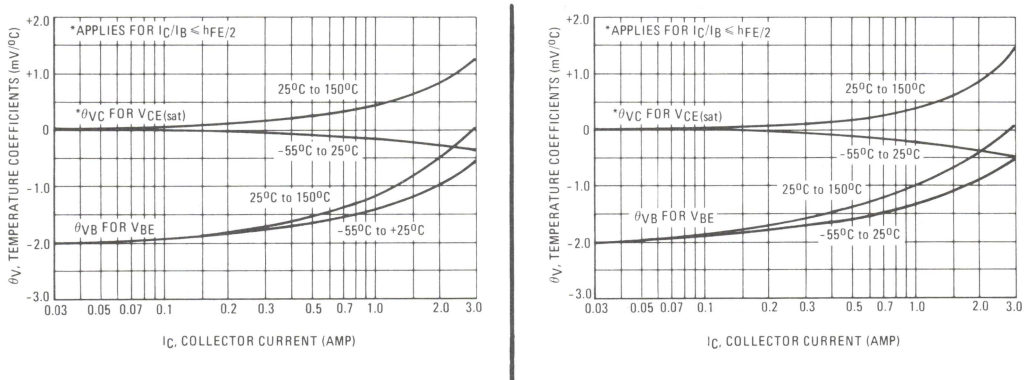

3

NPN MJE200 PNP MJE210

COMPLEMENTARY SILICON POWER PLASTIC TRANSISTORS

. . . designed for low voltage, low-power, high-gain audio amplifier applications.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 25 Vdc (Min) @ I_C = 10 mAdc
- High DC Current Gain – h_{FE} = 70 (Min) @ I_C = 500 mAdc
  = 45 (Min) @ I_C = 2.0 Adc
  = 10 (Min) @ I_C = 5.0 Adc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.3 Vdc (Max) @ I_C = 500 mAdc
  = 0.75 Vdc (Max) @ I_C = 2.0 Adc
- High Current-Gain – Bandwidth Product –
  f_T = 65 MHz (Min) @ I_C = 100 mAdc
- Annular Construction for Low Leakage – I_{CBO} = 100 nAdc @ Rated V_{CB}

5 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
25 VOLTS
15 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Base Voltage	V_{CB}	40	Vdc
Collector-Emitter Voltage	V_{CEO}	25	Vdc
Emitter-Base Voltage	V_{EB}	8.0	Vdc
Collector Current – Continuous Peak	I_C	5.0 10	Adc
Base Current	I_B	1.0	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12	Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.5 0.012	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	8.34	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	83.4	°C/W



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

FIGURE 1 – POWER DERATING

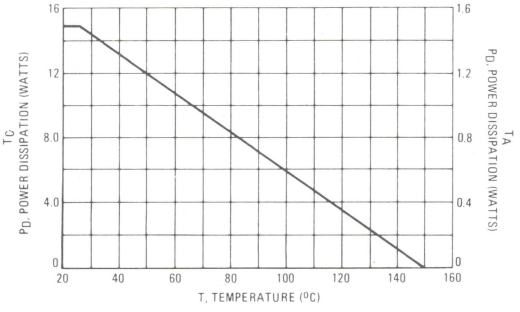

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 10 mAdc, I_B = 0)	$V_{CEO(sus)}$	25	–	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0)	I_{CBO}	–	100	nAdc
(V_{CB} = 40 Vdc, I_E = 0, T_J = 125°C)		–	100	μAdc
Emitter Cutoff Current (V_{BE} = 8.0 Vdc, I_C = 0)	I_{EBO}	–	100	nAdc
ON CHARACTERISTICS				
DC Current Gain (1)	h_{FE}			–
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		70	–	
(I_C = 2.0 Adc, V_{CE} = 1.0 Vdc)		45	180	
(I_C = 5.0 Adc, V_{CE} = 2.0 Vdc)		10	–	
Collector-Emitter Saturation Voltage (1)	$V_{CE(sat)}$			Vdc
(I_C = 500 mAdc, I_B = 50 mAdc)		–	0.3	
(I_C = 2.0 Adc, I_B = 200 mAdc)		–	0.75	
(I_C = 5.0 Adc, I_B = 1.0 Adc)		–	1.8	
Base-Emitter Saturation Voltage (1) (I_C = 5.0 Adc, I_B = 1.0 Adc)	$V_{BE(sat)}$	–	2.5	Vdc
Base-Emitter On Voltage (1) (I_C = 2.0 Adc, V_{CE} = 1.0 Vdc)	$V_{BE(on)}$	–	1.6	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain – Bandwidth Product (2) (I_C = 100 mAdc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)	f_T	65	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz) MJE200	C_{ob}	–	80	pF
MJE210		–	120	

(1) Pulse test: Pulse Width = 300 μs, Duty Cycle ≈ 2.0%.
(2) $f_T = |h_{fe}| \cdot f_{test}$

3

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

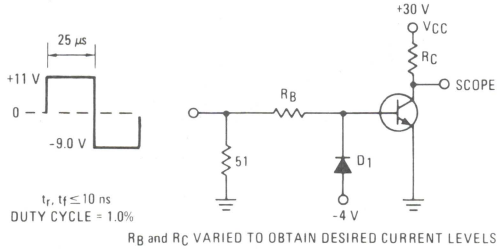

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈ 100 mA
MSD6100 USED BELOW I_B ≈ 100 mA

FOR PNP TEST CIRCUIT, REVERSE ALL POLARITIES

FIGURE 3 – TURN-ON TIME

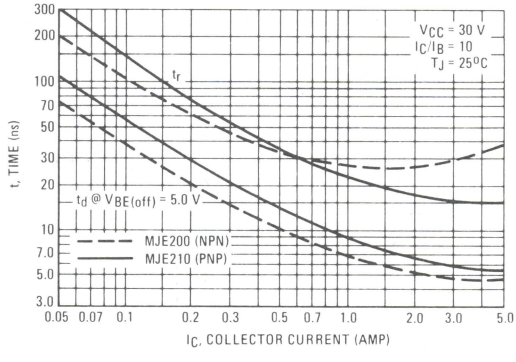

FIGURE 4 – THERMAL RESPONSE

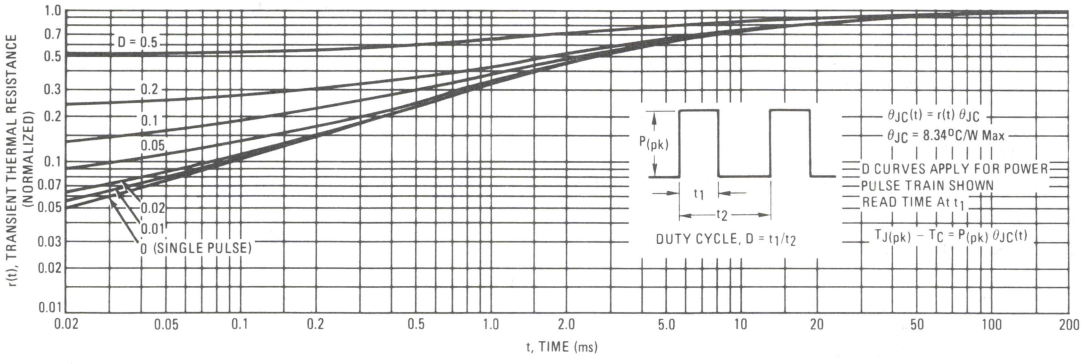

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

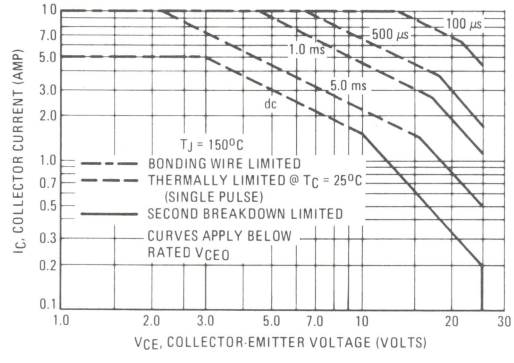

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

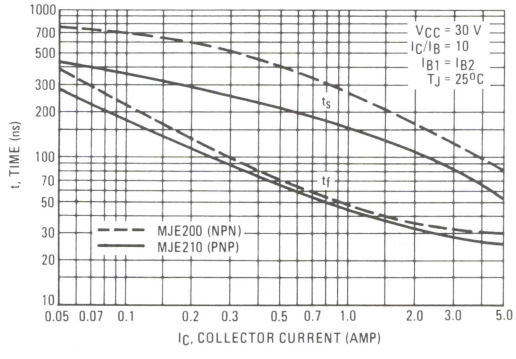

FIGURE 7 – CAPACITANCE

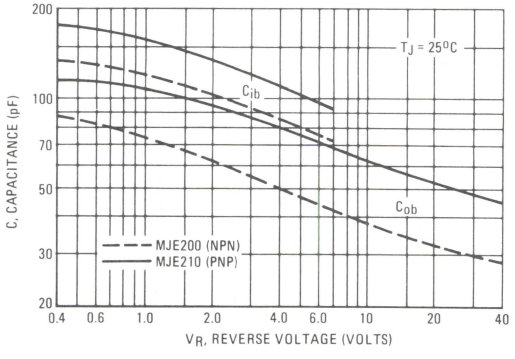

NPN
MJE200

PNP
MJE210

FIGURE 8 – DC CURRENT GAIN

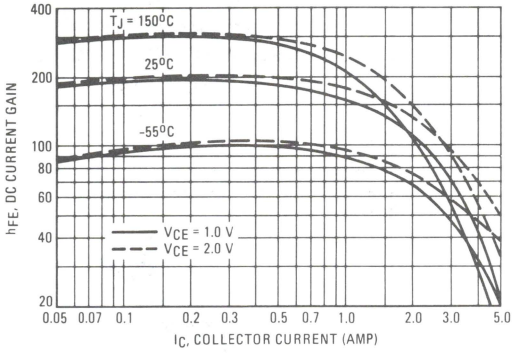

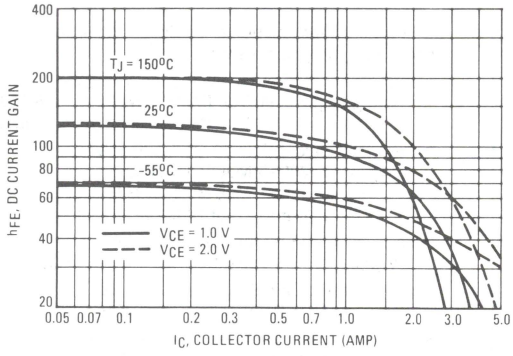

FIGURE 9 – "ON" VOLTAGE

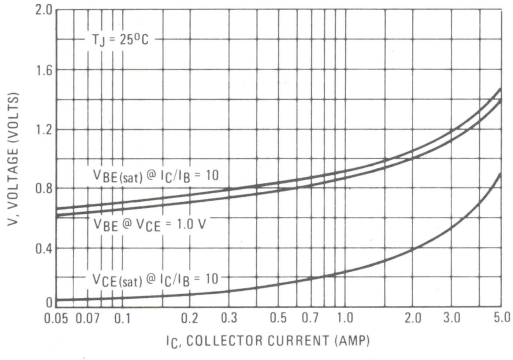

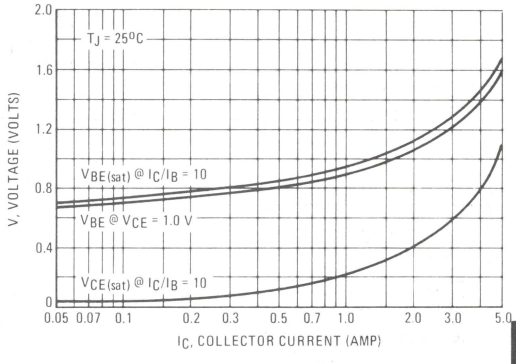

3

FIGURE 10 – TEMPERATURE COEFFICIENTS

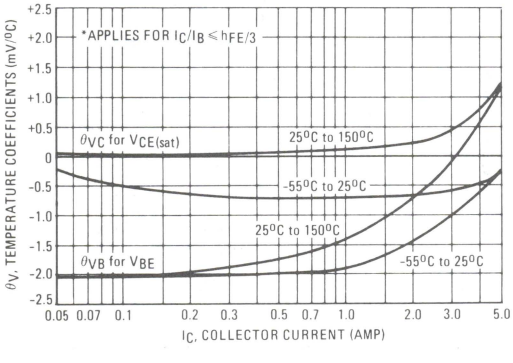

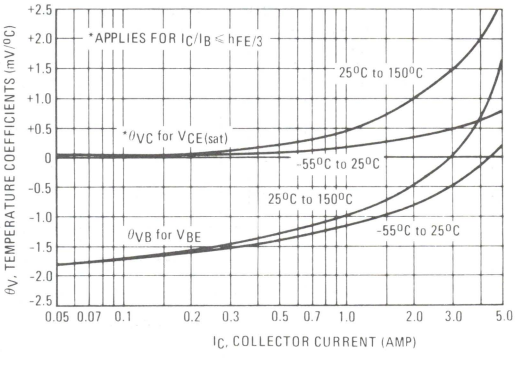

NPN
MJE240, MJE241
MJE243, MJE244
PNP
MJE250 thru MJE254

COMPLEMENTARY SILICON POWER PLASTIC TRANSISTORS

. . . designed for low power audio amplifier and low-current, high-speed switching applications.

- High Collector-Emitter Sustaining Voltage —
  $V_{CEO(sus)}$ = 80 Vdc (Min) — MJE240, MJE250/2
  = 100 Vdc (Min) — MJE243/4, MJE253/4
- High DC Current Gain @ I_C = 200 mAdc
  h_{FE} = 40–200 — MJE240, MJE250
  = 40–120 — MJE241,243, MJE251,253
  = 25 (Min) — MJE244, MJE252,54
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 0.3 Vdc (Max) @ I_C = 500 mAdc
- High Current Gain Bandwidth Product —
  f_T = 40 MHz (Min) @ I_C = 100 mAdc
- Annular Construction for Low Leakages
  I_{CBO} = 100 nAdc (Max) @ Rated V_{CB}

4 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
80, 100 VOLTS
15 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE240 MJE241 MJE250 MJE251 MJE252	MJE243 MJE244 MJE253 MJE254	Unit
Collector-Emitter Voltage	V_{CEO}	80	100	Vdc
Collector-Base Voltage	V_{CB}	80	100	Vdc
Emitter-Base Voltage	V_{EB}	7.0		Vdc
Collector Current — Continuous Peak	I_C	4.0 8.0		Adc
Base Current	I_B	1.0		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.5 0.012		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	8.34	°C/W
Thermal Resistance, Junction to Ambient	θ_{JA}	83.4	°C/W



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

FIGURE 1 – POWER DERATING

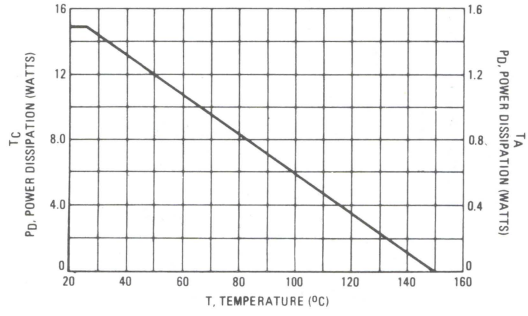

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 10 mAdc, I_B = 0)	MJE240, MJE241, MJE250, MJE251, MJE252	$V_{CEO(sus)}$	80	–	Vdc
	MJE243, MJE244 MJE253, MJE254		100	–	
Collector Cutoff Current (V_{CB} = 80 Vdc, I_E = 0)	MJE240, MJE241, MJE250, MJE251, MJE252	I_{CBO}	–	0.1	μAdc
(V_{CB} = 100 Vdc, I_E = 0)	MJE243, MJE244, MJE253, MJE254,		–	0.1	
(V_{CE} = 80 Vdc, I_E = 0, T_C = 125°C)	MJE240, MJE241, MJE250, MJE251, MJE252,		–	0.1	mAdc
(V_{CE} = 100 Vdc, I_E = 0, T_C = 125°C)	MJE243, MJE244 MJE253, MJE254		–	0.1	
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)		I_{EBO}	–	0.1	μAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 200 mAdc, V_{CE} = 1.0 Vdc)	MJE240, MJE250	h_{FE}	40	200	–
	MJE241, MJE251, MJE243, MJE253		40	120	
	MJE252, MJE244, MJE254		40 25	180 –	
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)	MJE241, MJE251, MJE243, MJE253		20	–	
(I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)	MJE252		15	–	
	MJE244, MJE254		10	–	
(I_C = 2.0 Adc, V_{CE} = 1.0 Vdc)	MJE240, MJE250		15	–	
Collector-Emitter Saturation Voltage (I_C = 500 mAdc, I_B = 50 mAdc)	All Types	$V_{CE(sat)}$	–	0.3	Vdc
(I_C = 1.0 Adc, I_B = 100 mAdc)	MJE241, MJE251, MJE243, MJE253		–	0.6	
(I_C = 2.0 Adc, I_B = 200 mAdc)	MJE240, MJE250		–	0.8	
Base-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 200 mAdc)		$V_{BE(sat)}$	–	1.8	Vdc
Base-Emitter On Voltage (I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	–	1.5	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C = 100 mAdc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)		f_T	40	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	MJE240/MJE244	C_{ob}	–	50	pF
	MJE250/MJE254		–	70	

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

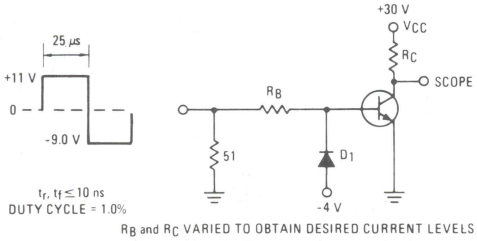

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS

D_1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE $I_B \approx 100$ mA
MSD6100 USED BELOW $I_B \approx 100$ mA

FOR PNP TEST CIRCUIT, REVERSE ALL POLARITIES

FIGURE 3 – TURN-ON TIME

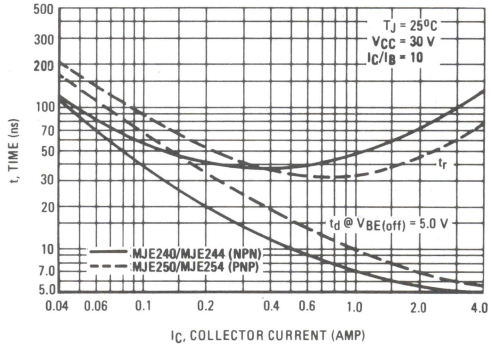

3

FIGURE 4 – THERMAL RESPONSE

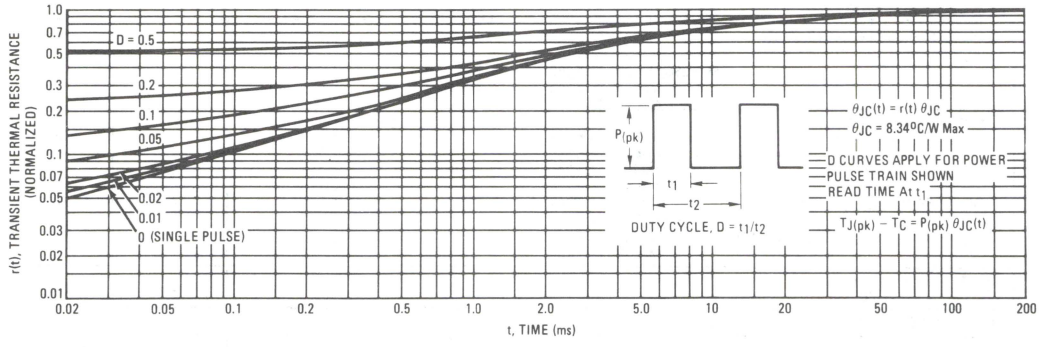

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

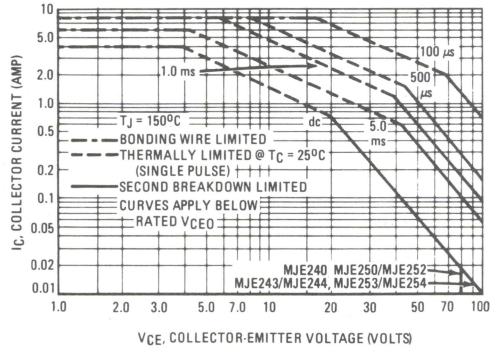

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

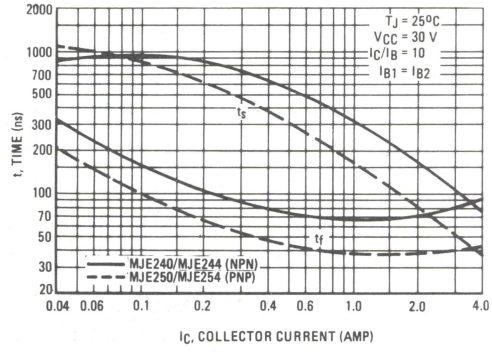

FIGURE 7 – CAPACITANCE

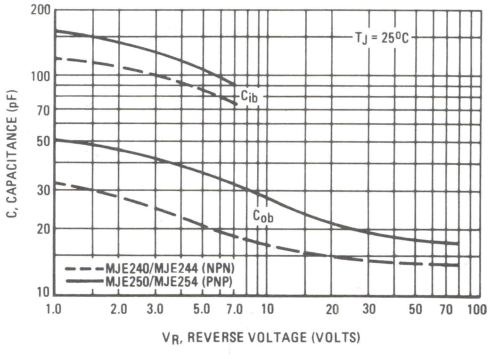

NPN
MJE240 thru MJE244

PNP
MJE250 thru MJE254

FIGURE 8 – DC CURRENT GAIN

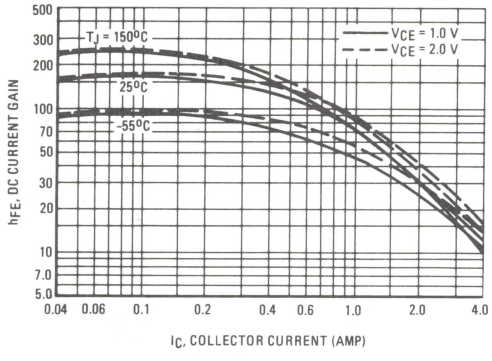

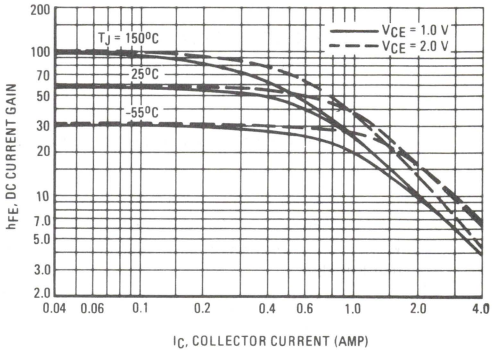

FIGURE 9 – "ON" VOLTAGES

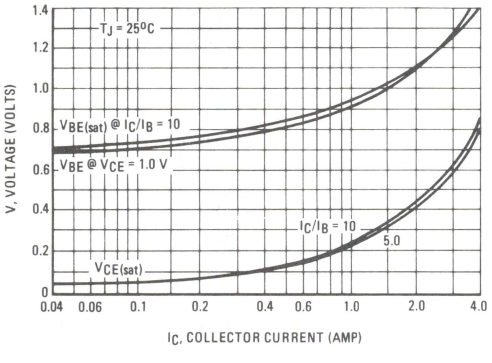

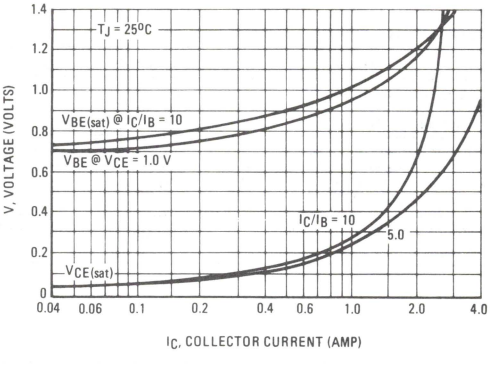

FIGURE 10 – TEMPERATURE COEFFICIENTS

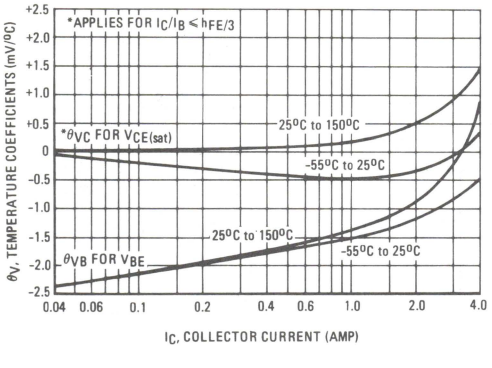

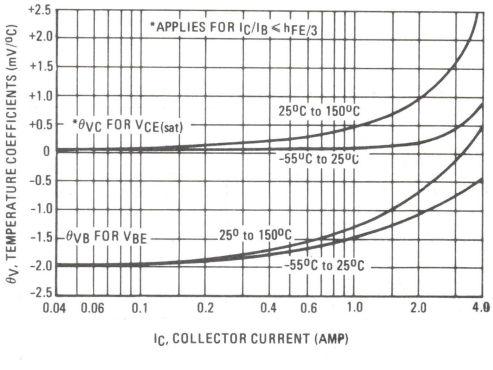

3

MJE340

PLASTIC MEDIUM POWER NPN
SILICON TRANSISTOR

. . . useful for high-voltage general purpose applications.

- Suitable for Transformerless, Line-Operated Equipment
- Thermopad Construction Provides High Power Dissipation Rating for High Reliability

0.5 AMPERE
POWER TRANSISTOR
NPN SILICON

300 VOLTS
20 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	300	Vdc
Emitter-Base Voltage	V_{EB}	3.0	Vdc
Collector Current — Continuous	I_C	500	mAdc
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	20 0.16	Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	$^oC/W$

ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (I_C = 1.0 mAdc, I_B = 0)	$V_{CEO(sus)}$	300	—	Vdc
Collector Cutoff Current (V_{CB} = 300 Vdc, I_E = 0)	I_{CBO}	—	100	μAdc
Emitter Cutoff Current (V_{EB} = 3.0 Vdc, I_C = 0)	I_{EBO}	—	100	μAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 50 mAdc, V_{CE} = 10 Vdc)	h_{FE}	30	240	—



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

FIGURE 1 – POWER TEMPERATURE DERATING

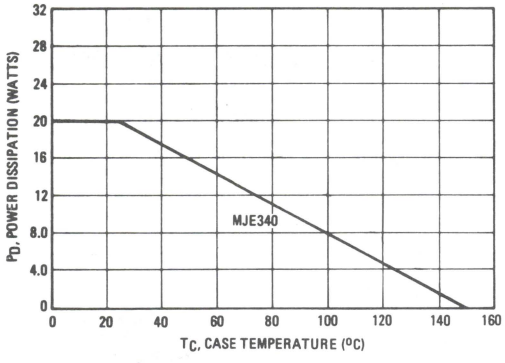

FIGURE 2 – "ON" VOLTAGES

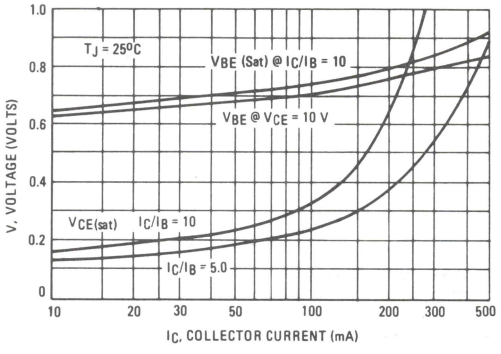

ACTIVE-REGION SAFE OPERATING AREA

FIGURE 3 – MJE340

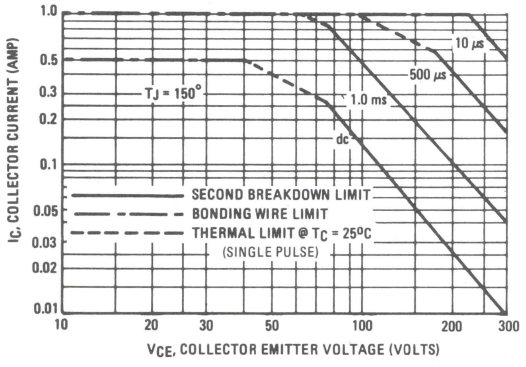

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 4 – DC CURRENT GAIN

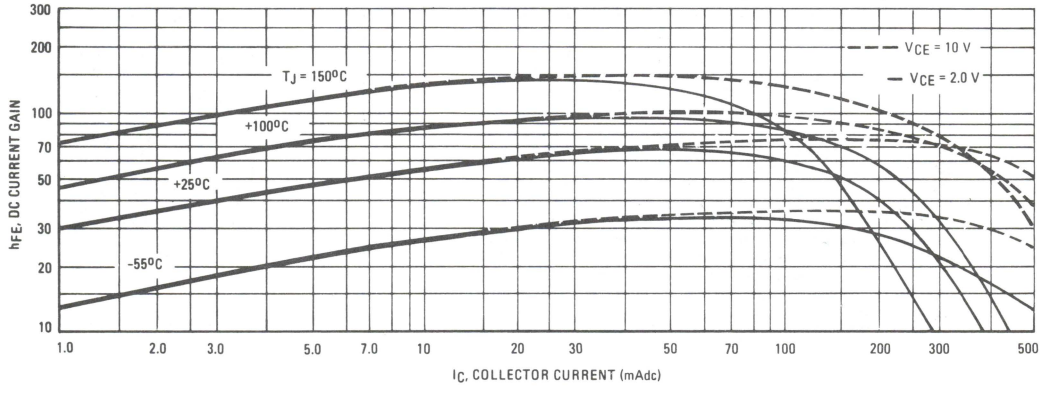

MJE341
MJE344

PLASTIC NPN SILICON MEDIUM-POWER TRANSISTORS

. . .useful for medium voltage applications requiring high f_T such as converters and extended range amplifiers.

0.5 AMPERE POWER TRANSISTORS NPN SILICON 150-200 VOLTS 20 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE341	MJE344	Unit
Collector-Emitter Voltage	V_{CEO}	150	200	Vdc
Collector-Base Voltage	V_{CB}	175	200	Vdc
Emitter-Base Voltage	V_{EB}	3.0	5.0	Vdc
Collector Current — Continuous	I_C	← 500 →		mAdc
Base Current	I_B	← 250 →		mAdc
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	20 0.16		Watts $W/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	← −65 to +150 →		^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	$^oC/W$

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

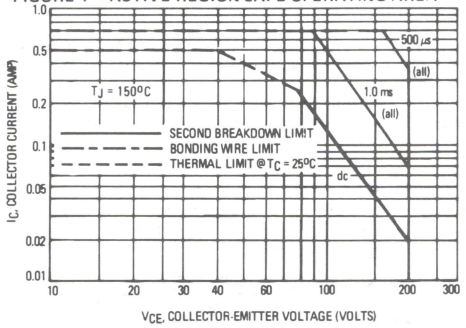

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150^oC$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 1.0 mAdc, I_B = 0)	MJE341 MJE344	$V_{CEO(sus)}$	 150 200	 – –	Vdc
Collector Cutoff Current (V_{CE} = 150 Vdc, I_B = 0) (V_{CE} = 200 Vdc, I_B = 0)	 MJE341 MJE344	I_{CEO}	 – –	 1.0 1.0	mAdc
Collector Cutoff Current (V_{CB} = 175 Vdc, I_E = 0) (V_{CB} = 200 Vdc, I_E = 0)	 MJE341 MJE344	I_{CBO}	 – –	 0.3 0.1	mAdc
Emitter Cutoff Current (V_{EB} = 3.0 Vdc, I_C = 0) (V_{EB} = 5.0 Vdc, I_C = 0)	 MJE341 MJE344	I_{EBO}	 – –	 0.1 0.1	mAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 10 mAdc, V_{CE} = 10 Vdc) (I_C = 50 mAdc, V_{CE} = 10 Vdc) (I_C = 150 mAdc, V_{CE} = 10 Vdc)	 MJE341 MJE341 MJE344 MJE341	h_{FE}	 20 25 30 20	 – 200 300 –	–
Collector-Emitter Saturation Voltage (I_C = 50 mAdc, I_B = 5.0 mAdc) (I_C = 150 mAdc, I_B = 15 mAdc)	 MJE344 MJE341	$V_{CE(sat)}$	 – –	 1.0 2.3	Vdc
Base-Emitter On Voltage (I_C = 50 mAdc, V_{CE} = 10 Vdc)		$V_{BE(on)}$	–	1.0	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (I_C = 50 mAdc, V_{CE} = 25 Vdc, f = 10 MHz)		f_T	15	–	MHz
Output Capacitance (V_{CB} = 20 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	15	pF
Small-Signal Current Gain (I_C = 50 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	25	–	–

3

FIGURE 2 – DC CURRENT GAIN

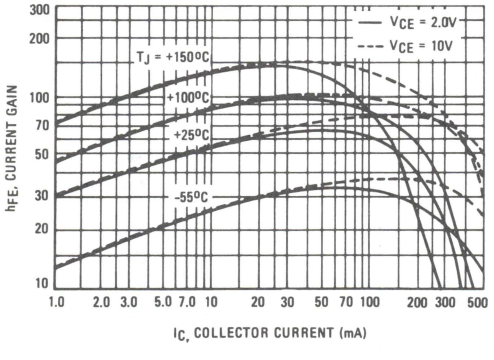

FIGURE 3 – "ON" VOLTAGES

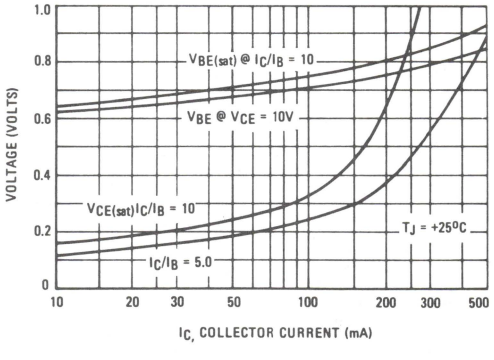

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE350

PLASTIC MEDIUM POWER PNP SILICON TRANSISTOR

. . . designed for use in line-operated applications such as low power, line-operated series pass and switching regulators requiring PNP capability.

- High Collector-Emitter Sustaining Voltage — $V_{CEO(sus)}$ = 300 Vdc @ I_C = 1.0 mAdc
- Excellent DC Current Gain — h_{FE} = 30-240 @ I_C = 50 mAdc
- Plastic Thermopad Package

0.5 AMPERE

POWER TRANSISTOR PNP SILICON

300 VOLTS
20 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	300	Vdc
Emitter-Base Voltage	V_{EB}	3.0	Vdc
Collector Current — Continuous	I_C	500	mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	20 0.16	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150	°C

3

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	6.25	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (I_C = 1.0 mAdc, I_B = 0)	$V_{CEO(sus)}$	300	–	Vdc
Collector Cutoff Current (V_{CB} = 300 Vdc, I_E = 0)	I_{CBO}	–	100	μAdc
Emitter Cutoff Current (V_{EB} = 3.0 Vdc, I_C = 0)	I_{EBO}	–	100	μAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 50 mAdc, V_{CE} = 10 Vdc)	h_{FE}	30	240	–



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

FIGURE 1 – DC CURRENT GAIN

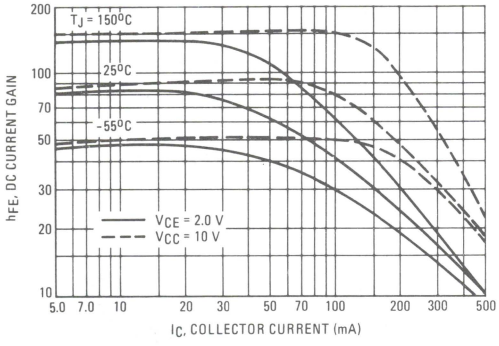

FIGURE 2 – "ON" VOLTAGES

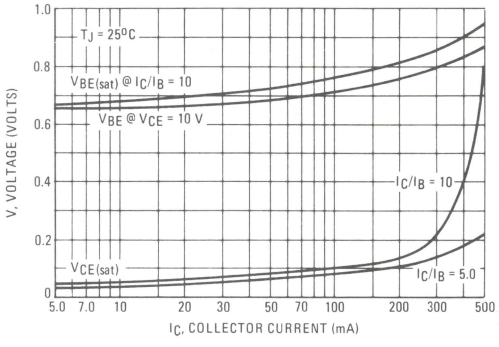

FIGURE 3 – ACTIVE-REGION SAFE OPERATING AREA

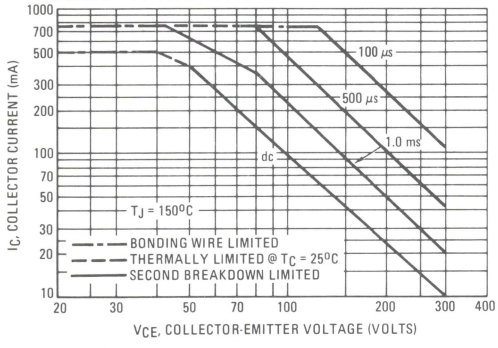

FIGURE 4 – TEMPERATURE COEFFICIENTS

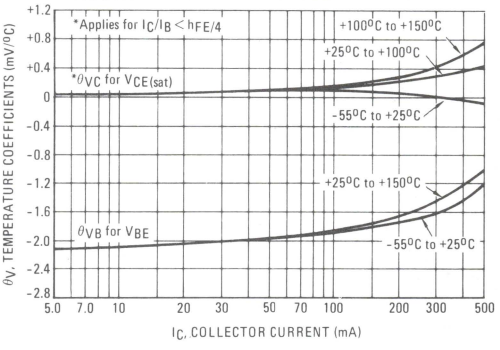

3

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 5 – POWER DERATING

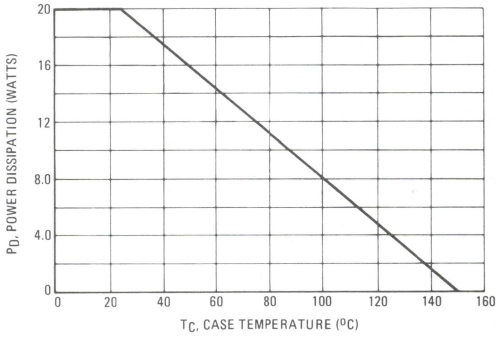

MJE370

PLASTIC MEDIUM-POWER PNP SILICON TRANSISTOR

. . . designed for use in general-purpose amplifiers and switching circuits. Recommended for use in 5 to 10 Watt audio amplifiers utilizing complementary symmetry circuitry.

- DC Current Gain – h_{FE} = 25 (Min) @ I_C = 1.0 Adc
- Complementary to NPN MJE520

3 AMPERE
POWER TRANSISTOR
PNP SILICON

30 VOLTS
25 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	30	Vdc
Collector-Base Voltage	V_{CB}	30	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current – Continuous – Peak	I_C	3.0 7.0	Adc
Base Current – Continuous	I_B	2.0	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	25 0.2	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	5.0	°C/W



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	30	–	Vdc
Collector-Base Cutoff Current (V_{CB} = 30 Vdc, I_E = 0)	I_{CBO}	–	100	μAdc
Emitter-Base Cutoff Current (V_{EB} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	100	μAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)	h_{FE}	25	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

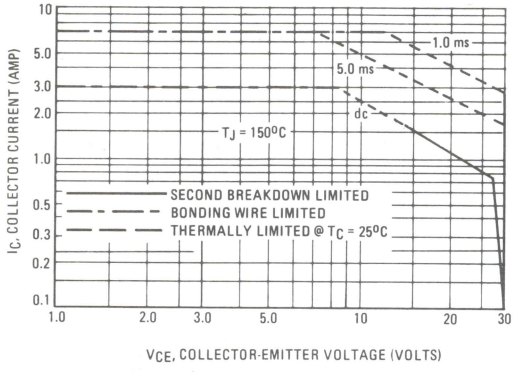

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J)pk)} \leqslant 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 2 – DC CURRENT GAIN

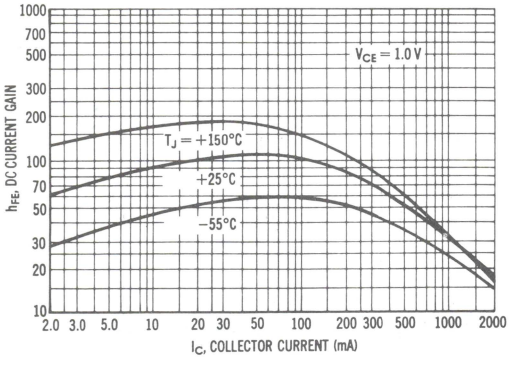

FIGURE 3 – "ON" VOLTAGE

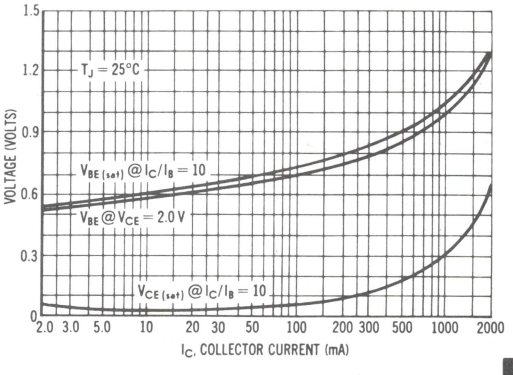

3

FIGURE 4 – THERMAL RESPONSE

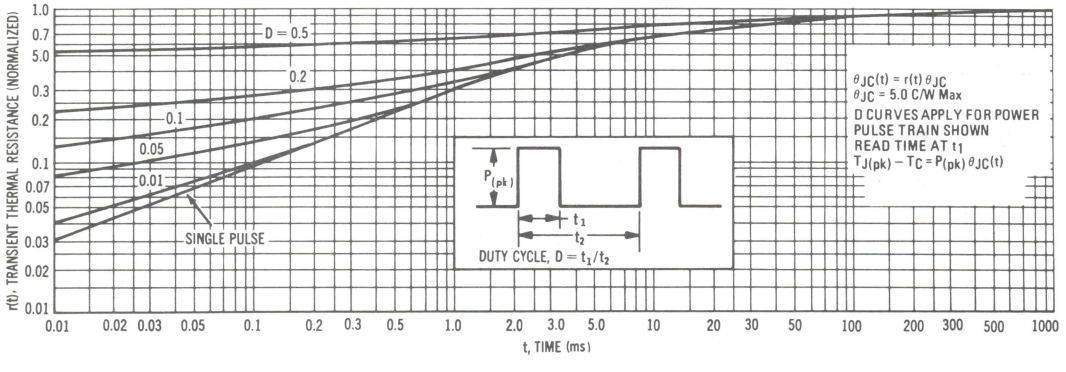

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE371

PLASTIC MEDIUM-POWER PNP SILICON TRANSISTORS

. . . designed for use in general-purpose amplifier and switching circuits. Recommended for use in 5 to 20 Watt audio amplifiers utilizing complementary symmetry circuitry.

- DC Current Gain – h_{FE} = 40 (Min) @ I_C = 1.0 Adc
- MJE371 is Complementary to NPN MJE521

4 AMPERE

POWER TRANSISTORS PNP SILICON

40 VOLTS
40 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	40	Vdc
Collector-Base Voltage	V_{CB}	40	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current – Continuous – Peak	I_C	4.0 8.0	Adc
Base Current – Continuous	I_B	2.0	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	40 320	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.12	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	40	–	Vdc
Collector-Base Cutoff Current (V_{CB} = 40 Vdc, I_E = 0)	I_{CBO}	–	100	μAdc
Emitter-Base Cutoff Current (V_{EB} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	100	μAdc
ON CHARACTERISTICS				
DC Current Gain (1) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)	h_{FE}	40	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs Duty Cycle ≤ 2.0%.



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	–	0.040	–

CASE 77-05

3

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

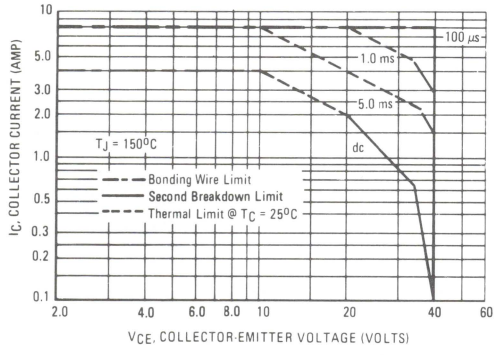

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 2 – DC CURRENT GAIN

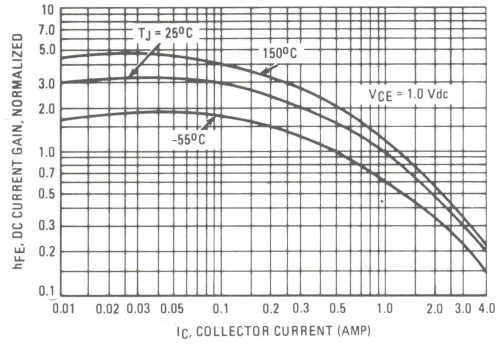

FIGURE 3 – "ON" VOLTAGE

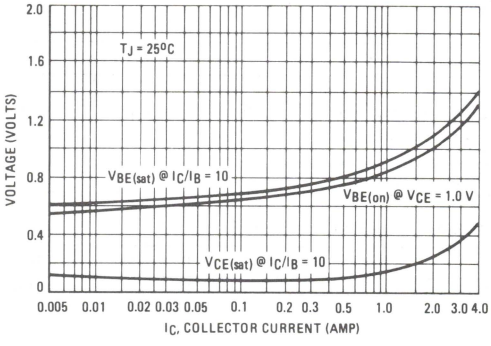

FIGURE 4 – THERMAL RESPONSE

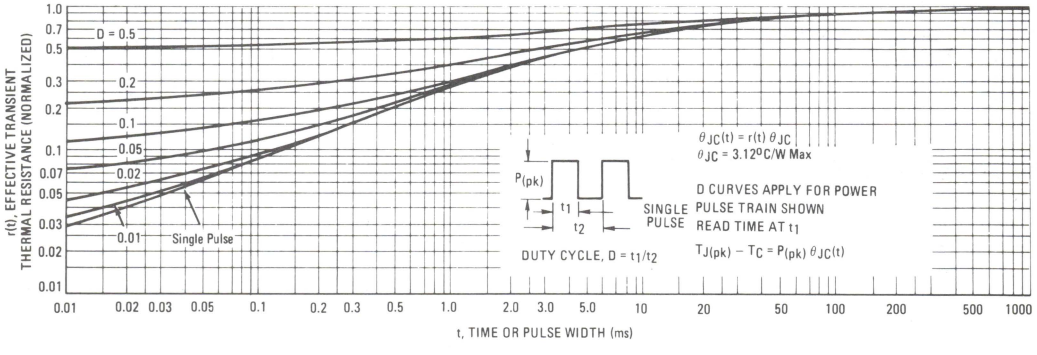

3

MJE520

PLASTIC MEDIUM-POWER NPN SILICON TRANSISTOR

. . . designed for use in general-purpose amplifier and switching circuits. Recommended for use in 5 to 10 Watt audio amplifiers utilizing complementary symmetry circuitry.

- DC Current Gain – h_{FE} = 25 (Min) @ I_C = 1.0 Adc
- Complementary to PNP MJE370

3 AMPERE
POWER TRANSISTOR
NPN SILICON

30 VOLTS
25 WATTS





STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	30	Vdc
Collector-Base Voltage	V_{CB}	30	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current – Continuous – Peak	I_C	3.0 7.0	Adc
Base Current – Continuous	I_B	2.0	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	25 0.2	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	5.0	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 100 mAdc, I_B = 0)	$V_{CEO(sus)}$	30	–	Vdc
Collector-Base Cutoff Current (V_{CB} = 30 Vdc, I_E = 0)	I_{CBO}	–	100	μAdc
Emitter-Base Cutoff Current (V_{EB} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	100	μAdc
ON CHARACTERISTICS				
DC Current Gain (1) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)	h_{FE}	25	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	–	0.040	–

CASE 77-05

3

FIGURE 1 ACTIVE-REGION SAFE OPERATING AREA

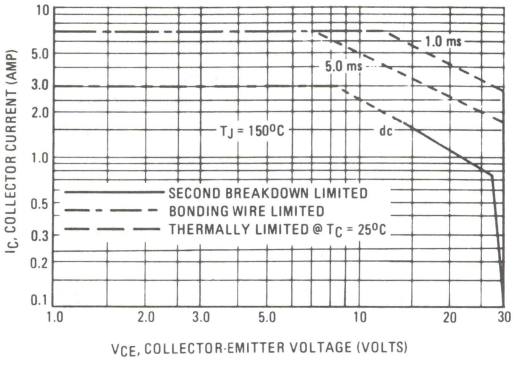

The data of Figure 1 based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided (T_{Jpk}) ≤ 150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C \cdot V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

FIGURE 2 – DC CURRENT GAIN

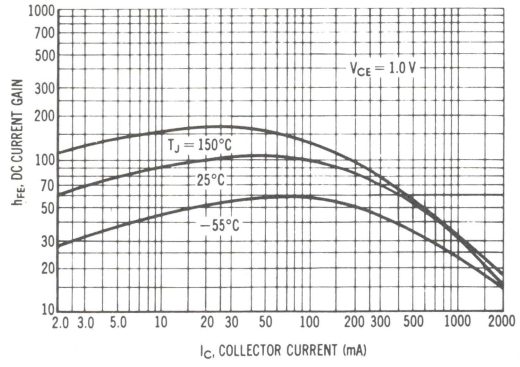

FIGURE 3 – "ON" VOLTAGE

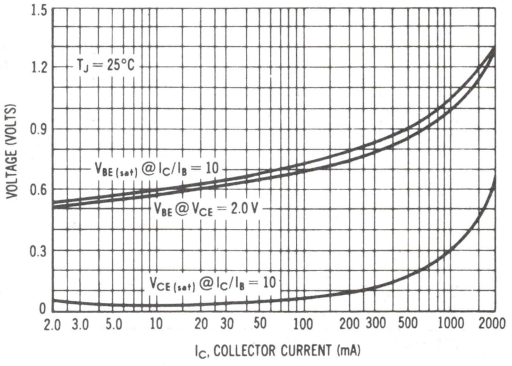

3

FIGURE 4 – THERMAL RESPONSE

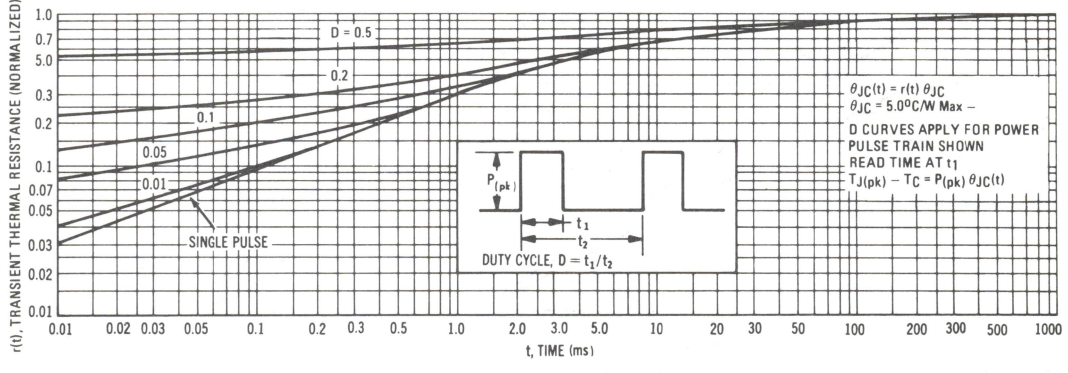

PNP MJE700,T thru MJE703 — NPN MJE800,T thru MJE803

PLASTIC DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain — h_{FE} = 2000 (Typ) @ I_C = 2.0 Adc
- Monolithic Construction with Built-in Base-Emitter Resistors to Limit Leakage Muliplication
- Choice of Packages — MJE700 and MJE800 series TO220AB, MJE700T and MJE800T

4.0 AMPERE
DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON
40 WATT
50 WATT



MJE700–703
MJE800–803

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.28	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

CASE 77-05

MAXIMUM RATINGS

Rating	Symbol	MJE700,T MJE701 MJE800,T MJE801	MJE702 MJE703 MJE802 MJE803	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current	I_C	4.0		Adc
Base Current	I_B	0.1		Adc
		CASE 77	**TO-220**	
Total Power Dissipation @ T_C = 25°C	P_D	40	50	Watts
Derate above 25°C		0.32	0.40	W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$		°C/W
CASE 77		3.13	
TO-220		2.50	

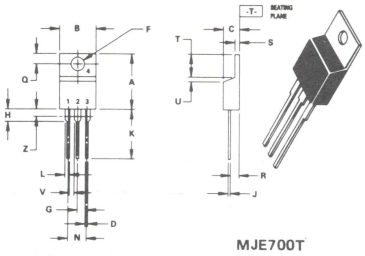

MJE700T
MJE800T

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.32	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

FIGURE 1 – POWER DERATING

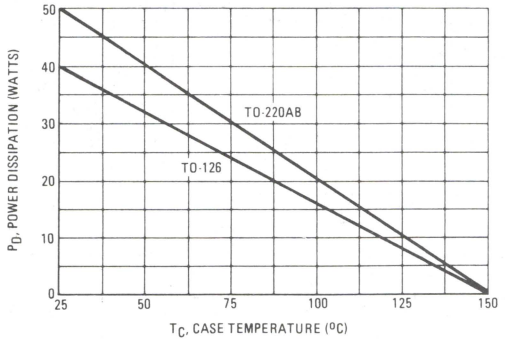

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1)		$V_{(BR)CEO}$			Vdc
(I_C = 50 mAdc, I_B = 0)	MJE700,T MJE701, MJE800,T MJE801		60	–	
	MJE702, MJE703, MJE802, MJE803		80	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 60 Vdc, I_B = 0)	MJE700,T MJE701, MJE800,T, MJE801		–	100	
(V_{CE} = 80 Vdc, I_B = 0)	MJE702, MJE703, MJE802, MJE803		–	100	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = Rated BV_{CEO}, I_E = 0)			–	100	
(V_{CB} = Rated BV_{CEO}, I_E = 0, T_C = 100°C)			–	500	
Emitter Cutoff Current		I_{EBO}	–	2.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 1.5 Adc, V_{CE} = 3.0 Vdc)	MJE700,T MJE702, MJE800,T MJE802		750	–	
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	MJE701, MJE703, MJE801, MJE803		750	–	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	All devices		100	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 1.5 Adc, I_B = 30 mAdc)	MJE700,T MJE702, MJE800,T MJE802		–	2.5	
(I_C = 2.0 Adc, I_B = 40 mAdc)	MJE701, MJE703, MJE801, MJE803		–	2.8	
(I_C = 4.0 Adc, I_B = 40 mAdc)	All devices		–	3.0	
Base-Emitter On Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 1.5 Adc, V_{CE} = 3.0 Vdc)	MJE700,T MJE702, MJE800,T MJE802		–	2.5	
(I_C = 2.0 Adc, V_{CE} = 3.0 Vdc)	MJE701, MJE703, MJE801, MJE803		–	2.5	
(I_C = 4.0 Adc, V_{CE} = 3.0 Vdc)	All devices		–	3.0	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain		$\|h_{fe}\|$	1.0	–	–
(I_C = 1.5 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)					

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

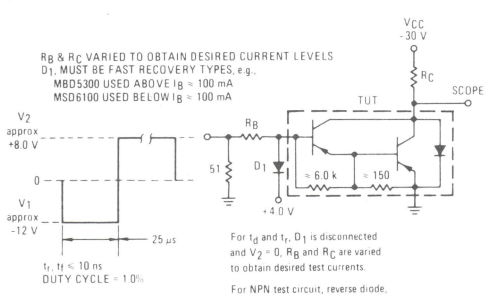

FIGURE 3 – SWITCHING TIMES

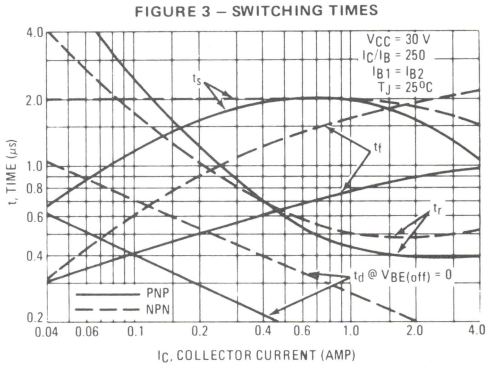

FIGURE 4 – THERMAL RESPONSE (MJE700T, 800T series)

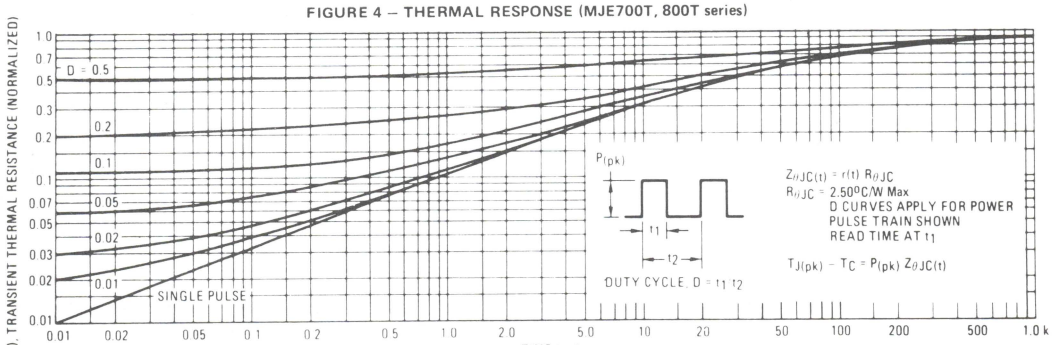

3

FIGURE 5 – THERMAL RESPONSE (MJE700, 800 series)

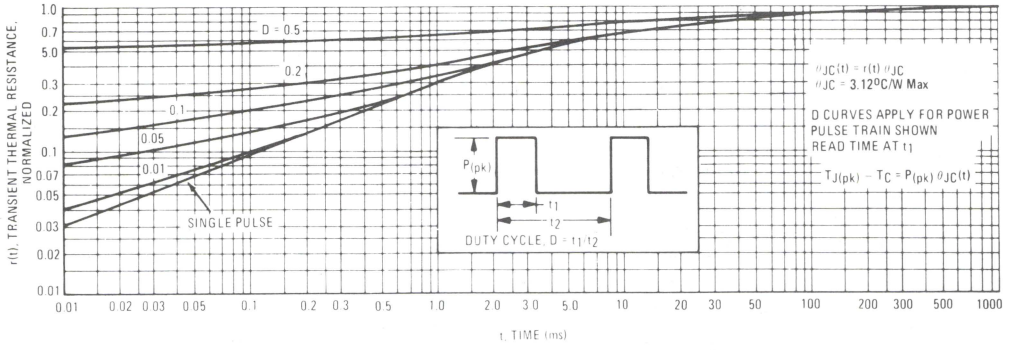

ACTIVE-REGION SAFE-OPERATING AREA

FIGURE 6 – MJE700 series

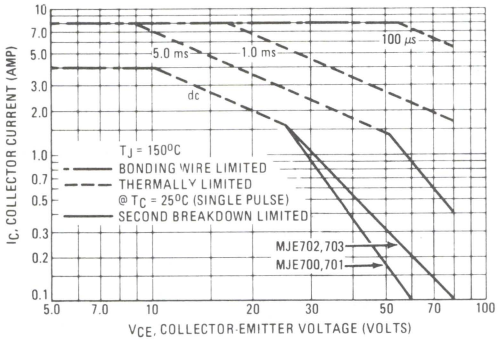

FIGURE 7 – MJE800 series

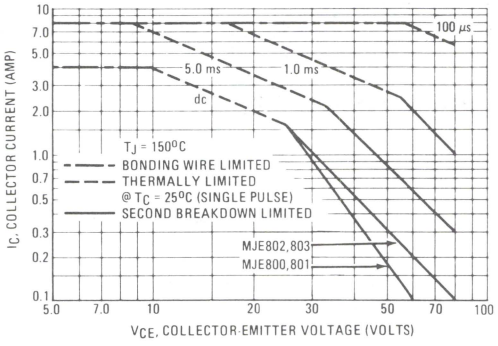

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 6 and 7 are based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4 or 5. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 8 – MJE700T

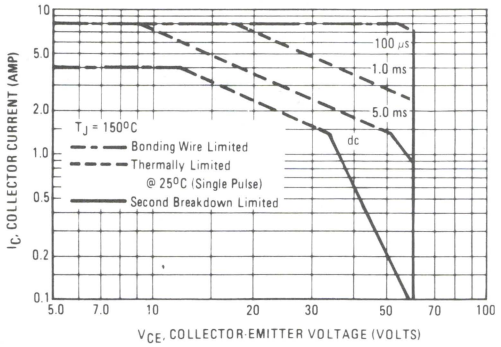

FIGURE 9 – MJE800T

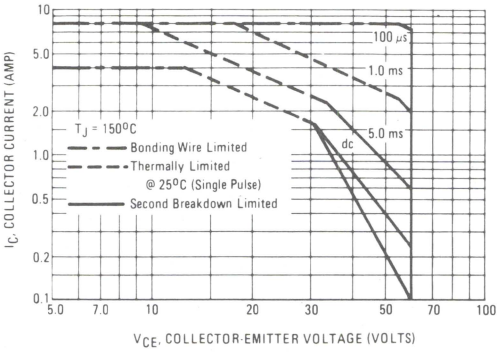

PNP
MJE700,T series

NPN
MJE800,T series

FIGURE 10 – DC CURRENT GAIN

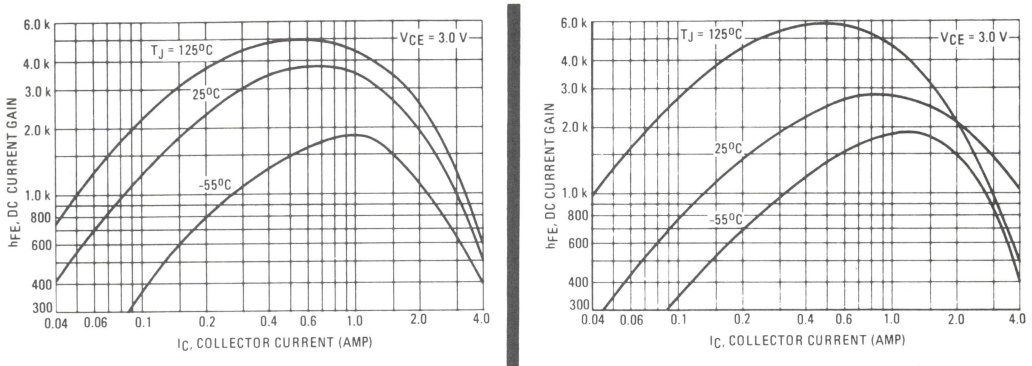

FIGURE 11 – COLLECTOR SATURATION REGION

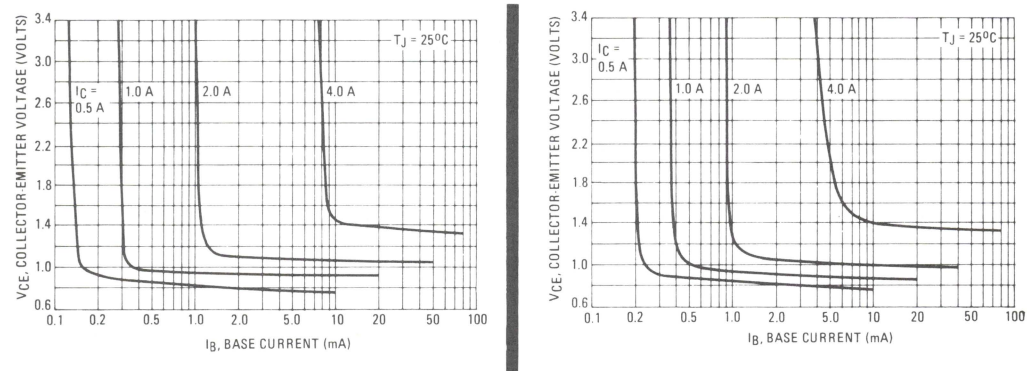

3

FIGURE 12 – "ON" VOLTAGES

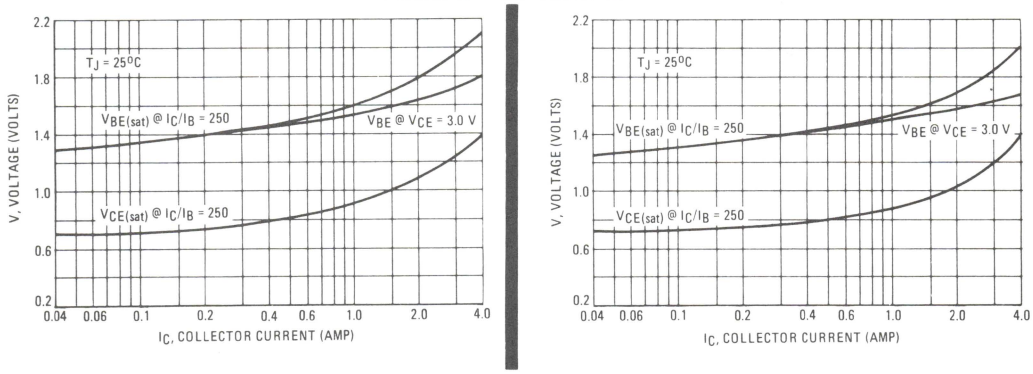

Designer's Data Sheet

NPN Silicon Power Transistor

Switchmode III Series

MJE1320

POWER TRANSISTOR
2 AMPERES
900 VOLTS
80 WATTS



This transistor is designed for high-voltage, power switching in inductive circuits where RBSOA and breakdown voltage are critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Fluorescent Lamp Ballasts
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Features:
- High V_{CEV} Capability (1800 Volts)
- Low Saturation Voltage
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	900	Vdc
Collector-Emitter Voltage	V_{CEV}	1800	Vdc
Emitter Base Voltage	V_{EB}	9	Vdc
Collector Current — Continuous Peak(1)	I_C I_{CM}	2 5	Adc
Base Current — Continuous Peak(1)	I_B I_{BM}	1.5 2.5	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	80 32 0.64	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
2. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

CASE 221A-04
(TO-220AB)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Collector-Emitter Sustaining Voltage (I_C = 50 mA, I_B = 0)			$V_{CEO(sus)}$	900	—	—	Vdc
Collector Cutoff Current			I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)				—	—	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)				—	—	2.5	
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)			I_{EBO}	—	—	0.25	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with base forward biased			$I_{S/b}$	See Figure 13			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figure 14			
ON CHARACTERISTICS(1)							
DC Current Gain (V_{CE} = 5 Vdc)	I_C = 2 Adc		h_{FE}	2.5	4.5	—	—
	I_C = 1 Adc			3	7	—	—
Collector-Emitter Saturation Voltage			$V_{CE(sat)}$				Vdc
(I_C = 1 Adc, I_B = 0.5 Adc)				—	0.18	1	
(I_C = 2 Adc, I_B = 1 Adc)				—	0.3	2.5	
(I_C = 1 Adc, I_B = 0.5 Adc, T_C = 100°C)				—	0.3	1.5	
Base-Emitter Saturation Voltage			$V_{BE(sat)}$				Vdc
(I_C = 1 Adc, I_B = 0.5 Adc)				—	0.2	1.5	
(I_C = 2 Adc, I_B = 1 Adc)				—	0.9	2.8	
(I_C = 1 Adc, I_B = 0.5 Adc, T_C = 100°C)				—	0.15	1.5	
DYNAMIC CHARACTERISTICS							
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)			C_{ob}	—	80	—	pF
SWITCHING CHARACTERISTICS							
Resistive Load (Table 1)							
Delay Time	V_{CC} = 250 Vdc, I_C = 1 A I_{B1} = I_{B2} = 0.5 Adc t_p = 25 μs, Duty Cycle ≤ 2%		t_d	—	0.1	—	μs
Rise Time			t_r	—	0.8	—	μs
Storage Time			t_s	—	4	—	μs
Fall Time			t_f	—	0.8	—	μs
Inductive Load, Clamped (Table 2)							
Storage Time	I_C = 1 A, V_{clamp} = 400 Vdc, $V_{BE(off)}$ = 2 Vdc, I_{B1} = 0.5 Adc	T_C = 25°C	t_{sv}	—	2.8	—	μs
Crossover Time			t_c	—	2.2	—	μs
Storage Time		T_C = 100°C	t_{sv}	—	3.7	10.5	μs
Crossover Time			t_c	—	3.5	10	μs
Fall Time							

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL STATIC CHARACTERISTICS

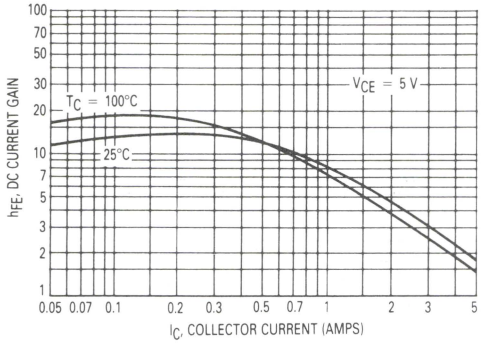

Figure 1. DC Current Gain

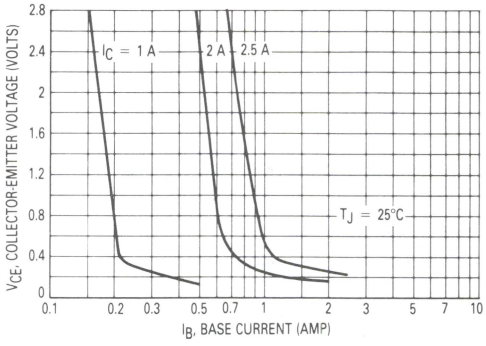

Figure 2. Collector Saturation Region

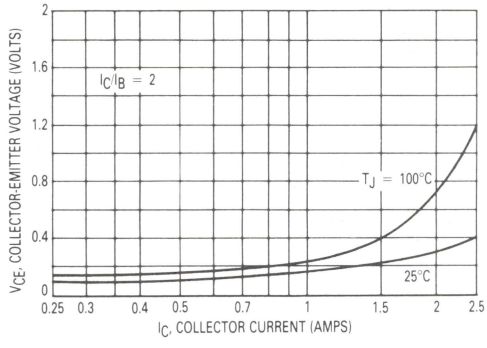

Figure 3. Collector Emitter Saturation Voltage

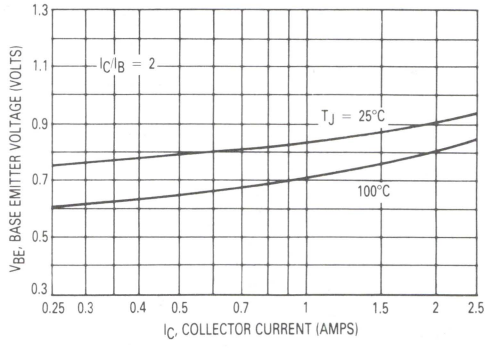

Figure 4. Base Emitter Saturation Voltage

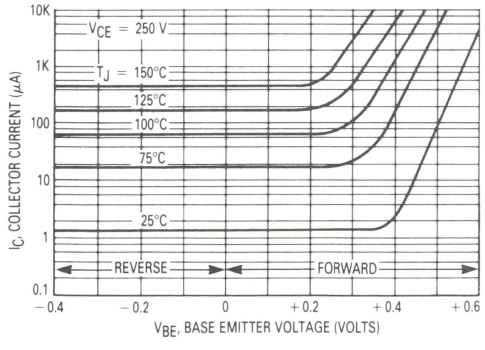

Figure 5. Collector Cutoff Region

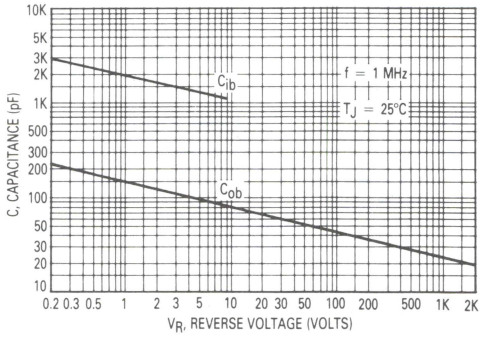

Figure 6. Capacitance Variation

TYPICAL DYNAMIC CHARACTERISTICS

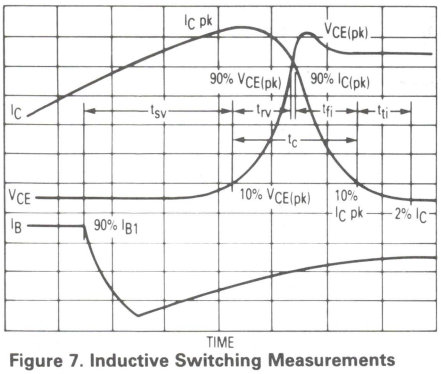

Figure 7. Inductive Switching Measurements

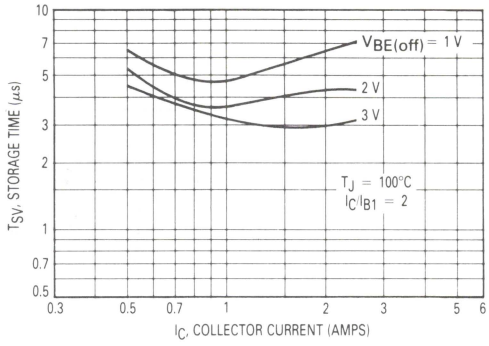

Figure 8. Inductive Storage Time

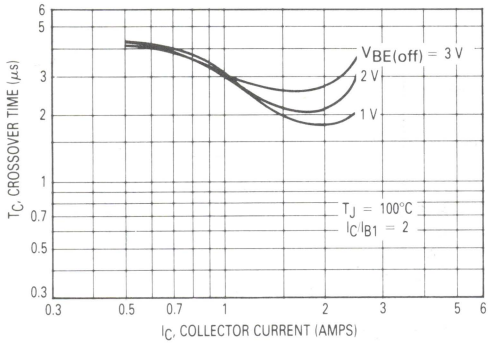

Figure 9. Inductive Crossover Time

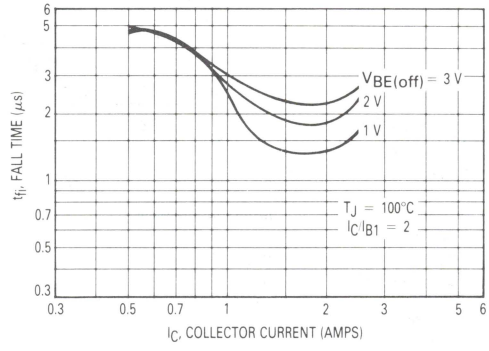

Figure 10. Inductive Fall Time

Table 1. Resistive Load Switching

t_d and t_r

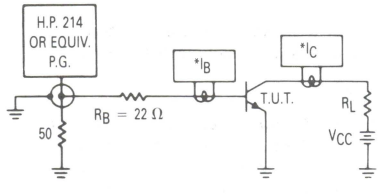

V_{CC} = 250 Vdc
R_L = 250 Ω
I_C = 1 Adc
I_B = 0.5 Adc



*Tektronix AM503
P6302 or Equivalent

t_s and t_f

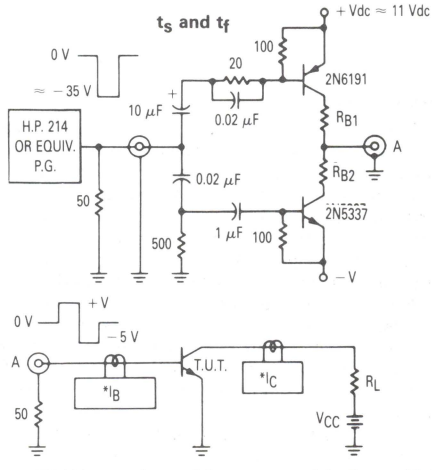

V_{CC} = 250 Vdc
R_L = 250 Ω
I_C = 1 Adc
I_{B1} = 0.5 Adc, R_{B1} = 22 Ω
I_{B2} = 0.5 Adc, R_{B2} = 10 Ω
For $V_{BE(off)}$ = 5 V R_{B2} = 0 Ω

Note: Adjust −V to obtain desired $V_{BE(off)}$ at point A.

Table 2. Inductive Load Switching

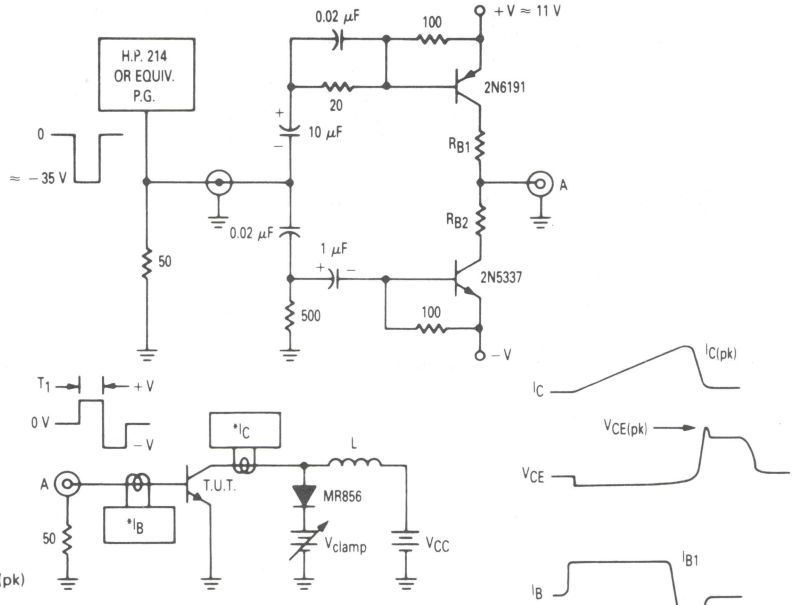

$T_1 \approx \frac{L_{coil}\,(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

Inductive Switching
L = 1.1 mH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

RBSOA
L = 1.1 mH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

*Tektronix P-6042 or Equivalent

Scope — Tektronix 7403 or Equivalent

Note: Adjust −V to obtain desired $V_{BE(off)}$ at Point A.

3

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 11.

$T_{J(pk)}$ may be calculated from the data in Figure 14. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the RBSOA characteristics.

GUARANTEED SAFE OPERATING AREA

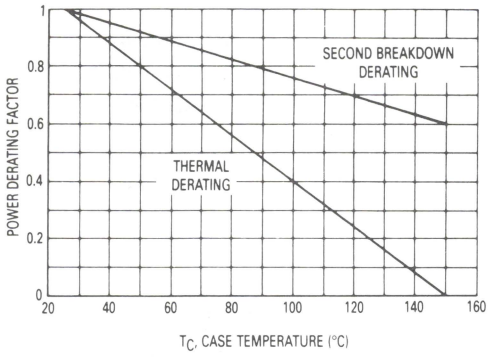

Figure 11. Power Derating

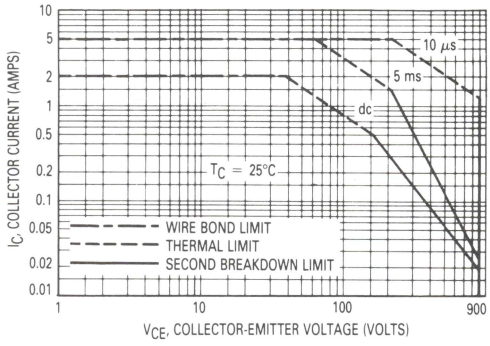

Figure 12. Maximum Rated Forward Bias Safe Operating Area

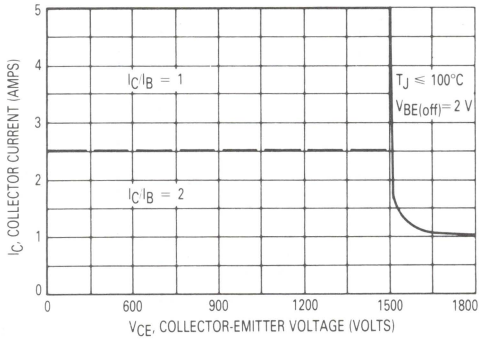

Figure 13. Maximum Rated Reverse Bias Safe Operating Area

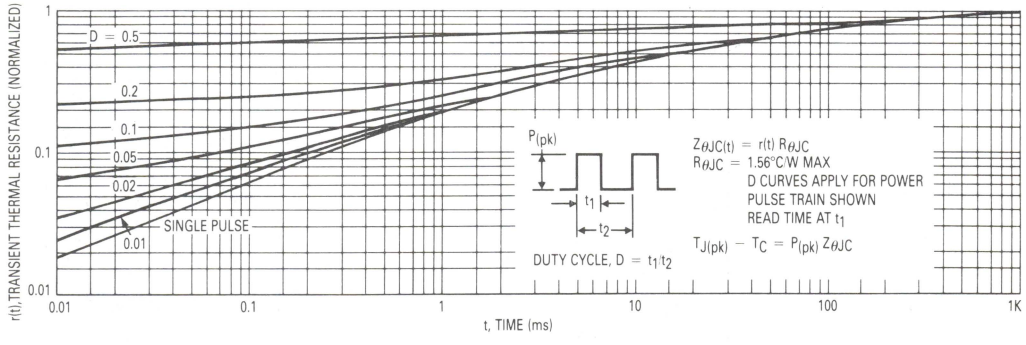

Figure 14. Thermal Response

NPN

MJE1660, MJE1661

SILICON
MEDIUM-POWER TRANSISTORS

. . . designed for use in power amplifier and switching applications.

- High Collector Current – I_C = 15 Adc
- High DC Current Gain – h_{FE} = 10 (Min) @ I_C = 15 Adc

15 AMPERE
POWER TRANSISTORS
SILICON

40–60 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE1660	MJE1661	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	Vdc
Collector-Base Voltage	V_{CB}	40	60	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current-Continuous	I_C	15		Adc
Base Current	I_B	5.0		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	90 0.72		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	1.39	°C/W



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	16.13	16.38	0.635	0.645
B	12.57	12.83	0.495	0.505
C	3.18	3.43	0.125	0.135
D	1.09	1.24	0.043	0.049
F	3.51	3.76	0.138	0.148
G	4.22 BSC		0.166 BSC	
H	2.67	2.92	0.105	0.115
J	0.813	0.864	0.032	0.034
K	15.11	16.38	0.595	0.645
M	9° TYP		9° TYP	
Q	4.70	4.95	0.185	0.195
R	1.91	2.16	0.075	0.085
U	6.22	6.48	0.245	0.255
V	2.03	–	0.080	–

CASE 90-05
TO-225AB

When mounting the device, torque not to exceed 8.0 in.-lb.

If lead bending is required, use suitable clamps or other supports between transistor case and point of bend.

FIGURE 1 – POWER TEMPERATURE DERATING CURVE

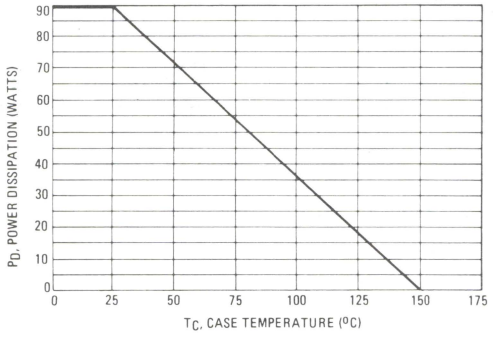

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	MJE1660		40	–	
	MJE1661		60	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)			–	1.0	
Collector Cutoff Current		I_{CES}			mAdc
(V_{CE} = 40 Vdc, V_{BE} = 0)	MJE1660		–	0.7	
(V_{CE} = 60 Vdc, V_{BE} = 0)	MJE1661		–	0.7	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 40 Vdc, I_E = 0)	MJE1660		–	0.7	
(V_{CB} = 60 Vdc, I_E = 0)	MJE1661		–	0.7	
Emitter Cutoff Current		I_{EBO}			mAdc
(V_{BE} = 5.0 Vdc, I_E = 0)			–	1.0	
ON CHARACTERISTICS					
DC Current Gain (1)		h_{FE}			–
(I_C = 5.0 Adc, V_{CE} = 4.0 Vdc)			20	100	
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)			10	–	
Collector-Emitter Saturation Voltage (1)		$V_{CE(sat)}$			Vdc
(I_C = 15 Adc, I_B = 1.5 Adc)			–	1.8	
Base-Emitter on Voltage (1)		$V_{BE(on)}$			Vdc
(I_C = 15 Adc, V_{CE} = 4.0 Vdc)			–	2.5	
DYNAMIC CHARACTERISTICS					
Current-Gain-Bandwidth Product		f_T			MHz
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)			3.0	–	
Small-Signal Current Gain		h_{fe}			–
(I_C = 1.0 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)			25	–	

(1) Pulse Test: Pulse Width ≤ 300 μs. Duty Cycle ≤ 2.0%.

3

FIGURE 2 – DC SAFE OPERATING AREA

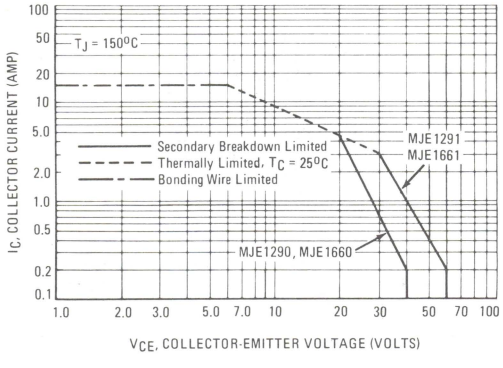

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE2360T
MJE2361T

NPN SILICON HIGH-VOLTAGE TRANSISTOR

. . . useful for general-purpose, high voltage applications requiring high f_T.

- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 350 Vdc (Min) @ I_C = 2.5 mAdc
- DC Current Gain –
  h_{FE} = 40 (Min) @ I_C = 100 mAdc – MJE2361T
- Current-Gain–Bandwidth Product –
  f_T = 10 MHz (Typ) @ I_C = 50 mAdc

0.5 AMPERE POWER TRANSISTORS NPN SILICON

350 VOLTS
30 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	350	Vdc
Collector-Base Voltage	V_{CB}	375	Vdc
Emitter-Base Voltage	V_{EB}	6.0	Vdc
Collector Current – Continuous	I_C	0.5	Adc
Base Current	I_B	0.25	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	30 0.24	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	4.167	°C/W



NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

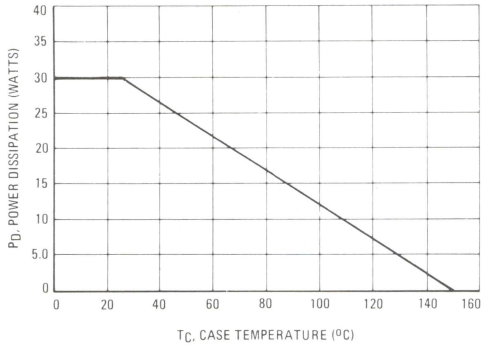

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage(1) (I_C = 2.5 mAdc, I_B = 0)		$V_{CEO(sus)}$	350	–	–	Vdc
Collector Cutoff Current (V_{CE} = 250 Vdc, I_B = 0)		I_{CEO}	–	–	0.25	mAdc
Collector Cutoff Current (V_{CE} = 375 Vdc, $V_{EB(off)}$ = 1.5 Vdc)		I_{CEX}	–	–	0.5	mAdc
Collector Cutoff Current (V_{CB} = 375 Vdc, I_E = 0)		I_{CBO}	–	–	0.1	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	–	0.1	mAdc
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				–
(I_C = 50 mAdc, V_{CE} = 10 Vdc)	MJE2360T		25	–	200	
	MJE2361T		50	–	250	
(I_C = 100 mAdc, V_{CE} = 10 Vdc)	MJE2360T		15	–	–	
	MJE2361T		40	–	–	
Collector-Emitter Saturation Voltage (I_C = 100 mAdc, I_B = 10 mAdc)		$V_{CE(sat)}$	–	–	1.5	Vdc
Base-Emitter On Voltage (I_C = 100 mAdc, V_{CE} = 10 Vdc)		$V_{BE(on)}$	–	–	1.0	Vdc
DYNAMIC CHARACTERISTICS						
Current-Gain–Bandwidth Product (I_C = 50 mAdc, V_{CE} = 10 Vdc, f = 1.0 MHz)		f_T	–	10	–	MHz
Output Capacitance (V_{CB} = 100 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	20	–	pF

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC SAFE OPERATING AREA

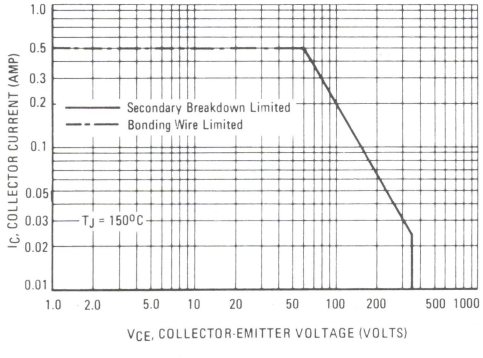

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
MJE2801, MJE2801T
PNP
MJE2901

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . for use as an output device in complementary audio amplifiers up to 35-Watts music power per channel.

- High DC Current Gain – h_{FE} = 25-100 @ I_C = 3.0 A
- Choice of Packages – MJE2801, 2901 – TO-225AB
  MJE2801T – TO-220AB

10 AMPERE
COMPLEMENTARY SILICON POWER TRANSISTORS
60 VOLTS
75, 90 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Base Voltage	V_{CB}	60	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current	I_C	10	Adc
Base Current	I_B	5.0	Adc
Total Power Dissipation @ T_C = 25°C	P_D†		Watts
MJE2801, 2901		90	
MJE2801T		75	
Derate above 25°C			
MJE2801, 2901		0.72	W/°C
MJE2801T		0.6	
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

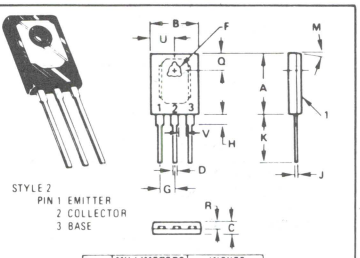

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	16.13	16.38	0.635	0.645
B	12.57	12.83	0.495	0.505
C	3.18	3.43	0.125	0.135
D	1.09	1.24	0.043	0.049
F	3.51	3.76	0.138	0.148
G	4.22 BSC		0.166 BSC	
H	2.67	2.92	0.105	0.115
J	0.813	0.864	0.032	0.034
K	15.11	16.38	0.595	0.645
M	90° TYP		90° TYP	
Q	4.70	4.95	0.185	0.195
R	1.91	2.16	0.075	0.085
U	6.22	6.48	0.245	0.255
V	2.03		0.080	

MJE2801
MJE2901

CASE 90-05
TO-225AB

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}		°C/W
MJE2801, 2901		1.39	
MJE2801T		1.67	

†Safe Area Curves are indicated by Figure 1. Both limits are applicable and must be observed.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (1) (I_C = 200 mAdc, I_B = 0)	$V_{(BR)CEO}$	60	–	Vdc
Collector-Cutoff Current	I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)		–	0.1	
(V_{CB} = 60 Vdc, I_E = 0, T_C = 150°C)		–	2.0	
Emitter Cutoff Current (V_{BE} = 4.0 Vdc, I_C = 0)	I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 3.0 Adc, V_{CE} = 2.0 Vdc)	h_{FE}	25	100	–
Base-Emitter Voltage (I_C = 3.0 Adc, V_{CE} = 2.0 Vdc)	V_{BE}	–	1.4	Vdc

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

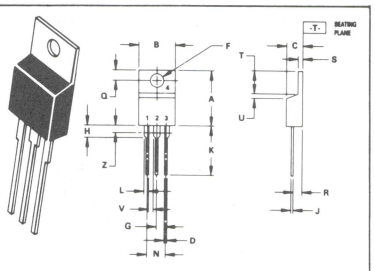

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	–	0.045	–
Z	–	2.04	–	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

3

FIGURE 1 – ACTIVE REGION SAFE OPERATING AREA

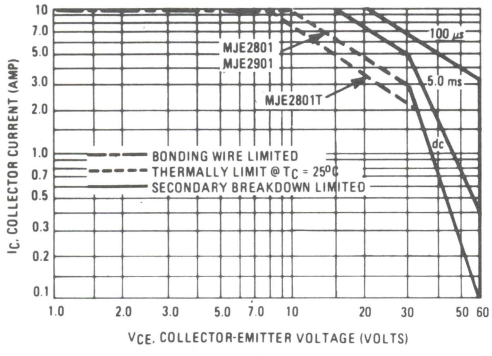

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 2 – DC CURRENT GAIN

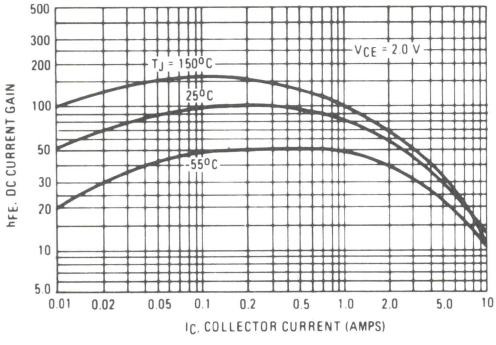

FIGURE 3 – POWER DERATING

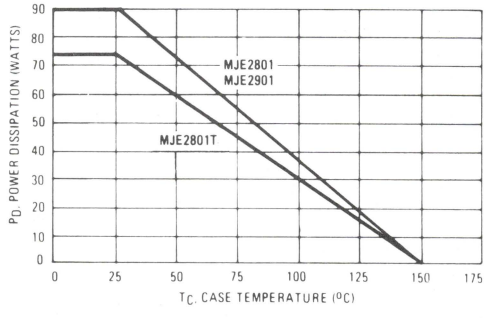

FIGURE 4 – "ON" VOLTAGES

MJE2801/MJE2801T

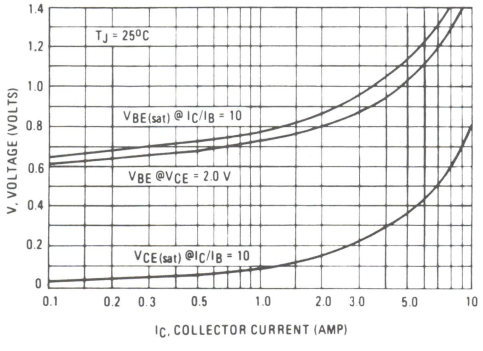

MJE2901

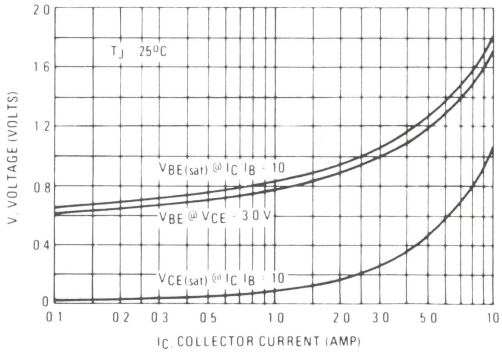

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

PNP
MJE2955, MJE2955T
NPN
MJE3055, MJE3055T

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general-purpose amplifier and switching applications.

- DC Current Gain Specified to 10 Amperes
- High Current Gain – Bandwidth Product – f_T = 2.0 MHz (Min) @ I_C = 500 mAdc
- Choice of Packages – MJE3055, MJE2955 – TO-225AB (TO-127)
  MJE3055T, MJE2955T – TO-220AB

10 AMPERE
COMPLEMENTARY SILICON POWER TRANSISTORS
60 VOLTS
75, 90 WATTS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Base Voltage	V_{CB}	70	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current	I_C	10	Adc
Base Current	I_B	6.0	Adc
Total Power Dissipation @ T_C = 25°C MJE3055, MJE2955 MJE3055T, MJE2955T Derate above 25°C MJE3055, MJE2955 MJE3055T, MJE2955T	P_D†	 90 75 0.72 0.6	Watts W/°C W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case MJE3055, MJE2955 MJE3055T, MJE2955T	θ_{JC}	 1.39 1.67	°C/W

†Safe Area Curves are indicated by Figure 1. Both limits are applicable and must be observed.

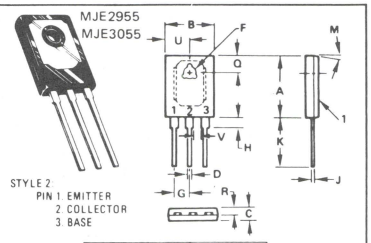

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	16.13	16.38	0.635	0.645
B	12.57	12.83	0.495	0.505
C	3.18	3.43	0.125	0.135
D	1.09	1.24	0.043	0.049
F	3.51	3.76	0.138	0.148
G	4.22 BSC		0.166 BSC	
H	2.67	2.92	0.105	0.115
J	0.813	0.864	0.032	0.034
K	15.11	16.38	0.595	0.645
M	90° TYP		90° TYP	
Q	4.70	4.95	0.185	0.195
R	1.91	2.16	0.075	0.085
U	6.22	6.48	0.245	0.255
V	2.03	–	0.080	–

CASE 90-05
TO-225AB

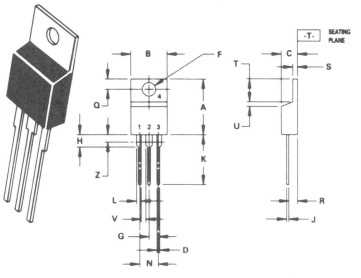

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	–	0.045	–
Z	–	2.04	–	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

FIGURE 1 – ACTIVE-REGION SAFE OPERATING AREA

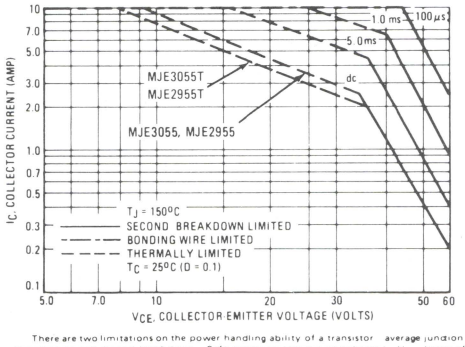

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown. (See AN-415A)

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 200 mAdc, I_B = 0)	$V_{CEO(sus)}$	60	–	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0)	I_{CEO}	–	700	μAdc
Collector Cutoff Current (V_{CE} = 70 Vdc, $V_{EB(off)}$ = 1.5 Vdc) (V_{CE} = 70 Vdc, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)	I_{CEX}	– –	1.0 5.0	mAdc
Collector Cutoff Current (V_{CB} = 70 Vdc, I_E = 0) (V_{CB} = 70 Vdc, I_E = 0, T_C = 150°C)	I_{CBO}	– –	1.0 10	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	5.0	mAdc
ON CHARACTERISTICS				
DC Current Gain (1) (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc) (I_C = 10 Adc, V_{CE} = 4.0 Vdc)	h_{FE}	20 5.0	100 –	–
Collector-Emitter Saturation Voltage (1) (I_C = 4.0 Adc, I_B = 0.4 Adc) (I_C = 10 Adc, I_B = 3.3 Adc)	$V_{CE(sat)}$	– –	1.1 8.0	Vdc
Base-Emitter On Voltage (1) (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	–	1.8	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain-Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 500 kHz)	f_T	2.0	–	MHz

(1) **Pulse Test**: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – DC CURRENT GAIN

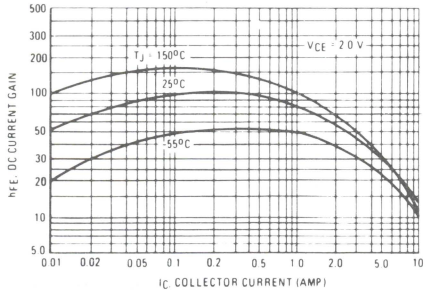

FIGURE 3 – POWER DERATING

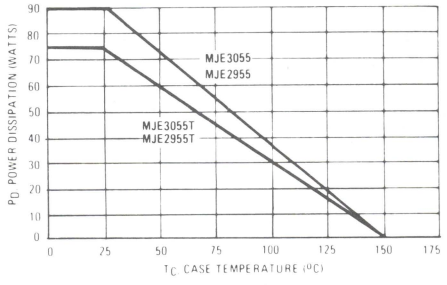

FIGURE 4 – "ON" VOLTAGES

MJE2955, 2955T

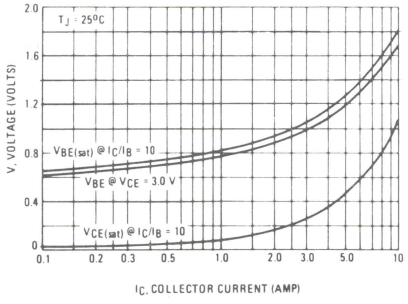

MJE3055, 3055T

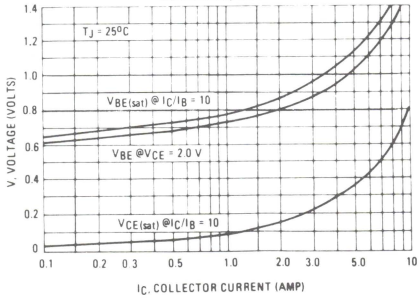

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN
MJE3300, MJE3301
PNP
MJE3310

PLASTIC DARLINGTON COMPLEMENTARY SILICON ANNULAR POWER TRANSISTORS

. . . designed for general-purpose amplifier and high-speed switching applications.

- High DC Current Gain —
  h_{FE} = 2000 (Typ) @ I_C = 1.0 Adc
- Collector-Emitter Sustaining Voltage — @ 10 mAdc
  $V_{CEO(sus)}$ = 40 Vdc (Min) — MJE3310/MJE3300
  = 60 Vdc (Min) — MJE3301
- Reverse Voltage Protection Diode
- Pinout Compatible with TO-220 Package
- Monolithic Construction with Built-In Base-Emitter Output Resistor
- Thermopad II Construction With Hard Solder for High Reliability

DARLINGTON 4-AMPERE

COMPLEMENTARY SILICON POWER TRANSISTORS

40, 60 VOLTS
15 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE3310 MJE3300	MJE3301	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	Vdc
Collector-Base Voltage	V_{CB}	40	60	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous Peak	I_C	4.0 6.0		Adc
Base Current	I_B	100		mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.5 0.012		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	8.33	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	83.3	°C/W



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

FIGURE 1 — POWER DERATING

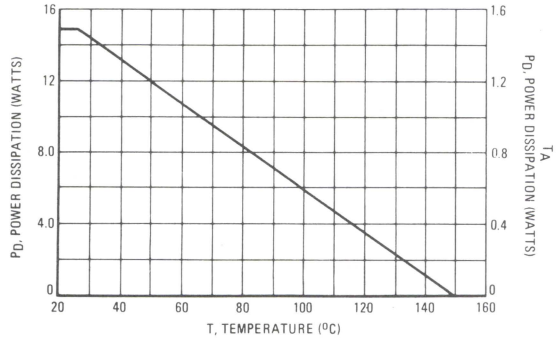

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 10 mAdc, I_B = 0)	MJE3310, MJE3300 MJE3301	$V_{CEO(sus)}$	 40 60	 – –	Vdc
Collector-Cutoff Current (V_{CE} = 20 Vdc, I_B = 0) (V_{CE} = 30 Vdc, I_B = 0) (V_{CE} = 40 Vdc, I_B = 0)	MJE3310, MJE3300 MJE3301	I_{CEO}	 – –	 100 100 —	μAdc
Collector Cutoff Current (V_{CB} = Rated $V_{CEO(sus)}$, I_E = 0) (V_{CB} = Rated $V_{CEO(sus)}$, I_E = 0, T_C = 100°C)		I_{CBO}	 –	1.0 100	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	μAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 2.0 Vdc) (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)		h_{FE}	 1000 750	 – –	–
Collector-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 6.0 mAdc)		$V_{CE(sat)}$	–	1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 1.5 Adc, I_B = 6.0 mAdc)		$V_{BE(sat)}$	–	2.5	Vdc
Base-Emitter On Voltage (I_C = 1.5 Adc, V_{CE} = 2.0 Vdc)		$V_{BE(on)}$	–	2.5	Vdc
Output Diode Voltage Drop (I_{EC} = 2.0 Adc)		V_{EC}	–	2.0	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain – Bandwidth Product (I_C= 1.0 Adc, V_{CE} = 2.0 Vdc)		f_T	20	–	MHz

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – ACTIVE-REGION SAFE OPERATING AREA

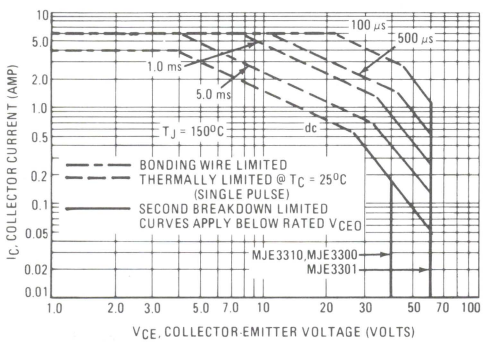

FIGURE 3 – TYPICAL DC CURRENT GAIN

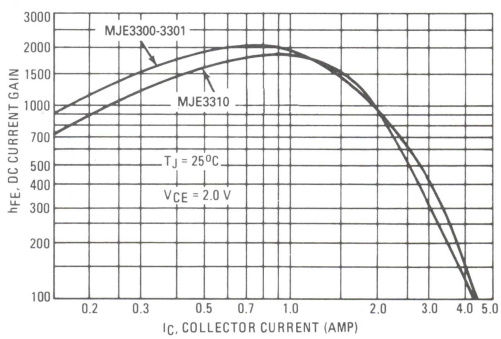

FIGURE 4 – DARLINGTON CIRCUIT SCHEMATIC





MJE3439
MJE3440

NPN SILICON HIGH-VOLTAGE POWER TRANSISTORS

. . . designed for use in line-operated equipment requiring high f_T.

- High DC Current Gain –
  h_{FE} = 40-160 @ I_C = 20 mAdc
- Current-Gain–Bandwidth Product –
  f_T = 15 MHz (Min) @ I_C = 10 mAdc
- Low Output Capacitance –
  C_{ob} = 10 pF (Max) @ f = 1.0 MHz

0.3 AMPERE

POWER TRANSISTORS NPN SILICON

250–350 VOLTS
15 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE3439	MJE3440	Unit
Collector-Emitter Voltage	V_{CEO}	350	250	Vdc
Collector-Base Voltage	V_{CB}	450	350	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous	I_C	0.3		Adc
Base Current	I_B	150		mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	15 0.12		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	8.33	°C/W

FIGURE 1 – POWER-TEMPERATURE DERATING CURVE

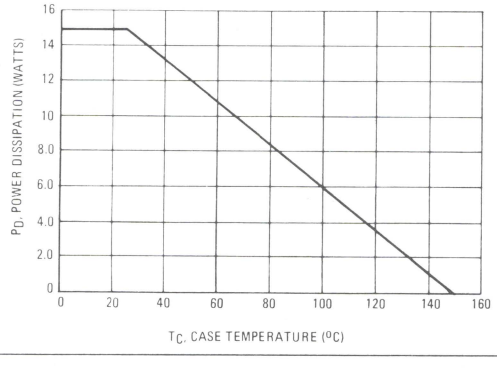



STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage		$V_{CEO(sus)}$			Vdc
(I_C = 5.0 mAdc, I_B = 0)	MJE3439		350	–	
(I_C = 50 mAdc, I_B = 0)	MJE3440		250	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 300 Vdc, I_B = 0)	MJE3439		–	20	
(V_{CE} = 200 Vdc, I_B = 0)	MJE3440		–	50	
Collector Cutoff Current		I_{CEX}			μAdc
(V_{CE} = 450 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	MJE3439		–	500	
(V_{CE} = 300 Vdc, $V_{EB(off)}$ = 1.5 Vdc)	MJE3440		–	500	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 350 Vdc, I_E = 0)	MJE3439		–	20	
(V_{CB} = 250 Vdc, I_E = 0)	MJE3440		–	20	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	20	μAdc
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			–
(I_C = 2.0 mAdc, V_{CE} = 10 Vdc)			30	–	
(I_C = 20 mAdc, V_{CE} = 10 Vdc)			50	200	
Collector-Emitter Saturation Voltage (I_C = 50 mAdc, I_B = 4.0 mAdc)		$V_{CE(sat)}$	–	0.5	Vdc
Base-Emitter Saturation Voltage (I_C = 50 mAdc, I_B = 4.0 mAdc)		$V_{BE(sat)}$	–	1.3	Vdc
Base-Emitter On Voltage (I_C = 50 mAdc, V_{CE} = 10 Vdc)		$V_{BE(on)}$	–	0.8	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (I_C = 10 mAdc, V_{CE} = 10 Vdc, f = 5.0 MHz)		f_T	15	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)		C_{ob}	–	10	pF
Small-Signal Current Gain (I_C = 5.0 mAdc, V_{CE} = 10 Vdc, f = 1.0 kHz)		h_{fe}	25	–	–

FIGURE 2 – ACTIVE-REGION SAFE OPERATING AREA

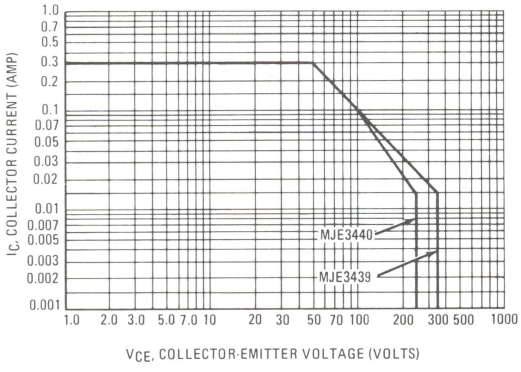

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter secondary breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
MJE4340	MJE4350
MJE4341	MJE4351
MJE4342	MJE4352
MJE4343	MJE4353

HIGH-VOLTAGE — HIGH POWER TRANSISTORS

. . . designed for use in high power audio amplifier applications and high voltage switching regulator circuits.

- High Collector-Emitter Sustaining Voltage —

	NPN	PNP
$V_{CEO(sus)}$ = 100 Vdc	MJE4340	MJE4350
= 120 Vdc	MJE4341	MJE4351
= 140 Vdc	MJE4342	MJE4352
= 160 Vdc	MJE4343	MJE4353

- High DC Current Gain — @ I_C = 8.0 Adc
  h_{FE} = 35 (Typ)
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 8.0 Adc

16 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON

100-160 VOLTS



MAXIMUM RATINGS

Rating	Symbol	MJE4340 MJE4350	MJE4341 MJE4351	MJE4342 MJE4352	MJE4343 MJE4353	Unit
Collector-Emitter Voltage	V_{CEO}	100	120	140	160	Vdc
Collector-Base Voltage	V_{CB}	100	120	140	160	Vdc
Emitter-Base Voltage	V_{EB}	7.0				Vdc
Collector Current — Continuous	I_C	16				Adc
Peak (1)		20				
Base Current — Continous	I_B	5.0				Adc
Total Device Dissipation @ T_C = 25°C	P_D	125				Watts
Operating and Storage Junction Temperature Range	T_J,T_{stg}	−65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

(1) Pulse Test: Pulse Width ≤ 5.0 μs, Duty Cycle ≥10%.



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

3

FIGURE 1 — POWER DERATING
REFERENCE: AMBIENT TEMPERATURE

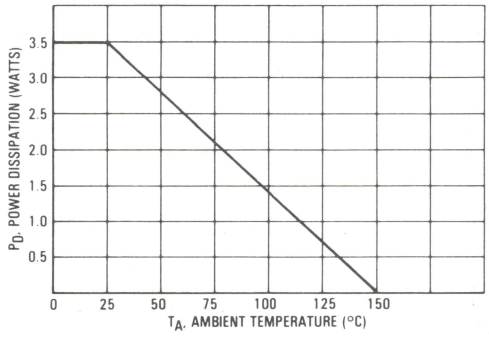

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 200 mAdc, I_B = 0)	MJE4340, MJE4350		100	—	
	MJE4341, MJE4351		120	—	
	MJE4342, MJE4352		140	—	
	MJE4343, MJE4353		160	—	
Collector-Emitter Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 50 Vdc, I_B = 0)	MJE4340, MJE4350		—	750	
(V_{CE} = 60 Vdc, I_B = 0)	MJE4341, MJE4351		—	750	
(V_{CE} = 70 Vdc, I_B = 0)	MJE4342, MJE4352		—	750	
(V_{CE} = 80 Vdc, I_B = 0)	MJE4343, MJE4353		—	750	
Collector-Emitter Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc)			—	1.0	
(V_{CE} = Rated V_{CB}, $V_{EB(off)}$ = 1.5 Vdc, T_C = 150°C)			—	5.0	
Collector-Base Cutoff Current		I_{CBO}	—	750	μAdc
(V_{CB} = Rated V_{CB}, I_E = 0)					
Emitter-Base Cutoff Current		I_{EBO}	—	1.0	mAdc
(V_{BE} = 7.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 8.0 Adc, V_{CE} = 2.0 Vdc)			15	35 (Typ)	
(I_C = 16 Adc, V_{CE} = 4.0 Vdc)			8.0	15 (Typ)	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 8.0 Adc, I_B = 800 mA)			—	2.0	
(I_C = 16 Adc, I_B = 2.0 Adc)			—	3.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	—	3.9	Vdc
(I_C = 16 Adc, I_B = 2.0 Adc)					
Base-Emitter On Voltage		$V_{BE(on)}$	—	3.9	Vdc
(I_C = 16 Adc, V_{CE} = 4.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (2)		f_T	1.0	—	MHz
(I_C = 1.0 Adc, V_{CE} = 20 Vdc, f_{test} = 0.5 MHz)					
Output Capacitance		C_{ob}	—	800	pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)					

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤2.0%.
(2) $f_T = |h_{fe}| \bullet f_{test}$

FIGURE 2 — SWITCHING TIMES TEST CIRCUIT

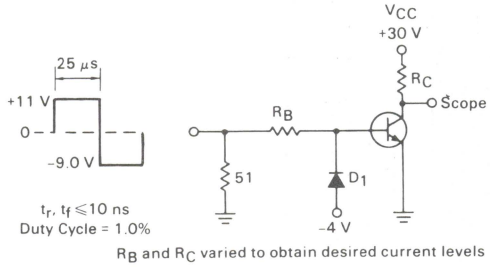

R_B and R_C varied to obtain desired current levels

D_1 must be fast recovery type, eg:
MBD5300 used above $I_B \approx$ 100 mA
MSD6100 used below $I_B \approx$ 100 mA

Note: Reverse polarities to test PNP devices.

FIGURE 3 — TYPICAL TURN-ON TIME

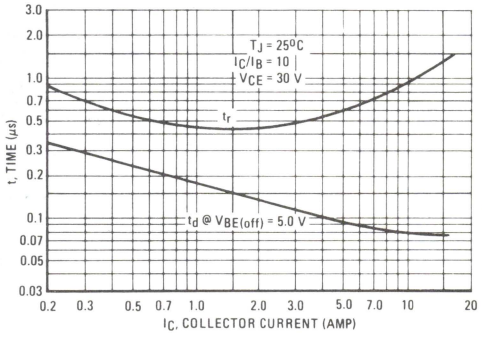

3

TYPICAL CHARACTERISTICS

FIGURE 4 — TURN-OFF TIME

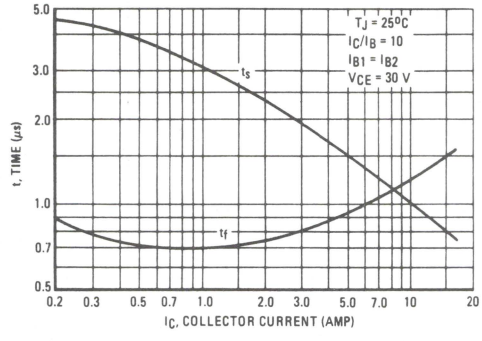

FIGURE 5 — ON VOLTAGES

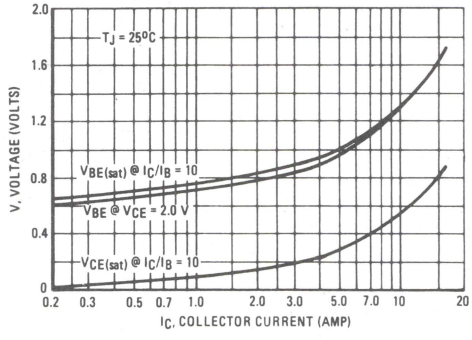

DC CURRENT GAIN

FIGURE 6 — MJE4340 SERIES (NPN)

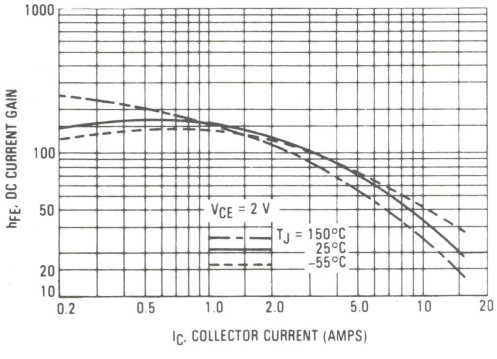

FIGURE 7 — MJE4350 SERIES (PNP)

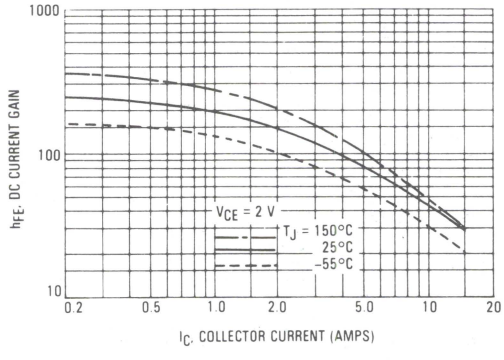

FIGURE 8 — COLLECTOR SATURATION REGION

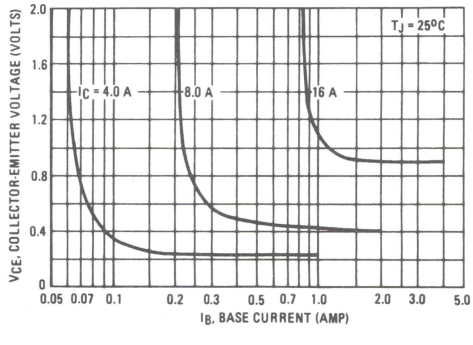

3

FIGURE 9 — THERMAL RESPONSE

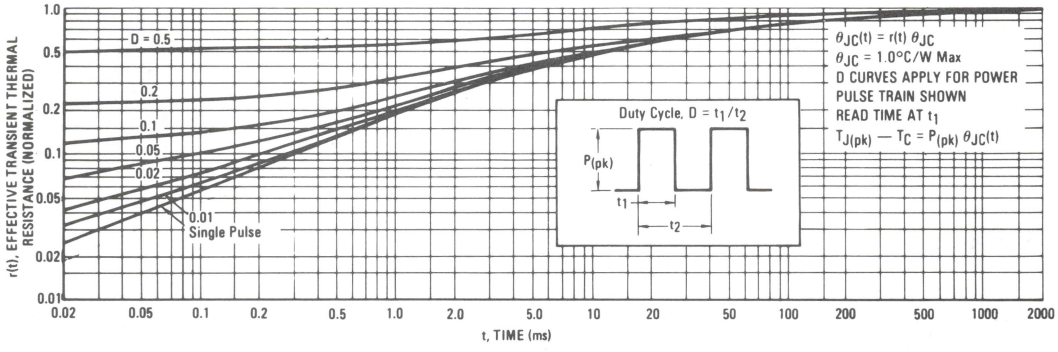

FIGURE 10 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

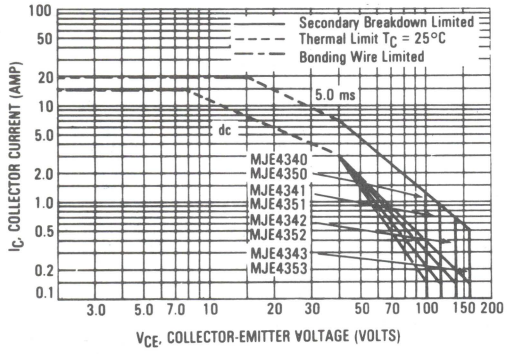

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_C = 25°C$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 10 may be found at any case temperature by using the appropriate curve on Figure 9.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 11 gives RBSOA characteristics.

FIGURE 11 — MAXIMUM REVERSE BIAS SAFE OPERATING AREA

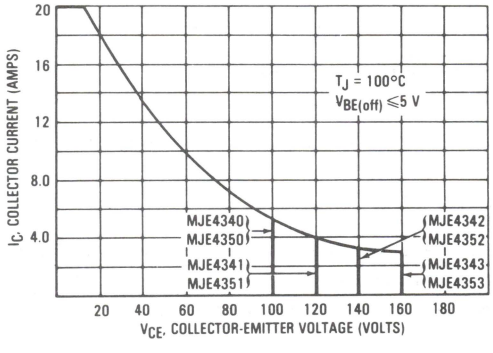

3

NPN Silicon Power Darlington Transistors

MJE5740
MJE5741
MJE5742

POWER DARLINGTON TRANSISTORS
8 AMPERES
300, 350, 400 VOLTS
80 WATTS

The MJE5740, 41, 42 Darlington transistors are designed for high-voltage power switching in inductive circuits. They are particularly suited for operation in applications such as:

- Small Engine Ignition
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls





CASE 221A-04
TO-220AB

MAXIMUM RATINGS

Rating	Symbol	MJE5740	MJE5741	MJE5742	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	350	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	700	800	Vdc
Emitter Base Voltage	V_{EB}		8		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}		8 16		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}		2.5 5		Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D		2 16		Watts mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D		80 640		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}		−65 to +150		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle = 10%.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (2)						
Collector-Emitter Sustaining Voltage (I_C = 50 mA, I_B = 0)	MJE5740 MJE5741 MJE5742	$V_{CEO(sus)}$	300 350 400	— — —	— — —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		I_{CEV}	— —	— —	1 5	mAdc
Emitter Cutoff Current (V_{EB} = 8 Vdc, I_C = 0)		I_{EBO}	—	—	75	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$	See Figure 6			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 7			

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

(continued)

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 0.5 Adc, V_{CE} = 5 Vdc) (I_C = 4 Adc, V_{CE} = 5 Vdc)	h_{FE}	50 200	100 400	— —	—
Collector-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 0.2 Adc) (I_C = 8 Adc, I_B = 0.4 Adc) (I_C = 4 Adc, I_B = 0.2 Adc, T_C = 100°C)	$V_{CE(sat)}$	 — — —	 — — —	 2 3 2.2	Vdc
Base-Emitter Saturation Voltage (I_C = 4 Adc, I_B = 0.2 Adc) (I_C = 8 Adc, I_B = 0.4 Adc) (I_C = 4 Adc, I_B = 0.2 Adc, T_C = 100°C)	$V_{BE(sat)}$	 — — —	 — — —	 2.5 3.5 2.4	Vdc
Diode Forward Voltage (2) (I_F = 5 Adc)	V_f	—	—	2.5	Vdc
SWITCHING CHARACTERISTICS					
Typical Resistive Load (Table 1)					
Delay Time	(V_{CC} = 250 Vdc, $I_{C(pk)}$ = 6 A, I_{B1} = I_{B2} = 0.25 A, t_p = 25 μs, Duty Cycle ≤ 1%)	t_d	—	0.04	—	μs
Rise Time		t_r	—	0.5	—	μs
Storage Time		t_s	—	8	—	μs
Fall Time		t_f	—	2	—	μs
Inductive Load, Clamped (Table 1)						
Voltage Storage Time	($I_{C(pk)}$ = 6 A, $V_{CE(pk)}$ = 250 Vdc, I_{B1} = 0.06 A, $V_{BE(off)}$ = 5 Vdc	t_{sv}	—	4	—	μs
Crossover Time		t_c	—	2	—	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.
(2) The internal Collector-to-Emitter diode can eliminate the need for an external diode to clamp inductive loads. Tests have shown that the Forward Recovery Voltage (V_f) of this diode is comparable to that of typical fast recovery rectifiers.

TYPICAL CHARACTERISTICS

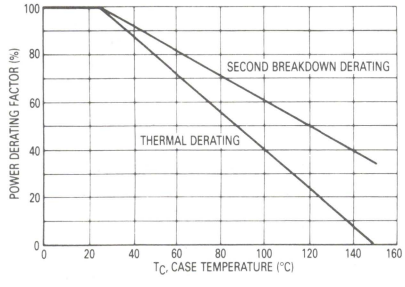

Figure 1. Power Derating

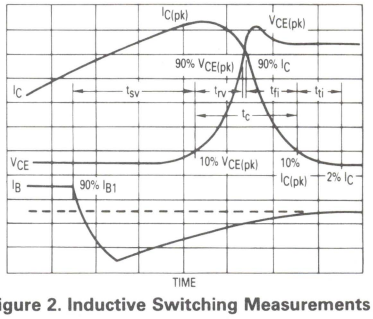

Figure 2. Inductive Switching Measurements

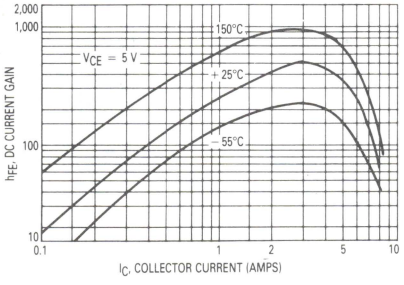

Figure 3. DC Current Gain

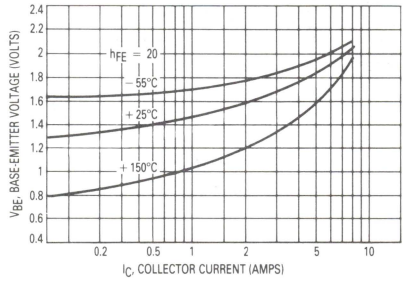

Figure 4. Base-Emitter Voltage

Table 1. Test Conditions for Dynamic Performance

	Reverse Bias Safe Operating Area and Inductive Switching	Resistive Switching
Test Circuits	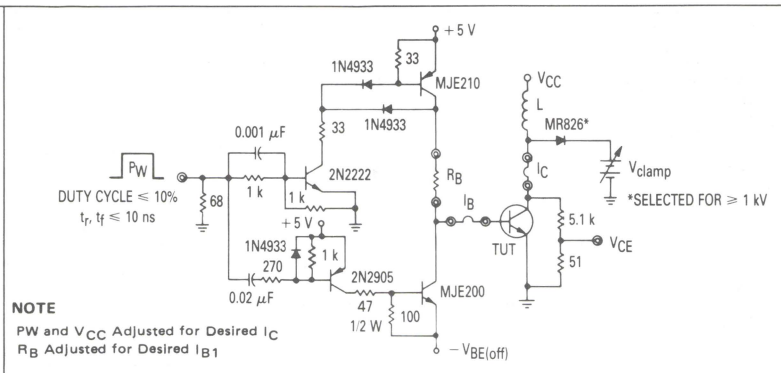 **NOTE** PW and V_{CC} Adjusted for Desired I_C R_B Adjusted for Desired I_{B1}	
Circuit Values	COIL DATA: FERROXCUBE CORE #6656 FULL BOBBIN (~16 TURNS) #16 GAP FOR 200 μH/20 A L_{coil} = 200 μH V_{CC} = 30 V $V_{CE(pk)}$ = 250 Vdc $I_{C(pk)}$ = 6 A	V_{CC} = 250 V D1 = 1N5820 OR EQUIV.
Test Waveforms	 **Output Waveforms** t_1 ADJUSTED TO OBTAIN I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ TEST EQUIPMENT SCOPE — TEKTRONIX 475 OR EQUIVALENT	 t_r, t_f < 10 ns DUTY CYCLE = 1% R_B AND R_C ADJUSTED FOR DESIRED I_B AND I_C

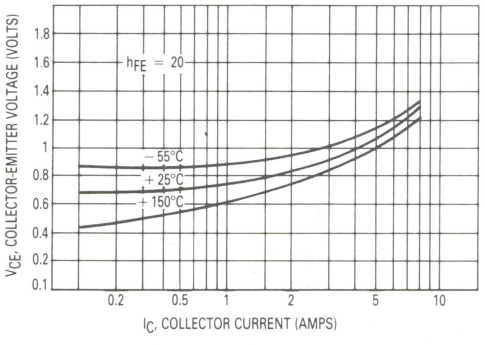

Figure 5. Collector Saturation Voltage

OUTLINE DIMENSIONS

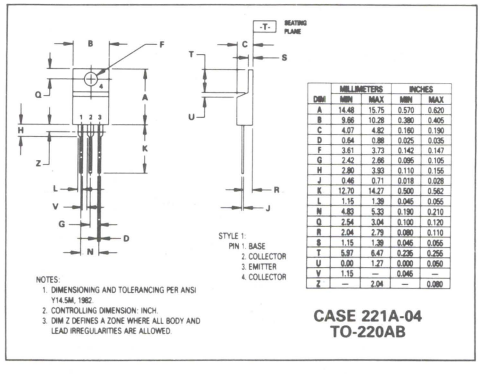

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on $T_C = 25°C$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 6 may be found at any case temperature by using the appropriate curve on Figure 1.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 7 gives the complete RBSOA characteristics.

The Safe Operating Area figures shown in Figures 6 and 7 are specified ratings for these devices under the test conditions shown.

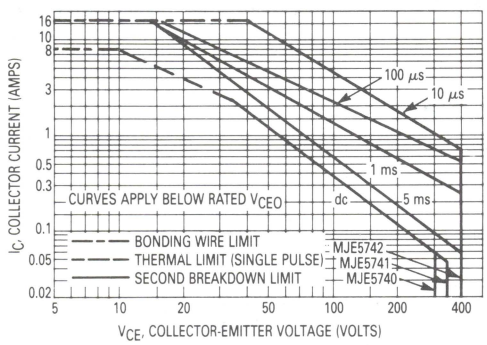

Figure 6. Forward Bias Safe Operating Area

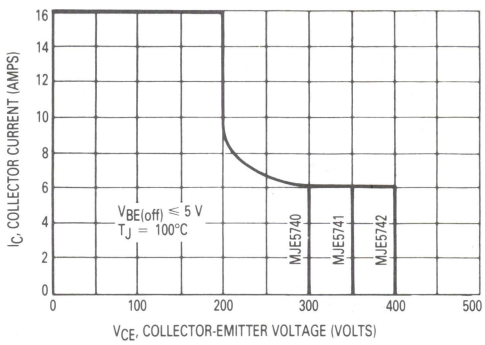

Figure 7. Reverse Bias Safe Operating Area

RESISTIVE SWITCHING PERFORMANCE

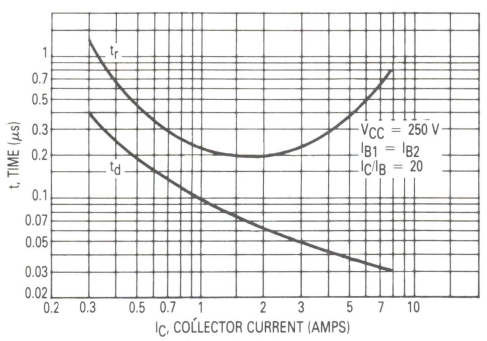

Figure 8. Turn-On Time

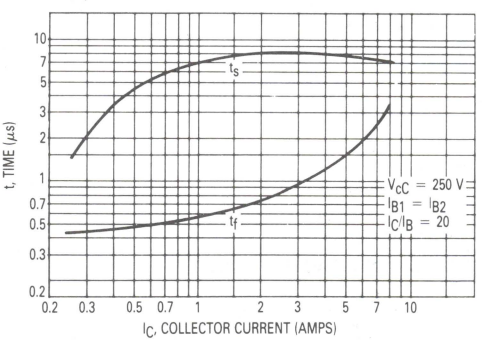

Figure 9. Turn-Off Time

3

MJE5850
MJE5851
MJE5852

Designers Data Sheet

8 AMPERE
PNP SILICON POWER TRANSISTORS
300, 350, 400 VOLTS
80 WATTS



SWITCHMODE SERIES
PNP SILICON POWER TRANSISTORS

The MJE5850, MJE5851 and the MJE5852 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Delfection Circuits

Fast Turn-Off Times
100 ns Inductive Fall Time @ 25°C (Typ)
125 ns Inductive Crossover Time @ 25°C (Typ)

Operating Temperature Range -65 to +150°C

100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJE 5850	MJE 5851	MJE 5852	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	350	400	Vdc
Collector-Emitter Voltage	V_{CEV}	350	400	450	Vdc
Emitter Base Voltage	V_{EB}	6.0			Vdc
Collector Current — Continuous Peak (1)	I_C I_{CM}	8.0 16			Adc
Base Current — Continuous Peak (1)	I_B I_{BM}	4.0 8.0			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	80 0.640			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to 150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

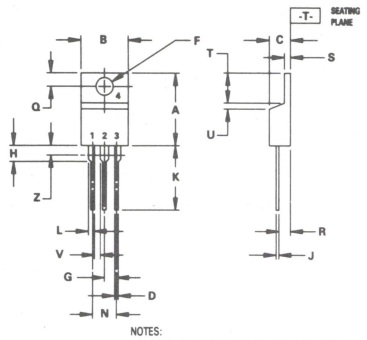

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (I_C = 10 mA, I_B = 0)	MJE5850	$V_{CEO(sus)}$	300			Vdc
	MJE5851		350	—	—	
	MJE5852		400	—	—	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			—	—	0.5	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			—	—	2.5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with base reverse biased		RBSOA	See Figure 13			
***ON CHARACTERISTICS**						
DC Current Gain		h_{FE}				—
(I_C = 2.0 Adc, V_{CE} = 5 Vdc)			15	—	—	
(I_C = 5.0 Adc, V_{CE} = 5 Vdc)			5	—	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 4.0 Adc, I_B = 1.0 Adc)			—	—	2.0	
(I_C = 8.0 Adc, I_B = 3.0 Adc)			—	—	5.0	
(I_C = 4.0 Adc, I_B = 1.0 Adc, T_C = 100°C)			—	—	2.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 4.0 Adc, I_B = 1.0 Adc)			—	—	1.5	
(I_C = 4.0 Adc, I_B = 1.0 Adc, T_C = 100°C)			—	—	1.5	

DYNAMIC CHARACTERISTICS

Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	—	270	—	pF

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)						
Delay Time	(V_{CC} = 250 Vdc, I_C = 4.0 A, I_{B1} = 1.0 A,	t_d	—	0.025	0.1	μs
Rise Time	t_p = 50 μs, Duty Cycle ≤ 2%)	t_r	—	0.100	0.5	μs
Storage Time	(V_{CC} = 250 Vdc, I_C = 4.0 A, I_{B1} = 1.0 A,	t_s	—	0.60	2.0	μs
Fall Time	$V_{BE(off)}$ = 5 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%)	t_f	—	0.11	0.5	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_{CM} = 4 A, V_{CEM} = 250 V, I_{B1} = 1.0 A,	t_{sv}	—	0.8	3.0	μs
Crossover Time	$V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	—	0.4	1.5	μs
Fall Time		t_{fi}	—	0.1	—	μs
Storage Time	(I_{CM} = 4 A, V_{CEM} = 250 V, I_{B1} = 1.0 A,	t_{sv}	—	0.5	—	μs
Crossover Time	$V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_c	—	0.125	—	μs
Fall Time		t_{fi}	—	0.1	—	μs

* Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%

3

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

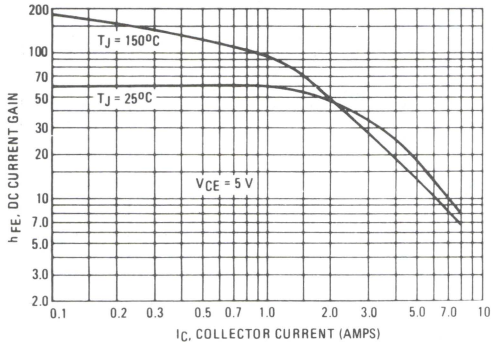

FIGURE 2 – COLLECTOR SATURATION REGION

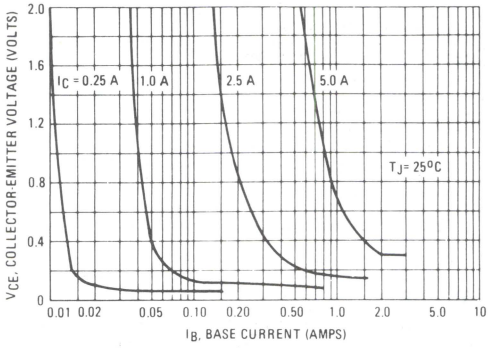

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

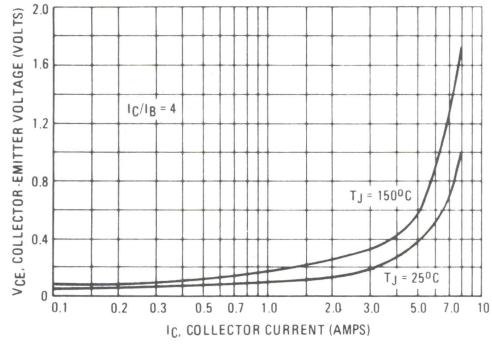

FIGURE 4 – BASE-EMITTER VOLTAGE

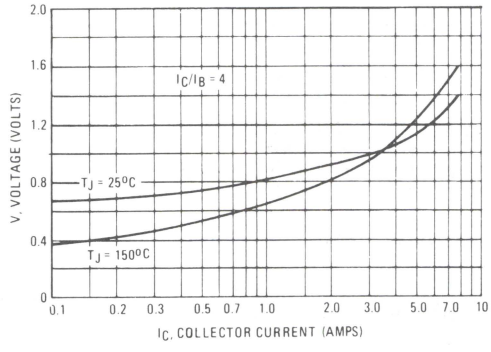

FIGURE 5 – COLLECTOR CUTOFF REGION

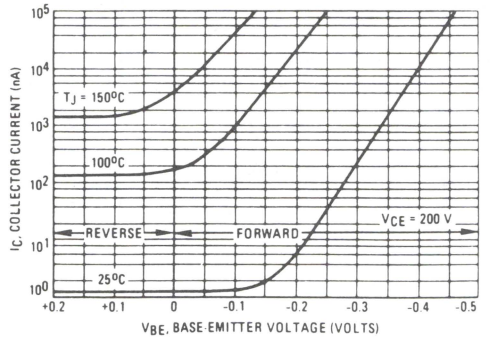

FIGURE 6 – CAPACITANCE

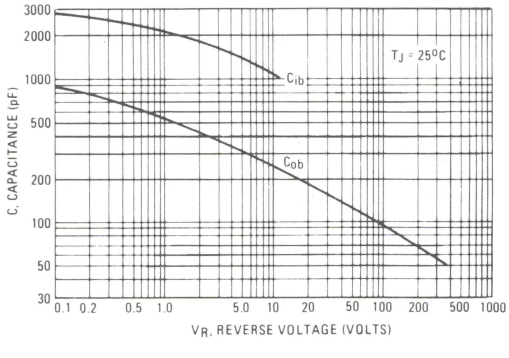

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	– 10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	+V, 50 µF, 0.0025 µF, 0.2 µF, 500 Ω ½ W, 0.1 µF, MJE15029, 500 Ω ½ W, IN4934, Input, 0.1 µF, 0.0033 µF, 500 Ω ½ W, 1 Ω 2 W, MJE15028, 50 Ω 2 W, 0.2 µF, 500 Ω ½ W, 0.1µF, 50 µF, –V –V adjusted to obtain desired I_{B1} +V adjusted to obtain desired $V_{BE(off)}$	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 µH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_B adjusted to attain I_{B1}	V_{CC} = 250 V R_L = 62 Ω Pulse Width = 10 µs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, See above for Detailed Conditions, R_S = 0.1Ω	OUTPUT WAVEFORMS I_C, I_{CM}, t_f Clamped, t_1, t_f, V_{clamp}, V_{CE}, V_{CEM}, Time, t_2, t t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT TUT, 1, 2, R_L, V_{CC}

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

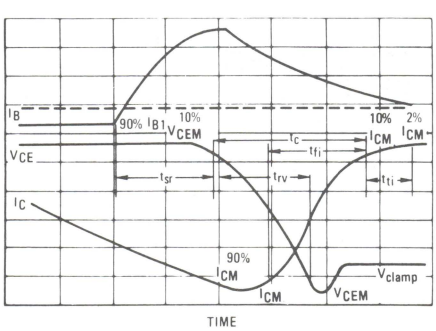

FIGURE 8 – INDUCTIVE SWITCHING TIMES

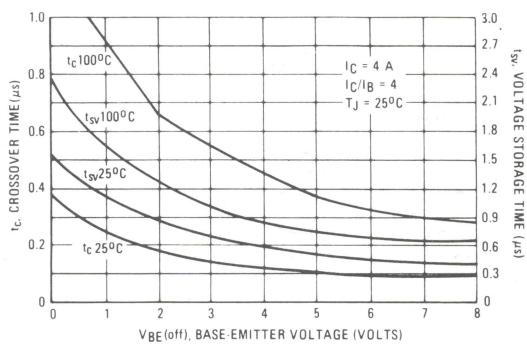

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10 % V_{CEM}
t_{rv} = Voltage Rise Time, 10—90% V_{CEM}
t_{fi} = Current Fall Time, 90—10% I_{CM}
t_{ti} = Current Tail, 10—2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is shown in Figure 7 to aid on the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user orinented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

FIGURE 9 – TURN-ON SWITCHING TIMES

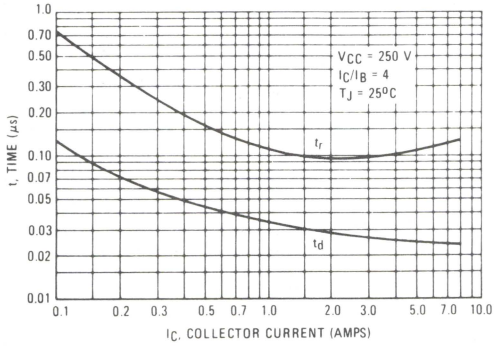

FIGURE 10 – TURN-OFF SWITCHING TIMES

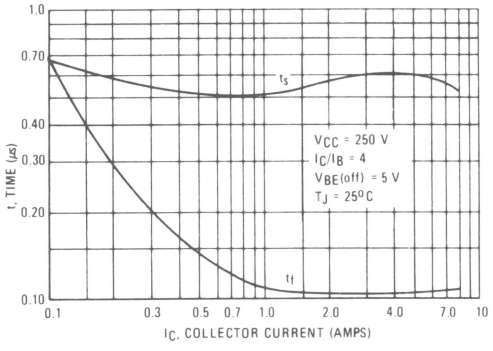

FIGURE 11 – TYPICAL THERMAL RESPONSE [$Z_{\theta JC}(t)$]

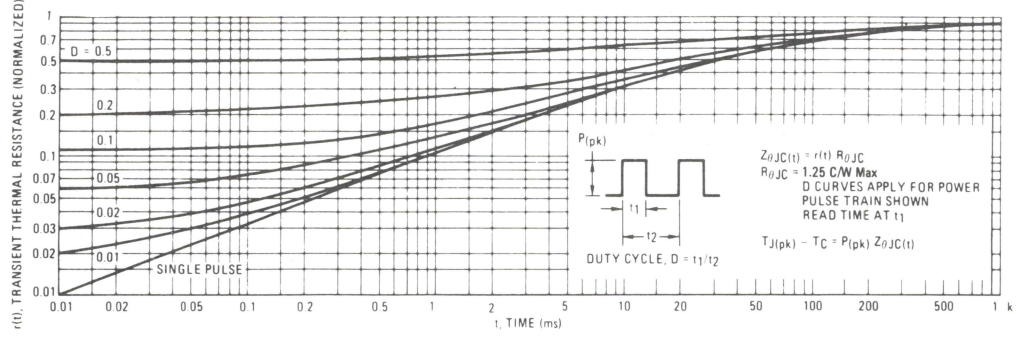

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 – MAXIMUM FORWARD BIAS SAFE OPERATING AREA

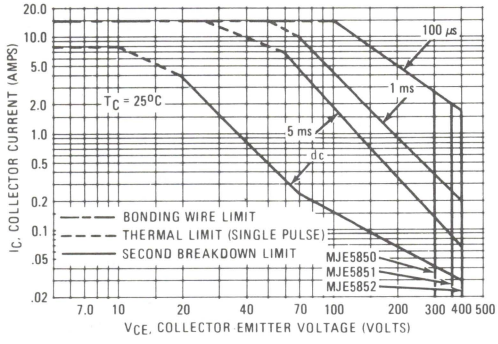

FIGURE 13 – RBSOA, MAXIMUM REVERSE BIAS SAFE OPERATING AREA

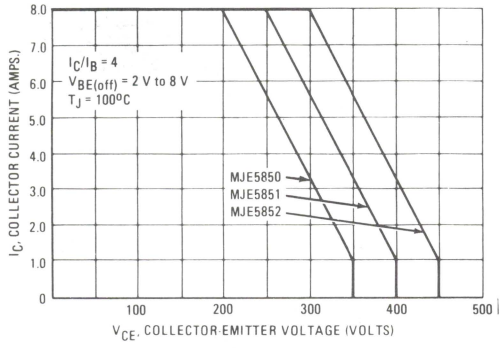

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the RBSOA characteristics.

3

FIGURE 14 PEAK REVERSE BASE CURRENT

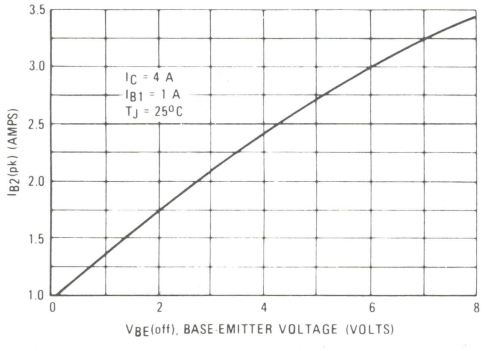

FIGURE 15 – FORWARD BIAS POWER DERATING

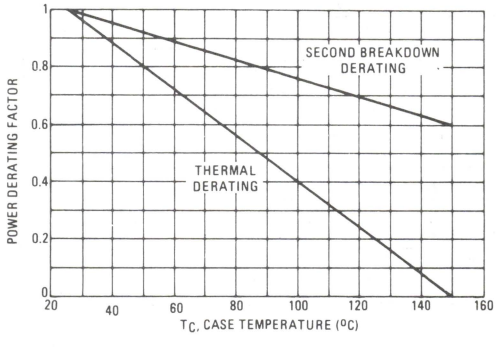

MJE6040 thru MJE6045
See Page 3-146

MJE8500
MJE8501

Designers Data Sheet

2.5 AMPERE

NPN SILICON
POWER TRANSISTORS

700 and 800 VOLTS
65 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJE8500 and MJE8501 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times
300 ns Inductive Fall Time – 25°C (Typ)
500 ns Inductive Crossover Time – 25°C (Typ)
900 ns Inductive Storage Time – 25°C (Typ)

Operating Temperature Range –65 to +125°C

100°C Performance Specified for:
Reversed Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



3

MAXIMUM RATINGS

Rating	Symbol	MJE8500	MJE8501	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	800	Vdc
Collector-Emitter Voltage	V_{CEV}	1200	1400	Vdc
Emitter Base Voltage	V_{EB}	8.0	8.0	Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	2.5 5.0	2.5 5.0	Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	2.0 4.0	2.0 4.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	65 17 0.65	65 17 0.65	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +125		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.54	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJE8500	$V_{CEO(sus)}$	700	–	–	Vdc
	MJE8501		800	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			–	–	5.0	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 7.0 Vdc, I_C = 0)		I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 0.5 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	7.5	–	–	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 1.0 Adc, I_B = 0.33 Adc)			–	–	2.0	
(I_C = 2.5 Adc, I_B = 1.0 Adc)			–	–	5.0	
(I_C = 1.0 Adc, I_B = 0.33 Adc, T_C = 100°C)			–	–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 1.0 Adc, I_B = 0.33 Adc)			–	–	1.5	
(I_C = 1.0 Adc, I_B = 0.33 Adc, TC = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	50	–	250	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 500 Vdc, I_C = 1.0 A, I_{B1} = 0.33 A, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.045	0.20	μs
Rise Time		t_r	–	0.2	2.0	μs
Storage Time		t_s	–	1.0	4.0	μs
Fall Time		t_f	–	0.5	2.0	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 1.0 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 0.33 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_{sv}	–	1.3	4.0	μs
Crossover Time		t_c	–	0.6	2.0	μs
Storage Time	(I_C = 1.0 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 0.33 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	0.9	–	μs
Crossover Time		t_c	–	0.5	–	μs
Fall Time		t_{fi}	–	0.3	–	μs

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤ 2%.

FIGURE 1 – DC CURRENT GAIN

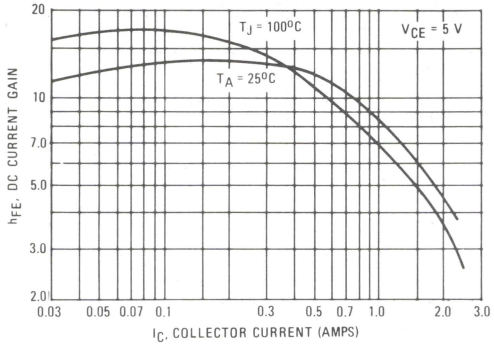

FIGURE 2 – COLLECTOR SATURATION REGION

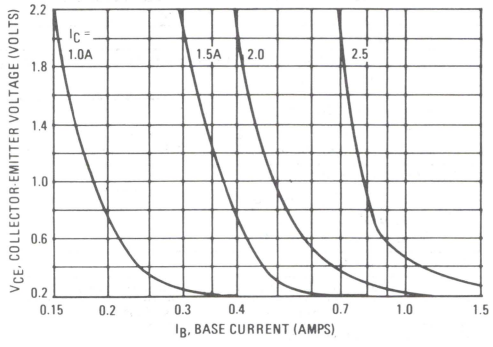

FIGURE 3 – COLLECTOR-EMITTER SATURATION VOLTAGE

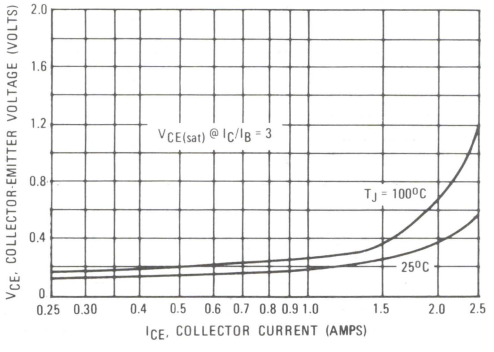

FIGURE 4 – BASE-EMITTER VOLTAGE

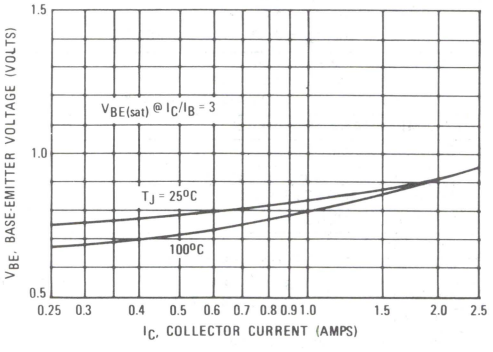

3

FIGURE 5 – COLLECTOR CUTOFF REGION

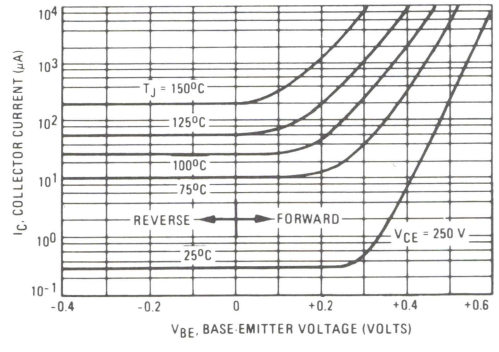

FIGURE 6 – CAPACITANCE

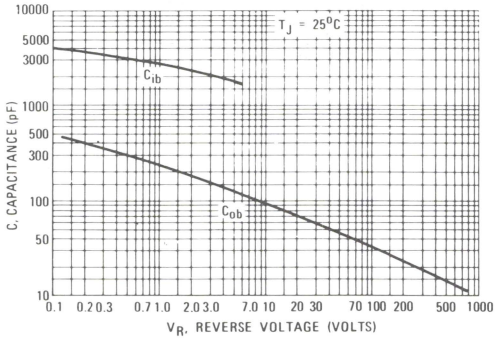

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

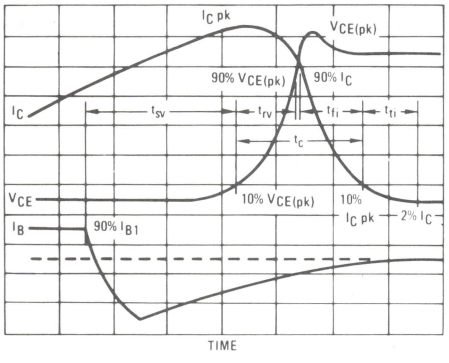

FIGURE 8 – PEAK REVERSE BASE CURRENT

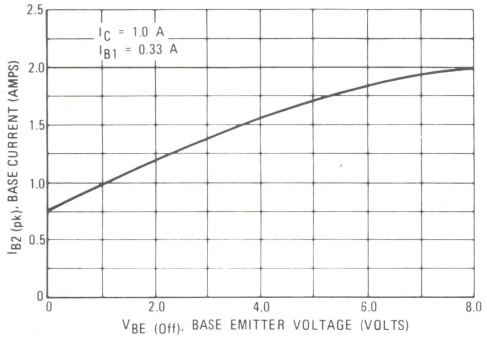

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% $V_{CE\ (pk)}$

t_{rv} = Voltage Rise Time, 10–90% $V_{CE\ (pk)}$

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% $V_{CE\ (pk)}$ to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

TYPICAL RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN - ON SWITCHING TIMES

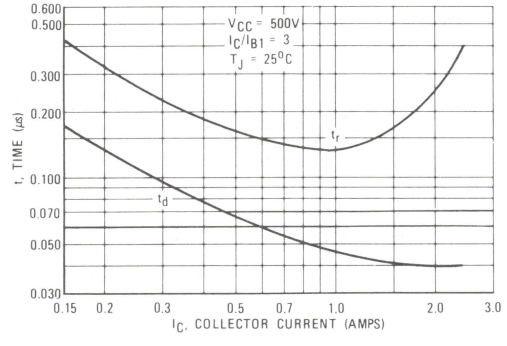

FIGURE 10 – TURN - OFF SWITCHING TIMES

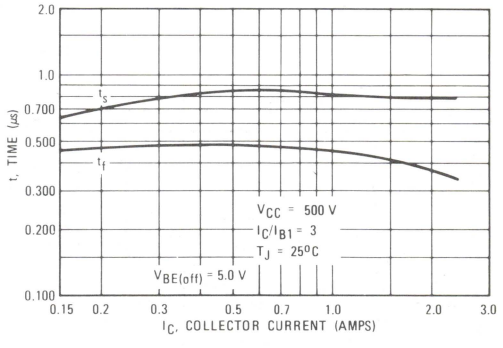

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	250 μF, 470 Ω 2 W, 47 Ω, R1, +15, 15 V, 0, 330 Ω, 5.1 Ω 5 W, R2, 1, 2, 50 Ω, 100 Ω, 430 Ω, 39 Ω, 250 μF, Adjust to obtain $V_{BE(off)}$ = 5.0 V All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $BV_{CEO(sus)}$, R2 = ∞	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 500 V	V_{CC} = 500 V R_L = 500 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT MR816, IN4934, TUT, MR816, IN4934, V_{clamp}, V_{CC}, 1, 2	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t, t_1, t_f, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT MR816, TUT, IN4934, IN4934, 1, 2, R_L, V_{CC}

FIGURE 11 – THERMAL RESPONSE

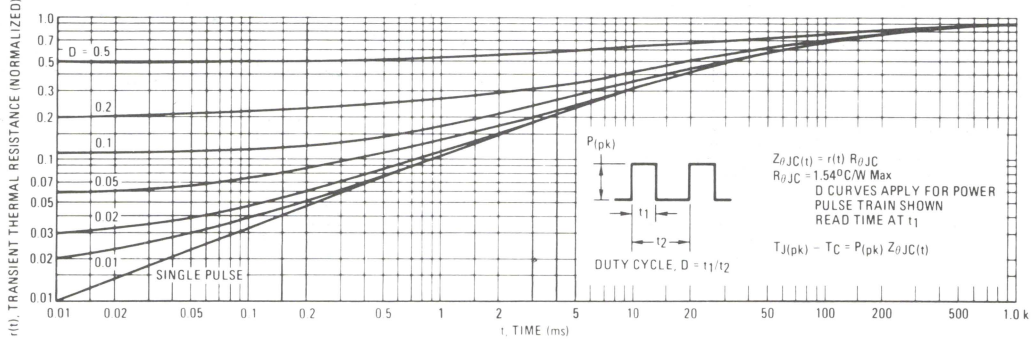

SAFE OPERATING AREA INFORMATION

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

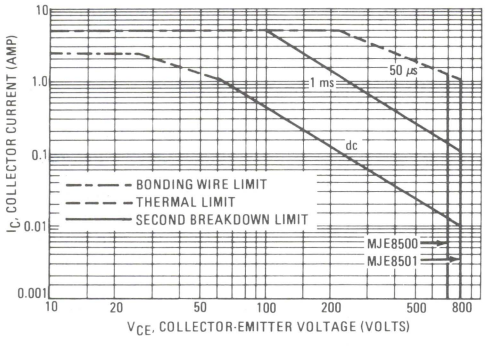

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

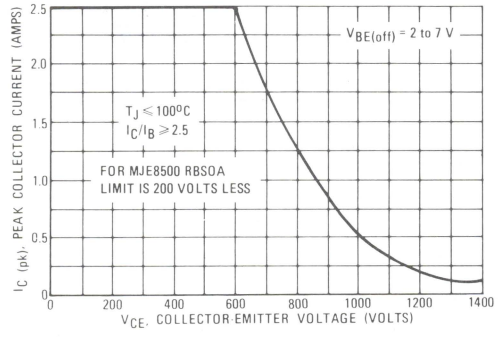

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

FIGURE 14 – POWER DERATING

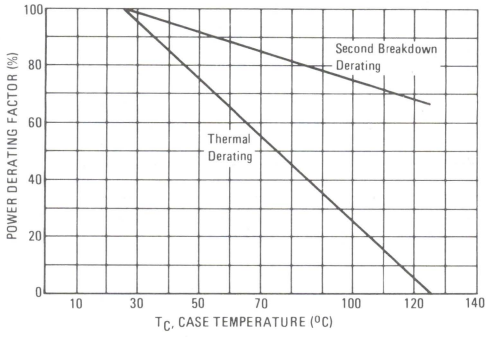

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE8502
MJE8503

Designers Data Sheet

5.0 AMPERE

NPN SILICON POWER TRANSISTORS

700 and 800 VOLTS
80 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJE8502 and MJE8503 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits

Fast Turn-Off Times

150 ns Inductive Fall Time–25°C (Typ)

400 ns Inductive Crossover Time–25°C (Typ)

1200 ns Inductive Storage Time–25°C (Typ)

Operating Temperature Range –65 to +125°C

100°C Performance Specified for:

Reverse-Biased SOA with Inductive Loads
Switching Times with Inductive Loads
Saturation Voltages
Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data – representing device characteristics boundaries – are given to facilitate "worst case" design.



MAXIMUM RATINGS

Rating	Symbol	MJE8502	MJE8503	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	700	800	Vdc
Collector-Emitter Voltage	V_{CEV}	1200	1400	Vdc
Emitter Base Voltage	V_{EB}	8.0	8.0	Vdc
Collector Current – Continuous Peak (1)	I_C I_{CM}	5.0 10	5.0 10	Adc
Base Current – Continuous Peak (1)	I_B I_{BM}	4.0 8.0	4.0 8.0	Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	80 21 0.80	80 21 0.80	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +125		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJE8502	$V_{CEO(sus)}$	700	–	–	Vdc
	MJE8503		800	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	0.25	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			–	–	5.0	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	–	–	5.0	mAdc
Emitter Cutoff Current (V_{EB} = 7.0 Vdc, I_C = 0)		I_{EBO}	–	–	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 13			
ON CHARACTERISTICS (1)						
DC Current Gain (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)		h_{FE}	7.5	–	–	–
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 1.0 Adc)			–	–	2.0	
(I_C = 5.0 Adc, I_B = 2.0 Adc)			–	–	5.0	
(I_C = 2.5 Adc, I_B = 1.0 Adc, T_C = 100°C)			–	–	3.0	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 2.5 Adc, I_B = 1.0 Adc)			–	–	1.5	
(I_C = 2.5 Adc, I_B = 1.0 Adc, T_C = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	60	–	300	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 500 Vdc, I_C = 2.5 A, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5.0 Vdc, t_p = 50 μs, Duty Cycle ≤ 2.0%)	t_d	–	0.040	0.20	μs
Rise Time		t_r	–	0.125	2.0	μs
Storage Time		t_s	–	1.2	4.0	μs
Fall Time		t_f	–	0.65	2.0	μs
Inductive Load, Clamped (Table 1)						
Storage Time	(I_C = 2.5 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, TC = 100°C)	t_{sv}	–	1.6	5.0	μs
Crossover Time		t_c	–	0.60	2.0	μs
Storage Time	(I_C = 2.5 A(pk), V_{clamp} = 500 Vdc, I_{B1} = 1.0 A, $V_{BE(off)}$ = 5 Vdc, T_C = 25°C)	t_{sv}	–	1.2	–	μs
Crossover Time		t_c	–	0.4	–	μs
Fall Time		t_{fi}	–	0.15	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 – DC CURRENT GAIN

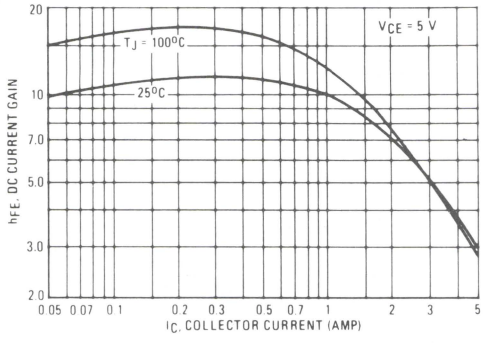

FIGURE 2 – COLLECTOR SATURATION REGION

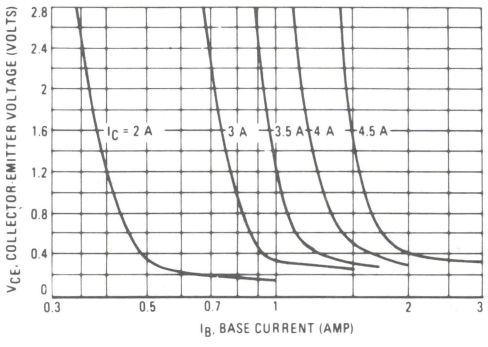

FIGURE 3 – COLLECTOR-EMITTER SATURATION REGION

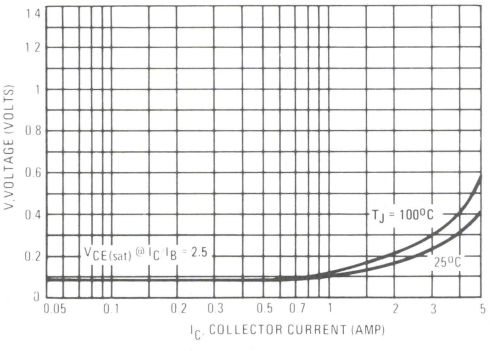

FIGURE 4 – BASE-EMITTER VOLTAGE

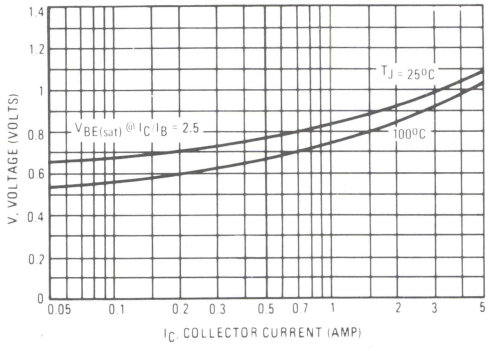

FIGURE 5 – COLLECTOR CUTOFF REGION

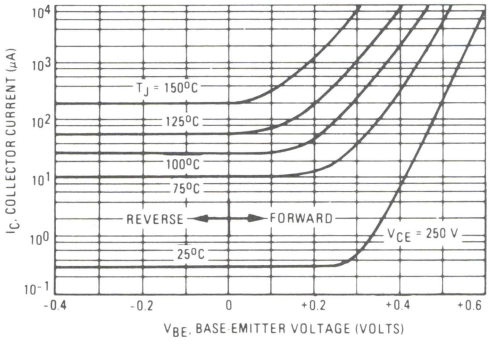

FIGURE 6 – CAPACITANCE

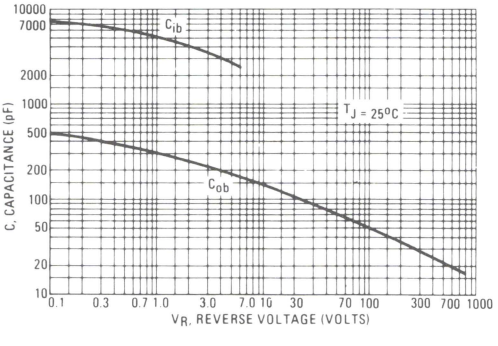

3

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

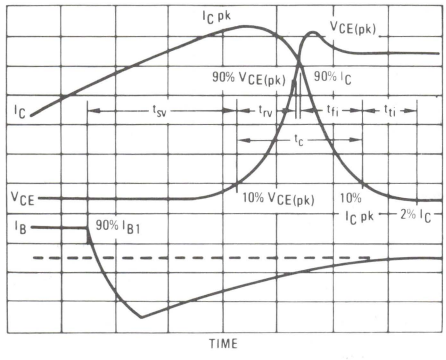

FIGURE 8 – PEAK REVERSE BASE CURRENT

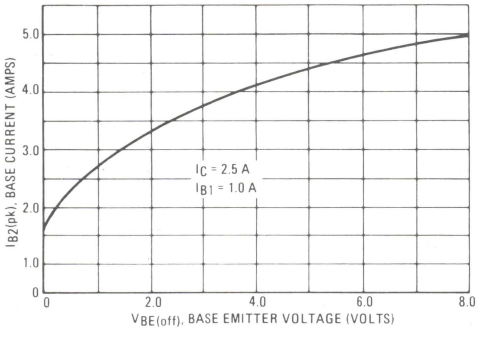

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% $V_{CE(pk)}$
t_{rv} = Voltage Rise Time, 10–90% $V_{CE(pk)}$
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% $V_{CE(pk)}$ to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

3

TYPICAL RESISTIVE SWITCHING PERFORMANCE

FIGURE 9 – TURN-ON SWITCHING TIMES

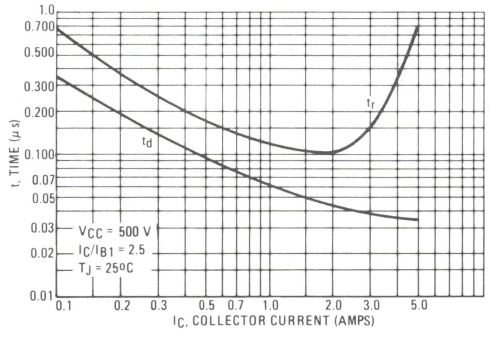

FIGURE 10 – TURN-OFF SWITCHING TIMES

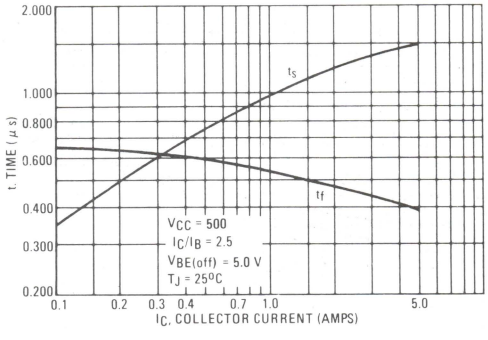

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	 PW Varied to Attain I_C = 100 mA	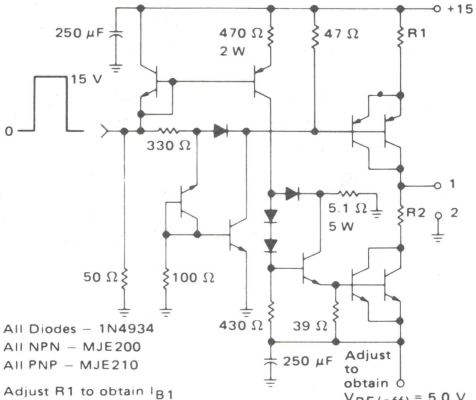 All Diodes – 1N4934 All NPN – MJE200 All PNP – MJE210 Adjust R1 to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $BV_{CEO(sus)}$, R2 = ∞	 I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 500 V	V_{CC} = 500 V R_L = 200 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT 	OUTPUT WAVEFORMS  t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 

FIGURE 11 – THERMAL RESPONSE

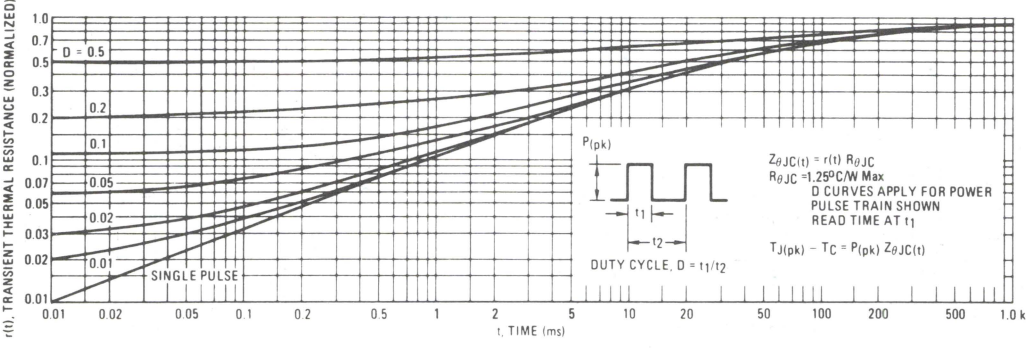

SAFE OPERATING AREA INFORMATION

FIGURE 12 – FORWARD BIAS SAFE OPERATING AREA

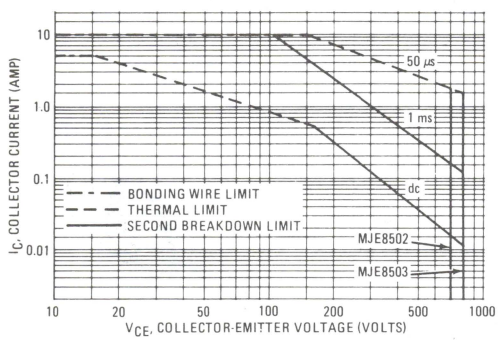

FIGURE 13 – RBSOA, REVERSE BIAS SWITCHING SAFE OPERATING AREA

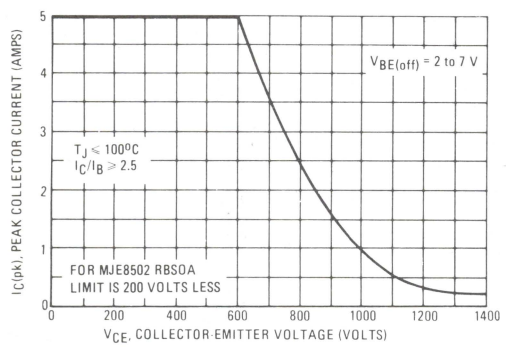

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the complete RBSOA characteristics.

3

FIGURE 14 – POWER DERATING

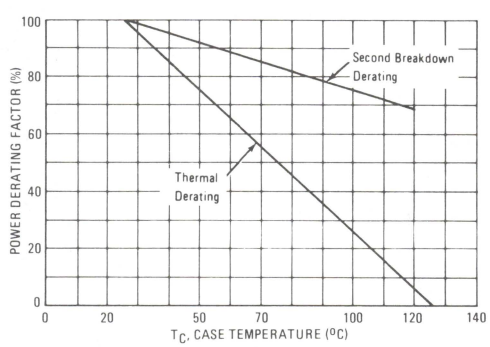

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE12007

HORIZONTAL DEFLECTION TRANSISTOR

. . . specifically designed for use in small screen black and white deflection circuits.

- Collector-Emitter Voltage – V_{CEX} = 1500 Volts
- Glassivated Base-Collector Junction
- Switching Times with Inductive Loads – t_f = 0.65 μs (Typ) @ I_C = 2.0 A

2.5 AMPERE

NPN SILICON
POWER TRANSISTOR

1500 VOLTS
65 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	750	Vdc
Collector-Emitter Voltage	V_{CEX}	1500	Vdc
Emitter-Base Voltage	V_{EBO}	5.0	Vdc
Collector Current – Continuous	I_C	2.5	Adc
Base Current – Continuous	I_B	2.0	Adc
Emitter Current – Continuous	I_E	4.5	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	65 0.65	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +125	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.54	°C/W

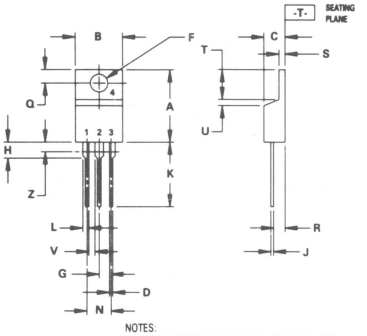

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

FIGURE 1 – TEST CIRCUIT

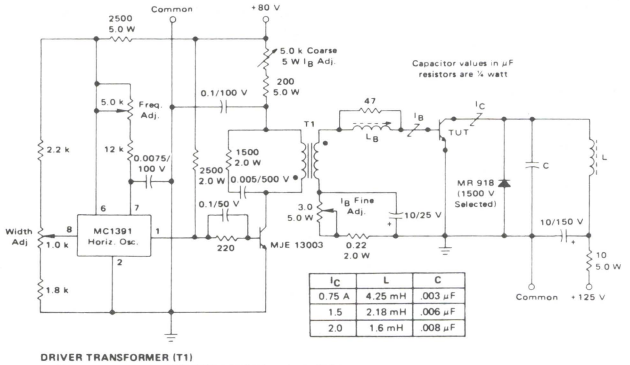

I_C	L	C
0.75 A	4.25 mH	.003 μF
1.5	2.18 mH	.006 μF
2.0	1.6 mH	.008 μF

DRIVER TRANSFORMER (T1)
Motorola part number 25D68782A-05-1/4" laminate "E" iron core. Primary Inductance – 39 mH. Secondary Inductance – 22 mH. Leakage Inductance with primary shorted – 2.0 μH. Primary 260 turns #28 AWG enamel wire. Secondary 17 turns, #22 AWG enamel wire.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Collector-Emitter Sustaining Voltage (I_C = 50 mAdc, I_B = 0)	$V_{CEO(sus)}$	750	–	–	Vdc
Collector Cutoff Current (V_{CE} = 1500 Vdc, V_{BE} = 0)	I_{CES}	–	–	1.0	mAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)	I_{EBO}	–	–	0.1	mAdc
ON CHARACTERISTICS (1)					
Collector-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 1.8 Adc)	$V_{CE(sat)}$	–	–	5.0	Vdc
Base-Emitter Saturation Voltage (I_C = 2.0 Adc, I_B = 1.8 Adc)	$V_{BE(sat)}$	–	–	1.5	Vdc
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	C_{ob}	–	50	–	pF
Current Gain – Bandwidth Product (1) (I_C = 0.1 Adc, V_{CE} = 5.0 Vdc, f_{test} = 1.0 MHz)	f_T	–	4.0	–	MHz
SWITCHING CHARACTERISTICS					
Fall Time (I_C = 2.0 Adc, I_{B1} = 1.0 Adc, L_B = 12 μH)	t_f	–	0.65	1.0	μs

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle = 2%.

FIGURE 2 – DC CURRENT GAIN

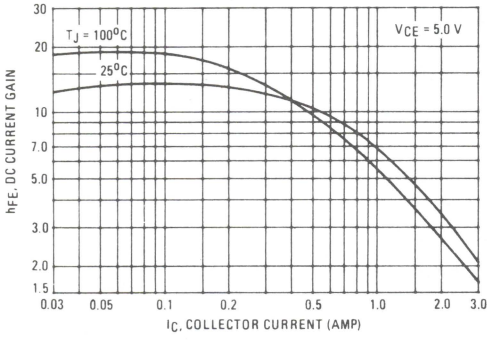

FIGURE 3 – "ON" VOLTAGE

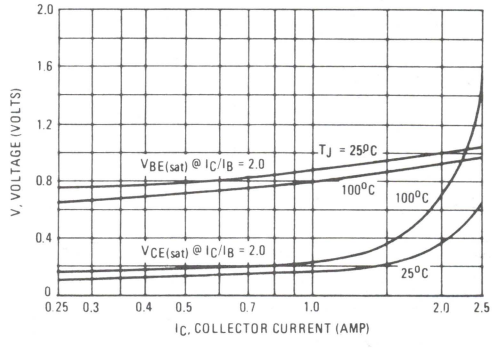

FIGURE 4 – SAFE OPERATING AREA

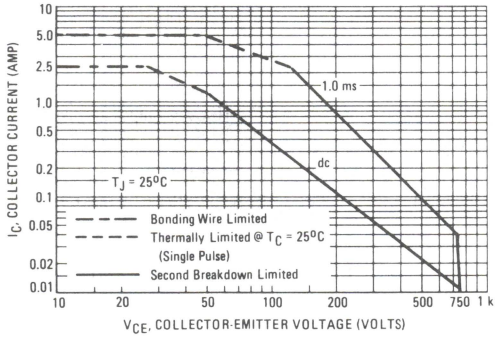

MJE13002
MJE13003

Designers Data Sheet

1.5 AMPERE
NPN SILICON
POWER TRANSISTORS
300 and 400 VOLTS
40 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

These devices are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115 and 220 V SWITCHMODE applications such as Switching Regulators, Inverters, Motor Controls, Solenoid/Relay drivers and Deflection circuits.

SPECIFICATION FEATURES:

- Reverse Biased SOA with Inductive Loads @ T_C = 100°C
- Inductive Switching Matrix 0.5 to 1.5 Amp, 25 and 100°C . . . t_c @ 1 A, 100°C is 290 ns (Typ).
- 700 V Blocking Capability
- SOA and Switching Applications Information.





STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25mm (0.010) DIA TO DIM A & B AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	10.80	11.04	0.425	0.435
B	7.50	7.74	0.295	0.305
C	2.42	2.66	0.095	0.105
D	0.51	0.66	0.020	0.026
F	2.93	3.17	0.115	0.125
G	2.32	2.46	0.091	0.097
H	1.27	2.41	0.050	0.095
J	0.39	0.63	0.015	0.025
K	14.61	16.63	0.575	0.655
M	3° TYP		3° TYP	
Q	3.76	4.01	0.148	0.158
R	1.15	1.39	0.045	0.055
S	0.64	0.88	0.025	0.035
U	3.69	3.93	0.145	0.155
V	1.02	—	0.040	—

CASE 77-05

MAXIMUM RATINGS

Rating	Symbol	MJE13002	MJE13003	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	700	Vdc
Emitter Base Voltage	V_{EBO}	9		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	1.5 3		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	0.75 1.5		Adc
Emitter Current — Continuous — Peak (1)	I_E I_{EM}	2.25 4.5		Adc
Total Power Dissipation@T_A = 25°C Derate above 25°C	P_D	1.4 11.2		Watts mW/°C
Total Power Dissipation@T_C = 25°C Derate above 25°C	P_D	40 320		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.12	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	89	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (I_C = 10 mA, I_B = 0)	MJE13002	$V_{CEO(sus)}$	300	–	–	Vdc
	MJE13003		400	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	1	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			–	–	5	
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)		I_{EBO}	–	–	1	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 11			
Clamped Inductive SOA with base reverse biased		RBSOA	See Figure 12			
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				–
(I_C = 0.5 Adc, V_{CE} = 2 Vdc)			8	–	40	
(I_C = 1 Adc, V_{CE} = 2 Vdc)			5	–	25	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 0.5 Adc, I_B = 0.1 Adc)			–	–	0.5	
(I_C = 1 Adc, I_B = 0.25 Adc)			–	–	1	
(I_C = 1.5 Adc, I_B = 0.5 Adc)			–	–	3	
(I_C = 1 Adc, I_B = 0.25 Adc, T_C = 100°C)			–	–	1	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 0.5 Adc, I_B = 0.1 Adc)			–	–	1	
(I_C = 1 Adc, I_B = 0.25 Adc)			–	–	1.2	
(I_C = 1 Adc, I_B = 0.25 Adc, T_C = 100°C)			–	–	1.1	
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C = 100 mAdc, V_{CE} = 10 Vdc, f = 1 MHz)		f_T	4	10	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	–	21	–	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 125 Vdc, I_C = 1 A,	t_d	–	0.05	0.1	μs
Rise Time	I_{B1} = I_{B2} = 0.2 A, t_p ≈ 25 μs,	t_r	–	0.5	1	μs
Storage Time	Duty Cycle ≤ 1%)	t_s	–	2	4	μs
Fall Time		t_f	–	0.4	0.7	μs
Inductive Load, Clamped (Table 1, Figure 13)						
Storage Time	(I_C = 1 A, V_{clamp} = 300 Vdc,	t_{sv}	–	1.7	4	μs
Crossover Time	I_{B1} = 0.2 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	–	0.29	0.75	μs
Fall Time		t_{fi}	–	0.15	–	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – DC CURRENT GAIN

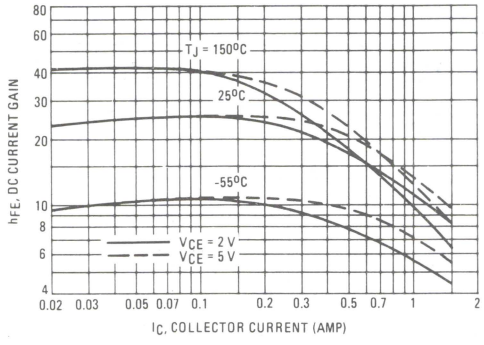

FIGURE 2 – COLLECTOR SATURATION REGION

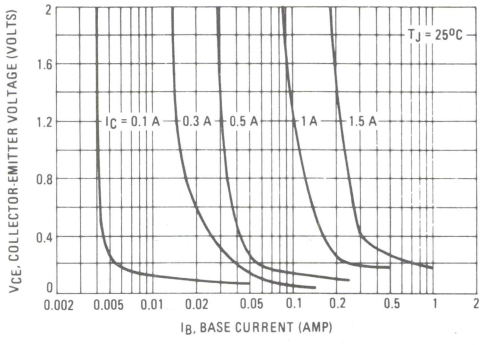

FIGURE 3 – BASE-EMITTER VOLTAGE

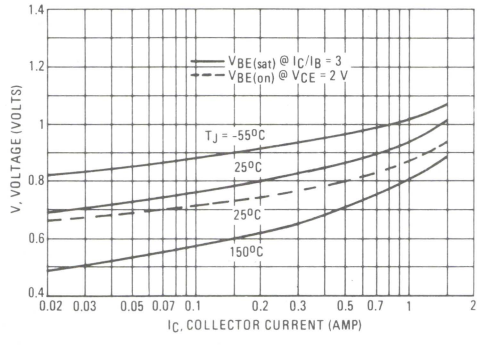

FIGURE 4 – COLLECTOR-EMITTER SATURATION REGION

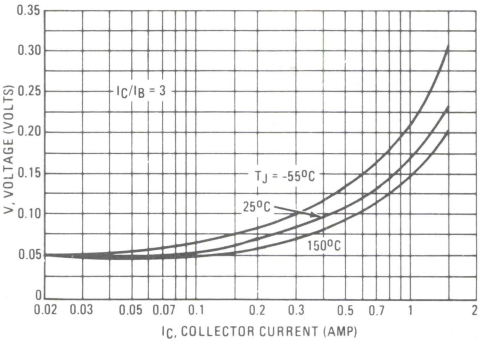

FIGURE 5 – COLLECTOR CUTOFF REGION

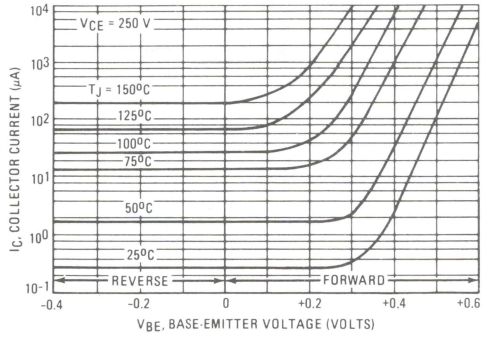

FIGURE 6 – CAPACITANCE

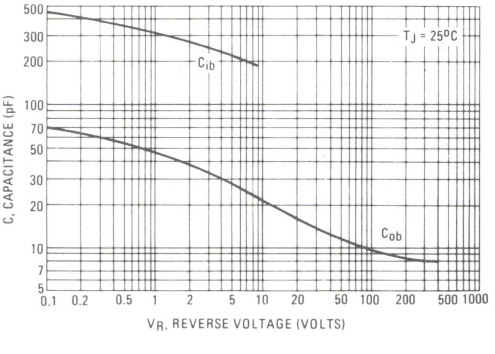

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
TEST CIRCUITS	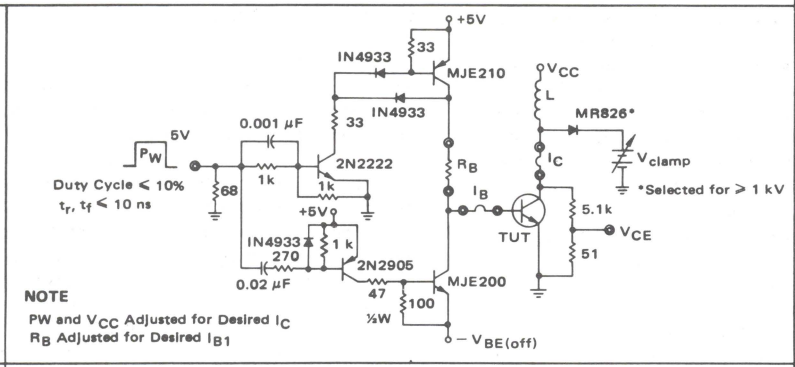 NOTE PW and V_{CC} Adjusted for Desired I_C R_B Adjusted for Desired I_{B1}	
CIRCUIT VALUES	Coil Data: Ferroxcube Core #6656 Full Bobbin (~200 Turns) #20 GAP for 30 mH/2A L_{coil} = 50 mH V_{CC} = 20 V V_{clamp} = 300 Vdc	V_{CC} = 125 V R_C = 125 Ω D1 = 1N5820 or Equiv. R_B = 47 Ω
TEST WAVEFORMS	 OUTPUT WAVEFORMS t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope-Tektronics 475 or Equivalent	 t_r, t_f < 10 ns Duty Cycle = 1.0% R_B and R_C adjusted for desired I_B and I_C

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

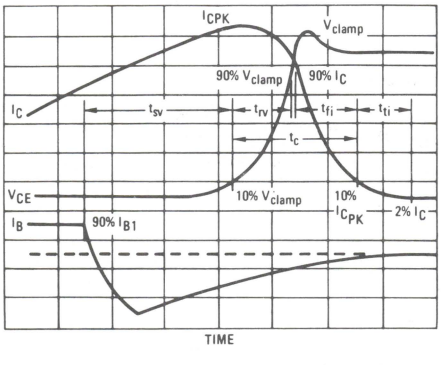

TABLE 2 – TYPICAL INDUCTIVE SWITCHING PERFORMANCE

I_C AMP	T_C °C	t_{sv} μs	t_{rv} μs	t_{fi} μs	t_{ti} μs	t_c μs
0.5	25	1.3	0.23	0.30	0.35	0.30
	100	1.6	0.26	0.30	0.40	0.36
1	25	1.5	0.10	0.14	0.05	0.16
	100	1.7	0.13	0.26	0.06	0.29
1.5	25	1.8	0.07	0.10	0.05	0.16
	100	3	0.08	0.22	0.08	0.28

NOTE: All Data Recorded in the Inductive Switching Circuit in Table 1

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}

t_{rv} = Voltage Rise Time, 10–90% V_{clamp}

t_{fi} = Current Fall Time, 90–10% I_C

t_{ti} = Current Tail, 10–2% I_C

t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

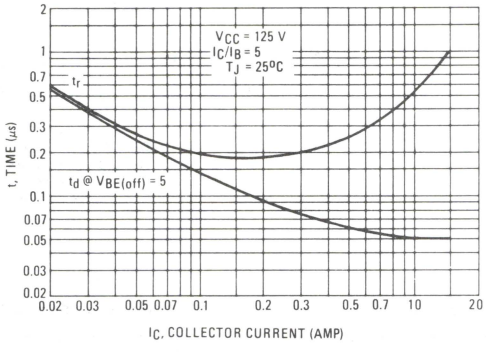

FIGURE 9 – TURN-OFF TIME

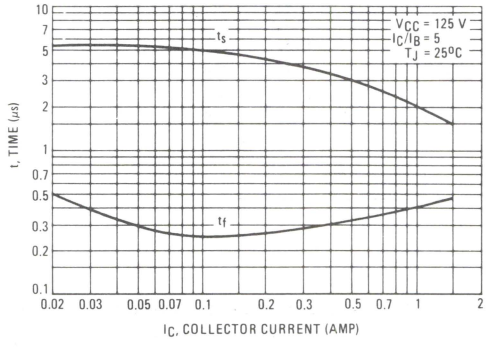

FIGURE 10 – THERMAL RESPONSE

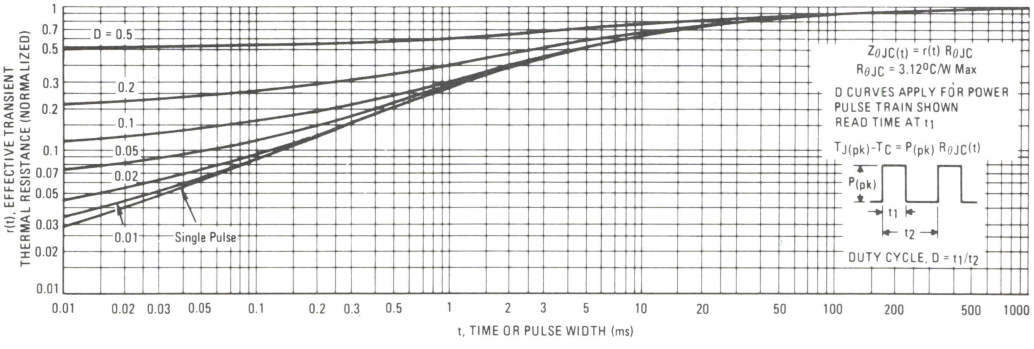

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATION AREA

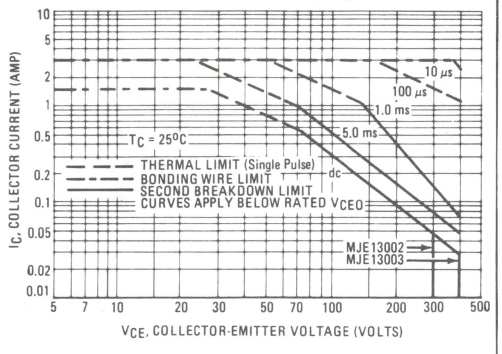

FIGURE 12 – REVERSE BIAS SAFE OPERATING AREA

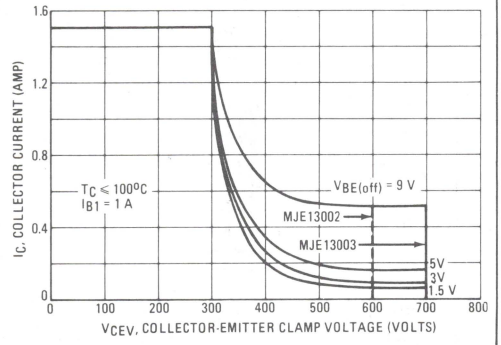

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives RBSOA characteristics.

FIGURE 13 – FORWARD BIAS POWER DERATING

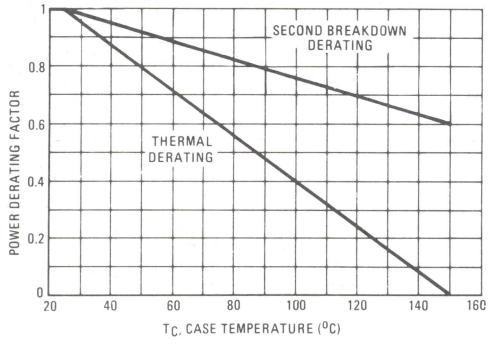

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE13004
MJE13005

Designers Data Sheet

4 AMPERE
NPN SILICON
POWER TRANSISTORS
300 and 400 VOLTS
75 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

These devices are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115 and 220 V SWITCHMODE applications such as Switching Regulator's, Inverters, Motor Controls, Solenoid/Relay drivers and Deflection circuits.

SPECIFICATION FEATURES:

- $V_{CEO(sus)}$ 400 V and 300 V
- Reverse Bias SOA with Inductive Loads @ T_C = 100°C
- Inductive Switching Matrix 2 to 4 Amp, 25 and 100°C
  . . . t_c @ 3A, 100°C is 180 ns (Typ)
- 700 V Blocking Capability
- SOA and Switching Applications Information.



MAXIMUM RATINGS

Rating	Symbol	MJE13004	MJE13005	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	700	Vdc
Emitter Base Voltage	V_{EBO}	9		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	4 8		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2 4		Adc
Emitter Current — Continuous — Peak (1)	I_E I_{EM}	6 12		Adc
Total Power Dissipation@T_A = 25°C Derate above 25°C	P_D	2 16		Watts mW/°C
Total Power Dissipation@T_C = 25°C Derate above 25°C	P_D	75 600		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.67	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions
The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

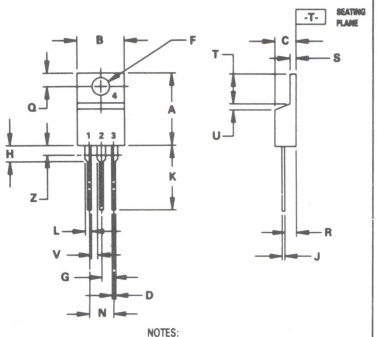

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
***OFF CHARACTERISTICS**						
Collector-Emitter Sustaining Voltage (I_C = 10 mA, I_B = 0)	MJE13004 MJE13005	$V_{CEO(sus)}$	 300 400	 – –	 – –	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		I_{CEV}	 – –	 – –	 1 5	mAdc
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)		I_{EBO}	–	–	1	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$		See Figure 11		
Clamped Inductive SOA with Base Reverse Biased		RBSOA		See Figure 12		
***ON CHARACTERISTICS**						
DC Current Gain (I_C = 1 Adc, V_{CE} = 5 Vdc) (I_C = 2 Adc, V_{CE} = 5 Vdc)		h_{FE}	 10 8	 – –	 60 40	–
Collector-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.2 Adc) (I_C = 2 Adc, I_B = 0.5 Adc) (I_C = 4 Adc, I_B = 1 Adc) (I_C = 2 Adc, I_B = 0.5 Adc, T_C = 100°C)		$V_{CE(sat)}$	 – – – –	 – – – –	 0.5 0.6 1 1	Vdc
Base-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.2 Adc) (I_C = 2 Adc, I_B = 0.5 Adc) (I_C = 2 Adc, I_B = 0.5 Adc, T_C = 100°C)		$V_{BE(sat)}$	 – – –	 – – –	 1.2 1.6 1.5	Vdc
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 1 MHz)		f_T	4	–	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	–	65	–	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 2)						
Delay Time	(V_{CC} = 125 Vdc, I_C = 2 A,	t_d	–	0.025	0.1	μs
Rise Time	I_{B1} = I_{B2} = 0.4 A, t_p = 25 μs,	t_r	–	0.3	0.7	μs
Storage Time	Duty Cycle ≤ 1%)	t_s	–	1.7	4	μs
Fall Time		t_f	–	0.4	0.9	μs
Inductive Load, Clamped (Table 2, Figure 13)						
Voltage Storage Time	(I_C = 2 A, V_{clamp} = 300 Vdc,	t_{sv}	–	0.9	4	μs
Crossover Time	I_{B1} = 0.4 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	–	0.32	0.9	μs
Fall Time		t_{fi}	–	0.16	–	μs

*Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

3

FIGURE 1 – DC CURRENT GAIN

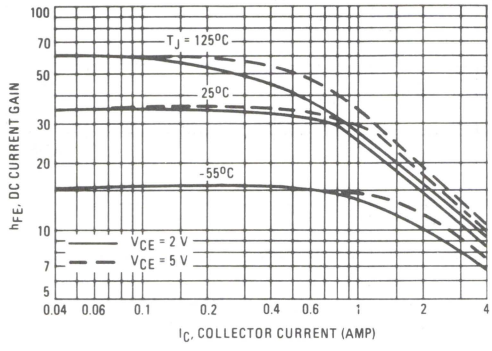

FIGURE 2 – COLLECTOR SATURATION REGION

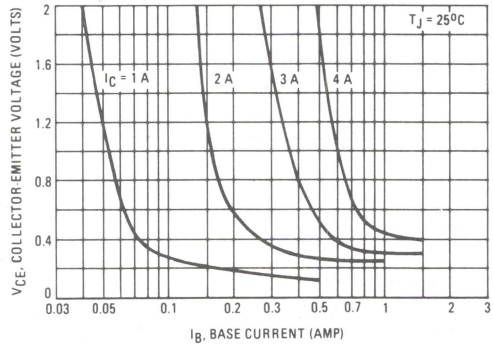

FIGURE 3 – BASE-EMITTER VOLTAGE

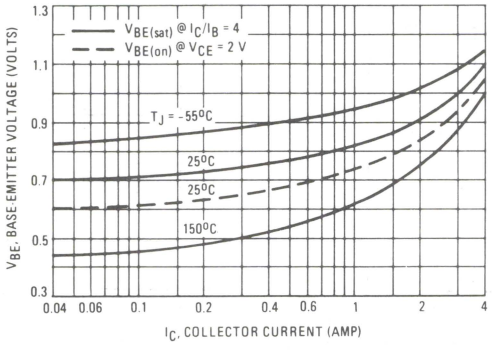

FIGURE 4 – COLLECTOR–EMITTER SATURATION VOLTAGE

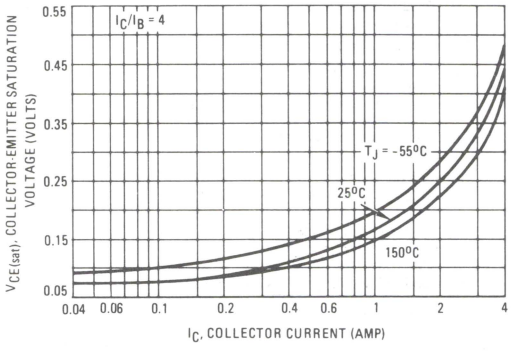

FIGURE 5 – COLLECTOR CUTOFF REGION

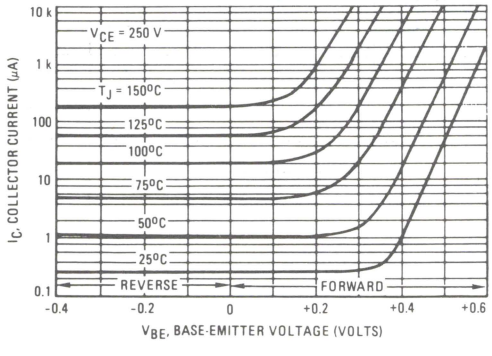

FIGURE 6 – CAPACITANCE

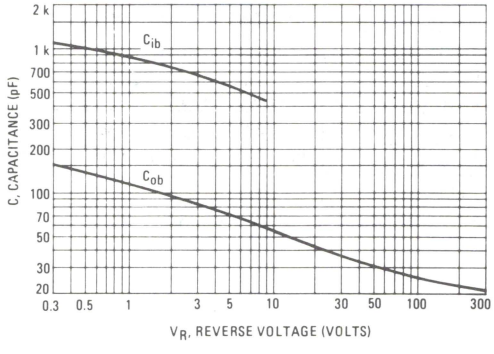

3

FIGURE 7 – INDUCTIVE SWITCHING MEASUREMENTS

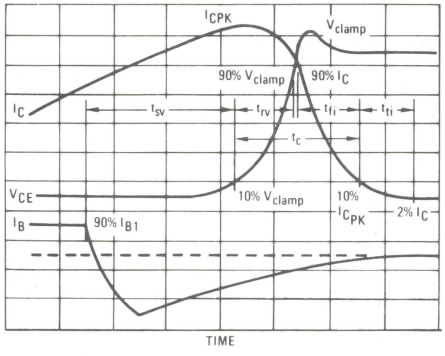

TABLE 1 – TYPICAL INDUCTIVE SWITCHING PERFORMANCE

I_C AMP	T_C °C	t_{sv} ns	t_{rv} ns	t_{fi} ns	t_{ti} ns	t_c ns
2	25	600	70	100	80	180
	100	900	110	240	130	320
3	25	650	60	140	60	200
	100	950	100	330	100	350
4	25	550	70	160	100	220
	100	850	110	350	160	390

NOTE: All Data recorded in the inductive Switching Circuit in Table 2.

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

3

RESISTIVE SWITCHING PERFORMANCE

FIGURE 8 – TURN-ON TIME

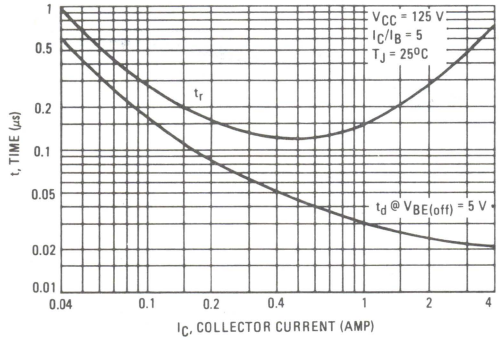

FIGURE 9 – TURN-OFF TIME

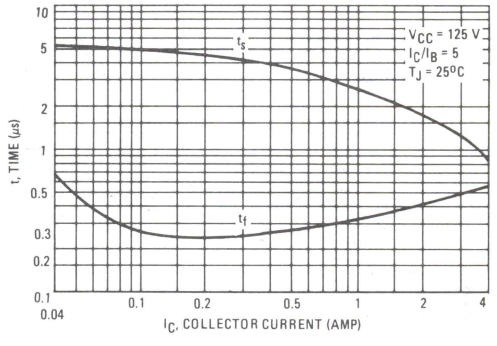

TABLE 2 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
TEST CIRCUITS	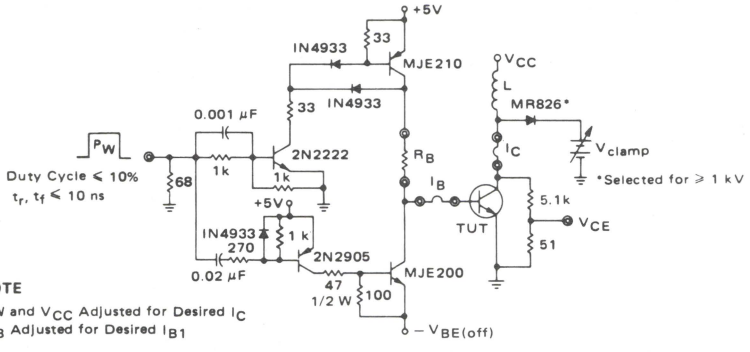 **NOTE** PW and V_{CC} Adjusted for Desired I_C R_B Adjusted for Desired I_{B1}	
CIRCUIT VALUES	Coil Data: Ferroxcube Core #6656 Full Bobbin (~16 Turns) #16 GAP for 200 μH/20A L_{coil} = 200 μH V_{CC} = 20 V V_{clamp} = 300 Vdc	V_{CC} = 125 V R_C = 62 Ω D1 = 1N5820 or Equiv. R_B = 22 Ω
TEST WAVEFORMS	OUTPUT WAVEFORMS  t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	 t_r, t_f < 10 ns Duty Cycle = 1.0% R_B and R_C adjusted for desired I_B and I_C

3

FIGURE 10 – TYPICAL THERMAL RESPONSE [$Z_{\theta JC}(t)$]

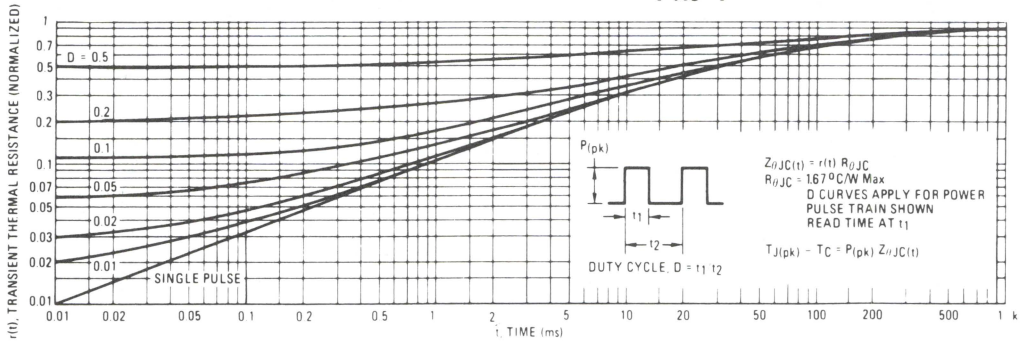

The Safe Operating Area Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

FIGURE 11 – FORWARD BIAS SAFE OPERATING AREA

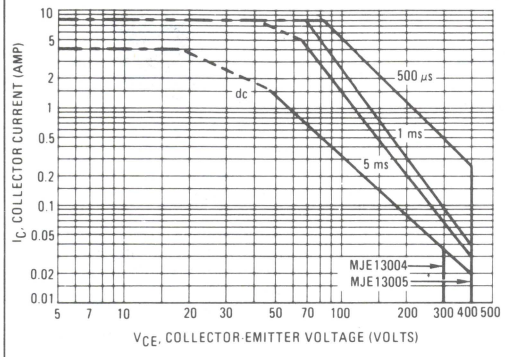

FIGURE 12– REVERSE BIAS SWITCHING SAFE OPERATING AREA

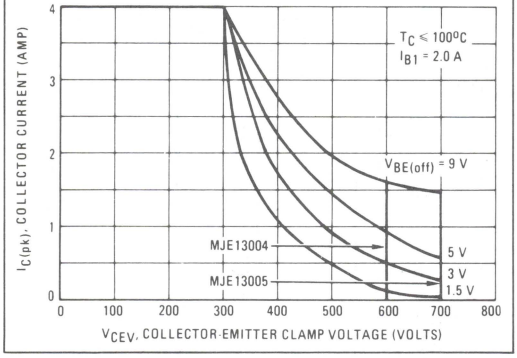

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives the complete RBSOA characteristics.

FIGURE 13 – FORWARD BIAS POWER DERATING

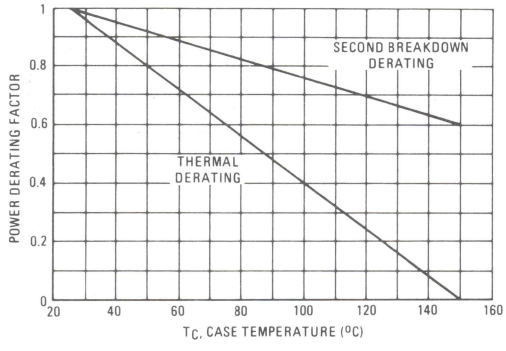

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE13006
MJE13007

Designers Data Sheet

8 AMPERE
NPN SILICON
POWER TRANSISTORS
300 and 400 VOLTS
80 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJE13006 and MJE13007 are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115 and 220 V switch-mode applications such as Switching Regulators, Inverters, Motor Controls, Solenoid/Relay drivers and Deflection circuits.

SPECIFICATION FEATURES:

- $V_{CEO(sus)}$ 400 V and 300 V
- Reverse Bias SOA with Inductive Loads @ T_C = 100°C
- Inductive Switching Matrix 3 to 8 Amp, 25 and 100°C . . . t_c @ 5A, 100°C is 136 ns (Typ).
- 700 V Blocking Capability
- SOA and Switching Applications Information.



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJE13006	MJE13007	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	700	Vdc
Emitter Base Voltage	V_{EBO}	9		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	8 16		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	4 8		Adc
Emitter Current — Continuous — Peak (1)	I_E I_{EM}	12 24		Adc
Total Power Dissipation@T_A = 25°C Derate above 25°C	P_D	2 16		Watts mW/°C
Total Power Dissipation@T_C = 25°C Derate above 25°C	P_D	80 640		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

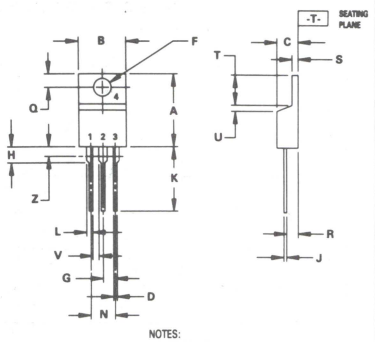

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
***OFF CHARACTERISTICS**						
Collector-Emitter Sustaining Voltage (I_C = 10 mA, I_B = 0)	MJE13006	$V_{CEO(sus)}$	300	–	–	Vdc
	MJE13007		400	–	–	
Collector Cutoff Current		I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)			–	–	1	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			–	–	5	
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)		I_{EBO}	–	–	1	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 1			
Clamped Inductive SOA with Base Reverse Biased		–	See Figure 2			
***ON CHARACTERISTICS**						
DC Current Gain		h_{FE}				–
(I_C = 2 Adc, V_{CE} = 5 Vdc)			8	–	60	
(I_C = 5 Adc, V_{CE} = 5 Vdc)			5	–	30	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 2 Adc, I_B = 0.4 Adc)			–	–	1	
(I_C = 5 Adc, I_B = 1 Adc)			–	–	2	
(I_C = 8 Adc, I_B = 2 Adc)			–	–	3	
(I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)			–	–	3	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 2 Adc, I_B = 0.4 Adc)			–	–	1.2	
(I_C = 5 Adc, I_B = 1 Adc)			–	–	1.6	
(I_C = 5 Adc, I_B = 1 Adc, T_C = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 1 MHz)		f_T	4	–	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	–	110	–	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 125 Vdc, I_C = 5 A,	t_d	–	0.05	0.1	μs
Rise Time	I_{B1} = I_{B2} = 1 A, t_p = 25 μs,	t_r	–	0.8	1.5	μs
Storage Time	Duty Cycle ≤ 1%)	t_s	–	1	3	μs
Fall Time		t_f	–	0.15	0.7	μs
Inductive Load, Clamped (Table 1, Figure 13)						
Voltage Storage Time	(I_C = 5 A, V_{clamp} = 300 Vdc,	t_{sv}	–	0.86	2.3	μs
Crossover Time	I_{B1} = 1 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	–	0.14	0.7	μs

*Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

3

FIGURE 1 – FORWARD BIAS SAFE OPERATING AREA

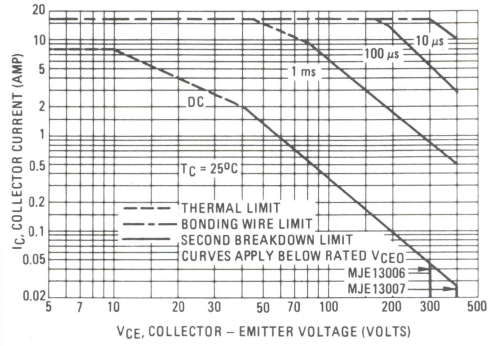

FIGURE 2 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

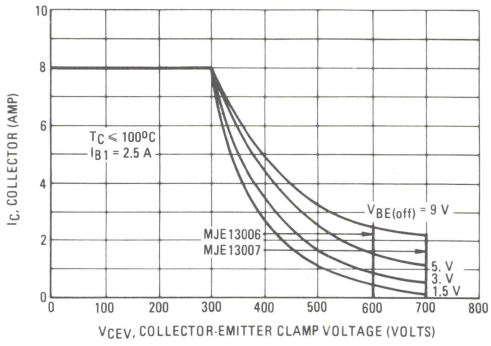

The Safe Operating Area figures shown in Figures 1 and 2 are specified ratings for these devices under the test conditions shown.

FIGURE 3 – FORWARD BIAS POWER DERATING

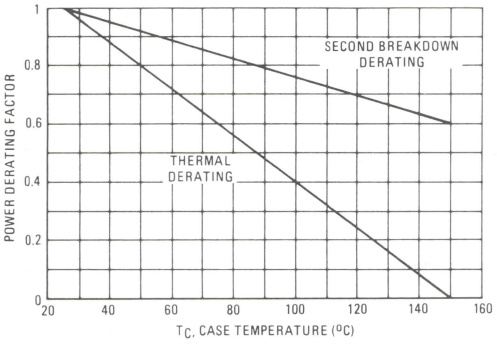

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geqslant 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 1 may be found at any case temperature by using the appropriate curve on Figure 3.

$T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Use of reverse biased safe operating area data (Figure 2) is discussed in the applications information section.

FIGURE 4 – TYPICAL THERMAL RESPONSE [$Z_{\theta JC}(t)$]

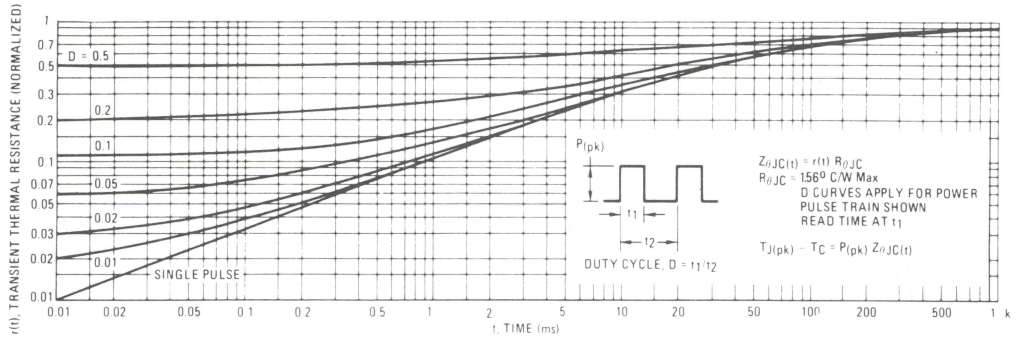

FIGURE 5 –DC CURRENT GAIN

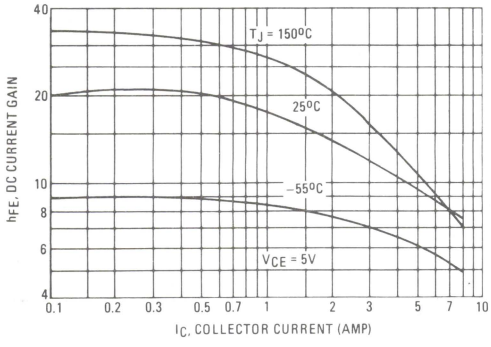

FIGURE 6 – COLLECTOR SATURATION REGION

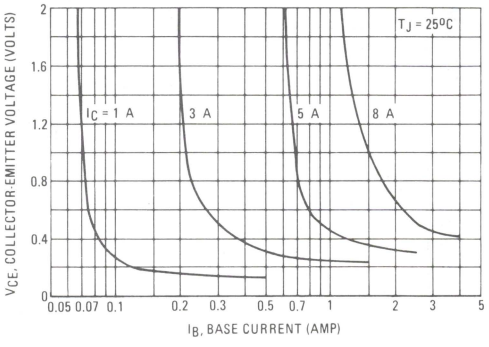

FIGURE 7 – BASE-EMITTER SATURATION VOLTAGE

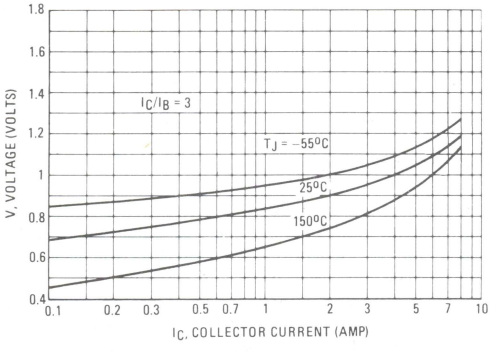

FIGURE 8 – COLLECTOR-EMITTER SATURATION VOLTAGE

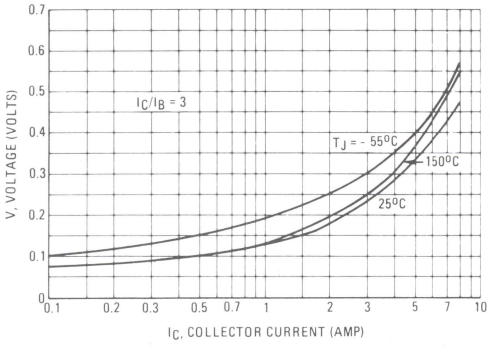

FIGURE 9 – COLLECTOR CUTOFF REGION

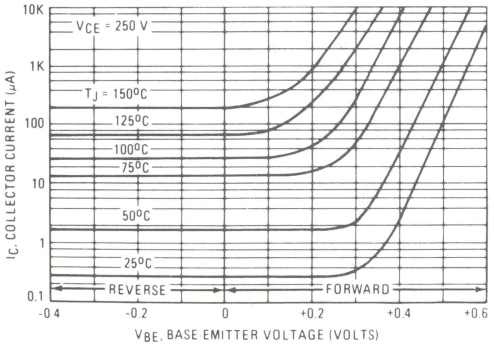

FIGURE 10 – CAPACITANCE

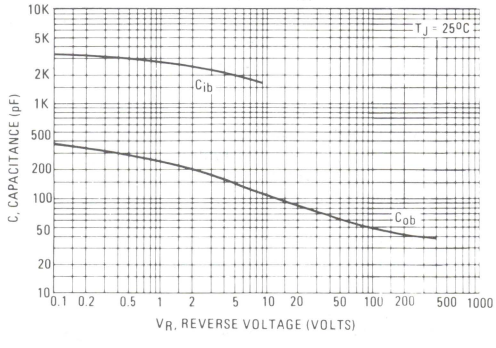

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
TEST CIRCUITS	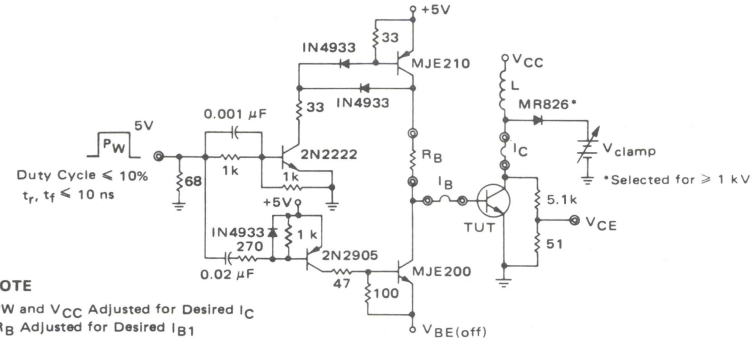	
	NOTE PW and V_{CC} Adjusted for Desired I_C R_B Adjusted for Desired I_{B1}	
CIRCUIT VALUES	Coil Data: Ferroxcube Core #6656 Full Bobbin (~16 Turns) #16 GAP for 200 μH/20A L_{coil} = 200 μH V_{CC} = 20 V V_{clamp} = 300 V	V_{CC} = 125 V R_C = 25 Ω D1 = 1N5820 or Equiv. R_B = 10Ω
TEST WAVEFORMS	 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	 t_r, t_f < 10 ns Duty Cycle = 1.0% R_B and R_C adjusted for desired I_B and I_C

APPLICATIONS INFORMATION FOR SWITCHMODE SPECIFICATIONS

INTRODUCTION

The primary considerations when selecting a power transistor for SWITCHMODE applications are voltage and current ratings, switching speed, and energy handling capability. In this section, these specifications will be discussed and related to the circuit examples illustrated in Table 2.(1)

VOLTAGE REQUIREMENTS

Both blocking voltage and sustaining voltage are important in SWITCHMODE applications.

Circuits B and C in Table 2 illustrate applications that require high blocking voltage capability. In both circuits the switching transistor is subjected to voltages substantially higher than V_{CC} after the device is completely off (see load line diagrams at $I_C = I_{leakage} \approx 0$ in Table 2). The blocking capability at this point depends on the base to emitter conditions and the device junction temperature. Since the highest device capability occurs when the base to emitter junction is reverse biased (V_{CEV}), this is the recommended and specified use condition. Maximum I_{CEV} at rated V_{CEV} is specified at a relatively low reverse bias (1.5 Volts) both at 25°C and 100°C. Increasing the reverse bias will give some improvement in device blocking capability.

The sustaining or active region voltage requirements in switching applications occur during turn-on and turn-off. If the load contains a significant capacitive component, high current and voltage can exist simultaneously during turn-on and the pulsed forward bias SOA curves (Figure 1) are the proper design limits.

For inductive loads, high voltage and current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as a Reverse Bias Safe Operating Area (Figure 2) which represents voltage-current conditions that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode.

In the four application examples (Table 2) load lines are shown in relation to the pulsed forward and reverse biased SOA curves.

(1) For detailed information on specific switching applications, see Motorola Application Notes AN-719, AN-737A, AN-767, and AN-752.

VOLTAGE REQUIREMENTS (continued)

In circuits A and D, inductive reactance is clamped by the diodes shown. In circuits B and C the voltage is clamped by the output rectifiers, however, the voltage induced in the primary leakage inductance is not clamped by these diodes and could be large enough to destroy the device. A snubber network or an additional clamp may be required to keep the turn-off load line within the Reverse Bias SOA curve.

Load lines that fall within the pulsed forward biased SOA curve during turn-on and within the reverse bias SOA curve during turn-off are considered safe, with the following assumptions:

(1) The device thermal limitations are not exceeded.

(2) The turn-on time does not exceed 10 μs (see standard pulsed forward SOA curves in Figure 1).

(3) The base drive conditions are within the specified limits shown on the Reverse Bias SOA curve (Figure 2).

CURRENT REQUIREMENTS

An efficient switching transistor must operate at the required current level with good fall time, high energy handling capability and low saturation voltage. On this data sheet, these parameters have been specified at 5 amperes which represents typical design conditions for these devices. The current drive requirements are usually dictated by the $V_{CE(sat)}$ specification because the maximum saturation voltage is specified at a forced gain condition which must be duplicated or exceeded in the application to control the saturation voltage.

SWITCHING REQUIREMENTS

In many switching applications, a major portion of the transistor power dissipation occurs during the fall time (t_{fi}). For this reason considerable effort is usually devoted to reducing the fall time. The recommended way to accomplish this is to reverse bias the base-emitter junction during turn-off. The reverse biased switching characteristics for inductive loads are discussed in Figure 11 and Table 3 and resistive loads in Figures 13 and 14. Usually the inductive load component will be the dominant factor in SWITCHMODE applications and the inductive switching data will more closely represent the device performance in actual application. The inductive switching characteristics are derived from the same circuit used to specify the reverse biased SOA curves, (See Table 1) providing correlation between test procedures and actual use conditions.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 11 – TURN-ON TIME

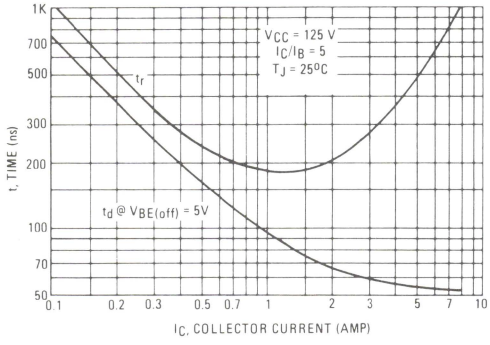

FIGURE 12 – TURN-OFF TIME

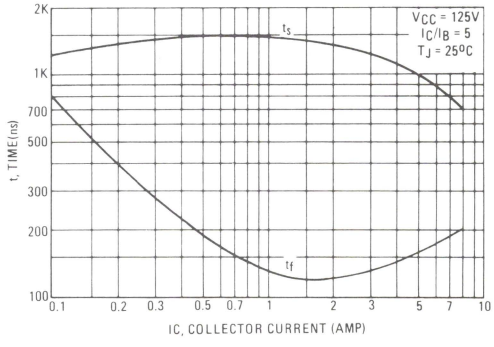

FIGURE 13 – INDUCTIVE SWITCHING MEASUREMENTS

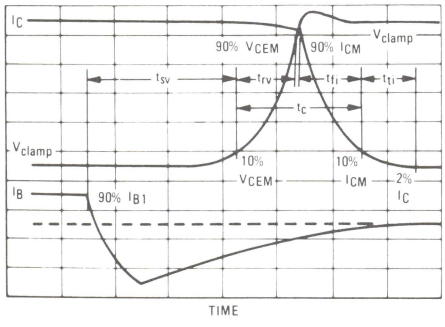

FIGURE 14 – TYPICAL INDUCTIVE SWITCHING WAVEFORMS
(at 300 V and 8A with I_{B1} = 1.6A and $V_{BE(off)}$ = 5 V)

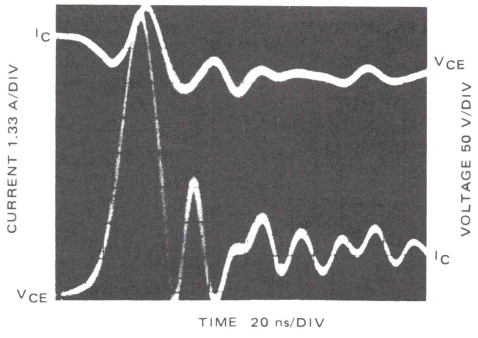

3

TABLE 2 – APPLICATIONS EXAMPLES OF SWITCHING CIRCUITS

	CIRCUIT	LOAD LINE DIAGRAMS	TIME DIAGRAMS
A	**SERIES SWITCHING REGULATOR** 	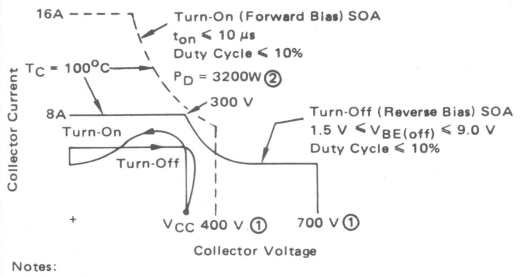 Notes: ① MJE13007 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) are Shown, MJE13006 Ratings are 100 V Lower. ② See AN-569 for Pulse Power Derating Procedure.	
B	**RINGING CHOKE INVERTER** 	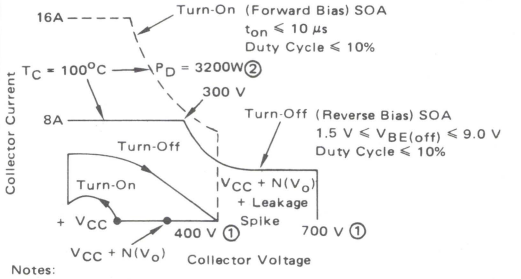 Notes: ① MJE13007 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) Are Shown. MJE13006 Ratings Are 100 V Lower. ② See AN-569 For Pulse Power Derating Procedure	
C	**PUSH-PULL INVERTER/CONVERTER** 	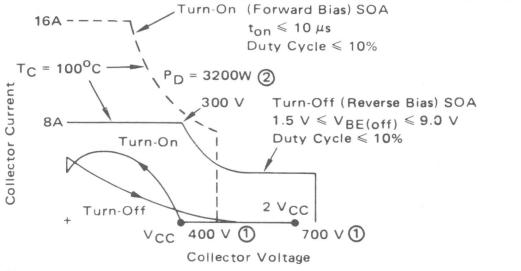 Notes: ① MJE13007 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) Are Shown, MJE13006 Ratings Are 100 V Lower. ② See AN-569 for Pulse Power Derating Procedure.	
D	**SOLENOID DRIVER** 	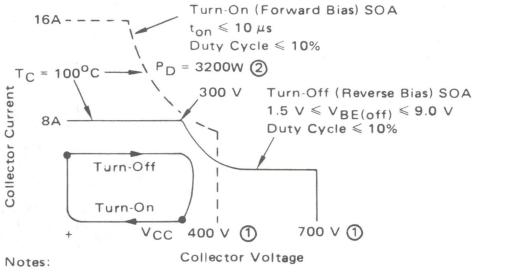 Notes: ① MJE13007 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) Are Shown, MJE13006 Ratings Are 100 V Lower. ② See AN-569 for Pulse Power Derating Procedure.	

3

TABLE 3 – TYPICAL INDUCTIVE SWITCHING PERFORMANCE

I_C AMP	T_C °C	t_{sv} ns	t_{rv} ns	t_{fi} ns	t_{ti} ns	t_c ns
3	25	730	115	100	110	200
	100	1000	150	100	150	250
5	25	600	60	23	4	85
	100	860	84	50	10	136
8	25	650	25	26	4	42
	100	880	52	80	20	160

NOTE: All Data recorded in the inductive Switching Circuit in Table 1.

SWITCHING TIME NOTES

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}
t_{rv} = Voltage Rise Time, 10–90% V_{CEM}
t_{fi} = Current Fall Time, 90–10% I_{CM}
t_{ti} = Current Tail, 10–2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the turn-off waveforms is shown in Figure 13 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222A:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c)\ f$$

Typical inductive switching waveforms are shown in Figure 14. In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

3

MJE13008
MJE13009

Designers Data Sheet

12 AMPERE
NPN SILICON
POWER TRANSISTORS
300 and 400 VOLTS
100 WATTS

SWITCHMODE SERIES
NPN SILICON POWER TRANSISTORS

The MJE13008 and MJE13009 are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115 and 220 V switch-mode applications such as Switching Regulators, Inverters, Motor Controls, Solenoid/Relay drivers and Deflection circuits.

SPECIFICATION FEATURES:

- $V_{CEO(sus)}$ 400 V and 300 V
- Reverse Bias SOA with Inductive Loads @ T_C = 100°C
- Inductive Switching Matrix 3 to 12 Amp, 25 and 100°C . . . t_c @ 8 A, 100°C is 120 ns (Typ).
- 700 V Blocking Capability
- SOA and Switching Applications Information.



Designer's Data for "Worst Case" Conditions

The Designers Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJE13008	MJE13009	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	400	Vdc
Collector-Emitter Voltage	V_{CEV}	600	700	Vdc
Emitter Base Voltage	V_{EBO}	9		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	12 24		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	6 12		Adc
Emitter Current — Continuous — Peak (1)	I_E I_{EM}	18 36		Adc
Total Power Dissipation@T_A = 25°C Derate above 25°C	P_D	2 16		Watts mW/°C
Total Power Dissipation@T_C = 25°C Derate above 25°C	P_D	100 800		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.25	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

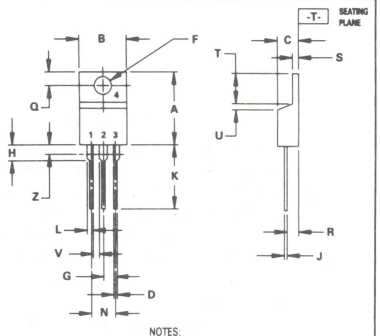

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
***OFF CHARACTERISTICS**						
Collector-Emitter Sustaining Voltage (I_C = 10 mA, I_B = 0)	MJE13008	$V_{CEO(sus)}$	300	–	–	Vdc
	MJE13009		400	–	–	
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)		I_{CEV}	–	–	1	mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)			–	–	5	
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)		I_{EBO}	–	–	1	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 1			
Clamped Inductive SOA with Base Reverse Biased		–	See Figure 2			
***ON CHARACTERISTICS**						
DC Current Gain (I_C = 5 Adc, V_{CE} = 5 Vdc)		h_{FE}	8	–	40	
(I_C = 8 Adc, V_{CE} = 5 Vdc)			6	–	30	
Collector-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 1Adc)		$V_{CE(sat)}$	–	–	1	Vdc
(I_C = 8 Adc, I_B = 1.6 Adc)			–	–	1.5	
(I_C = 12 Adc, I_B = 3 Adc)			–	–	3	
(I_C = 8 Adc, I_B = 1.6 Adc, T_C = 100°C)			–	–	2	
Base-Emitter Saturation Voltage (I_C = 5 Adc, I_B = 1 Adc)		$V_{BE(sat)}$	–	–	1.2	Vdc
(I_C = 8 Adc, I_B = 1.6 Adc)			–	–	1.6	
(I_C = 8 Adc, I_B = 1.6 Adc, T_C = 100°C)			–	–	1.5	
DYNAMIC CHARACTERISTICS						
Current-Gain – Bandwidth Product (I_C = 500 mAdc, V_{CE} = 10 Vdc, f = 1 MHz)		f_T	4	–	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}	–	180	–	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 125 Vdc, I_C = 8 A,	t_d	–	0.06	0.1	μs
Rise Time	I_{B1} = I_{B2} = 1.6 A, t_p = 25 μs,	t_r	–	0.45	1	μs
Storage Time	Duty Cycle ≤ 1%)	t_s	–	1.3	3	μs
Fall Time		t_f	–	0.2	0.7	μs
Inductive Load, Clamped (Table 1, Figure 13)						
Voltage Storage Time	(I_C = 8 A, V_{clamp} = 300 Vdc,	t_{sv}	–	0.92	2.3	μs
Crossover Time	I_{B1} = 1.6 A, $V_{BE(off)}$ = 5 Vdc, T_C = 100°C)	t_c	–	0.12	0.7	μs

*Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.

3

FIGURE 1 – FORWARD BIAS SAFE OPERATING AREA

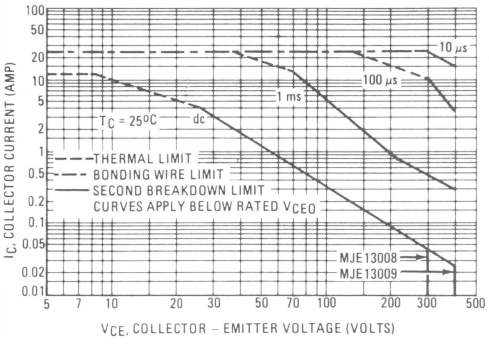

FIGURE 2 – REVERSE BIAS SWITCHING SAFE OPERATING AREA

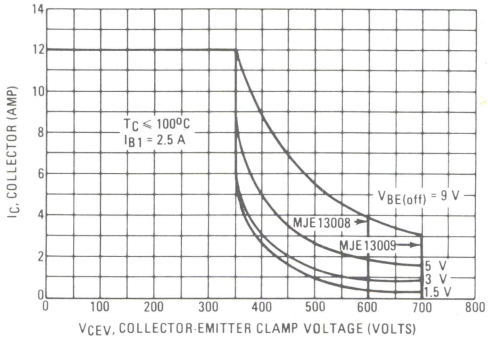

The Safe Operating Area figures shown in Figures 1 and 2 are specified ratings for these devices under the test conditions shown.

FIGURE 3 – FORWARD BIAS POWER DERATING

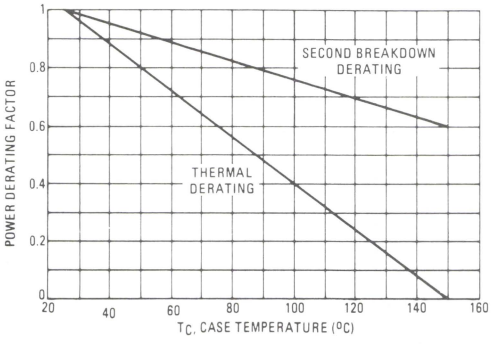

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 1 is based on $T_C = 25^oC$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^oC$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 1 may be found at any case temperature by using the appropriate curve on Figure 3.

$T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Use of reverse biased safe operating area data (Figure 2) is discussed in the applications information section.

FIGURE 4 – TYPICAL THERMAL RESPONSE [$Z_{\theta JC}(t)$]

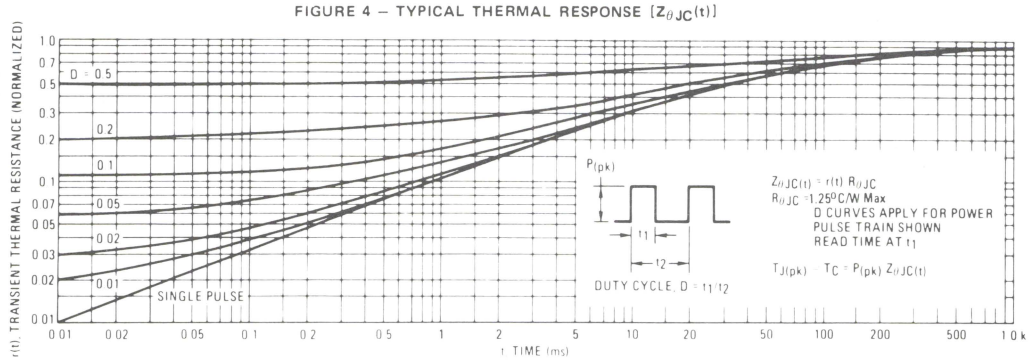

FIGURE 5 – DC CURRENT GAIN

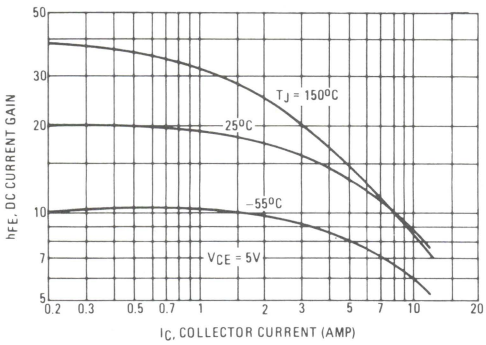

FIGURE 6 – COLLECTOR SATURATION REGION

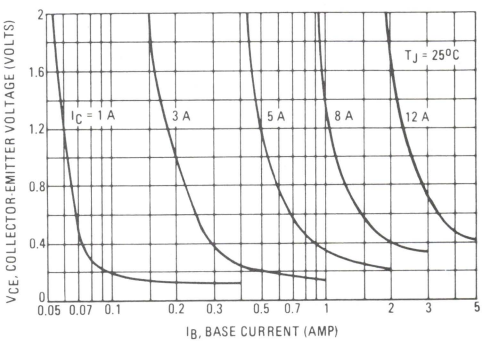

FIGURE 7 – BASE-EMITTER SATURATION VOLTAGE

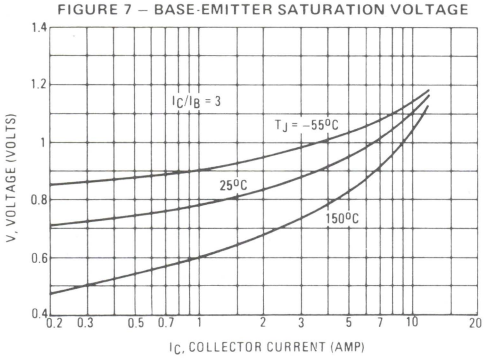

FIGURE 8 – COLLECTOR-EMITTER SATURATION VOLTAGE

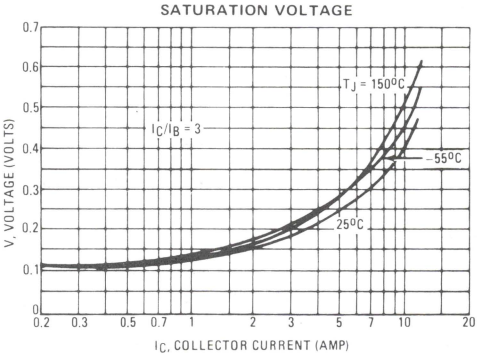

FIGURE 9 – COLLECTOR CUTOFF REGION

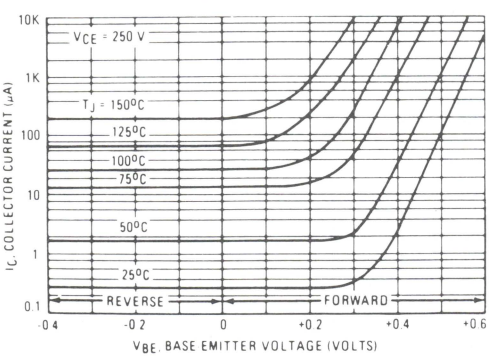

FIGURE 10 – CAPACITANCE

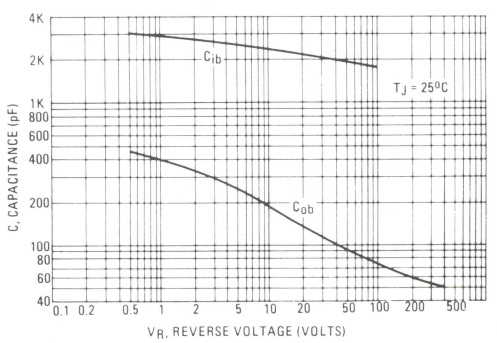

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
TEST CIRCUITS	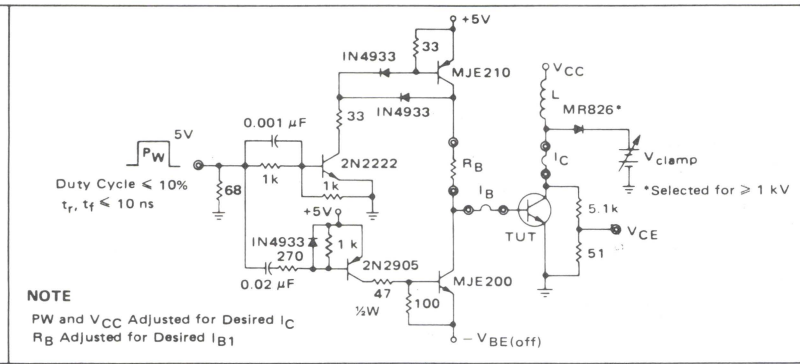 **NOTE** PW and V_{CC} Adjusted for Desired I_C R_B Adjusted for Desired I_{B1}	
CIRCUIT VALUES	Coil Data: Ferroxcube Core #6656 Full Bobbin (~16 Turns) #16 GAP for 200 μH/20A L_{coil} = 200 μH V_{CC} = 20 V V_{clamp} = 300 Vdc	V_{CC} = 125 V R_C = 15 Ω D1 = 1N5820 or Equiv R_B = 5.6 Ω
TEST WAVEFORMS	OUTPUT WAVEFORMS  t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{CM})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{CM})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	 t_r, t_f ≤ 10 ns Duty Cycle = 1.0% R_B and R_C adjusted for desired I_B and I_C

APPLICATIONS INFORMATION FOR SWITCHMODE SPECIFICATIONS

INTRODUCTION

The primary considerations when selecting a power transistor for SWITCHMODE applications are voltage and current ratings, switching speed, and energy handling capability. In this section, these specifications will be discussed and related to the circuit examples illustrated in Table 2.(1)

VOLTAGE REQUIREMENTS

Both blocking voltage and sustaining voltage are important in SWITCHMODE applications.

Circuits B and C in Table 2 illustrate applications that require high blocking voltage capability. In both circuits the switching transistor is subjected to voltages substantially higher than V_{CC} after the device is completely off (see load line diagrams at $I_C = I_{leakage} \approx 0$ in Table 2). The blocking capability at this point depends on the base to emitter conditions and the device junction temperature. Since the highest device capability occurs when the base to emitter junction is reverse biased (V_{CEV}), this is the recommended and specified use condition. Maximum I_{CEV} at rated V_{CEV} is specified at a relatively low reverse bias (1.5 Volts) both at 25°C and 100°C. Increasing the reverse bias will give some improvement in device blocking capability.

The sustaining or active region voltage requirements in switching applications occur during turn-on and turn-off. If the load contains a significant capacitive component, high current and voltage can exist simultaneously during turn-on and the pulsed forward bias SOA curves (Figure 1) are the proper design limits.

For inductive loads, high voltage and current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as a Reverse Bias Safe Operating Area (Figure 2) which represents voltage-current conditions that can be sustained during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode.

In the four application examples (Table 2) load lines are shown in relation to the pulsed forward and reverse biased SOA curves.

(1) For detailed information on specific switching applications, see Motorola Application Notes An-719, AN-737A, AN-752, AN-767.

VOLTAGE REQUIREMENTS (continued)

In circuits A and D, inductive reactance is clamped by the diodes shown. In circuits B and C the voltage is clamped by the output rectifiers, however, the voltage induced in the primary leakage inductance is not clamped by these diodes and could be large enough to destroy the device. A snubber network or an additional clamp may be required to keep the turn-off load line within the Reverse Bias SOA curve.

Load lines that fall within the pulsed forward biased SOA curve during turn-on and within the reverse bias SOA curve during turn-off are considered safe, with the following assumptions:

(1) The device thermal limitations are not exceeded.
(2) The turn-on time does not exceed 10 μs (see standard pulsed forward SOA curves in Figure 1).
(3) The base drive conditions are within the specified limits shown on the Reverse Bias SOA curve (Figure 2).

CURRENT REQUIREMENTS

An efficient switching transistor must operate at the required current level with good fall time, high energy handling capability and low saturation voltage. On this data sheet, these parameters have been specified at 8 amperes which represents typical design conditions for these devices. The current drive requirements are usually dictated by the $V_{CE(sat)}$ specification because the maximum saturation voltage is specified at a forced gain condition which must be duplicated or exceeded in the application to control the saturation voltage.

SWITCHING REQUIREMENTS

In many switching applications, a major portion of the transistor power dissipation occurs during the fall time (t_{fi}). For this reason considerable effort is usually devoted to reducing the fall time. The recommended way to accomplish this is to reverse bias the base-emitter junction during turn-off. The reverse biased switching characteristics for inductive loads are discussed in Figure 11 and Table 3 and resistive loads in Figures 13 and 14. Usually the inductive load component will be the dominant factor in SWITCHMODE applications and the inductive switching data will more closely represent the device performance in actual application. The inductive switching characteristics are derived from the same circuit used to specify the reverse biased SOA curves, (See Table 1) providing correlation between test procedures and actual use conditions.

RESISTIVE SWITCHING PERFORMANCE

FIGURE 11 – TURN-ON TIME

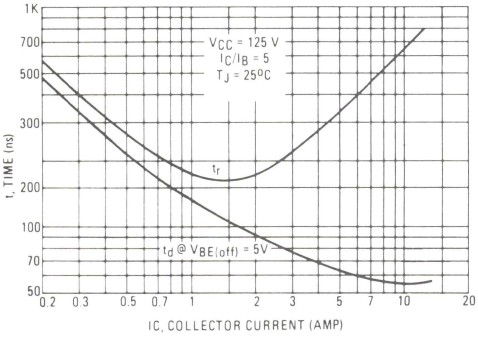

FIGURE 12 – TURN-OFF TIME

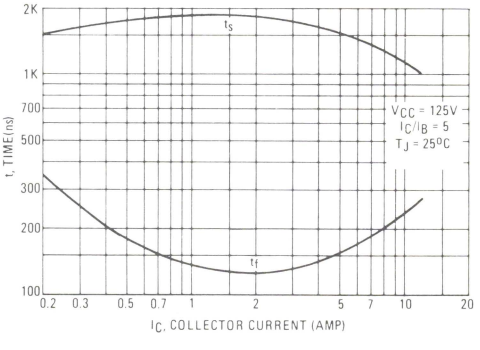

FIGURE 13 – INDUCTIVE SWITCHING MEASUREMENTS

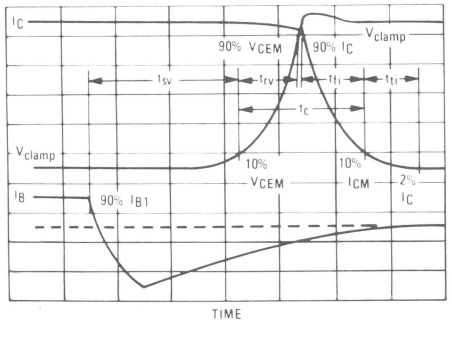

FIGURE 14 – TYPICAL INDUCTIVE SWITCHING WAVEFORMS
(at 300 V and 12 A with I_{B1} = 2.4 A and $V_{BE(off)}$ = 5 V)

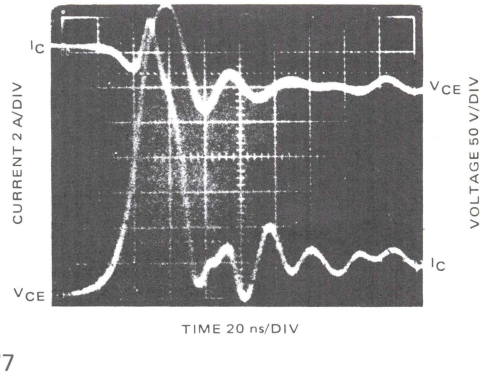

3

TABLE 2 – APPLICATIONS EXAMPLES OF SWITCHING CIRCUITS

	CIRCUIT	LOAD LINE DIAGRAMS	TIME DIAGRAMS
A	**SERIES SWITCHING REGULATOR** 	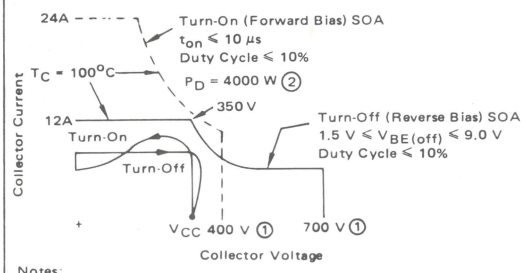 Notes: (1) MJE13009 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) are shown, MJE13008 Ratings are 100 V Lower. (2) See AN-569 for Pulse Power Derating Procedure.	
B	**RINGING CHOKE INVERTER** 	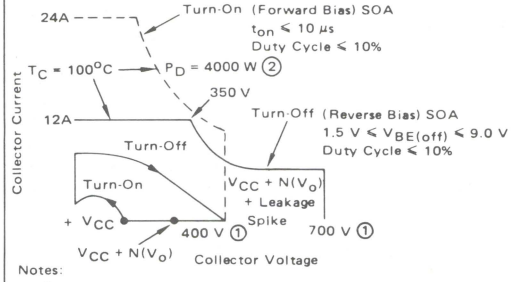 Notes: (1) MJE13009 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) are shown, MJE13008 Ratings are 100 V Lower. (2) See AN-569 For Pulse Power Derating Procedure	
C	**PUSH-PULL INVERTER/CONVERTER** 	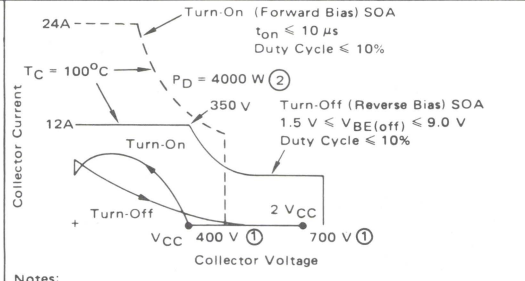 Notes: (1) MJE13009 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) are shown, MJE13008 Ratings are 100 V Lower. (2) See AN-569 for Pulse Power Derating Procedure.	
D	**SOLENOID DRIVER** 	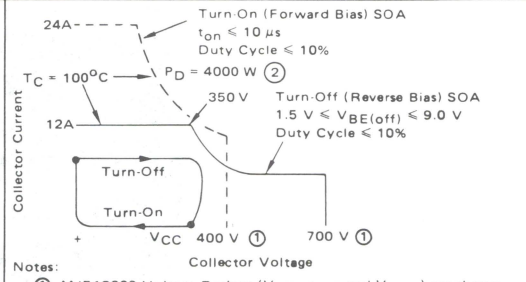 Notes: (1) MJE13009 Voltage Ratings ($V_{CEO(sus)}$ and V_{CEV}) are shown, MJE13008 Ratings are 100 V Lower. (2) See AN-569 for Pulse Power Derating Procedure.	

3

TABLE 3 – TYPICAL INDUCTIVE SWITCHING PERFORMANCE

I_C AMP	T_C °C	t_{sv} ns	t_{rv} ns	t_{fi} ns	t_{ti} ns	t_c ns
3	25	770	100	150	200	240
	100	1000	230	160	200	320
5	25	630	72	26	10	100
	100	820	100	55	30	180
8	25	720	55	27	2	77
	100	920	70	50	8	120
12	25	640	20	17	2	41
	100	800	32	24	4	54

NOTE: All Data recorded in the Inductive Switching Circuit in Table 1.

SWITCHING TIME NOTES

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}
t_{rv} = Voltage Rise Time, 10–90% V_{CEM}
t_{fi} = Current Fall Time, 90–10% I_{CM}
t_{ti} = Current Tail, 10–2% I_{CM}
t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the turn-off waveforms is shown in Figure 13 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c)\ f$$

Typical inductive switching waveforms are shown in Figure 14. In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE13070
MJE13071

Designer's Data Sheet

5 AMPERE

NPN SILICON POWER TRANSISTORS

400 AND 450 VOLTS
80 WATTS



SWITCHMODE II SERIES NPN SILICON POWER TRANSISTORS

The MJE13070 and MJE13071 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switch-mode applications such as:

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits



Fast Turn-Off Times
- 100 ns Inductive Fall Time @ 25°C (Typ)
- 150 ns Inductive Crossover Time @ 25°C (Typ)
- 400 ns Inductive Storage Time @ 25°C (Typ)

Operating Temperature Range -65 to +150°C

100°C Performance Specified for:
- Reverse-Biased SOA with Inductive Loads
- Switching Times with Inductive Loads
- Saturation Voltages
- Leakage Currents

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

MAXIMUM RATINGS

Rating	Symbol	MJE13070	MJE13071	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	650	750	Vdc
Emitter Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	5.0 8.0		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	2.0 4.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	80 32 0.64		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

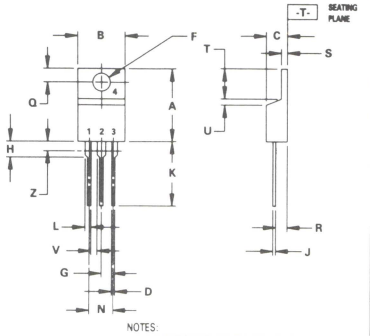

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic			Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)							
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJE13070		$V_{CEO(sus)}$	400	—	—	Vdc
	MJE13071			450	—	—	
Collector Cutoff Current			I_{CEV}				mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)				—	—	0.5	
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)				—	—	2.5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)			I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)			I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN							
Second Breakdown Collector Current with Base Forward Biased			$I_{S/b}$	See Figure 12			
Clamped Inductive SOA with Base Reverse Biased			RBSOA	See Figure 13			
ON CHARACTERISTICS (1)							
DC Current Gain (I_C = 3.0 Adc, V_{CE} = 5.0 Vdc)			h_{FE}	8.0	—	—	—
Collector-Emitter Saturation Voltage			$V_{CE(sat)}$				Vdc
(I_C = 3.0 Adc, I_B = 0.6 Adc)				—	—	1.0	
(I_C = 5.0 Adc, I_B = 1.0 Adc)				—	—	3.0	
(I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)				—	—	2.0	
Base-Emitter Saturation Voltage			$V_{BE(sat)}$				Vdc
(I_C = 3.0 Adc, I_B = 0.6 Adc)				—	—	1.5	
(I_C = 3.0 Adc, I_B = 0.6 Adc, T_C = 100°C)				—	—	1.5	
DYNAMIC CHARACTERISTICS							
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)			C_{ob}	—	—	250	pF
SWITCHING CHARACTERISTICS							
Resistive Load (Table 1)							
Delay Time	(V_{CC} = 250 Vdc, I_C = 3.0 Adc, I_{B1} = 0.4 Adc, t_p = 30 μs, Duty Cycle ≤ 2%, $V_{BE(off)}$ = 5.0 Vdc)		t_d	—	0.03	0.05	μs
Rise Time			t_r	—	0.10	0.40	
Storage Time			t_s	—	0.40	1.50	
Fall Time			t_f	—	0.175	0.50	
Inductive Load, Clamped (Table 1)							
Storage Time	($I_{C(pk)}$ = 3.0 A, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 250 V)	(T_J = 100°C)	t_{sv}	—	0.70	2.0	μs
Crossover Time			t_c	—	0.28	0.50	
Fall Time			t_{fi}	—	0.15	0.30	
Storage Time		(T_J = 25°C)	t_{sv}	—	0.40	—	
Crossover Time			t_c	—	0.15	—	
Fall Time			t_{fi}	—	0.10	—	

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

$$\beta_f = \frac{I_C}{I_B}$$

3

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 1 — DC CURRENT GAIN

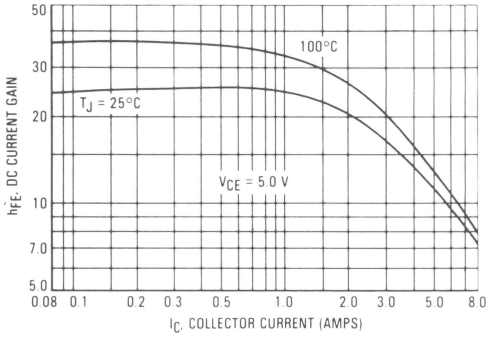

FIGURE 2 — COLLECTOR SATURATION REGION

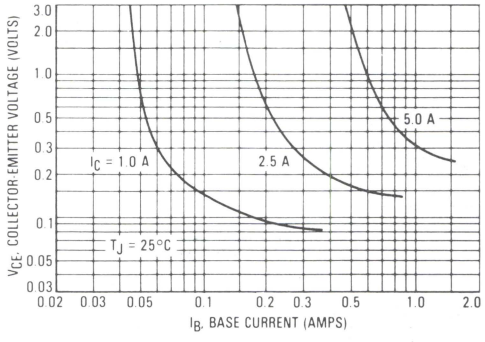

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

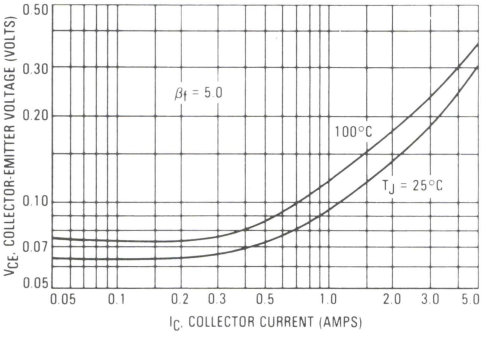

FIGURE 4 — BASE-EMITTER VOLTAGE

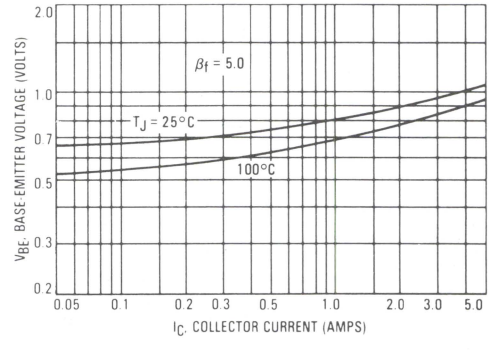

FIGURE 5 — COLLECTOR CUTOFF REGION

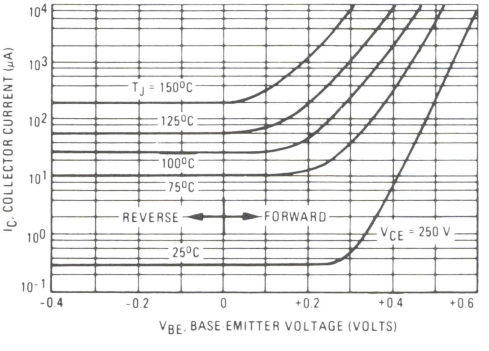

FIGURE 6 — CAPACITANCE

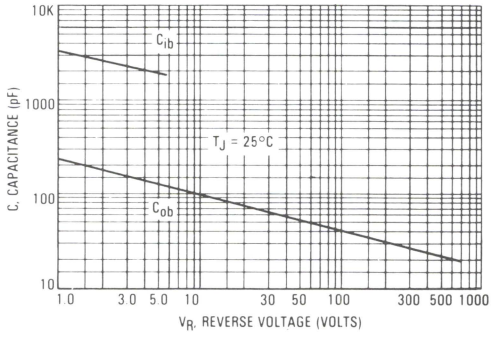

3

TABLE 1 – TEST CONDITIONS FOR DYNAMIC PERFORMANCE

	$V_{CEO(sus)}$	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS	+10 V, 20, 0, 1, 2 PW Varied to Attain I_C = 100 mA	H.P. 214 or Equiv. P.G.; 0.02 μF; 100; +V ≈ 11 V; 20; 2N6191; 10 μF; R_{B1}; A; R_{B2}; 0.02 μF; 1.0 μF; 2N5337; 50; 500; 100; -V; 0; ≈ -35 V Adjust R_{B1} to obtain I_{B1} For switching and RB_{SOA}, R2 = 0 For $BV_{CEO(sus)}$, R2 = ∞	TURN ON TIME I_{B1} adjusted to obtain the forced h_{FE} desired TURN OFF TIME Use inductive switching driver as the input to the resistive test circuit.
CIRCUIT VALUES	L_{coil} = 80 mH V_{CC} = 10 V R_{coil} = 0.7 Ω	L_{coil} = 180 μH R_{coil} = 0.05 Ω V_{CC} = 20 V V_{clamp} = 250 V R_{B1} adjusted to attain desired I_{B1}	V_{CC} = 250 V R_L = 83 Ω Pulse Width = 10 μs
TEST CIRCUITS	INDUCTIVE TEST CIRCUIT TUT, 1, Input, 2, 1N4937 or Equivalent, R_{coil}, L_{coil}, V_{clamp}, V_{CC}, R_S = 0.1 Ω See Above for Detailed Conditions	OUTPUT WAVEFORMS I_C, $I_{C(pk)}$, t_f Clamped, t_1, t_f, t, V_{CE}, V_{CE} or V_{clamp}, Time, t_2 t_1 Adjusted to Obtain I_C $t_1 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{CC}}$ $t_2 \approx \frac{L_{coil}(I_{C_{pk}})}{V_{clamp}}$ Test Equipment Scope – Tektronix 475 or Equivalent	RESISTIVE TEST CIRCUIT 1, 2, TUT, R_L, V_{CC}

FIGURE 7 — INDUCTIVE SWITCHING MEASUREMENTS

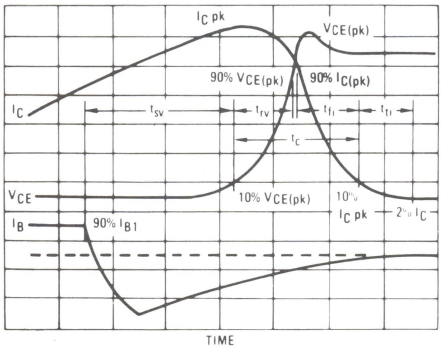

FIGURE 8 — PEAK REVERSE CURRENT

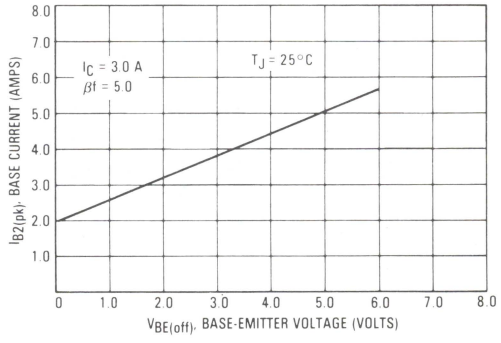

3

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
t_{fi} = Current Fall Time, 90–10% I_C
t_{ti} = Current Tail, 10–2% I_C
t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2\ V_{CC} I_C (t_c) f$$

In general, $t_{rv} + t_{fi} \simeq t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a "SWITCHMODE" transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

INDUCTIVE SWITCHING

FIGURE 9 — STORAGE TIME

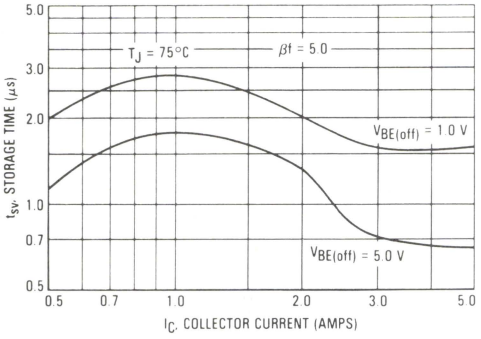

FIGURE 10 — CROSSOVER AND FALL TIMES

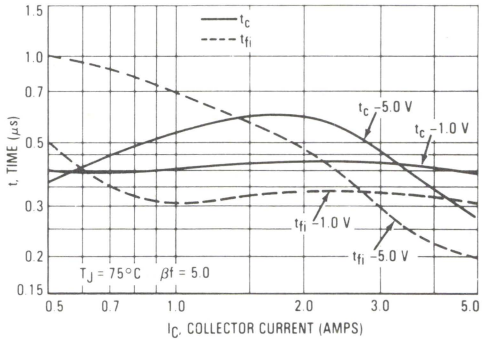

FIGURE 11 — THERMAL RESPONSE

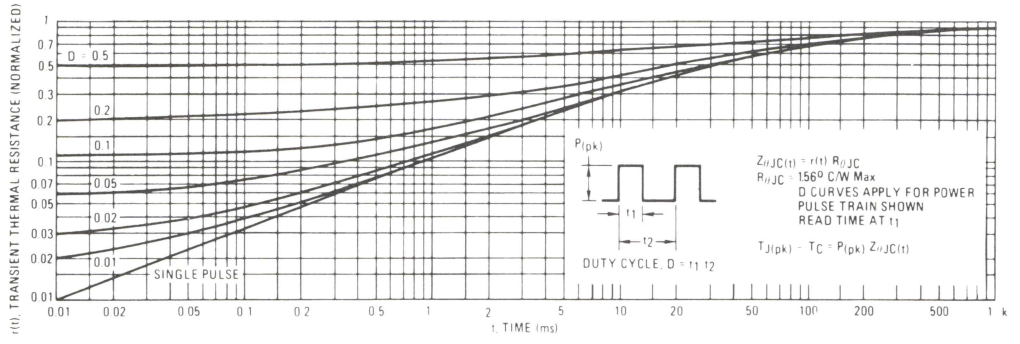

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

FIGURE 12 — MAXIMUM FORWARD BIAS SAFE OPERATING AREA

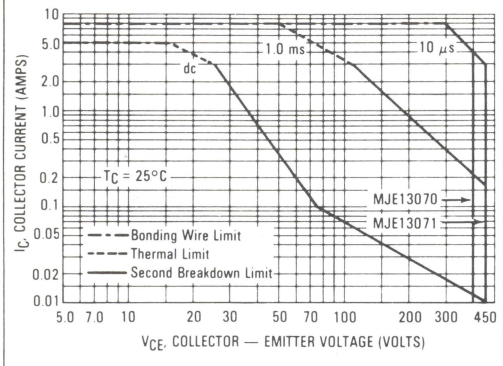

FIGURE 13 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

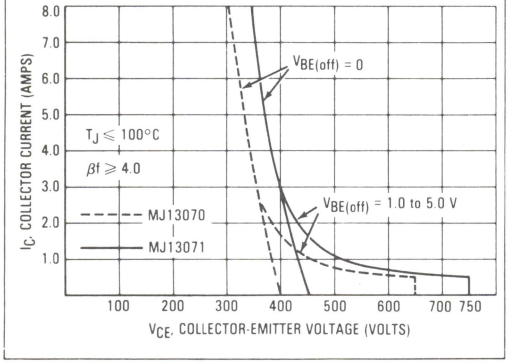

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 14.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives RBSOA characteristics.

FIGURE 14 — POWER DERATING

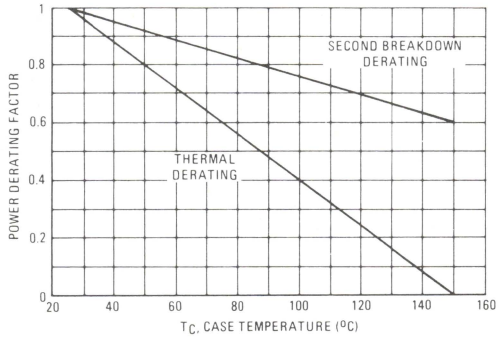

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN **PNP**
MJE15028 MJE15029
MJE15030 MJE15031

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use as high-frequency drivers in audio amplifiers.

- DC Current Gain Specified to 4.0 Amperes
  h_{FE} = 40(Min) @ I_C = 3.0 Adc
  = 20(Min) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 120 Vdc (Min) – MJE15028, MJE15029
  = 150 Vdc (Min) – MJE15030, MJE15031
- High Current Gain – Bandwidth Product
  f_T = 30 MHz (Min) @ I_C = 500 mAdc
- TO-220AB Compact Package
- TO-66 Leadform Also Available

8 AMPERE

POWER TRANSISTORS COMPLEMENTARY SILICON

120–150 VOLTS
50 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJE15028 MJE15029	MJE15030 MJE15031	Unit
Collector-Emitter Voltage	V_{CEO}	120	150	Vdc
Collector-Base Voltage	V_{CB}	120	150	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous – Peak	I_C	8.0 16		Adc
Base Current	I_B	2.0		Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	50 0.40		Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	2.0 0.016		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

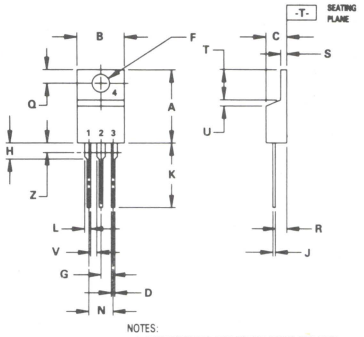

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

FIGURE 1 – POWER DERATING

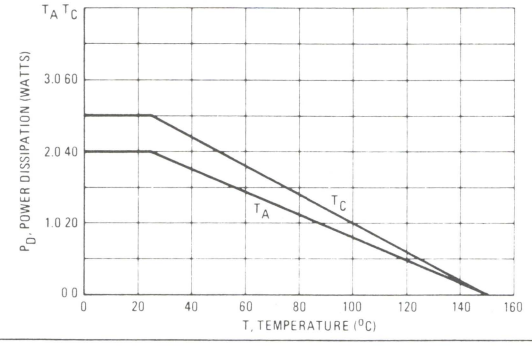

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 10 mAdc, I_B = 0)	MJE15028, MJE15029		120	–	
	MJE15030, MJE15031		150	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 120 Vdc, I_B = 0)	MJE15028, MJE15029		–	0.1	
(V_{CE} = 150 Vdc, I_B = 0)	MJE15030, MJE15031		–	0.1	
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 120 Vdc, I_E = 0)	MJE15028, MJE15029		–	10	
(V_{CB} = 150 Vdc, I_E = 0)	MJE15030, MJE15031		–	10	
Emitter Cutoff Current		I_{EBO}	–	10	μAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 0.1 Adc, V_{CE} = 2.0 Vdc)			40	–	
(I_C = 2.0 Adc, V_{CE} = 2.0 Vdc)			40	–	
(I_C = 3.0 Adc, V_{CE} = 2.0 Vdc)			40	–	
(I_C = 4.0 Adc, V_{CE} = 2.0 Vdc)			20	–	
DC Current Gain Linearity		h_{FE}	Typ		
(V_{CE} From 2.0V to 20V, I_C From 0.1A to 3A)			2		
(NPN TO PNP)			3		
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	–	0.5	Vdc
(I_C = 1.0 Adc, I_B = 0.1 Adc)					
Base-Emitter On Voltage		$V_{BE(on)}$	–	1.0	Vdc
(I_C = 1.0 Adc, V_{CE} = 2.0 Vdc)					
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2)		f_T	30	–	MHz
(I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 10 MHz)					

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2)$f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 – THERMAL RESPONSE

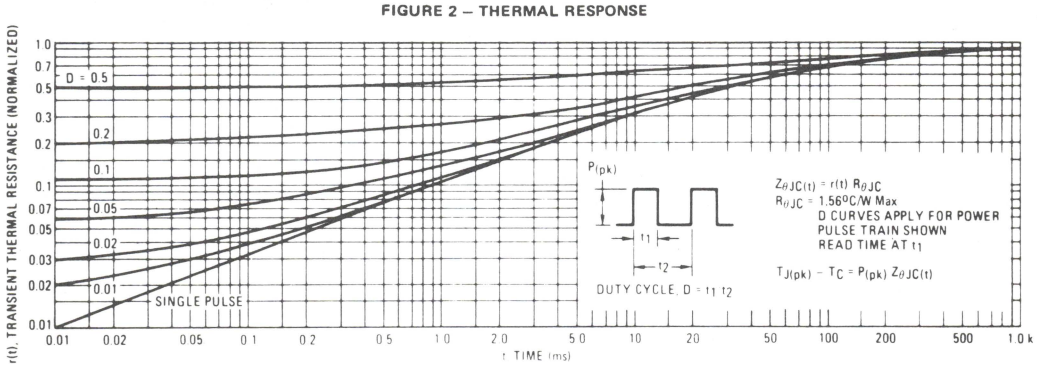

3

FIGURE 3 – FORWARD BIAS SAFE OPERATING AREA

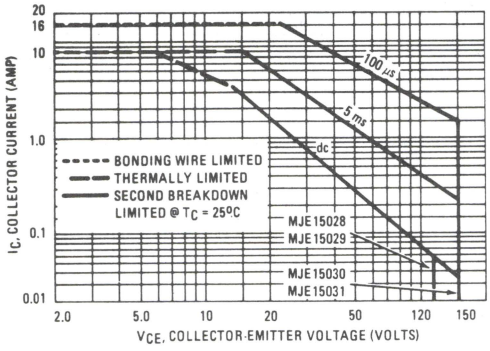

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 3 and 4 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 2. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 4 – REVERSE-BIAS SWITCHING SAFE OPERATING AREA

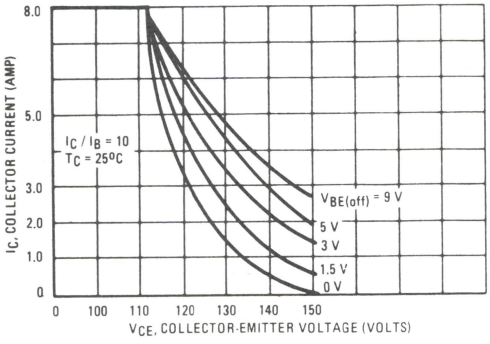

FIGURE 5 – CAPACITANCES

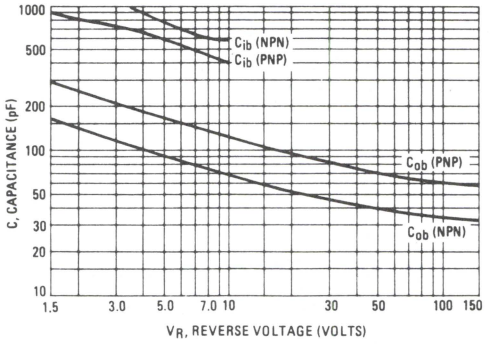

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

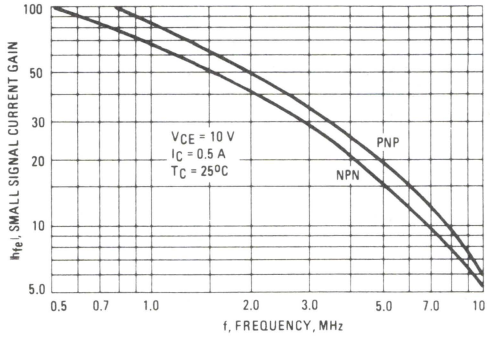

FIGURE 7 – CURRENT GAIN-BANDWIDTH PRODUCT

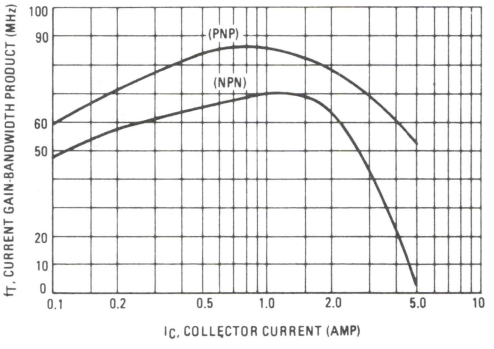

3

FIGURE 8 – DC CURRENT GAIN

NPN – MJE15028 MJE15030

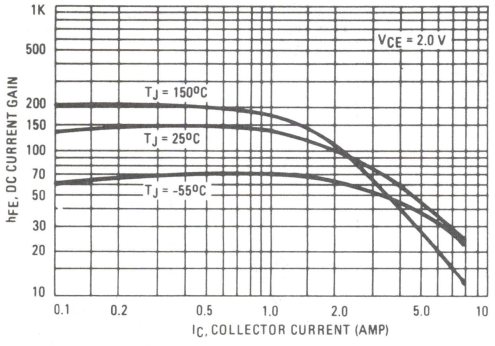

PNP – MJE15029 MJE15031

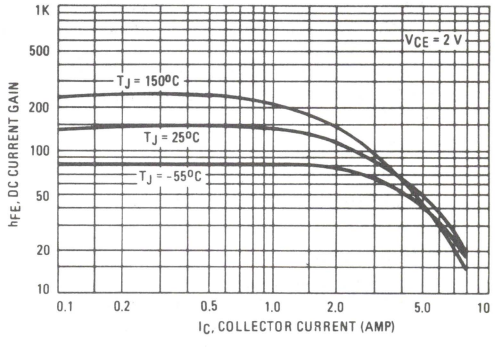

FIGURE 9 – "ON" VOLTAGE

NPN

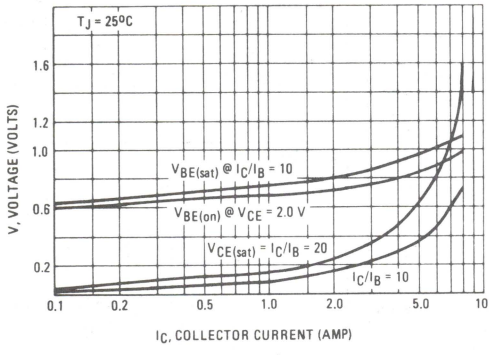

PNP

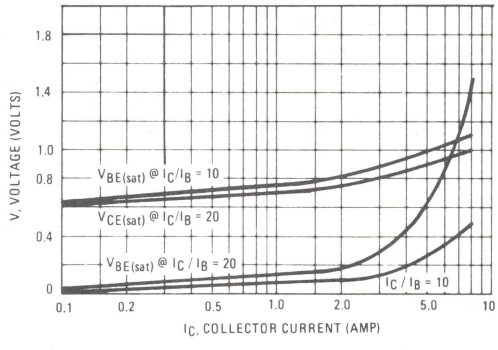

FIGURE 10 – TURN-ON TIMES

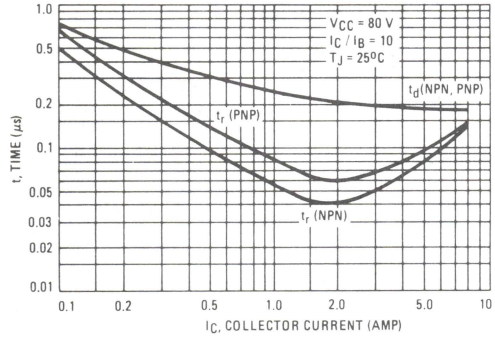

FIGURE 11 – TURN-OFF TIMES

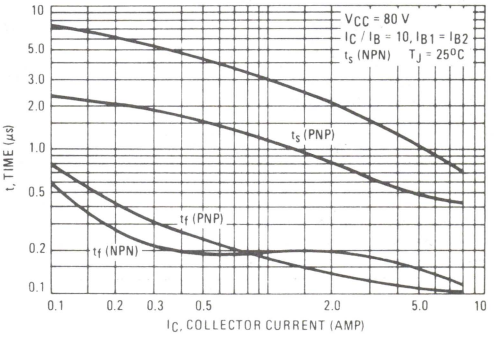

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MJE16002
MJE16004
MJH16002
MJH16004

Designer's Data Sheet

5.0 AMPERE

NPN SILICON POWER TRANSISTORS

450 VOLTS
80 and 100 WATTS

SWITCHMODE III SERIES
NPN SILICON POWER TRANSISTORS

These transistors are designed for high-voltage, high-speed switching of inductive circuits where fall time and RBSOA are critical. They are particularly well-suited for line-operated switch-mode applications.

The MJE16004 and MJH16004 are high-gain versions of the MJE16002 and MJH16002 for applications where drive current is limited.

Typical Applications:

- Switching Regulators
- High Resolution Deflection Circuits
- Inverters
- Motor Drives
- Fast Switching Speeds
  - 50 ns Inductive Fall Time @ 75°C (Typ)
  - 70 ns Crossover Time @ 75°C (Typ)
- 100°C Performance Specified for:
  - Reverse-Biased SOA
  - Inductive Switching Times
  - Saturation Voltages
  - Leakage Currents

MJE16002
MJE16004

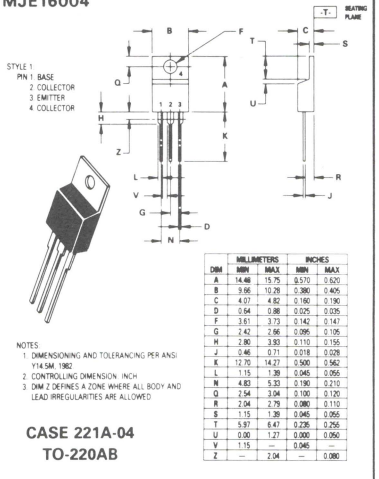

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

CASE 221A-04
TO-220AB

MJH16002
MJH16004

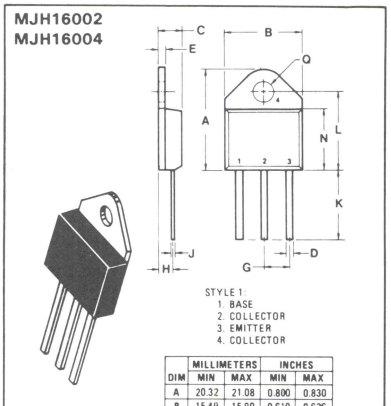

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

MAXIMUM RATINGS

Rating	Symbol	MJE16002 MJE16004	MJH16002 MJH16004	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	450		Vdc
Collector-Emitter Voltage	V_{CEV}	850		Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous — Peak (1)	I_C I_{CM}	5.0 10		Adc
Base Current — Continuous — Peak (1)	I_B I_{BM}	4.0 8.0		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above T_C = 25°C	P_D	80 32 0.64	100 40 0.8	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	1.25	°C/W
Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)						
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0)		$V_{CEO(sus)}$	450	—	—	Vdc
Collector Cutoff Current (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = 850 Vdc, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		I_{CEV}	— —	— —	0.25 1.5	mAdc
Collector Cutoff Current (V_{CE} = 850 Vdc, R_{BE} = 50 Ω, T_C = 100°C)		I_{CER}	—	—	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 6.0 Vdc, I_C = 0)		I_{EBO}	—	—	1.0	mAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with Base Forward Biased		$I_{S/b}$		See Figure 17 or 18		
Clamped Inductive SOA with Base Reverse Biased		RBSOA		See Figure 19		
ON CHARACTERISTICS (1)						
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 1.5 Adc, I_B = 0.2 Adc)	MJE16002/MJH16002		—	—	1.0	
(I_C = 1.5 Adc, I_B = 0.15 Adc)	MJE16004/MJH16004		—	—	1.0	
(I_C = 3.0 Adc, I_B = 0.4 Adc)	MJE16002/MJH16002		—	—	2.5	
(I_C = 3.0 Adc, I_B = 0.3 Adc)	MJE16004/MJH16004		—	—	2.5	
(I_C = 3.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	MJE16002/MJH16002		—	—	2.5	
(I_C = 3.0 Adc, I_B = 0.3 Adc, T_C = 100°C)	MJE16004/MJH16004		—	—	2.5	
Base-Emitter Saturation Voltage		$V_{BE(sat)}$				Vdc
(I_C = 3.0 Adc, I_B = 0.4 Adc)	MJE16002/MJH16002		—	—	1.5	
(I_C = 3.0 Adc, I_B = 0.3 Adc)	MJE16004/MJH16004		—	—	1.5	
(I_C = 3.0 Adc, I_B = 0.4 Adc, T_C = 100°C)	MJE16002/MJH16002		—	—	1.5	
(I_C = 3.0 Adc, I_B = 0.3 Adc, T_C = 100°C)	MJE16004/MJH16004		—	—	1.5	
DC Current Gain		h_{FE}				—
(I_C = 5.0 Adc, V_{CE} = 5.0 Vdc)	MJE16002/MJH16002		5.0	—	—	
	MJE16004/MJH16004		7.0	—	—	
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1.0 kHz)		C_{ob}	—	—	200	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)	**MJE16002/MJH16002**					
Delay Time	(I_C = 3.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.4 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 0.8 Adc, R_{B2} = 8.0 Ω)	t_d	—	30	100	ns
Rise Time			t_r	—	100	300	
Storage Time			t_s	—	1000	3000	
Fall Time			t_f	—	60	300	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	400	—	
Fall Time			t_f	—	130	—	
Resistive Load (Table 1)	**MJE16004/MJH16004**						
Delay Time	(I_C = 3.0 Adc, V_{CC} = 250 Vdc, I_{B1} = 0.3 Adc, PW = 30 μs, Duty Cycle ≤2.0%)	(I_{B2} = 0.6 Adc, R_{B2} = 8.0 Ω)	t_d	—	30	100	ns
Rise Time			t_r	—	130	300	
Storage Time			t_s	—	800	2700	
Fall Time			t_f	—	80	350	
Storage Time		($V_{BE(off)}$ = 5.0 Vdc)	t_s	—	250	—	
Fall Time			t_f	—	60	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_{B1}}$

SWITCHING CHARACTERISTICS (continued)

Characteristics			Symbol	Min	Typ	Max	Unit
Inductive Load (Table 2) MJE16002/MJH16002							
Storage Time	(I_C = 3.0 Adc, I_{B1} = 0.4 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	500	1600	ns
Fall Time			t_{fi}	—	100	200	
Crossover Time			t_c	—	120	250	
Storage Time		(T_J = 150°C)	t_{sv}	—	600	—	
Fall Time			t_{fi}	—	120	—	
Crossover Time			t_c	—	160	—	
Inductive Load (Table 2) MJE16004/MJH16004							
Storage Time	(I_C = 3.0 Adc, I_{B1} = 0.3 Adc, $V_{BE(off)}$ = 5.0 Vdc, $V_{CE(pk)}$ = 400 Vdc)	(T_J = 100°C)	t_{sv}	—	400	1300	ns
Fall Time			t_{fi}	—	80	150	
Crossover Time			t_c	—	90	200	
Storage Time		(T_J = 150°C)	t_{sv}	—	450	—	
Fall Time			t_{fi}	—	100	—	
Crossover Time			t_c	—	110	—	

(1) Pulse Test: PW - 300 μs, Duty Cycle ≤2%.

*$\beta_f = \frac{I_C}{I_{B1}}$

FIGURE 1 — DC CURRENT GAIN

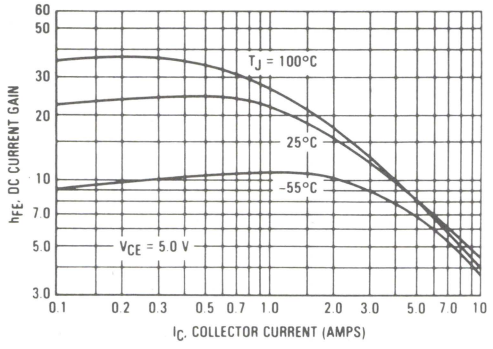

FIGURE 2 — COLLECTOR SATURATION REGION

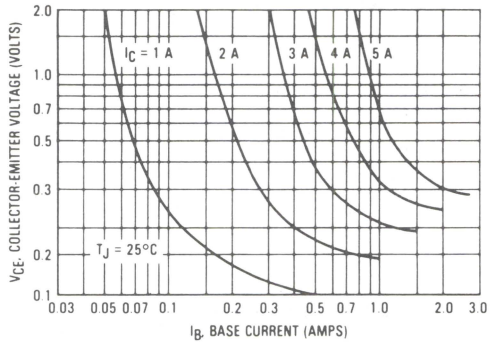

FIGURE 3 — COLLECTOR-EMITTER SATURATION VOLTAGE

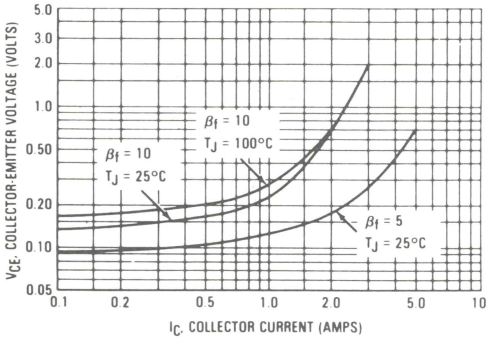

FIGURE 4 — BASE-EMITTER VOLTAGE

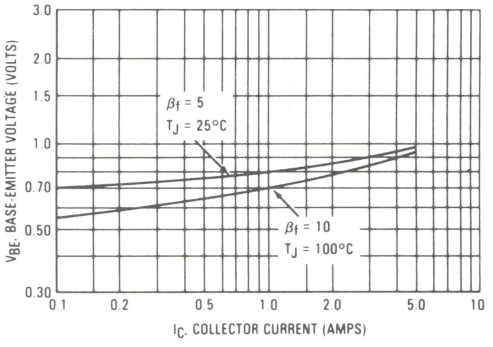

TYPICAL STATIC CHARACTERISTICS (continued)

FIGURE 5 — COLLECTOR CUTOFF REGION

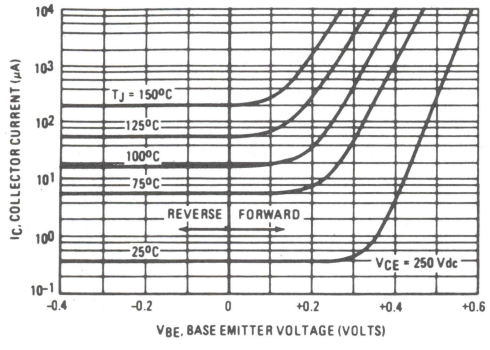

FIGURE 6 — CAPACITANCE

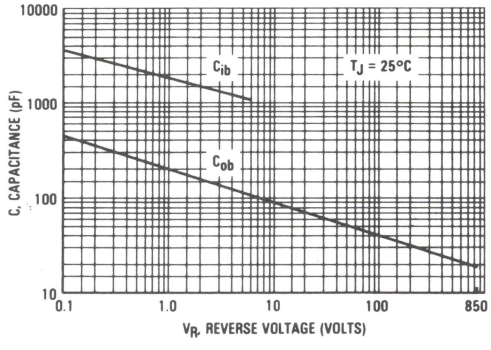

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 7 — STORAGE TIME

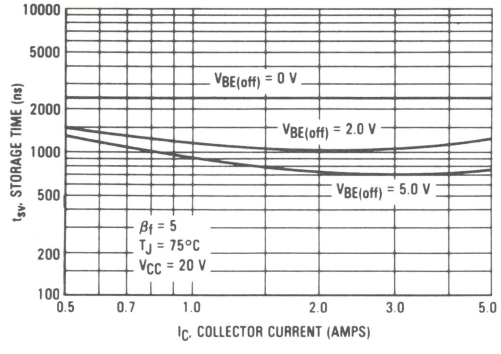

FIGURE 8 — STORAGE TIME

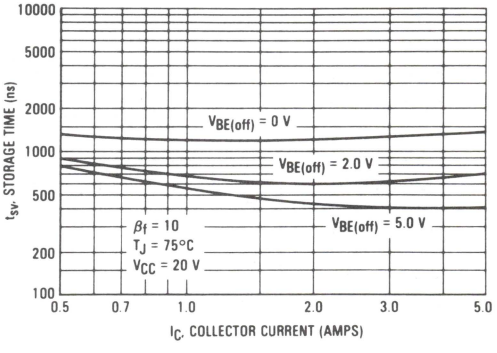

FIGURE 9 — COLLECTOR CURRENT FALL TIME

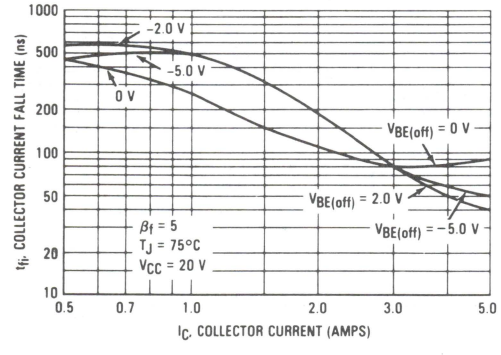

FIGURE 10 — COLLECTOR CURRENT FALL TIME

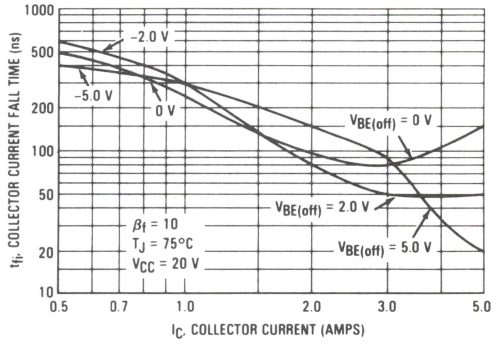

3

TYPICAL DYNAMIC CHARACTERISTICS (continued)

FIGURE 11 — CROSSOVER TIME

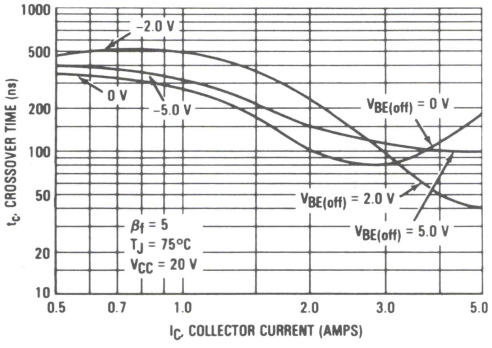

FIGURE 12 — CROSSOVER TIME

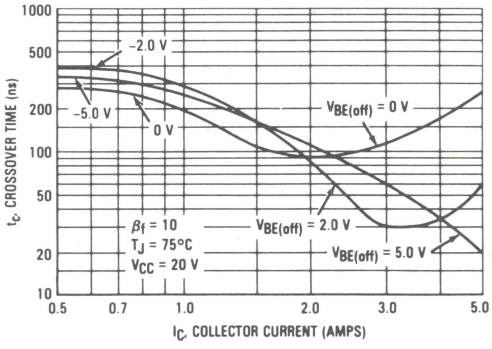

TYPICAL ELECTRICAL CHARACTERISTICS

FIGURE 13 — INDUCTIVE SWITCHING MEASUREMENTS

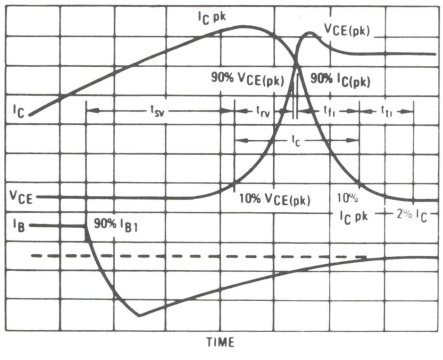

FIGURE 14 — PEAK REVERSE BASE CURRENT

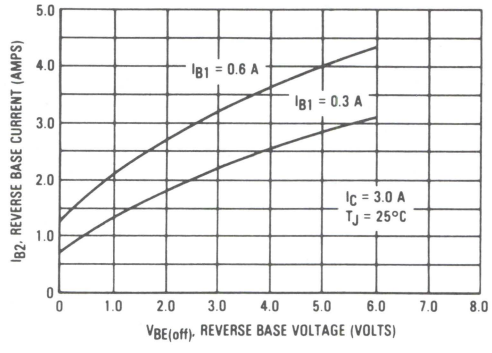

FIGURE 15 — THERMAL RESPONSE (MJE16002 and MJE16004)

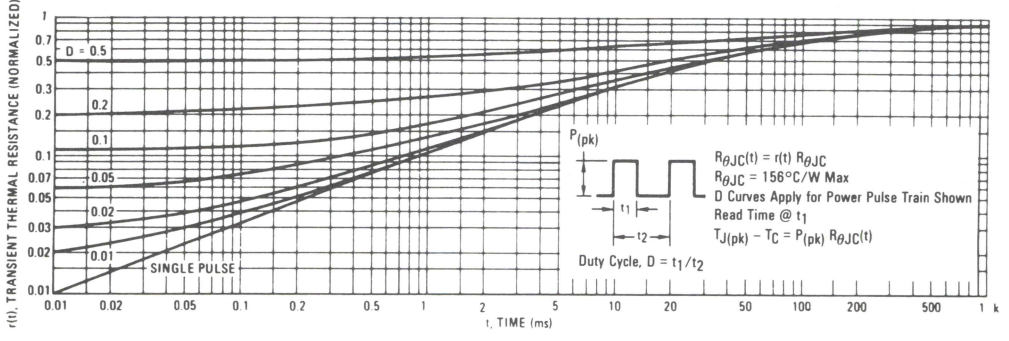

TYPICAL ELECTRICAL CHARACTERISTICS (continued)

FIGURE 16 — THERMAL RESPONSE (MJH16002 and MJH16004)

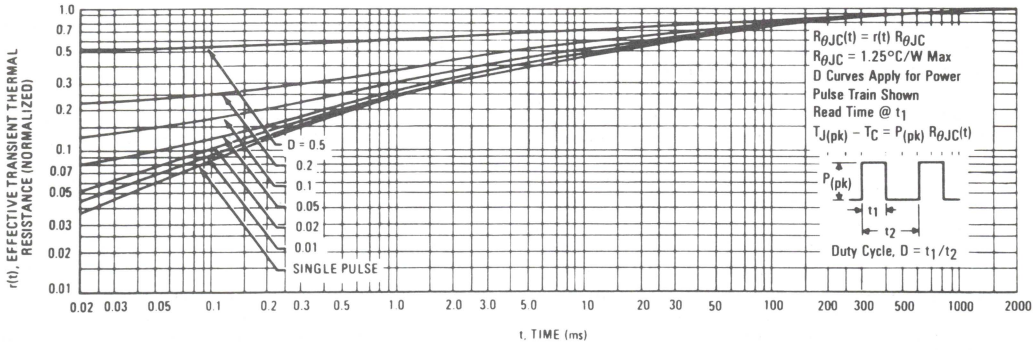

SAFE OPERATING AREA INFORMATION

FIGURE 17 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA (MJE16002 and MJE16004)

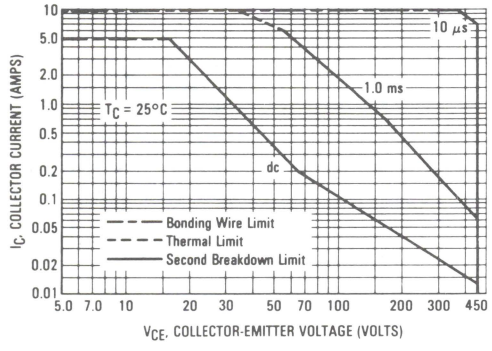

FIGURE 18 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA (MJH16002 and MJH16004)

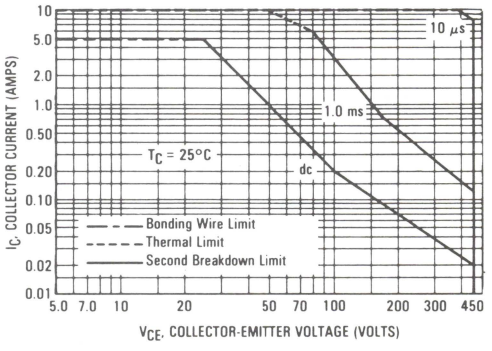

FIGURE 19 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

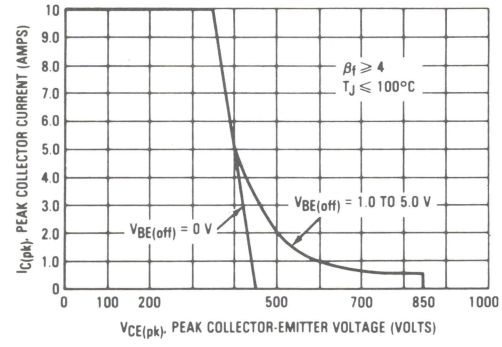

FIGURE 20 — POWER DERATING

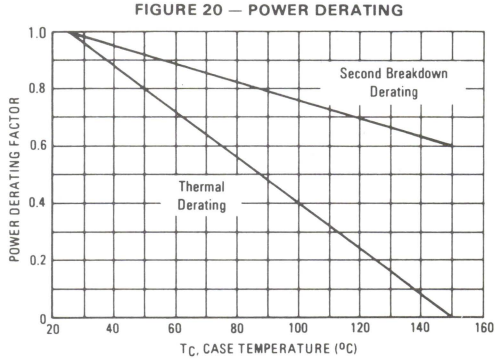

3

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 17 and 18 are based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figures 17 and 18 may be found at any case temperature by using the appropriate curve on Figure 20.

$T_{J(pk)}$ may be calculated from the data in Figures 15 or 16. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneousl during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable putting reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 19 gives the RBSOA characteristics.

TABLE 1 — RESISTIVE LOAD SWITCHING

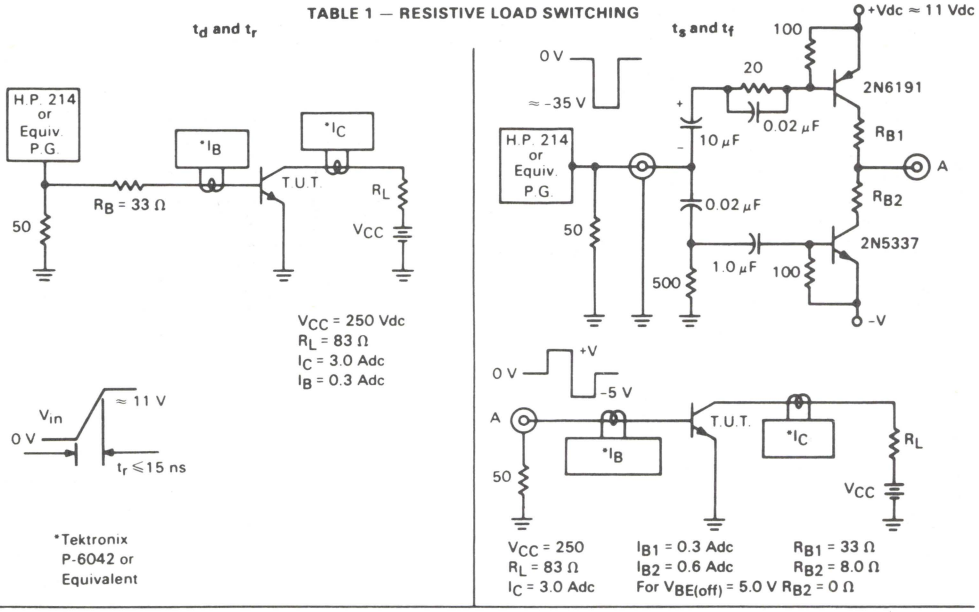

*Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

TABLE 2 — INDUCTIVE LOAD SWITCHING

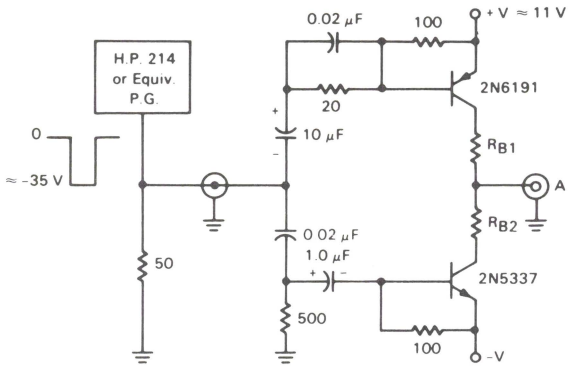

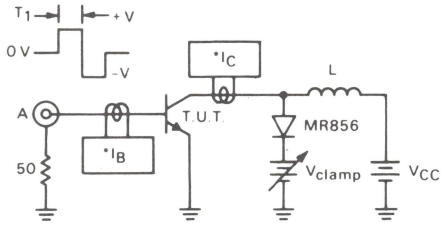



$T_1 \approx \frac{L_{coil}(I_{Cpk})}{V_{CC}}$

T_1 adjusted to obtain $I_{C(pk)}$

BV_{CEO}
L = 10 mH
$R_{B2} = \infty$
V_{CC} = 20 Volts

*Tektronix
P-6042 or
Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope - Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust -V to obtain desired $V_{BE(off)}$ at Point A.

3

TYPICAL INDUCTIVE SWITCHING WAVEFORMS

t_{sv}

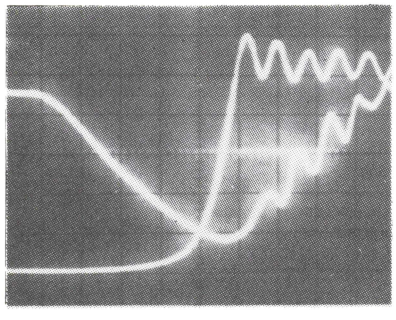

$I_{C(pk)}$ = 3.0 Amps
I_{B1} = 0.3 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 300 Volts
T_C = 25°C
Time Base =
20 ns/cm

t_{fi}, t_c

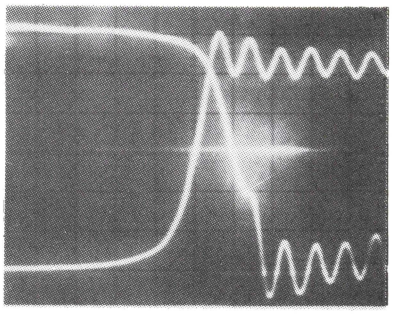

$I_{C(pk)}$ = 3.0 Amps
I_{B1} = 0.3 Amp
$V_{BE(off)}$ = 5.0 Volts
$V_{CE(pk)}$ = 300 Volts
T_C = 25°C
Time Base =
20 ns/cm

MJE16032
MJE16034
MJH16032
MJH16034

Designer's Data Sheet

NPN Silicon Power Transistors

Switchmode III Series

POWER TRANSISTORS
3 AMPERES
750 and 850 VOLTS
80 and 125 WATTS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  - 150 ns Inductive Fall Time: 25°C (Typ)
  - 150 ns Inductive Crossover Time: 25°C (Typ)
  - 500 ns Inductive Storage Time: 25°C (Typ)
- Operating Temperature Range: −65 to +150°C
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents

CASE 221A-04
(TO-220AB)



CASE 340-01
(TO-218AC)

MAXIMUM RATINGS

Rating	Symbol	MJE16032 MJH16032	MJE16034 MJH16034	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	750	850	Vdc
Collector-Emitter Voltage	V_{CEV}	1500		Vdc
Emitter Base Voltage	V_{EB}	9		Vdc
Collector Current — Continuous — Peak(1)	I_C I_{CM}	3 6		Adc
Base Current — Continuous — Peak(1)	I_B I_{BM}	2 4		Adc
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C
		MJE16032 MJE16034	**MJH16032 MJH16034**	
Total Power Dissipation @ T_C = +25°C @ T_C = +100°C Derate above 25°C	P_D	80 32 0.64	125 50 1	Watts W/°C

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	1	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275		°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (Table 2) (I_C = 100 mA, I_B = 0) MJE16032, MJH16032	$V_{CEO(sus)}$	750	—	—	Vdc
MJE16034, MJH16034		850	—	—	
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc)	I_{CEV}	—	0.005	0.25	mAdc
(V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		—	0.020	2.5	
Collector Cutoff Current (V_{CE} = Rated V_{CEV}, R_{BE} = 50 Ω, T_C = 100°C)	I_{CER}	—	0.020	2.5	mAdc
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)	I_{EBO}	—	0.002	0.25	mAdc
SECOND BREAKDOWN					
Second Breakdown Collector Current with base forward biased	$I_{S/b}$	See Figure 15			
Clamped Inductive SOA with Base Reverse Biased	RBSOA	See Figure 17			
ON CHARACTERISTICS(1)					
DC Current Gain (V_{CE} = 5 Vdc) I_C = 0.5 Adc	h_{FE}	10	15	—	—
I_C = 3 Adc		4	7	—	—
Collector-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.33 Adc)	$V_{CE(sat)}$	—	0.15	1	Vdc
(I_C = 3 Adc, I_B = 1 Adc)		—	1	2.5	
(I_C = 1 Adc, I_B = 0.33 Adc, T_C = 100°C)		—	0.5	1.5	
Base-Emitter Saturation Voltage (I_C = 1 Adc, I_B = 0.33 Adc)	$V_{BE(sat)}$	—	0.8	1.5	Vdc
(I_C = 1 Adc, I_B = 0.33 Adc, T_C = 100°C)		—	0.7	1.5	
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)	C_{ob}	—	80	—	pF
SWITCHING CHARACTERISTICS					
Resistive Load (Table 1)					
Delay Time	t_d	—	0.06	0.2	μs
Rise Time	t_r	—	0.15	1	μs
Storage Time	t_s	—	1.5	2	μs
Fall Time	t_f	—	0.15	1.5	μs
Inductive Load, Clamped (Table 2)					
Storage Time	t_{sv}	—	0.5	1.5	μs
Crossover Time	t_c	—	0.2	1	μs
Storage Time	t_{sv}	—	0.5	—	μs
Crossover Time	t_c	—	0.15	—	μs
Fall Time	t_{fi}	—	0.15	—	μs

(V_{CC} = 400 Vdc, I_C = 2 A, I_{B1} = 333 mA, $V_{BE(off)}$ = 5 Vdc, t_p = 50 μs, Duty Cycle ≤ 2%)

(I_C = 2 A, V_{clamp} = 400 Vdc, $V_{BE(off)}$ = 5 Vdc, I_{B1} = 333 mA)

T_C = 100°C

T_C = 25°C

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL STATIC CHARACTERISTICS

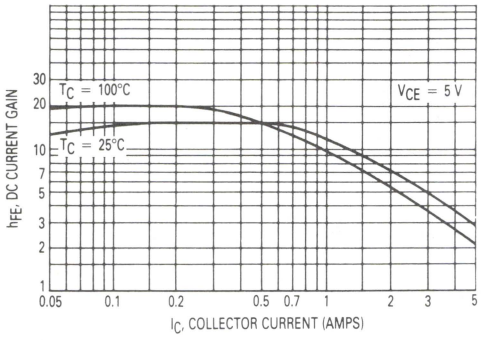

Figure 1. DC Current Gain

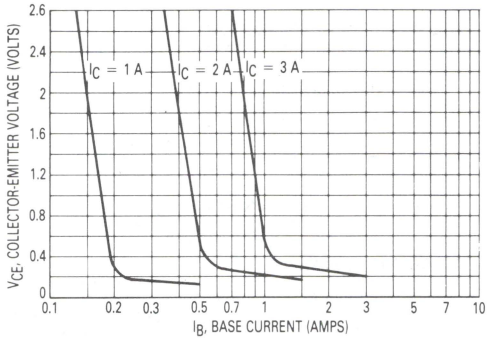

Figure 2. Collector Saturation Region

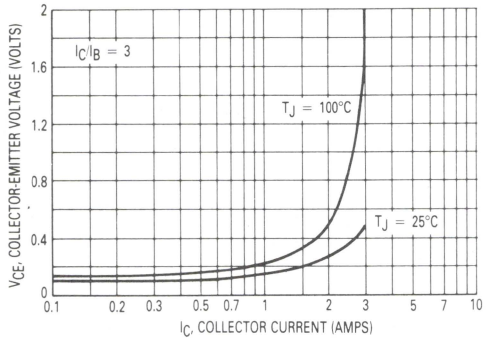

Figure 3. Collector-Emitter Saturation Voltage

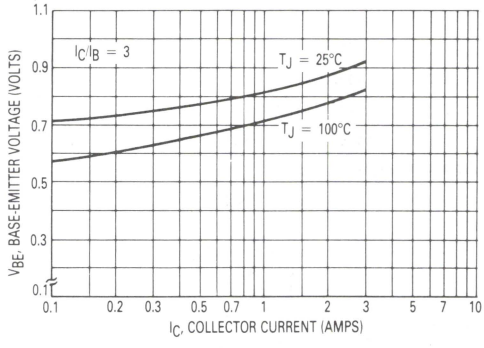

Figure 4. Base-Emitter Saturation Voltage

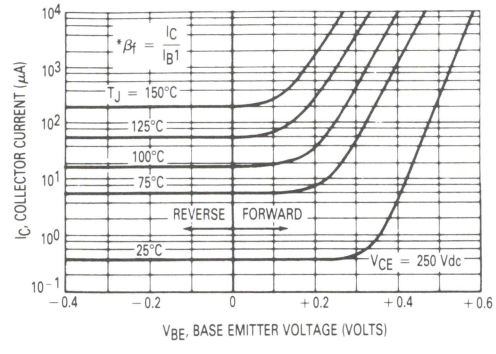

Figure 5. Collector Cutoff Region

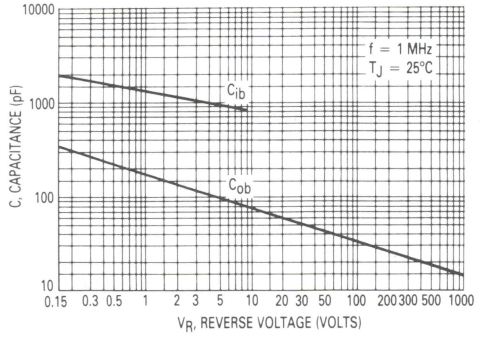

Figure 6. Capacitance Variation

TYPICAL DYNAMIC CHARACTERISTICS

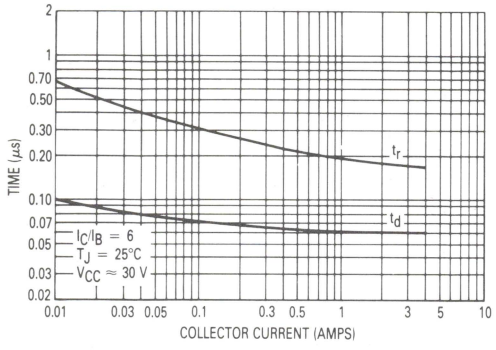

Figure 7. Resistive Turn-On Time

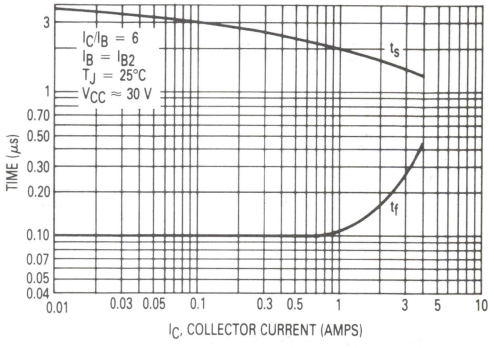

Figure 8. Resistive Turn-Off Time

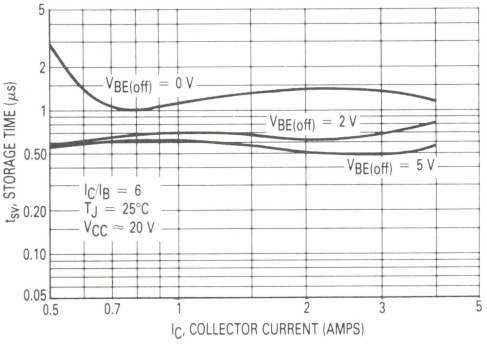

Figure 9. Inductive Storage Time
T_J = 25°C

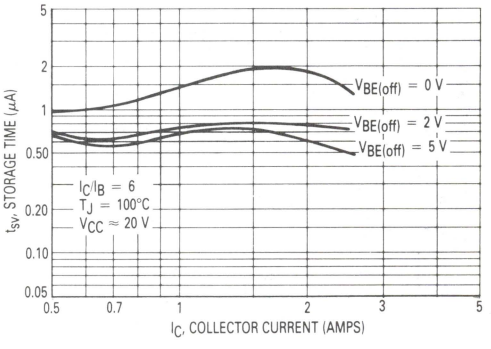

Figure 10. Inductive Storage Time
T_J = 100°C

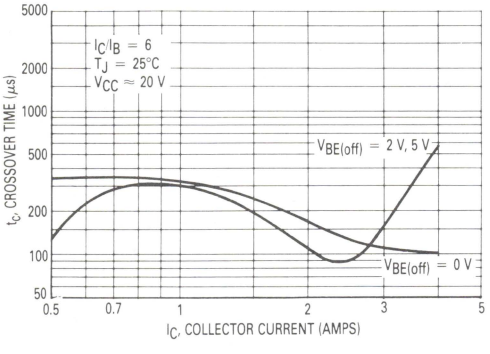

Figure 11. Inductive Crossover Time
T_J = 25°C

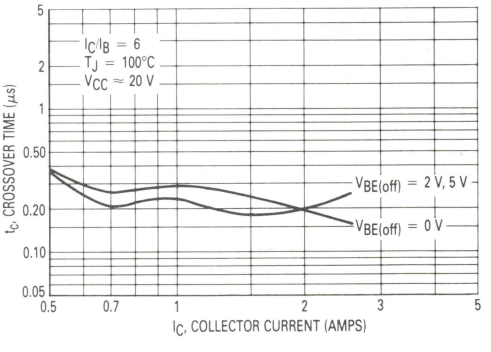

Figure 12. Inductive Crossover Time
T_J = 100°C

3

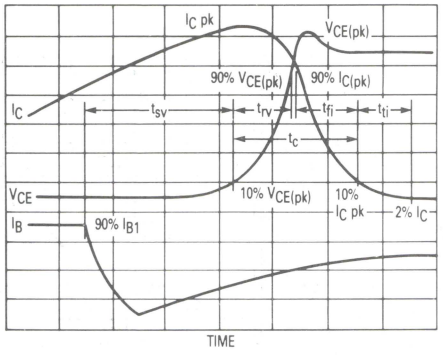

Figure 13. Inductive Switching Measurements

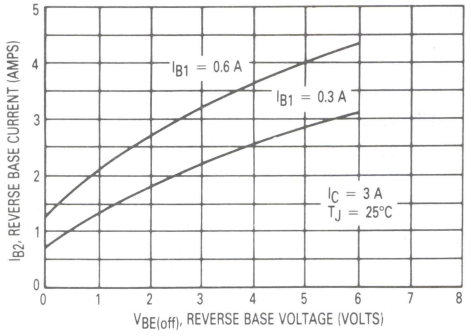

Figure 14. Peak Reverse Base Current

GUARANTEED SAFE OPERATING AREA LIMITS

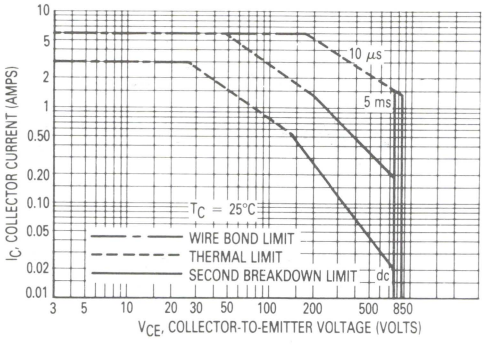

a. MJE16032, MJE16034

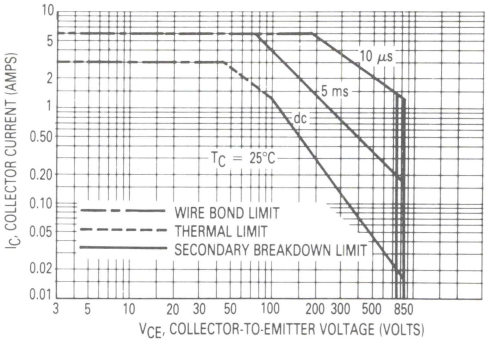

b. MJH16032, MJH16034

Figure 15. Maximum Rated Forward Bias Safe Operating Area

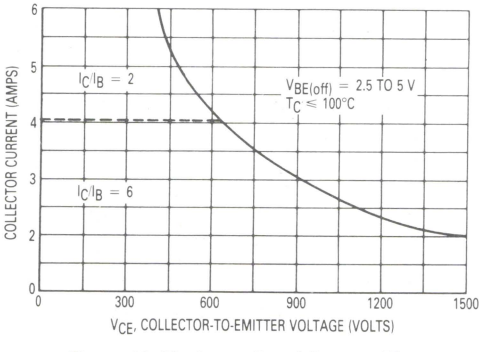

Figure 16. Maximum Rated Reverse Bias Safe Operating Area

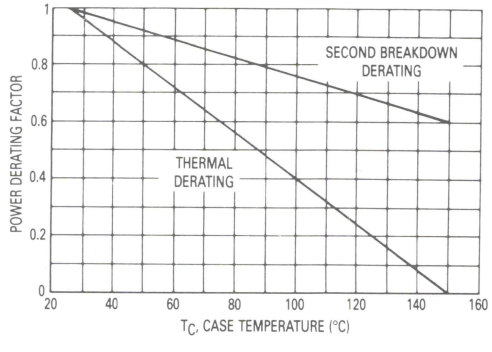

Figure 17. Power Derating

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 15 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 15 may be found at any case temperature by using the appropriate curve on Figure 17.

$T_{J(pk)}$ may be calculated from the data in Figure 18. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 16 gives the RBSOA characteristics.

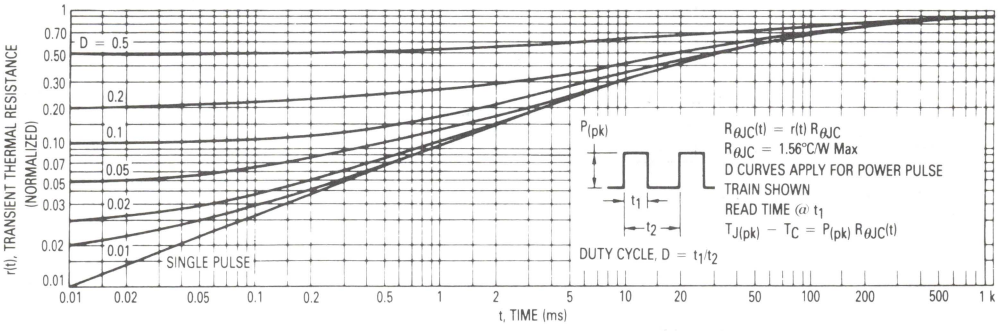

Figure 18. Thermal Response

Table 1. Resistive Load Switching

t_d and t_r

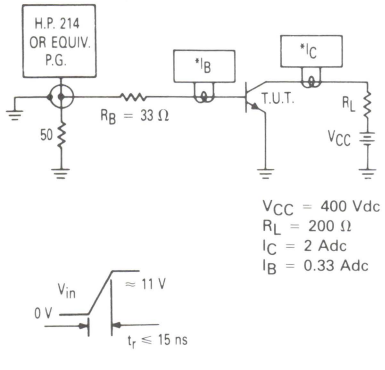

V_{CC} = 400 Vdc
R_L = 200 Ω
I_C = 2 Adc
I_B = 0.33 Adc

*Tektronix AM503
P6302 or Equivalent

t_s and t_f

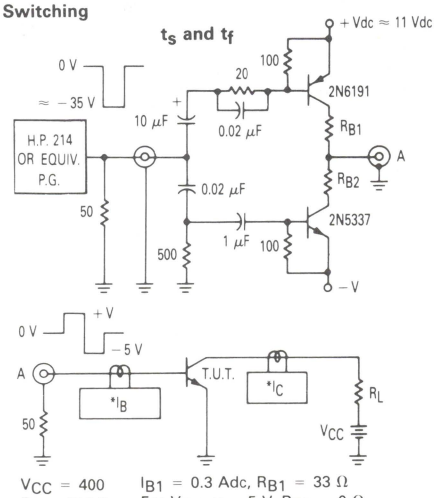

V_{CC} = 400
R_L = 200 Ω
I_C = 2 Adc
I_{B1} = 0.3 Adc, R_{B1} = 33 Ω
For V_{BEoff} = 5 V, R_{B2} = 0 Ω

Note: Adjust −V to obtain desired $V_{BE(off)}$ at point A.

Table 2. Inductive Load Switching

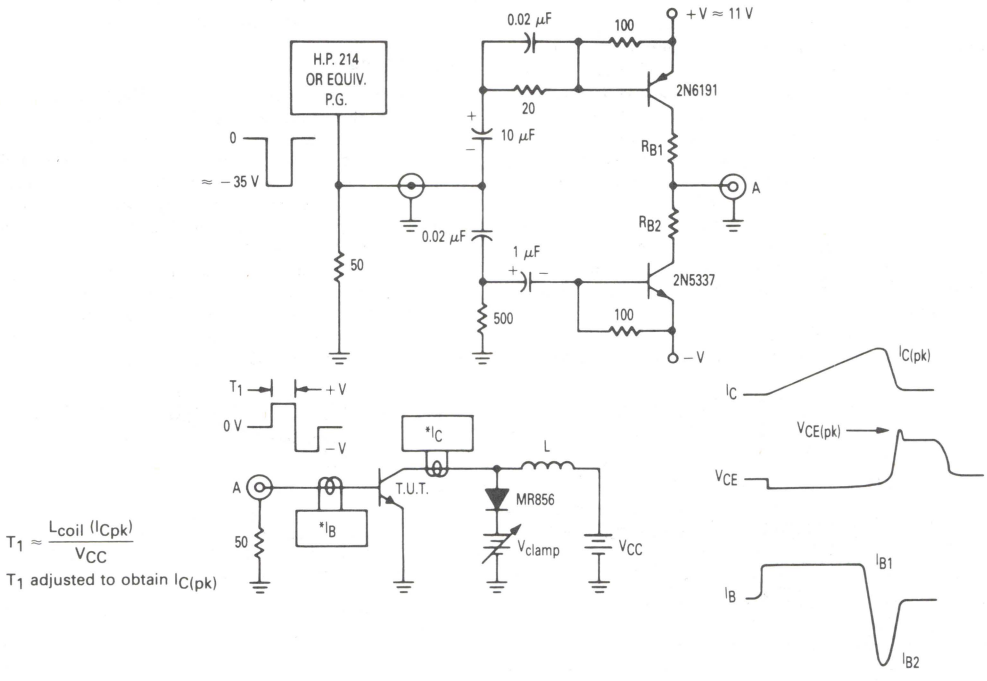

$$T_1 \approx \frac{L_{coil}\,(I_{Cpk})}{V_{CC}}$$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

*Tektronix
AM503
P6302 or Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope — Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust −V to obtain desired $V_{BE(off)}$ at Point A.

3

OUTLINE DIMENSIONS

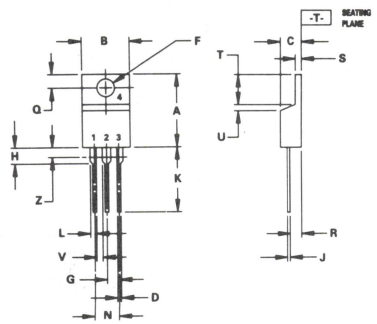

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
(TO-220AB)



	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
(TO-218AC)

3

MJE16080
MJE16081

Designer's Data Sheet

NPN Silicon Power Transistors

Switchmode III Series

POWER TRANSISTORS
8 AMPERES
400 and 450 VOLTS
80 WATTS

These transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line-operated switchmode applications.

Typical Applications:
- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
  - 10 ns Inductive Fall Time – 100°C (Typ)
  - 80 ns Inductive Crossover Time – 100°C (Typ)
  - 900 ns Inductive Storage Time – 100°C (Typ)
- Operating Temperature Range – 65 to + 150°C
- 100°C Performance Specified for:
  - Reverse-Biased SOA with Inductive Loads
  - Switching Times with Inductive Loads
  - Saturation Voltages
  - Leakage Currents



CASE 221A-04
(TO-220AB)

MAXIMUM RATINGS

Rating	Symbol	MJE16080	MJE16081	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	400	450	Vdc
Collector-Emitter Voltage	V_{CEV}	800	850	Vdc
Emitter Base Voltage	V_{EB}	9		Vdc
Collector Current — Continuous Peak(1)	I_C I_{CM}	8 16		Adc
Base Current — Continuous Peak(1)	I_B I_{BM}	4 8		Adc
Total Power Dissipation @ T_C = 25°C @ T_C = 100°C Derate above 25°C	P_D	80 32 0.64		Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to 150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

(1) Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.

Designer's Data for "Worst Case" Conditions

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit data — representing device characteristics boundaries — are given to facilitate "worst case" design.

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (Table 1) (I_C = 100 mA, I_B = 0)	MJE16080 MJE16081	$V_{CEO(sus)}$	400 450	— —	— —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc) (V_{CEV} = Rated Value, $V_{BE(off)}$ = 1.5 Vdc, T_C = 100°C)		I_{CEV}	 — —	 0.020 —	 0.25 2.5	mAdc
Emitter Cutoff Current (V_{EB} = 9 Vdc, I_C = 0)		I_{EBO}	—	0.05	50	μAdc
SECOND BREAKDOWN						
Second Breakdown Collector Current with base forward biased		$I_{S/b}$	See Figure 13			
Clamped Inductive SOA with Base Reverse Biased		RBSOA	See Figure 14			
ON CHARACTERISTICS(1)						
DC Current Gain (V_{CE} = 5 Vdc)	I_C = 1.0 Adc I_C = 8 Adc	h_{FE}	15 5	25 10	— —	— —
Collector-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 0.25 Adc) (I_C = 5 Adc, I_B = 0.625 Adc) (I_C = 8 Adc, I_B = 1.6 Adc) (I_C = 5 Adc, I_B = 0.625 Adc, T_C = 100°C)		$V_{CE(sat)}$	 — — — —	 0.2 0.4 0.6 0.5	 0.5 1.2 1.5 1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 2 Adc, I_B = 0.25 Adc) (I_C = 5 Adc, I_B = 0.625 Adc) (I_C = 5 Adc, I_B = 0.625 Adc, T_C = 100°C)		$V_{BE(sat)}$	 — — —	 0.9 1 1	 1.2 1.5 1.5	Vdc
DYNAMIC CHARACTERISTICS						
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f_{test} = 1 MHz)		C_{ob}	—	120	—	pF
SWITCHING CHARACTERISTICS						
Resistive Load (Table 1)						
Delay Time	(V_{CC} = 125 Vdc, I_C = 5 A I_{B1} = I_{B2} = 0.625 Adc t_p = 25 μs, Duty Cycle ≤ 2%)	t_d	—	0.07	0.15	μs
Rise Time		t_r	—	0.03	0.08	μs
Storage Time		t_s	—	0.5	2	μs
Fall Time		t_f	—	0.2	0.5	μs
Inductive Load, Clamped (Table 2)						
Storage Time	(I_C = 5 A, V_{clamp} = 350 Vdc, $V_{BE(off)}$ = 5 Vdc, I_{B1} = 0.625 Adc) T_C = 100°C	t_{sv}	—	0.90	2	μs
Crossover Time		t_c	—	0.08	0.20	μs
Fall Time		t_{fi}	—	0.01	0.10	μs

(1) Pulse Test: PW = 300 μs, Duty Cycle ≤ 2%.

3

TYPICAL STATIC CHARACTERISTICS

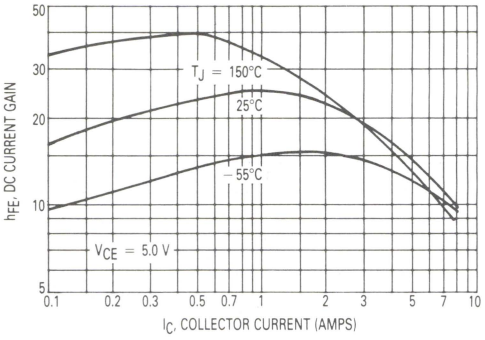

Figure 1. DC Current Gain

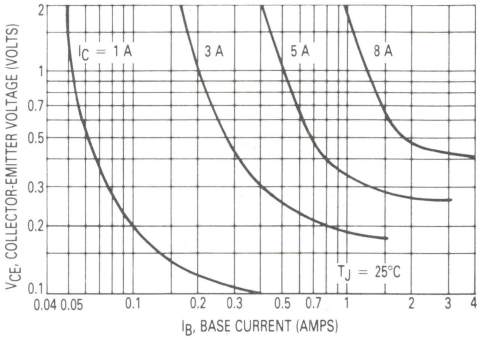

Figure 2. Collector Saturation Region

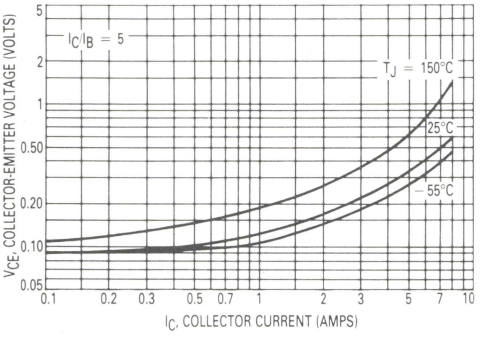

Figure 3. Collector-Emitter Saturation Voltage

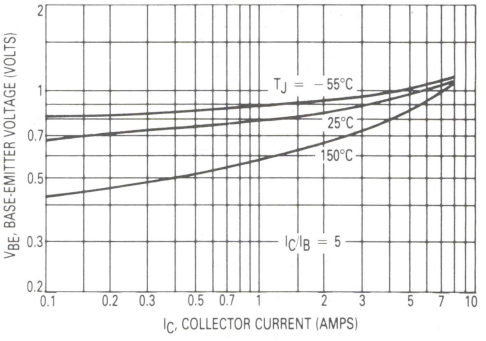

Figure 4. Base-Emitter Saturation Voltage

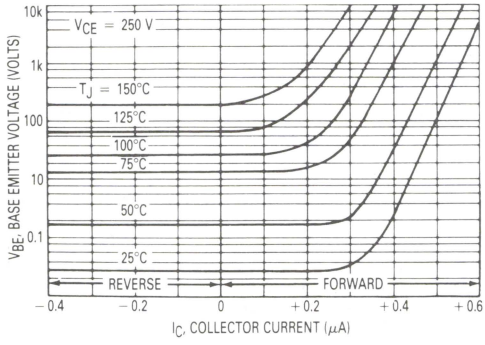

Figure 5. Collector Cutoff Region

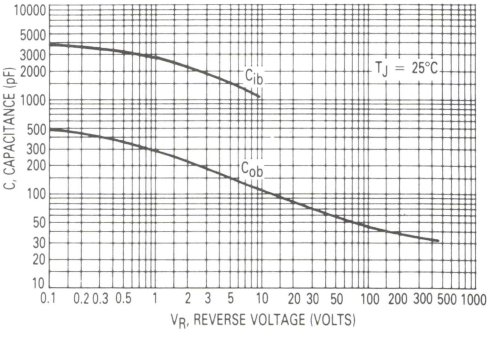

Figure 6. Capacitance Variation

TYPICAL DYNAMIC CHARACTERISTICS

T_J = 25°C

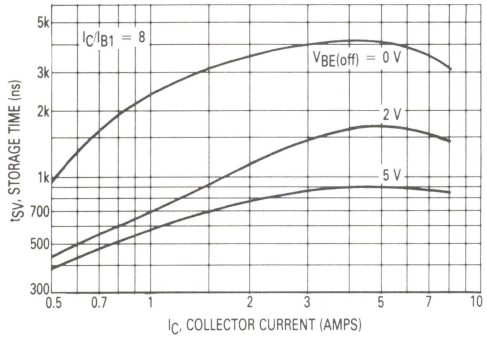

Figure 7. Inductive Storage Time

T_J = 100°C

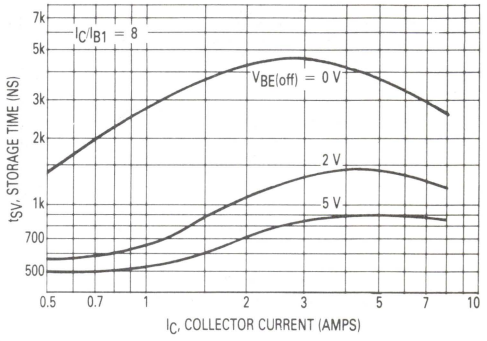

Figure 8. Inductive Storage Time

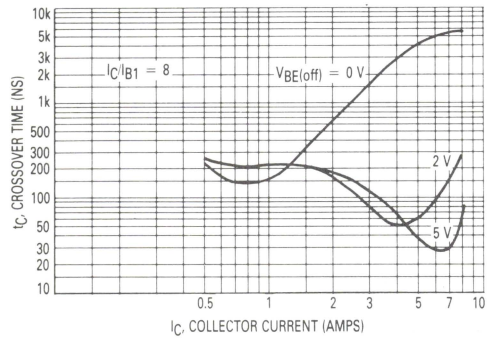

Figure 9. Inductive Crossover Time

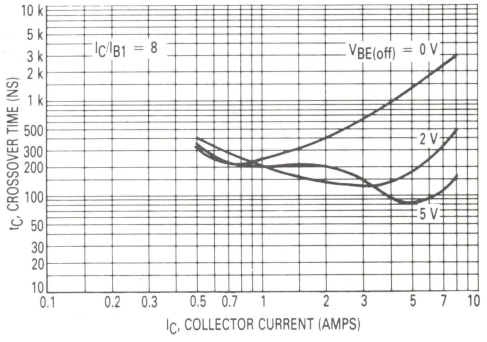

Figure 10. Inductive Crossover Time

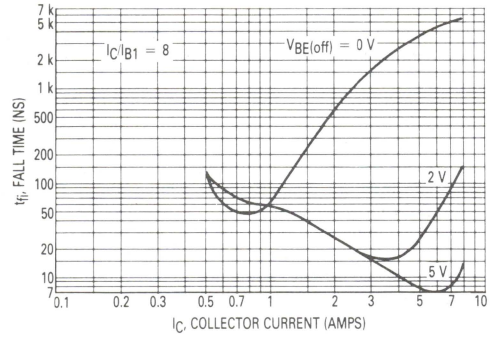

Figure 11. Inductive Fall Time

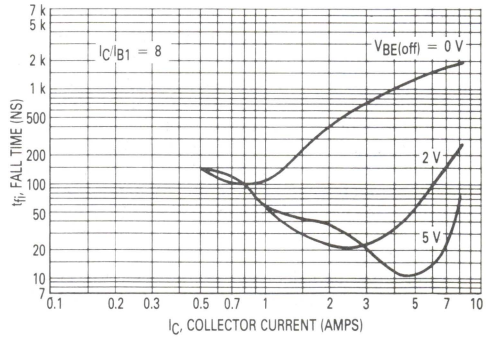

Figure 12. Inductive Fall Time

3

GUARANTEED SAFE OPERATING AREA LIMITS

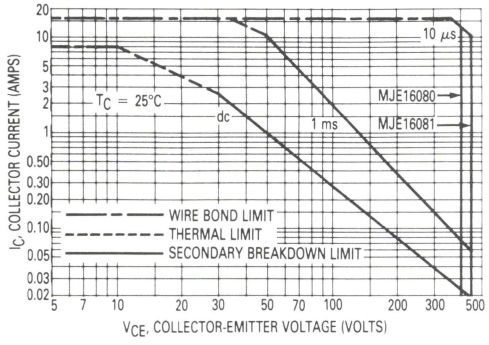

Figure 13. Maximum Rated Forward Bias Safe Operating Area

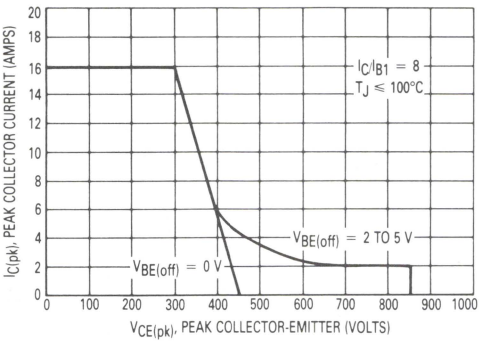

Figure 14. Maximum Rated Reverse Bias Safe Operating Area

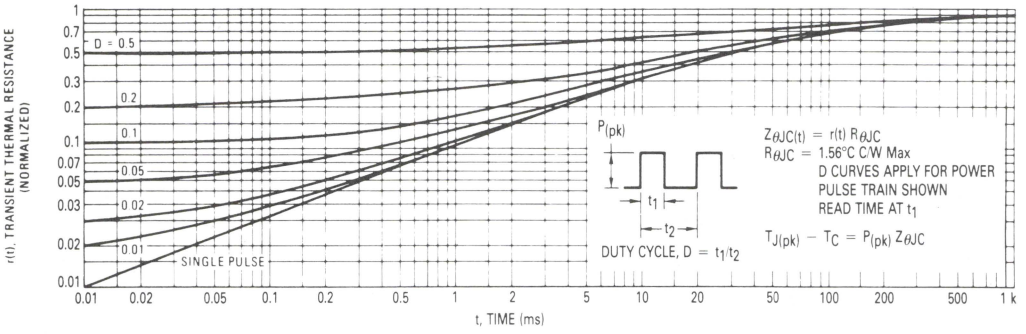

Figure 15. Typical Thermal Response [$Z_{\theta JC}(t)$]

3

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C—V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 13 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 13 may be found at any case temperature by using the appropriate curve on Figure 16.

$T_{J(pk)}$ may be calculated from the data in Figure 15. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base-to-emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 14 gives the RBSOA characteristics.

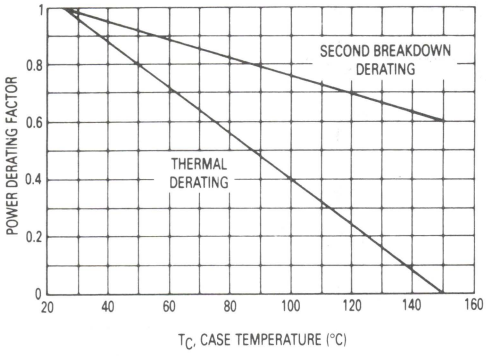

Figure 16. Power Derating

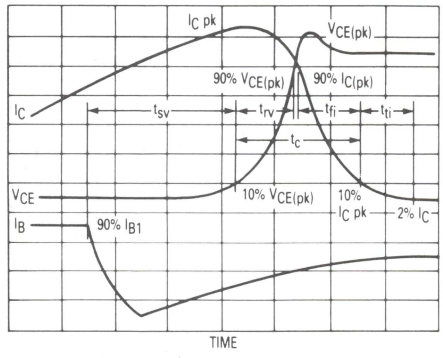

Figure 17. Inductive Switching Measurements

Table 1. Resistive Load Switching

t_d and t_r

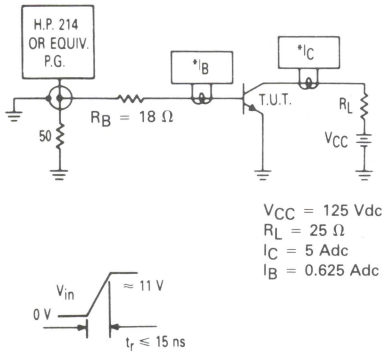

V_{CC} = 125 Vdc
R_L = 25 Ω
I_C = 5 Adc
I_B = 0.625 Adc

*Tektronix AM503
P6302 or Equivalent

t_s and t_f

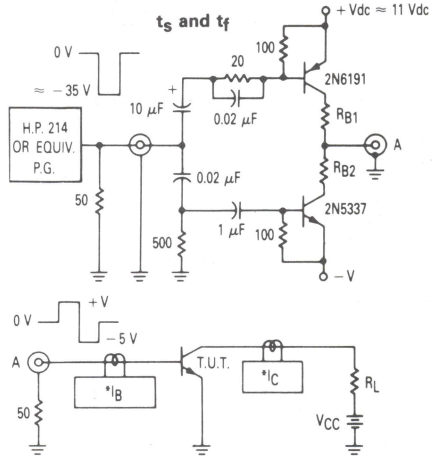

V_{CC} = 125
R_L = 25 Ω
I_C = 5 Adc

I_{B1} = 0.625 Adc, R_{B1} = 18 Ω
I_{B2} = 0.625 Adc, R_{B2} = 8 Ω
For $V_{BE(off)}$ = 5 V R_{B2} = 0 Ω

Note: Adjust − V to obtain desired $V_{BE(off)}$ at point A.

3

Table 2. Inductive Load Switching

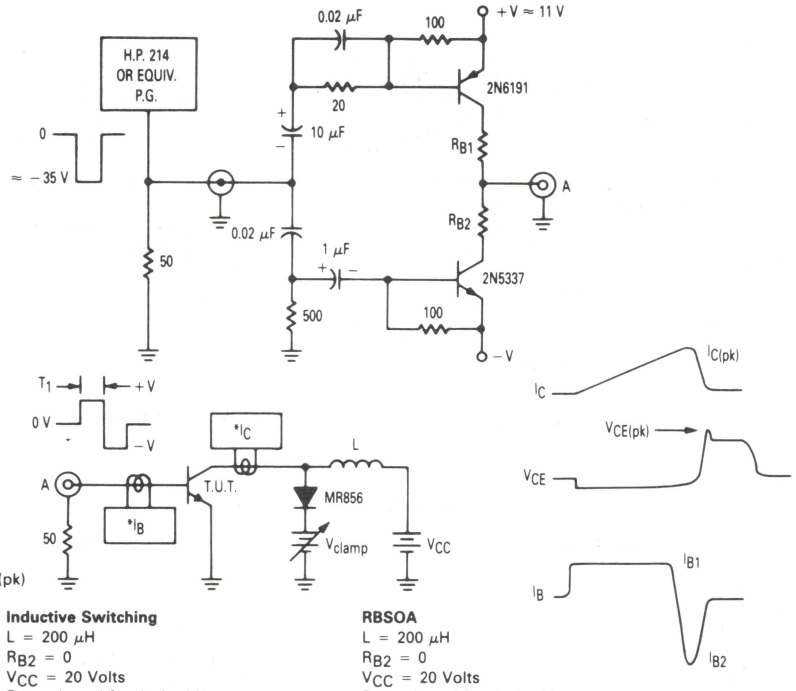

$$T_1 \approx \frac{L_{coil}\,(I_{Cpk})}{V_{CC}}$$

T_1 adjusted to obtain $I_{C(pk)}$

$V_{(BR)CEO}$
L = 10 mH
R_{B2} = ∞
V_{CC} = 20 Volts

*Tektronix
P-6042 or
Equivalent

Inductive Switching
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Scope — Tektronix
7403 or
Equivalent

RBSOA
L = 200 μH
R_{B2} = 0
V_{CC} = 20 Volts
R_{B1} selected for desired I_{B1}

Note: Adjust −V to obtain desired $V_{BE(off)}$ at Point A.

3

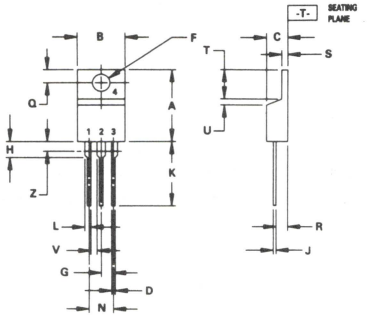

CASE 221A-04
(TO-220AB)

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

NPN **PNP**
MJH6282 MJH6285
MJH6283 MJH6286
MJH6284 MJH6287

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching motor control applications.

- Similar to the Popular NPN 2N6282, 2N6283, 2N6284 and the PNP 2N6285, 2N6286, 2N6287
- Rugged RBSOA Characteristics
- Monolithic Construction with Built-In Collector-Emitter Diode

DARLINGTON 20 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60, 80, 100 VOLTS
160 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJH6282 MJH6285	MJH6283 MJH6286	MJH6284 MJH6287	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}		5.0		Vdc
Collector Current — Continuous Peak	I_C		20 40		Adc
Base Current	I_B		0.5		Adc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D		160 1.28		Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}		−65 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.78	°C/W

FIGURE 1 — POWER DERATING

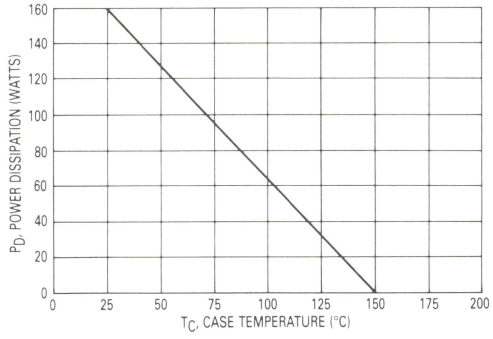

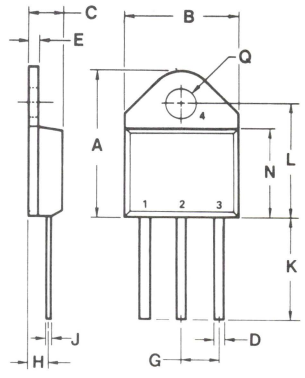

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (I_C = 0.1 Adc, I_B = 0)	MJH6282, MJH6285	$V_{CEO(sus)}$	60	—	Vdc
	MJH6283, MJH6286		80	—	
	MJH6284, MJH6287		100	—	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	MJH6282, MJH6285		—	1.0	
(V_{CE} = 40 Vdc, I_B = 0)	MJH6283, MJH6286		—	1.0	
(V_{CE} = 50 Vdc, I_B = 0)	MJH6284, MJH6287		—	1.0	
Collector Cutoff Current		I_{CEX}			mAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)			—	0.5	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_C = 150°C)			—	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	—	2.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 10 Adc, V_{CE} = 3.0 Vdc)			750	18,000	
(I_C = 20 Adc, V_{CE} = 3.0 Vdc)			100	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 40 mAdc)			—	2.0	
(I_C = 20 Adc, I_B = 200 mAdc)			—	3.0	
Base-Emitter On Voltage (I_C = 10 Adc, V_{CE} = 3.0 Vdc)		$V_{BE(on)}$	—	2.8	Vdc
Base-Emitter Saturation Voltage (I_C = 20 Adc, I_B = 200 mAdc)		$V_{BE(sat)}$	—	4.0	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio (I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		$\lvert h_{fe} \rvert$	4.0	—	MHz
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	MJH6282, 83, 84		—	400	
	MJH6285, 86, 87		—	600	
Small-Signal Current Gain (I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)		h_{fe}	300	—	—

SWITCHING CHARACTERISTICS

Resistive Load		Symbol	Typical NPN	Typical PNP	Unit
Delay Time	V_{CC} = 30 Vdc, I_C = 10 Adc I_{B1} = I_{B2} = 100 mA Duty Cycle = 1.0%	t_d	0.1	0.1	μs
Rise Time		t_r	0.3	0.3	
Storage Time		t_s	1.0	1.0	
Fall Time		t_f	3.5	2.0	

(1) Pulse test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

FIGURE 2 — SWITCHING TIMES TEST CIRCUIT

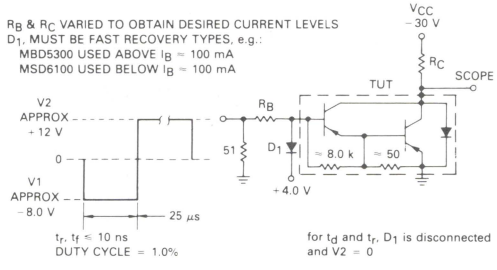

For NPN test circuit reverse diode and voltage polarities.

FIGURE 3 — DARLINGTON SCHEMATIC

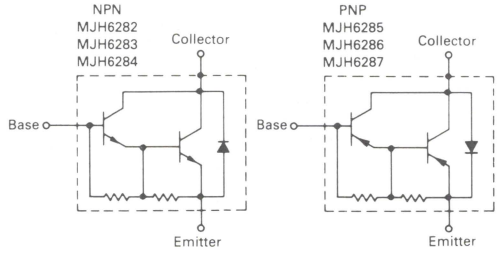

FIGURE 4 — THERMAL RESPONSE

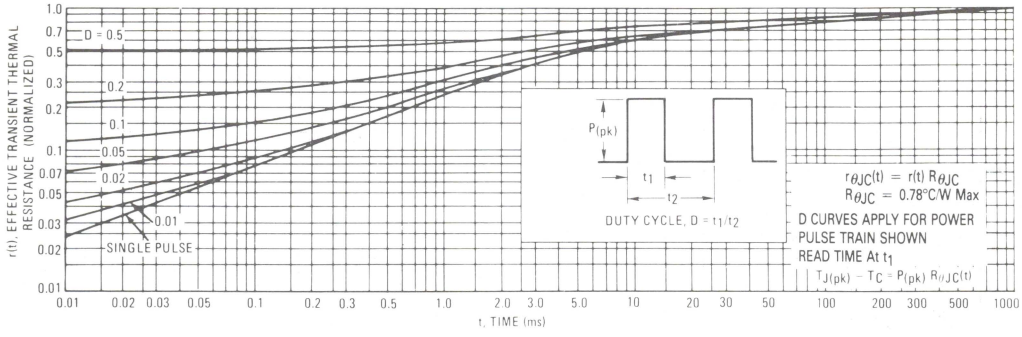

FBSOA, FORWARD BIAS SAFE OPERATING AREA

FIGURE 5 — MJH6282, MJH6285



FIGURE 6 — MJH6283, MJH6286



FIGURE 7 — MJH6284, MJH6287



FIGURE 8 — MAXIMUM RBSOA, REVERSE BIAS SAFE OPERATING AREA

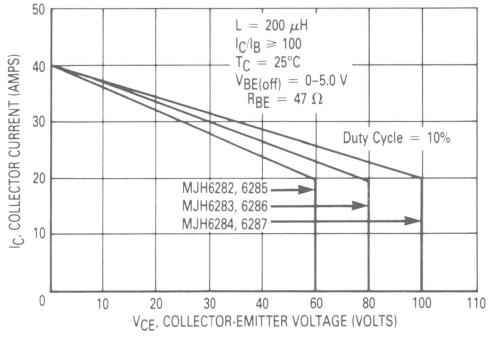

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5, 6 and 7 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 9 — DC CURRENT GAIN

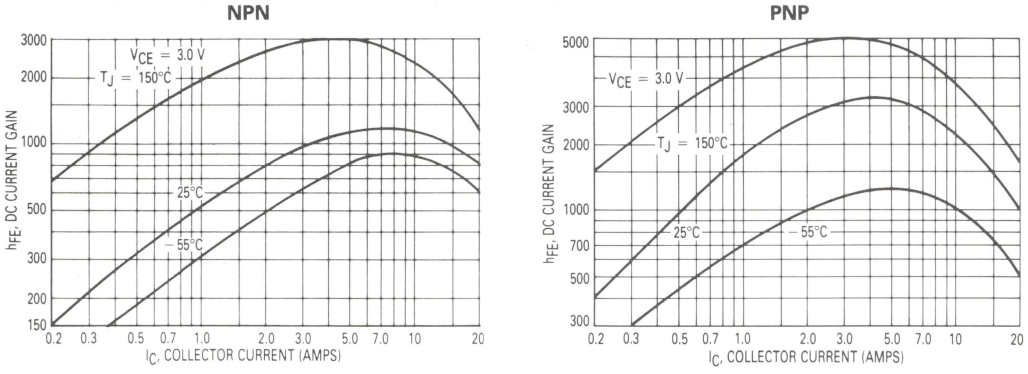

FIGURE 10 — COLLECTOR SATURATION REGION

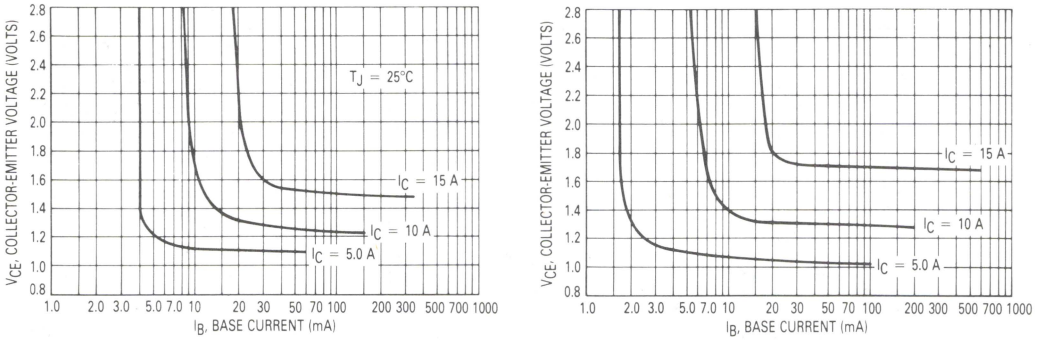

3

FIGURE 11 — "ON" VOLTAGES

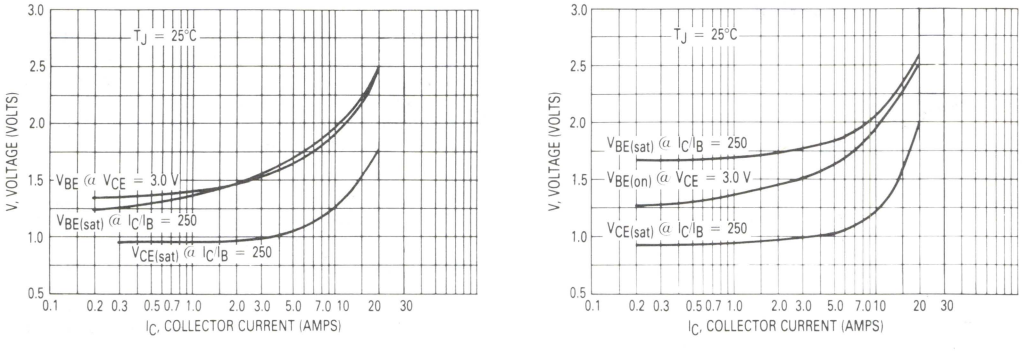

MJH6676 thru MJH6678
See Page 3-250

PNP	NPN
MJH11017	MJH11018
MJH11019	MJH11020
MJH11021	MJH11022

COMPLEMENTARY DARLINGTON SILICON POWER TRANSISTORS

. . . designed for use as general purpose amplifiers, low frequency switching and motor control applications.

- High DC Current Gain @ 10 Adc — h_{FE} = 400 Min (All Types)
- Collector-Emitter Sustaining Voltage
  $V_{CEO(sus)}$ = 150 Vdc (Min) — MJH11018, 17
  = 200 Vdc (Min) — MJH11020, 19
  = 250 Vdc (Min) — MJH11022, 21
- Low Collector-Emitter Saturation Voltage
  $V_{CE(sat)}$ = 1.2 V (Typ) @ I_C = 5.0 A
  = 1.8 V (Typ) @ I_C = 10 A
- Monolithic Construction

15 AMPERE

DARLINGTON POWER TRANSISTORS COMPLEMENTARY SILICON

150, 200, 250 VOLTS
150 WATTS



MAXIMUM RATINGS

Rating	Symbol	MJH 11018 11017	MJH 11020 11019	MJH 11022 11021	Unit
Collector-Emitter Voltage	V_{CEO}	150	200	250	Vdc
Collector-Base Voltage	V_{CB}	150	200	250	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous — Peak (1)	I_C	15 30			Adc
Base Current	I_B	0.5			Adc
Total Device Dissipation @ T_C = 25°C Derate Above 25°C	P_D	150 1.2			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.83	°C/W

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%

FIGURE 1 — POWER DERATING

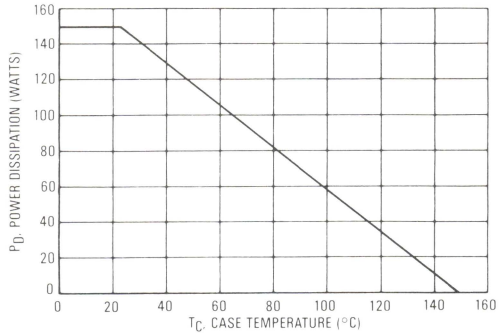



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
(TO-218AC)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C Unless Otherwise Noted)

Characteristics		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 0.1 Adc, I_B = 0)	MJH11017, MJH11018	$V_{CEO(sus)}$	150	—	Vdc
	MJH11019, MJH11020		200	—	
	MJH11021, MJH11022		250	—	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 75 Vdc, I_B = 0)	MJH11017, MJH11018		—	1.0	
(V_{CE} = 100 Vdc, I_B = 0)	MJH11019, MJH11020		—	1.0	
(V_{CE} = 125 Vdc, I_B = 0)	MJH11021, MJH11022		—	1.0	
Collector Cutoff Current		I_{CEV}			mAdc
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc)			—	0.5	
(V_{CE} = Rated V_{CB}, $V_{BE(off)}$ = 1.5 Vdc, T_J = 150°C)			—	5.0	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	—	2.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 10 Adc, V_{CE} = 5.0 Vdc)			400	15,000	
(I_C = 15 Adc, V_{CE} = 5.0 Vdc)			100	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 10 Adc, I_B = 100 mA)			—	2.5	
(I_C = 15 Adc, I_B = 150 mA)			—	4.0	
Base-Emitter On Voltage (I_C = 10 A, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	—	2.8	Vdc
Base-Emitter Saturation Voltage (I_C = 15 Adc, I_B = 150 mA)		$V_{BE(sat)}$	—	3.8	Vdc
DYNAMIC CHARACTERISTICS					
Magnitude of Common Emitter Small-Signal Short Circuit Forward Current Transfer Ratio (I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 MHz)		$\|h_{fe}\|$	3.0	—	—
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)		C_{ob}			pF
	MJH11018, MJH11020, MJH11022		—	400	
	MJH11017, MJH11019, MJH11021		—	600	
Small-Signal Current Gain (I_C = 10 Adc, V_{CE} = 3.0 Vdc, f = 1.0 kHz)		h_{fe}	100	—	—

SWITCHING CHARACTERISTICS

Characteristics		Symbol	Typical NPN	Typical PNP	Unit
Delay Time	(V_{CC} = 100 V, I_C = 10 A, I_B = 100 mA $V_{BE(off)}$ = 5.0 V) (See Figure 2)	t_d	150	75	ns
Rise Time		t_r	1.2	0.5	μs
Storage Time		t_s	4.4	2.7	μs
Fall Time		t_f	2.5	2.5	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%

FIGURE 2 — SWITCHING TIMES TEST CIRCUIT

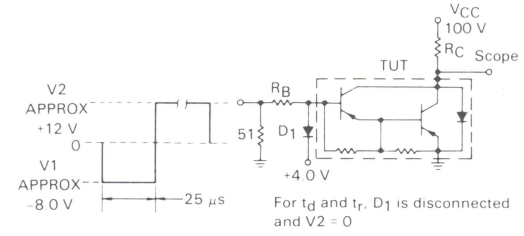

R_B & R_C varied to obtain desired current levels
D_1 must be fast recovery types, e.g.:
MBD5300 used above $I_B \approx$ 100 mA
MSD6100 used below $I_B \approx$ 100 mA

For t_d and t_r, D_1 is disconnected and V2 = 0

t_r, $t_f \leq$ 10 ns
Duty Cycle = 1.0%

For NPN test circuit, reverse diode and voltage polarities.

FIGURE 3 — THERMAL RESPONSE

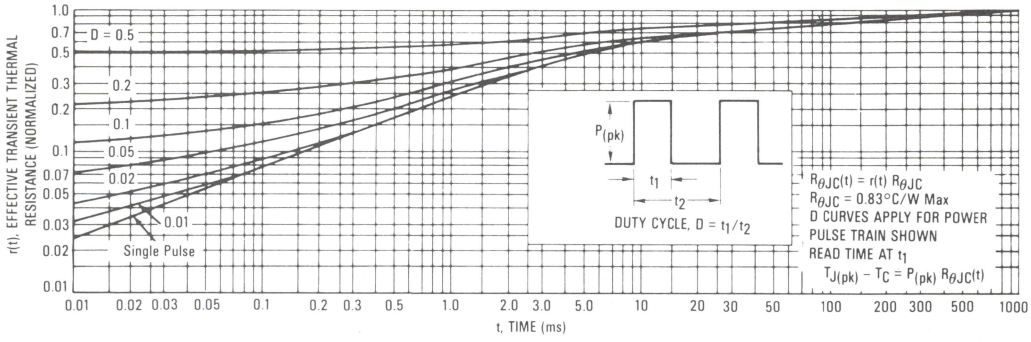

FIGURE 4 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA (FBSOA)

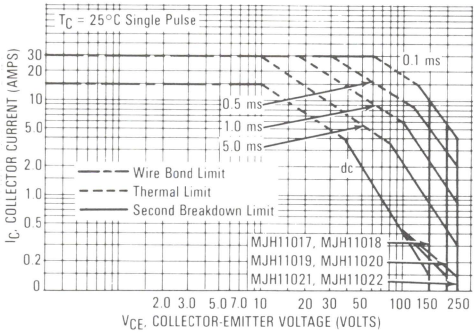

FIGURE 5 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA (RBSOA)

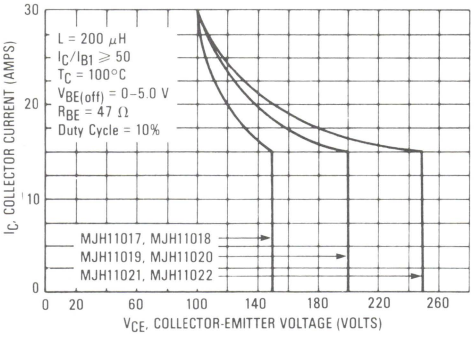

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 4 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 3. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 5 gives RBSOA characteristics.

3

FIGURE 6 — DC CURRENT GAIN

PNP

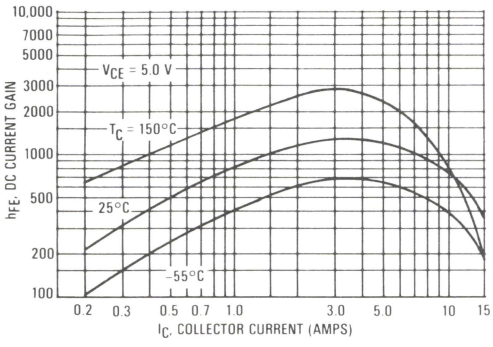

NPN

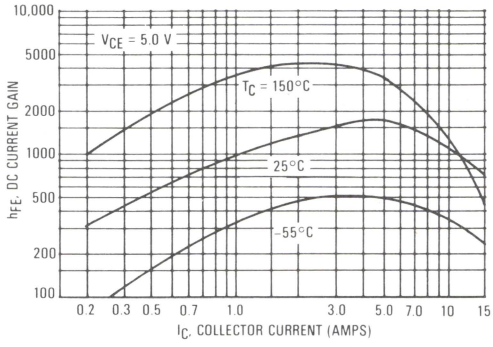

FIGURE 7 — COLLECTOR SATURATION REGION

PNP

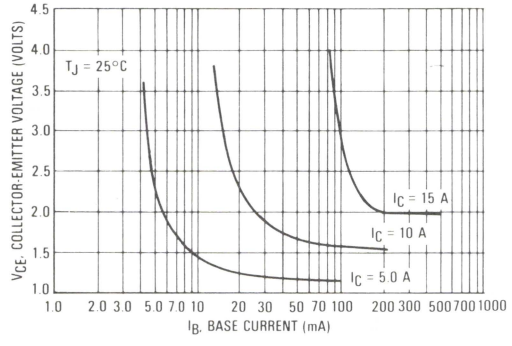

NPN

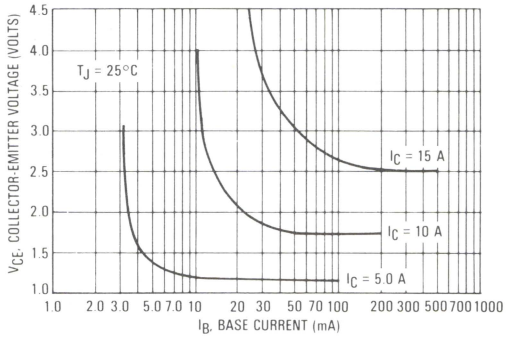

FIGURE 8 — "ON" VOLTAGES

PNP

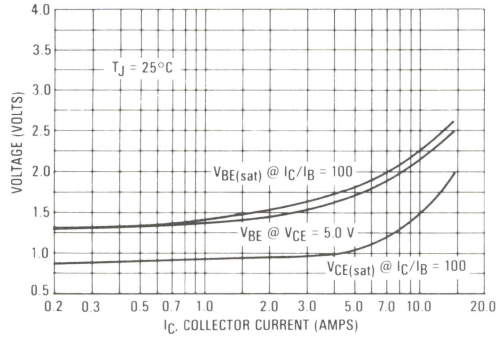

NPN

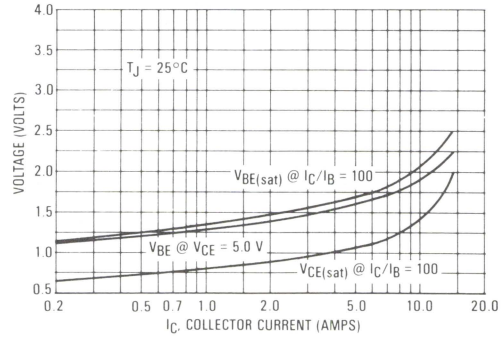

3

FIGURE 9 — DARLINGTON SCHEMATIC

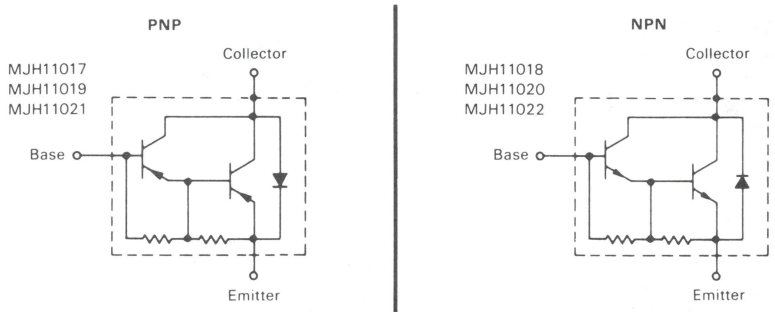

MJH13090
MJH13091
See Page 3-816

MJH16010
MJH16012
See Page 3-890

MJH16002
MJH16004
See Page 3-1090

MJH16010A
See Page 3-898

MJH16002A
See Page 3-866

MJH16018
See Page 3-914

MJH16006
MJH16008
See Page 3-874

MJH16032
MJH16034
See Page 3-1098

MJH16006A
See Page 3-882

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MPS-U01
MPS-U01A

NPN SILICON ANNULAR TRANSISTORS

. . . **designed for complementary symmetry audio circuits to 10 Watts output.**

- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.5 Vdc (Max) @ I_C = 1.0 Adc
- Complements to PNP MPS-U51 and MPS-U51A
- Uniwatt Package for Excellent Thermal Properties –
  1.0 Watt @ T_A = 25°C

NPN SILICON AUDIO TRANSISTORS



MAXIMUM RATINGS

Rating	Symbol	MPS-U01	MPS-U01A	Unit
Collector-Emitter Voltage	V_{CEO}	30	40	Vdc
Collector-Base Voltage	V_{CB}	40	50	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current – Continuous	I_C	2.0		Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0		Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$(1)	125	°C/W

(1) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.

Uniwatt packages can be To-5 lead formed by adding -5 to the device title and tab formed for flush mounting by adding -1 to the device title.

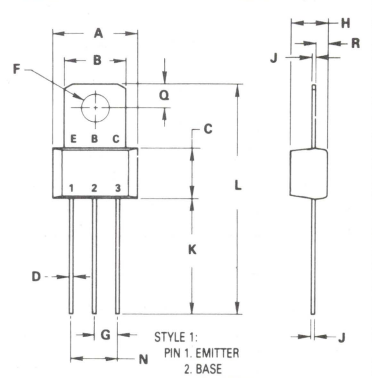

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR
(COLLECTOR CONNECTED TO TAB)

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1) (I_C = 10 mAdc, I_B = 0)	MPS-U01 MPS-U01A	$V_{(BR)CEO}$	 30 40	 – –	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	MPS-U01 MPS-U01A	$V_{(BR)CBO}$	 40 50	 – –	Vdc
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		$V_{(BR)EBO}$	5.0	–	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0) (V_{CB} = 40 Vdc, I_E = 0)	 MPS-U01 MPS-U01A	I_{CBO}	 – –	 0.1 0.1	μAdc
Emitter Cutoff Current (V_{BE} = 3.0 Vdc, I_C = 0)		I_{EBO}	–	0.1	μAdc
ON CHARACTERISTICS(1)					
DC Current Gain (I_C = 10 mAdc, V_{CE} = 1.0 Vdc) (I_C = 100 mAdc, V_{CE} = 1.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		h_{FE}	 55 60 50	 – – –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	–	0.5	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	–	1.2	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (I_C = 50 mAdc, V_{CE} = 10 Vdc, f = 20 MHz)		f_T	50	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)		C_{ob}	–	20	pF

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – DC CURRENT GAIN

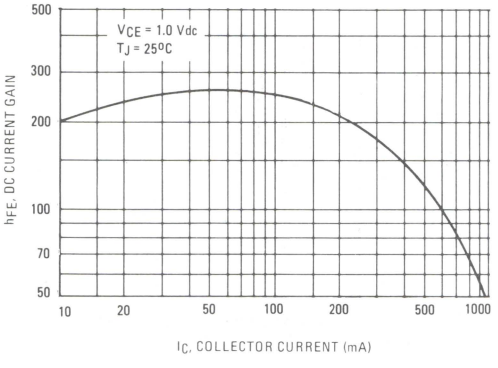

FIGURE 2 – "ON" VOLTAGES

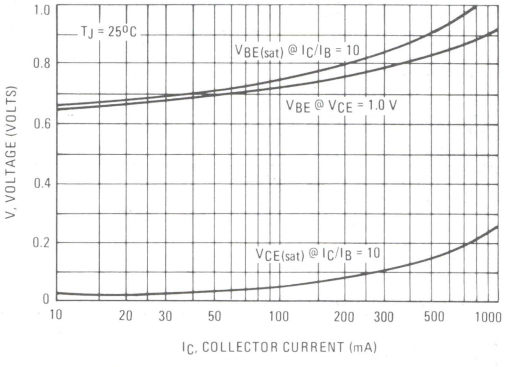

FIGURE 3 – DC SAFE OPERATING AREA

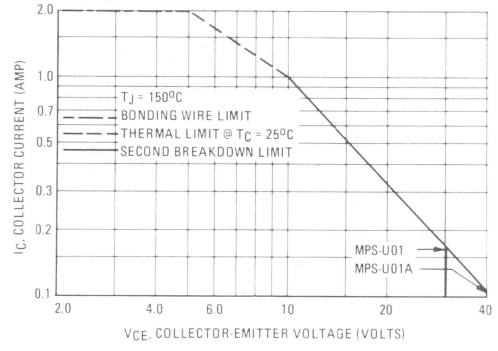

There are two limitations on the power handling ability of a transistor: junction temperature and secondary breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown.

MPS-U02

NPN SILICON ANNULAR AMPLIFIER TRANSISTOR

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Power Dissipation – P_D = 10 W @ T_C = 25°C
- Complement to PNP MPS-U52

NPN SILICON AMPLIFIER TRANSISTOR



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	40	Vdc
Collector-Base Voltage	V_{CB}	60	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	800	mAdc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R\theta_{JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R\theta_{JA}$	125	C/W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	40	-	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	60	-	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0)	I_{CBO}	-	100	nAdc
ON CHARACTERISTICS				
DC Current Gain (I_C = 10 mAdc, V_{CE} = 10 Vdc) (I_C = 150 mAdc, V_{CE} = 10 Vdc) (I_C = 500 mAdc, V_{CE} = 10 Vdc)	h_{FE}	 50 50 30	 - 300 -	
Collector-Emitter Saturation Voltage (I_C = 150 mAdc, I_B = 15 mAdc)	$V_{CE(sat)}$	-	0.4	Vdc
Base-Emitter Saturation Voltage (I_C = 150 mAdc, I_B = 15 mAdc)	$V_{BE(sat)}$	-	1.3	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain—Bandwidth Product (I_C = 20 mAdc, V_{CE} = 20 Vdc, f = 100 MHz)	f_T	100	-	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)	C_{ob}	-	20	pF

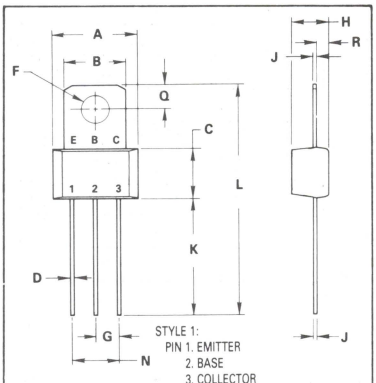

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.14	9.53	0.360	0.375
B	6.30	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

FIGURE 1 – NORMALIZED DC CURRENT GAIN

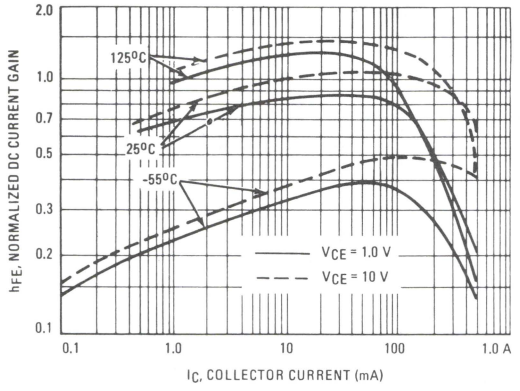

FIGURE 2 – COLLECTOR-EMITTER SATURATION VOLTAGE versus BASE CURRENT

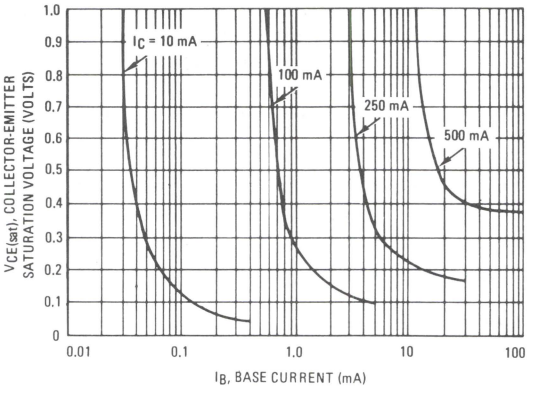

FIGURE 3 – BASE-EMITTER VOLTAGE versus COLLECTOR CURRENT

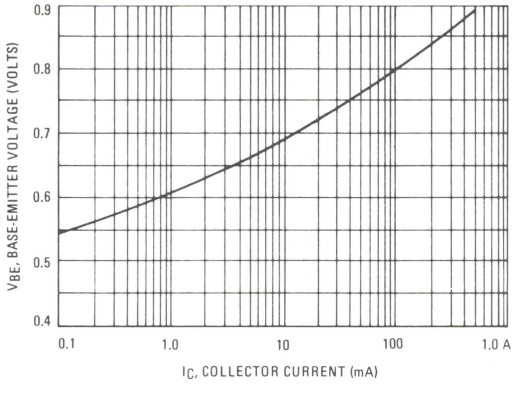

FIGURE 4 – CAPACITANCE versus VOLTAGE

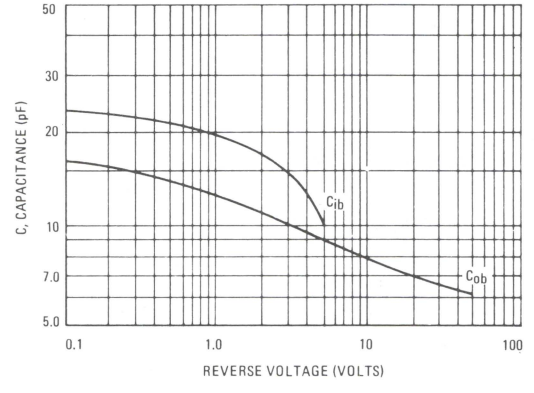

3

FIGURE 5 – CURRENT-GAIN-BANDWIDTH PRODUCT versus COLLECTOR CURRENT

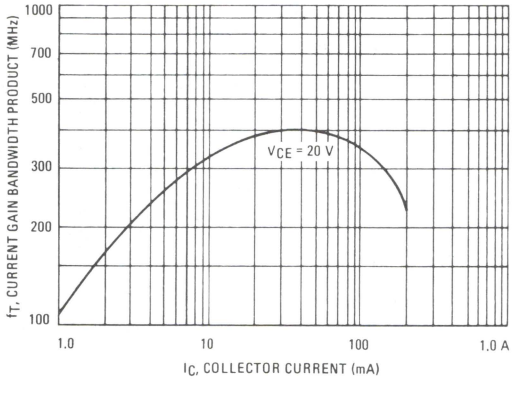

FIGURE 6 – ACTIVE REGION DC SAFE OPERATING AREA

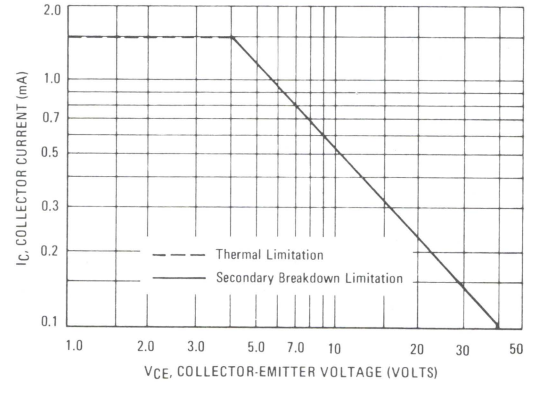

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MPS-U03
MPS-U04

NPN SILICON ANNULAR HIGH VOLTAGE AMPLIFIER TRANSISTORS

. . . designed for horizontal drive applications, high-voltage linear amplifiers, and high-voltage transistor regulators.

- High Collector-Emitter Breakdown Voltage –
  $V_{(BR)CEO}$ = 180 Vdc (Min) @ I_C = 1 mAdc — MPS-U04
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.5 Vdc (Max) @ I_C = 200 mAdc
- High Power Dissipation –
  P_D = 10 W @ T_C = 25°C

NPN SILICON AMPLIFIER TRANSISTORS



MAXIMUM RATINGS

Rating	Symbol	MPS-U03	MPS-U04	Unit
Collector-Emitter Voltage	V_{CEO}	120	180	Vdc
Collector-Base Voltage	V_{CB}	120	180	Vdc
Emitter-Base Voltage	V_{EB}	5		Vdc
Collector Current	I_C	1		Adc
Total Power Dissipation @ T_A = 25°C Derate Above 25°C	P_D	1 8		Watts mW/°C
Total Power Dissipation @ T_C = 25°C Derate Above 25°C	P_D	10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150		°C
Solder Temperature, 1/16" From Case for 10 Seconds	–	260		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W

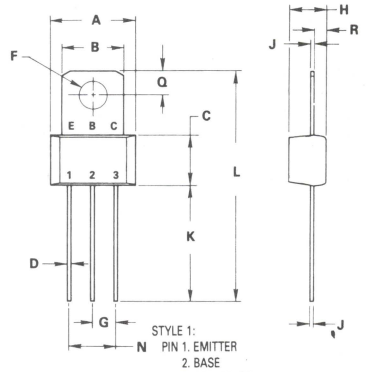

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR
(COLLECTOR CONNECTED TO TAB)

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	MPS-U03	$V_{(BR)CEO}$	120	–	Vdc
	MPS-U04		180	–	
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	MPS-U03	$V_{(BR)CBO}$	120	–	Vdc
	MPS-U04		180	–	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		$V_{(BR)EBO}$	5.0	–	Vdc
Collector Cutoff Current		I_{CBO}			μAdc
(V_{CB} = 100 Vdc, I_E = 0)	MPS-U03		–	0.1	
(V_{CB} = 150 Vdc, I_E = 0)	MPS-U04		–	0.1	
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 10 mAdc, V_{CE} = 10 Vdc)		h_{FE}	40	–	–
Collector-Emitter Saturation Voltage (I_C = 200 mAdc, I_B = 20 mAdc)		$V_{CE(sat)}$	–	0.5	Vdc
Base-Emitter On Voltage (I_C = 200 mAdc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	–	1.0	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain—Bandwidth Product (I_C = 50 mAdc, V_{CE} = 20 Vdc, f = 20 MHz)		f_T	35	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	12	pF
Input Capacitance (V_{BE} = 0.5 Vdc, I_C = 0, f = 100 kHz)		C_{ib}	–	110	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

3

TYPICAL CHARACTERISTICS

FIGURE 1 – CURRENT-GAIN – BANDWIDTH PRODUCT

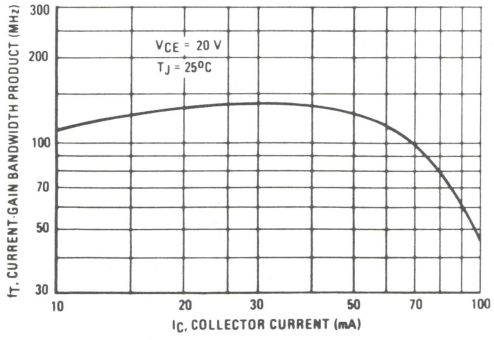

FIGURE 2 – CAPACITANCE

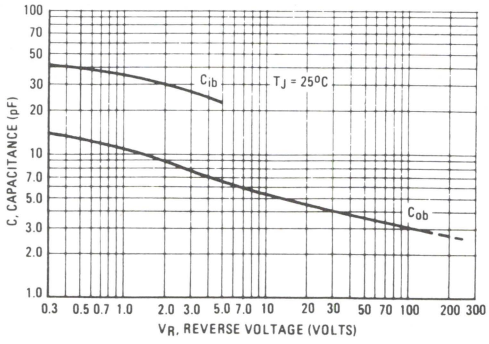

TYPICAL CHARACTERISTICS (Continued)

FIGURE 3 – DC CURRENT GAIN

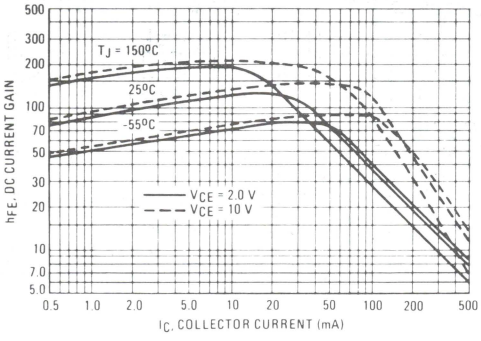

FIGURE 4 – "ON" VOLTAGE

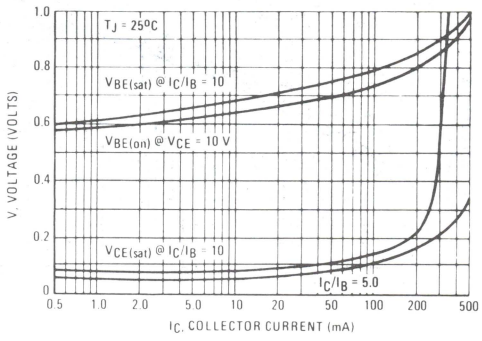

FIGURE 5 – COLLECTOR SATURATION REGION

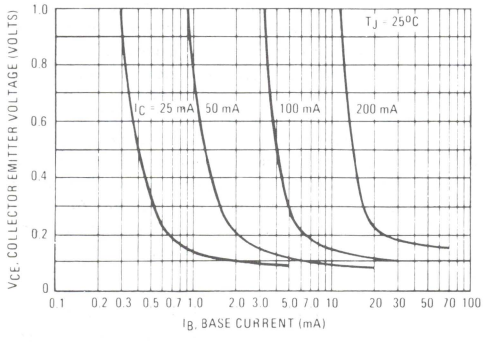

FIGURE 6 – TEMPERATURE COEFFICIENTS

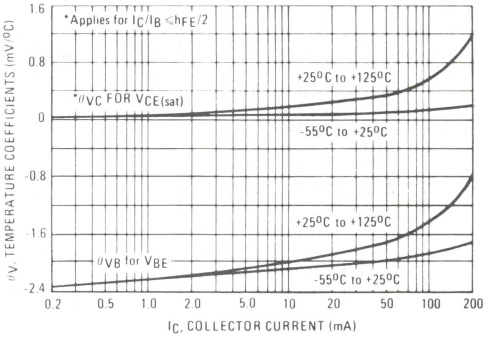

FIGURE 7 – COLLECTOR CHARACTERISTICS

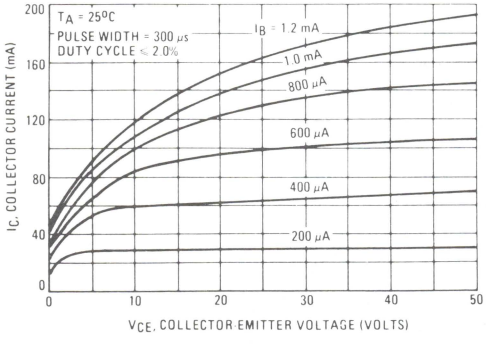

FIGURE 8 – COLLECTOR CUTOFF REGION

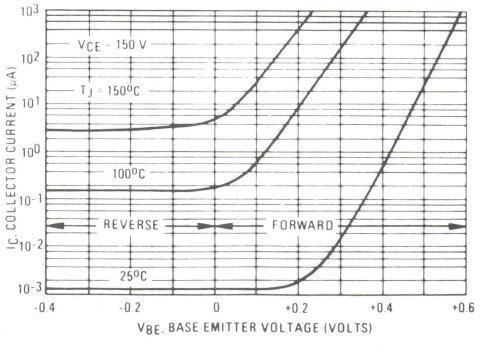

3

TYPICAL CHARACTERISTICS (Continued)

FIGURE 9 – THERMAL RESPONSE

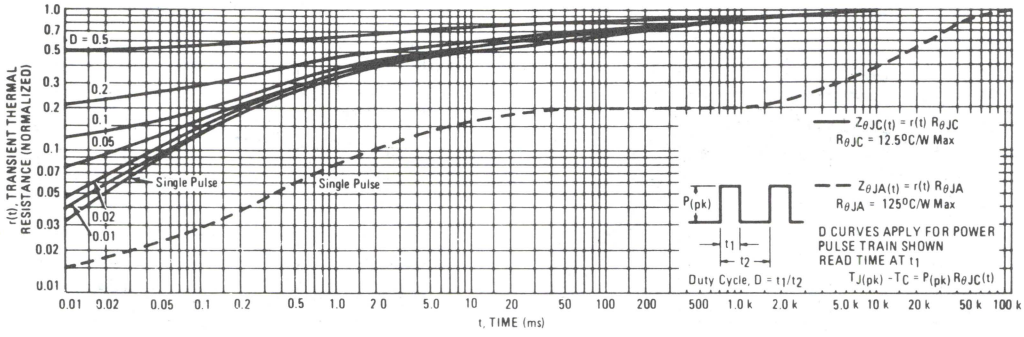

FIGURE 10 – ACTIVE REGION SAFE-OPERATING AREA

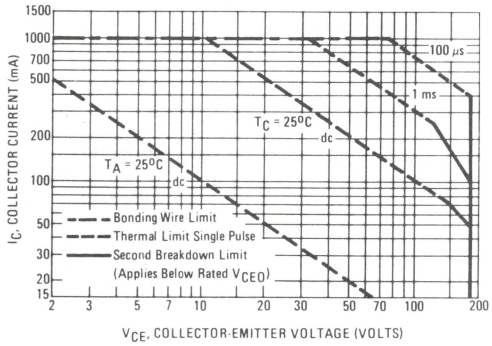

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 10 is based on $T_C = 25^{o}C$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^{o}C$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 10 may be found at any case temperature by using the appropriate curve on Figure 11.

$T_{J(pk)}$ may be calculated from the data in Figure 9. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 11 – POWER DERATING

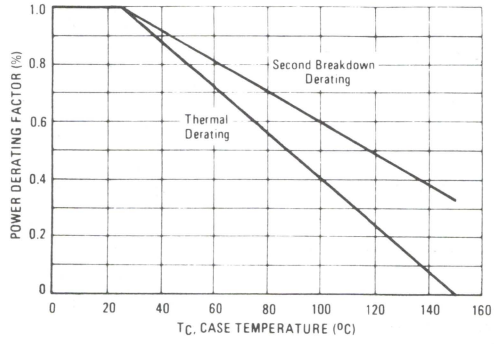

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MPS-U05
MPS-U06

NPN SILICON ANNULAR AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage –
  $V_{(BR)CEO}$ = 60 Vdc (Min) @ I_C = 1.0 mAdc — MPS-U05
  80 Vdc (Min) @ I_C = 1.0 mAdc – MPS-U06
- High Power Dissipation – P_D = 10 W @ T_C = 25°C
- Complements to PNP MPS-U55 and MPS-U56

NPN SILICON AMPLIFIER TRANSISTORS



MAXIMUM RATINGS

Rating	Symbol	MPS-U05	MPS-U06	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	4.0		Vdc
Collector Current – Continuous	I_C	2.0		Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0		Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W

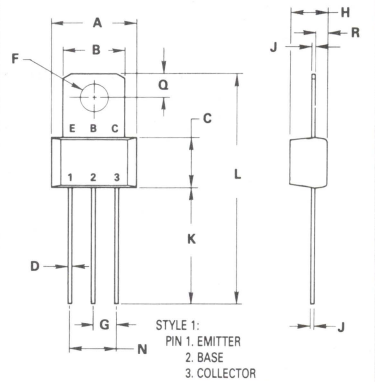

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	MPS-U05	$V_{(BR)CEO}$	60	–	–	Vdc
	MPS-U06		80	–	–	
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		$V_{(BR)EBO}$	4.0	–	–	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0)	MPS-U05	I_{CBO}	–	–	100	nAdc
(V_{CB} = 60 Vdc, I_E = 0)	MPS-U06		–	–	100	
ON CHARACTERISTICS						
DC Current Gain (1) (I_C = 50 mAdc, V_{CE} = 1.0 Vdc)		h_{FE}	80	125	–	–
(I_C = 250 mAdc, V_{CE} = 1.0 Vdc)			60	100	–	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)			–	55	–	
Collector-Emitter Saturation Voltage(1) (I_C = 250 mAdc, I_B = 10 mAdc)		$V_{CE(sat)}$	–	0.18	0.4	Vdc
(I_C = 250 mAdc, I_B = 25 mAdc)			–	0.1	–	
Base-Emitter On Voltage (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	–	0.74	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain–Bandwidth Product (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	150	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	6.0	12	pF

(1)Pulse Test: Pulse Width ≤300 μs; Duty Cycle ≤2.0%.

FIGURE 1 – DC CURRENT GAIN

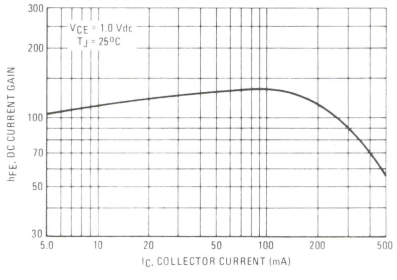

FIGURE 2 – "ON" VOLTAGES

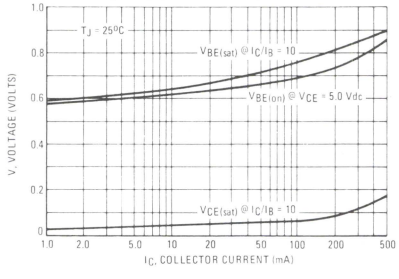

FIGURE 3 – DC SAFE OPERATING AREA

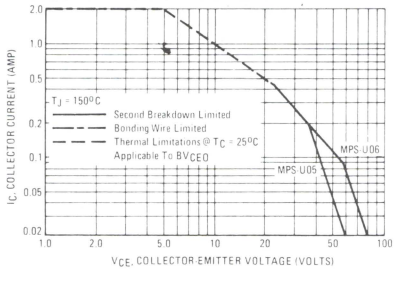

FIGURE 4 – CURRENT-GAIN–BANDWIDTH PRODUCT

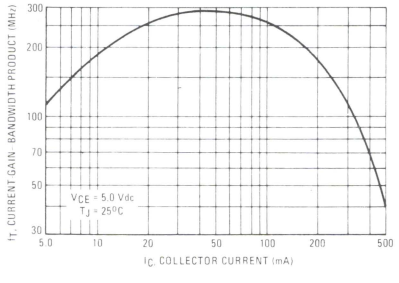

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MPS-U07

NPN SILICON ANNULAR AMPLIFIER TRANSISTOR

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage — $V_{(BR)CEO}$ = 100 Vdc (Min) @ I_C = 1.0 mAdc
- High Power Dissipation — P_D = 10 W @ T_C = 25°C
- Complement to PNP MPS-U57

NPN SILICON AMPLIFIER TRANSISTOR



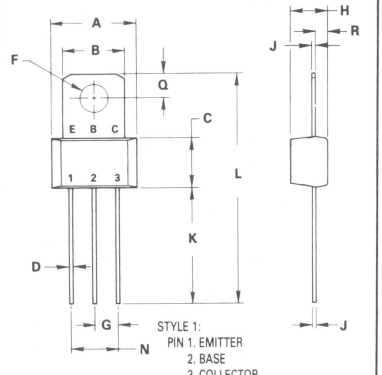

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current — Continuous	I_C	2.0	Adc
Total Power Dissipaton @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipaton @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1) (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	100	–	–	Vdc
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)	$V_{(BR)EBO}$	4.0	–	–	Vdc
Collector Cutoff Current (V_{CB} = 80 Vdc, I_E = 0)	I_{CBO}	–	–	100	nAdc
ON CHARACTERISTICS					
DC Current Gain (1)	h_{FE}				–
(I_C = 50 mAdc, V_{CE} = 1.0 Vdc)		60	110	–	
(I_C = 250 mAdc, V_{CE} = 1.0 Vdc)		30	65	–	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		–	33	–	
Collector-Emitter Saturation Voltage (1)	$V_{CE(sat)}$				Vdc
(I_C = 250 mAdc, I_B = 10 mAdc)		–	0.18	0.4	
(I_C = 250 mAdc, I_B = 25 mAdc)		–	0.1	–	
Base-Emitter On Voltage (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	–	0.76	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS					
Current-Gain–Bandwidth Product (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)	f_T	50	150	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)	C_{ob}	–	6.0	12	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – DC CURRENT GAIN

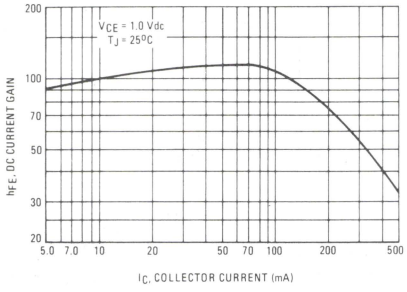

FIGURE 2 – "ON" VOLTAGES

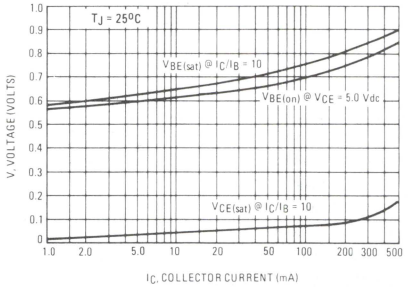

FIGURE 3 – DC SAFE OPERATING AREA

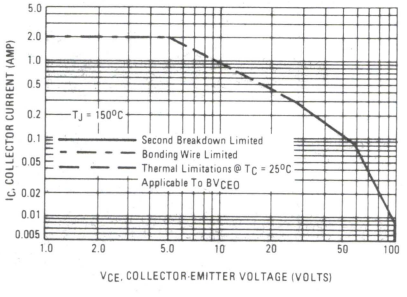

FIGURE 4 – CURRENT-GAIN–BANDWIDTH PRODUCT

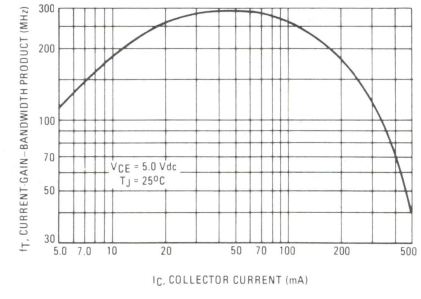

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MPS-U10

NPN SILICON
HIGH VOLTAGE
AMPLIFIER
TRANSISTOR

NPN SILICON ANNULAR TRANSISTOR

. . . designed for high-voltage video and luminance output stages in TV receivers.

- High Collector-Emitter Breakdown Voltage –
  $V_{(BR)CEO}$ = 300 Vdc (Min) @ I_C = 1.0 mAdc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 0.75 Vdc (Max) @ I_C = 30 mAdc
- Low Collector-Base Capacitance –
  C_{cb} = 3.0 pF (Max) @ V_{CB} = 20 Vdc



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	300	Vdc
Collector-Base Voltage	V_{CB}	300	Vdc
Emitter-Base Voltage	V_{EB}	6.0	Vdc
Collector Current – Continuous	I_C	0.5	Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA(1)}$	125	°C/W

(1) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.

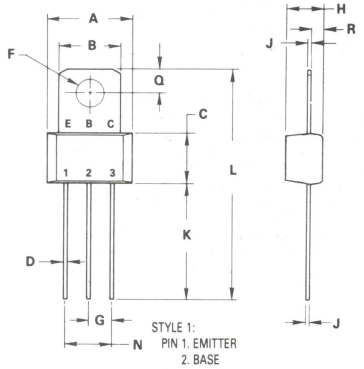

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristics	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (1) (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	300	–	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	300	–	Vdc
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)	$V_{(BR)EBO}$	6.0	–	Vdc
Collector Cutoff Current (V_{CB} = 200 Vdc, I_E = 0)	I_{CBO}	–	0.2	μAdc
Emitter Cutoff Current (V_{BE} = 6.0 Vdc, I_C = 0)	I_{EBO}	–	0.1	μAdc
ON CHARACTERISTICS				
DC Current Gain	h_{FE}			–
(I_C = 1.0 mAdc, V_{CE} = 10 Vdc)		25	–	
(I_C = 10 mAdc, V_{CE} = 10 Vdc)		40	–	
(I_C = 30 mAdc, V_{CE} = 10 Vdc)		40	–	
Collector-Emitter Saturation Voltage (I_C = 30 mAdc, I_B = 3.0 mAdc)	$V_{CE(sat)}$	–	0.75	Vdc
Base-Emitter On Voltage (I_C = 30 mAdc, V_{CE} = 10 Vdc)	$V_{BE(on)}$	–	0.85	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain–Bandwidth Product (1) (I_C = 10 mAdc, V_{CE} = 20 Vdc, f = 100 MHz)	f_T	45	–	MHz
Collector-Base Capacitance (V_{CB} = 20 Vdc, I_E = 0, f = 1.0 MHz)	C_{cb}	–	3.0	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 1 – DC SAFE OPERATING AREA

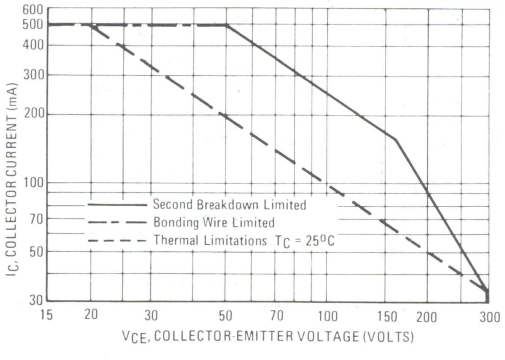

The Safe Operating Area Curves indicate I_C–V_{CE} limits below which the device will not enter second breakdown. Collector load lines for specific circuits must fall within the applicable Safe Area to avoid causing a catastrophic failure. To insure operation below the maximum T_J, power-temperature derating must be observed for both steady state and pulse power conditions.

FIGURE 2 – DC CURRENT GAIN

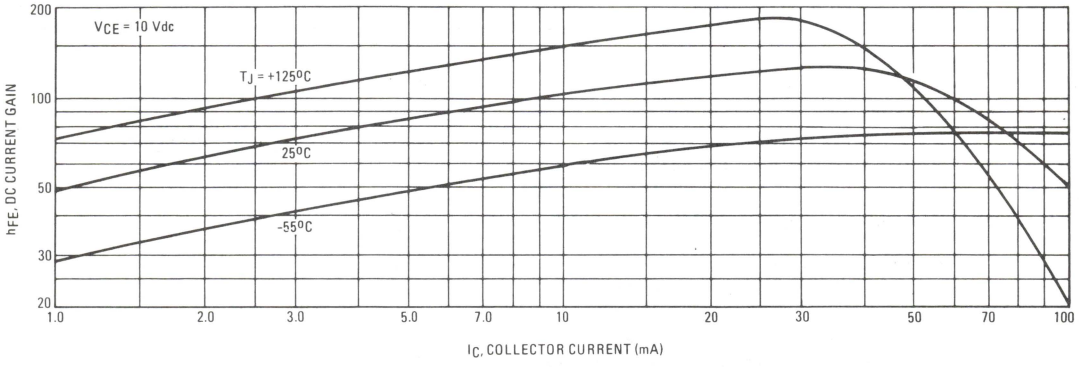

FIGURE 3 – CAPACITANCES

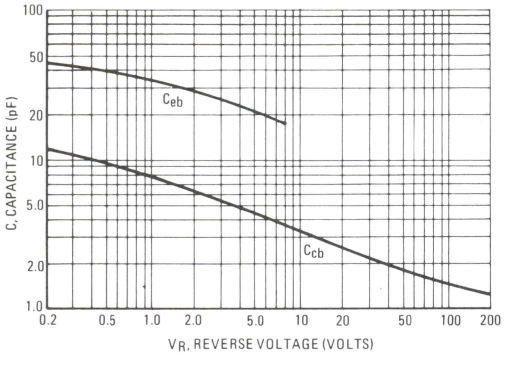

FIGURE 4 – CURRENT-GAIN–BANDWIDTH PRODUCT

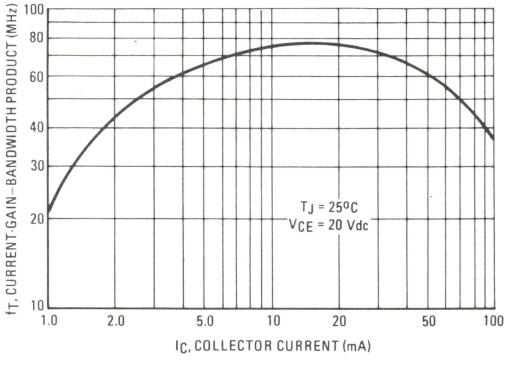

FIGURE 5 – "ON" VOLTAGES

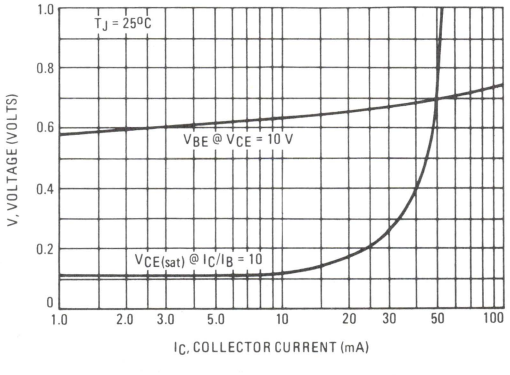

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MPS-U45

NPN SILICON DARLINGTON AMPLIFIER TRANSISTOR

. . . designed for amplifier and driver applications.

- High DC Current Gain –
  h_{FE} = 25,000 (Min) @ I_C = 200 mAdc
  15,000 (Min) @ I_C = 500 mAdc
- Collector-Emitter Breakdown Voltage –
  $V_{(BR)CES}$ = 40 Vdc (Min) @ I_C = 100 μAdc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.5 Vdc @ I_C = 1.0 Adc
- Monolithic Construction for High Reliability
- Complement to PNP MPS-U95

NPN SILICON
DARLINGTON
TRANSISTOR



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}(1)	40	Vdc
Collector-Emitter Voltage	V_{CES}	40	Vdc
Collector-Base Voltage	V_{CB}	50	Vdc
Emitter-Base Voltage	V_{EB}	12	Vdc
Collector Current	I_C	2.0	Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W

(1) Due to the monolithic construction of this device, breakdown voltages of both transistor elements are identical. $V_{(BR)CES}$ is tested in lieu of $V_{(BR)CEO}$ in order to avoid errors caused by noise pickup. The voltage measured during the $V_{(BR)CES}$ test is the $V_{(BR)CEO}$ of the output transistor.

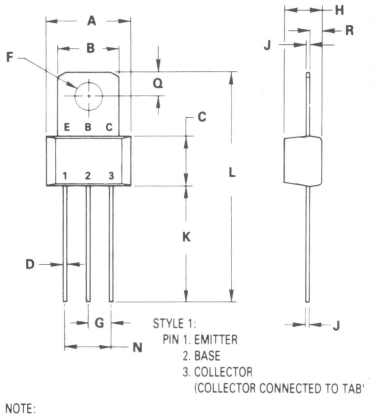

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (I_C = 100 μAdc, V_{BE} = 0)	$V_{(BR)CES}$	40	–	–	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	50	–	–	Vdc
Emitter-Base Breakdown Voltage (I_E = 10 μAdc, I_C = 0)	$V_{(BR)EBO}$	12	–	–	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0)	I_{CBO}	–	–	100	nAdc
Emitter Cutoff Current (V_{EB} = 10 Vdc, I_C = 0)	I_{EBO}	–	–	100	nAdc
ON CHARACTERISTICS(1)					
DC Current Gain (I_C = 200 mAdc, V_{CE} = 5.0 Vdc) (I_C = 500 mAdc, V_{CE} = 5.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	h_{FE}	 25,000 15,000 4,000	 65,000 35,000 12,000	 150,000 – –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 2.0 mAdc)	$V_{CE(sat)}$	–	1.2	1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 2.0 mAdc)	$V_{BE(sat)}$	–	1.85	2.0	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	–	1.7	2.0	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (1) (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)	$\lvert h_{fe} \rvert$	1.0	3.2	–	–
Collector Base Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	C_{cb}	–	2.5	6.0	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

3

Uniwatt darlington transistors can be used in any number of low power applications, such as relay drivers, motor control and as general purpose amplifiers. As an audio amplifier these devices, when used as a complementary pair, can drive 3.5 watts into a 3.2 ohm speaker using a 14 volt supply with less than one per cent distortion. Because of the high gain the base drive requirement is as low as 1 mA in this application. They are also useful as power drivers for high current application such as voltage regulators.

FIGURE 1 – DC CURRENT GAIN

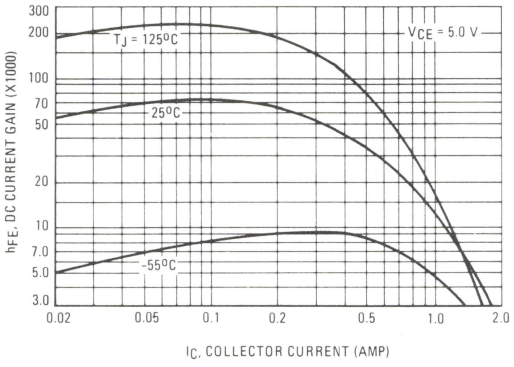

FIGURE 2 – SMALL-SIGNAL CURRENT GAIN

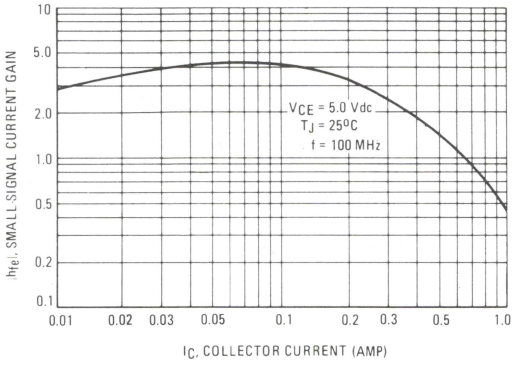

FIGURE 3 – "ON" VOLTAGES

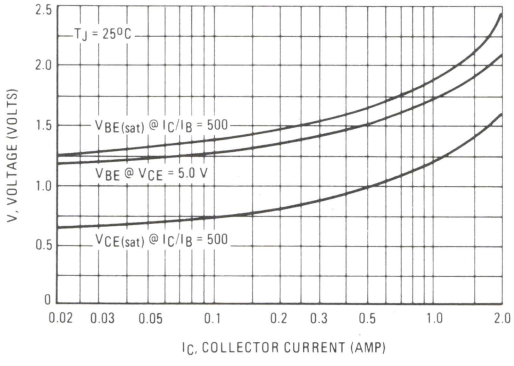

FIGURE 4 – TEMPERATURE COEFFICIENT

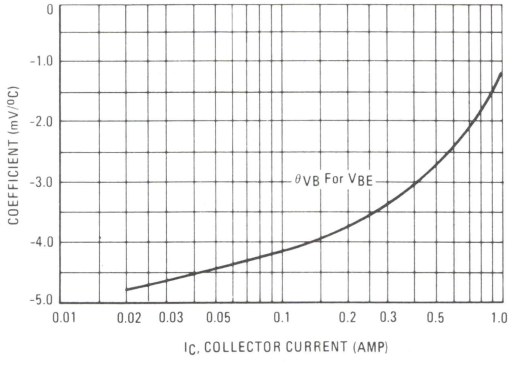

3

FIGURE 5 – DC SAFE OPERATING AREA

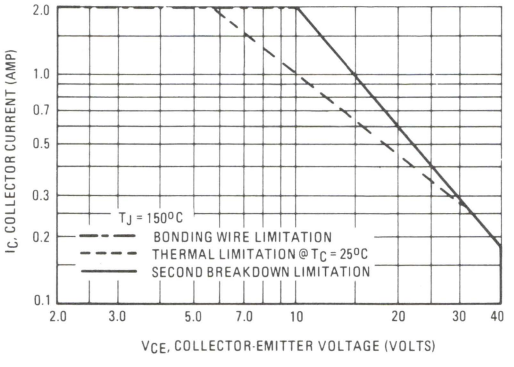

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MPS-U51
MPS-U51A

PNP SILICON ANNULAR TRANSISTORS

. . . designed for complementary symmetry audio circuits to 5 Watts output.

- Excellent Current Gain Linearity — 1.0 mAdc to 1.0 Adc
- Low Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 0.7 Vdc (Max) @ I_C = 1.0 Adc
- Complements to NPN MPS-U01 and MPS-U01A
- Uniwatt Package for Excellent Thermal Properties — 1.0 Watt @ T_A = 25°C

PNP SILICON AUDIO TRANSISTORS



MAXIMUM RATINGS

Rating	Symbol	MPS-U51	MPS-U51A	Unit
Collector-Emitter Voltage	V_{CEO}	30	40	Vdc
Collector-Base Voltage	V_{CB}	40	50	Vdc
Emitter-Base Voltage	V_{EB}	5.0		Vdc
Collector Current — Continuous	I_C	2.0		Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0		Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W

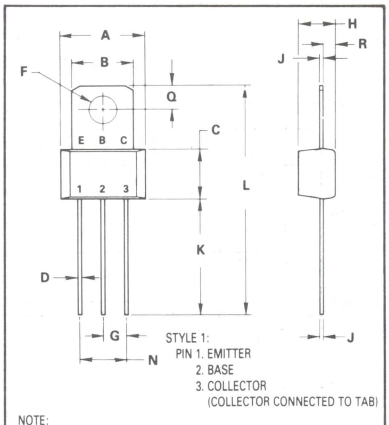

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR
(COLLECTOR CONNECTED TO TAB)

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	MPS-U51 MPS-U51A	$V_{(BR)CEO}$	30 40	– –	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	MPS-U51 MPS-U51A	$V_{(BR)CBO}$	40 50	– –	Vdc
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		$V_{(BR)EBO}$	5.0	–	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0) (V_{CB} = 40 Vdc, I_E = 0)	 MPS-U51 MPS-U51A	I_{CBO}	 – –	 0.1 0.1	μAdc
Emitter Cutoff Current (V_{BE} = 3.0 Vdc, I_C = 0)		I_{EBO}	–	0.1	μAdc
ON CHARACTERISTICS(1)					
DC Current Gain (I_C = 10 mAdc, V_{CE} = 1.0 Vdc) (I_C = 100 mAdc, V_{CE} = 1.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		h_{FE}	 55 60 50	 – – –	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 0.1 Adc)		$V_{CE(sat)}$	–	0.7	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 1.0 Vdc)		$V_{BE(on)}$	–	1.2	Vdc
DYNAMIC CHARACTERISTICS					
Current-Gain–Bandwidth Product (I_C = 50 mAdc, V_{CE} = 10 Vdc, f = 20 MHz)		f_T	50	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	30	pF

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – DC CURRENT GAIN

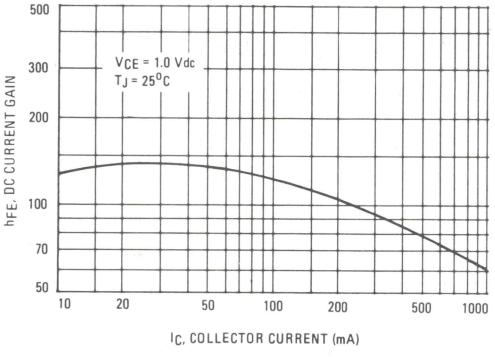

FIGURE 2 – "ON" VOLTAGES

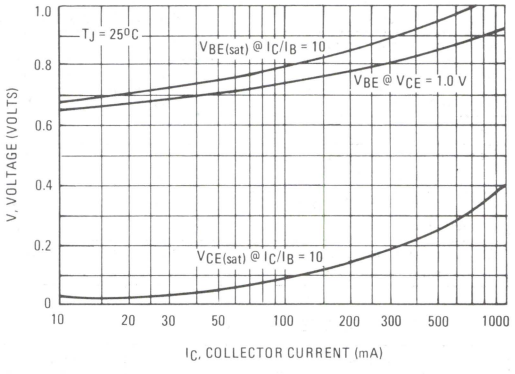

FIGURE 3 – DC SAFE OPERATING AREA

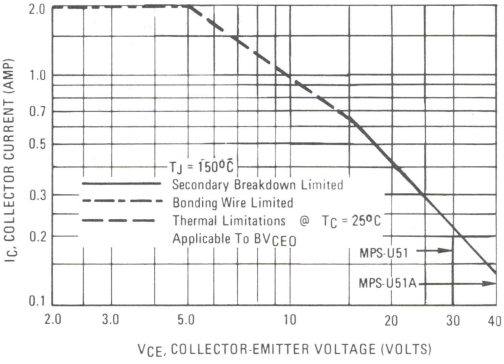

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MPS-U52

PNP SILICON ANNULAR TRANSISTOR

. . . designed for general-purpose amplifier and driver applications.

- Complement to NPN MPS-U02

PNP SILICON AMPLIFIER TRANSISTOR



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	40	Vdc
Collector-Base Voltage	V_{CB}	60	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	1.5	Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg} (1)	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$ (1)	125	C/W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	40	-	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	60	-	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0)	I_{CBO}	-	100	nAdc
ON CHARACTERISTICS (2)				
DC Current Gain (I_C = 10 mAdc, V_{CE} = 10 Vdc) (I_C = 150 mAdc, V_{CE} = 10 Vdc) (I_C = 500 mAdc, V_{CE} = 10 Vdc)	h_{FE}	 50 50 30	 - 300 -	-
Collector-Emitter Saturation Voltage (I_C = 150 mAdc, I_B = 15 mAdc)	$V_{CE(sat)}$	-	0.4	Vdc
Base-Emitter Saturation Voltage (I_C = 150 mAdc, I_B = 15 mAdc)	$V_{BE(sat)}$	-	1.3	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain—Bandwidth Product (2) (I_C = 20 mAdc, V_{CE} = 20 Vdc, f = 100 MHz)	f_T	100	-	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)	C_{ob}	-	24	pF

(1) $R_{\theta JA}$ is measured with device soldered into a typical printed circuit board

(2) Pulse Test: Pulse Width≤300 μs, Duty Cycle≤2.0%

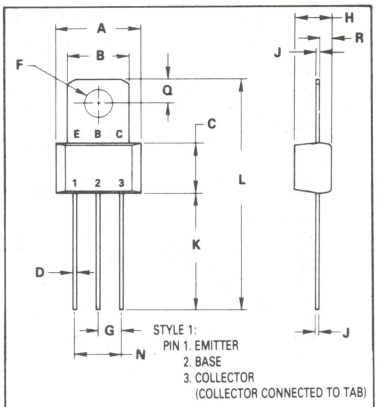

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

FIGURE 1 – DC CURRENT GAIN

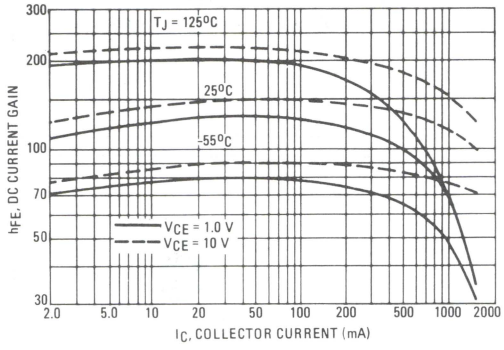

FIGURE 2 – "ON" VOLTAGES

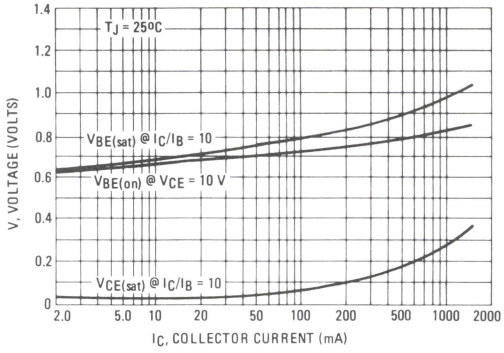

FIGURE 3 – COLLECTOR SATURATION REGION

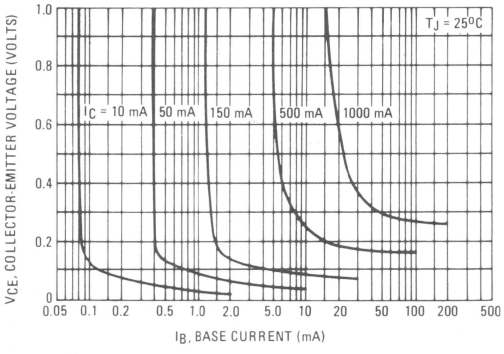

FIGURE 4 – DC SAFE OPERATING AREA

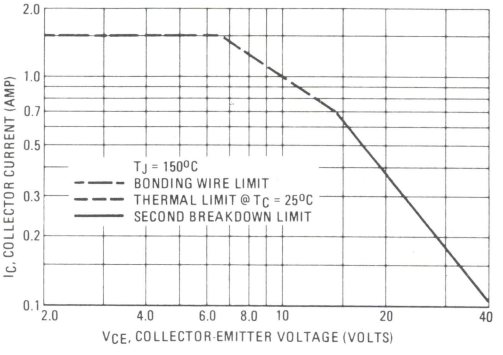

FIGURE 5 – CURRENT-GAIN BANDWIDTH PRODUCT

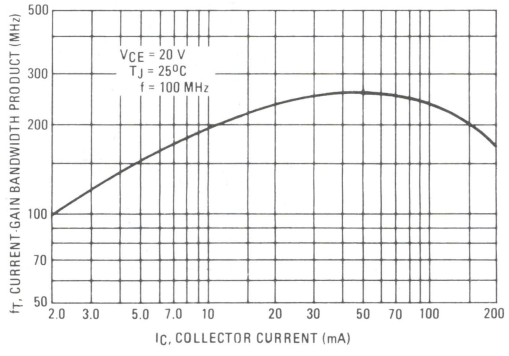

FIGURE 6 – CAPACITANCE

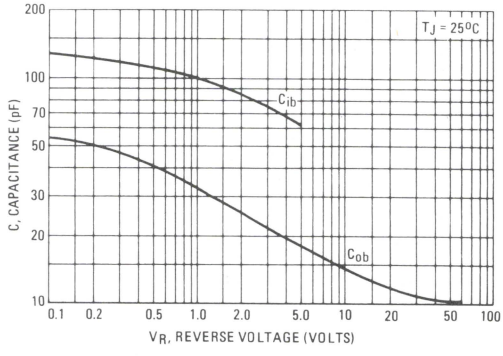

3

MPS-U55
MPS-U56

PNP SILICON ANNULAR AMPLIFIER TRANSISTORS

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage –
  $V_{(BR)CEO}$ = 60 Vdc (Min) @ I_C = 1.0 mAdc — MPS-U55
  80 Vdc (Min) @ I_C = 1.0 mAdc – MPS-U56
- High Power Dissipation – P_D = 10 W @ T_C = 25°C
- Complements to NPN MPS-U05 and MPS-U06

PNP SILICON AMPLIFIER TRANSISTORS



MAXIMUM RATINGS

Rating	Symbol	MPS-U55	MPS-U56	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CB}	60	80	Vdc
Emitter-Base Voltage	V_{EB}	4.0		Vdc
Collector Current – Continuous	I_C	2.0		Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0		Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$(1)	125	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W

(1) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.



STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR
(COLLECTOR CONNECTED TO TAB)

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Breakdown Voltage (1) (I_C = 1.0 mAdc, I_B = 0)	MPS-U55 MPS-U56	$V_{(BR)CEO}$	 60 80	 – –	 – –	Vdc
Emitter-Base Breakdown Voltage (I_E = 100 μAdc, I_C = 0)		$V_{(BR)EBO}$	4.0	–	–	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0) (V_{CB} = 60 Vdc, I_E = 0)	 MPS-U55 MPS-U56	I_{CBO}	 – –	 – –	 100 100	nAdc
ON CHARACTERISTICS						
DC Current Gain (1) (I_C = 50 mAdc, V_{CE} = 1.0 Vdc) (I_C = 250 mAdc, V_{CE} = 1.0 Vdc) (I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		h_{FE}	 80 50 –	 160 130 80	 – – –	–
Collector-Emitter Saturation Voltage (1) (I_C = 250 mAdc, I_B = 10 mAdc) (I_C = 250 mAdc, I_B = 25 mAdc)		$V_{CE(sat)}$	 – –	 0.22 0.15	 0.5 –	Vdc
Base-Emitter On Voltage (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)		$V_{BE(on)}$	–	0.78	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS						
Current-Gain–Bandwidth Product (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)		f_T	50	100	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)		C_{ob}	–	10	15	pF

(1)Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – DC CURRENT GAIN

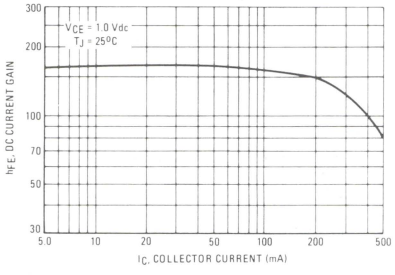

FIGURE 2 – "ON" VOLTAGES

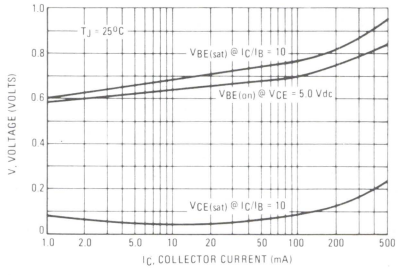

FIGURE 3 – ACTIVE-REGION SAFE OPERATING AREA

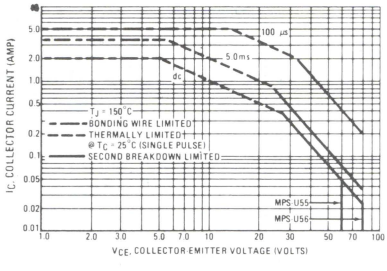

FIGURE 4 – CURRENT-GAIN–BANDWIDTH PRODUCT

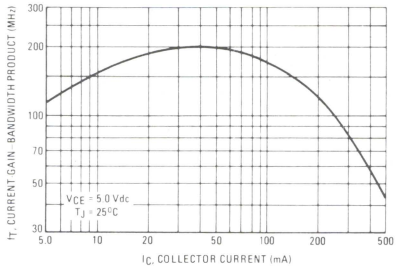

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MPS-U57

PNP SILICON ANNULAR
AMPLIFIER TRANSISTOR

. . . designed for general-purpose, high-voltage amplifier and driver applications.

- High Collector-Emitter Breakdown Voltage — $V_{(BR)CEO}$ = 100 Vdc (Min) @ I_C = 1.0 mAdc
- High Power Dissipation — P_D = 10 W @ T_C = 25°C
- Complement to NPN MPS-U07

AMPLIFIER TRANSISTOR
PNP SILICON



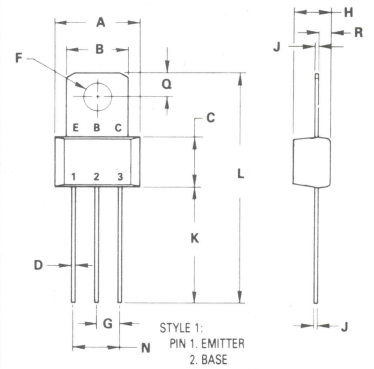

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	100	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	4.0	Vdc
Collector Current — Continuous	I_C	2.0	Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	125	°C/W

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (1) (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	100	–	–	Vdc
Emitter-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)EBO}$	4.0	–	–	Vdc
Collector Cutoff Current (V_{CB} = 40 Vdc, I_E = 0)	I_{CBO}	–	–	100	nAdc
ON CHARACTERISTICS (1)					
DC Current Gain	h_{FE}				–
(I_C = 50 mAdc, V_{CE} = 1.0 Vdc)		60	140	–	
(I_C = 250 mAdc, V_{CE} = 1.0 Vdc)		30	65	–	
(I_C = 500 mAdc, V_{CE} = 1.0 Vdc)		–	30	–	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$				Vdc
(I_C = 250 mAdc, I_B = 10 mAdc)		–	0.24	0.5	
(I_C = 250 mAdc, I_B = 25 mAdc)		–	0.15	–	
Base-Emitter On Voltage (I_C = 250 mAdc, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	–	0.78	1.2	Vdc
SMALL-SIGNAL CHARACTERISTICS					
Current-Gain–Bandwidth Product (1) (I_C = 250 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)	f_T	50	100	–	MHz
Output Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 100 kHz)	C_{ob}	–	10	15	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 1 – DC CURRENT GAIN

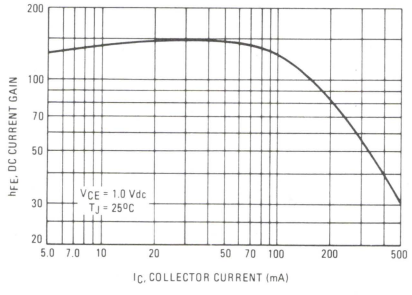

FIGURE 2 – "ON" VOLTAGES

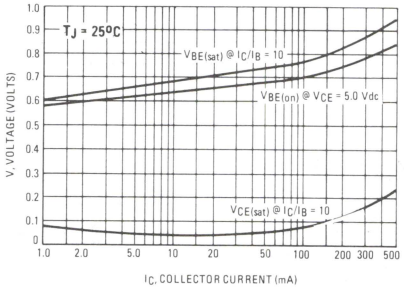

FIGURE 3 – DC SAFE OPERATING AREA

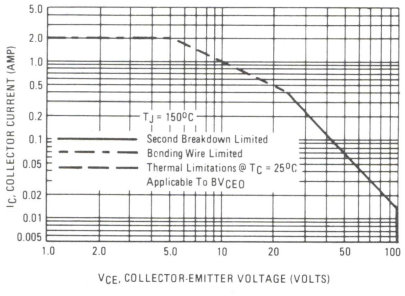

FIGURE 4 – CURRENT-GAIN–BANDWIDTH PRODUCT

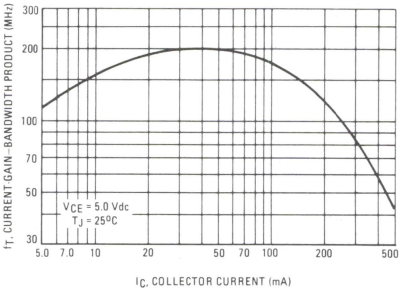

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 3 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

MPS-U60

PNP SILICON ANNULAR TRANSISTOR

. . . designed for general-purpose applications requiring high breakdown voltages, low saturation voltages and low capacitance.

- Complement to NPN Type MPS-U10

PNP SILICON HIGH VOLTAGE TRANSISTOR



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	300	Vdc
Collector-Base Voltage	V_{CB}	300	Vdc
Emitter-Base Voltage	V_{EB}	5.0	Vdc
Collector Current — Continuous	I_C	500	mAdc
Total Power Dissipation @ $T_A = 25^oC$ Derate above 25^oC	P_D	1.0 8.0	Watt $mW/^oC$
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	10 80	Watts $mW/^oC$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-55 to +150	^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	$^oC/W$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}(1)$	125	$^oC/W$

ELECTRICAL CHARACTERISTICS ($T_A = 25^oC$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector Emitter Breakdown Voltage (2) (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	300	–	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	300	–	Vdc
Emitter-Base Breakdown Voltage (I_E = 10 μAdc, I_C = 0)	$V_{(BR)EBO}$	5.0	–	Vdc
Collector Cutoff Current (V_{CB} = 200 Vdc, I_E = 0)	I_{CBO}	–	0.2	μAdc
Emitter Cutoff Current (V_{BE} = 3.0 Vdc, I_C = 0)	I_{EBO}	–	0.1	μAdc
ON CHARACTERISTICS				
DC Current Gain (2) (I_C = 1.0 mAdc, V_{CE} = 10 Vdc) (I_C = 10 mAdc, V_{CE} = 10 Vdc) (I_C = 30 mAdc, V_{CE} = 10 Vdc)	h_{FE}	25 30 30		
Collector-Emitter Saturation Voltage (I_C = 20 mAdc, I_B = 2.0 mAdc)	$V_{CE(sat)}$	–	0.75	Vdc
Base-Emitter Saturation Voltage (I_C = 20 mAdc, I_B = 2.0 mAdc)	$V_{BE(sat)}$	–	0.9	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain—Bandwidth Product (2) (I_C = 10 mAdc, V_{CE} = 20 Vdc, f = 100 MHz)	f_T	60	–	MHz
Collector-Base Capacitance (V_{CB} = 20 Vdc, I_E = 0, f = 1.0 MHz)	C_{cb}	–	8.0	pF

(1) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.

(2) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

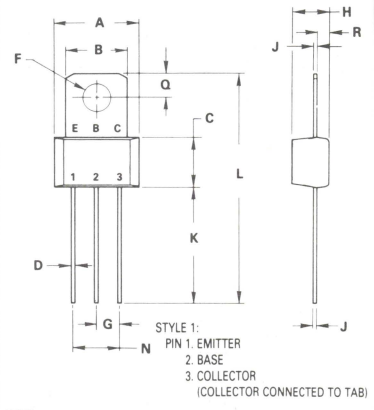

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

FIGURE 1 – DC CURRENT GAIN

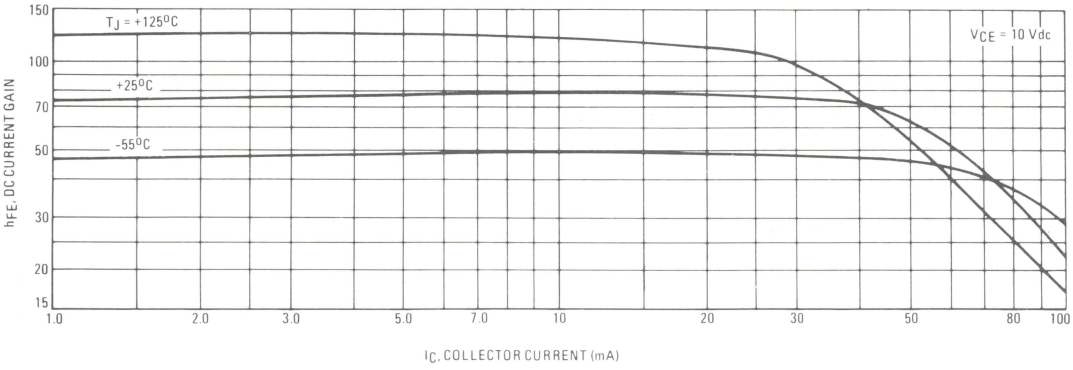

FIGURE 2 – CAPACITANCES

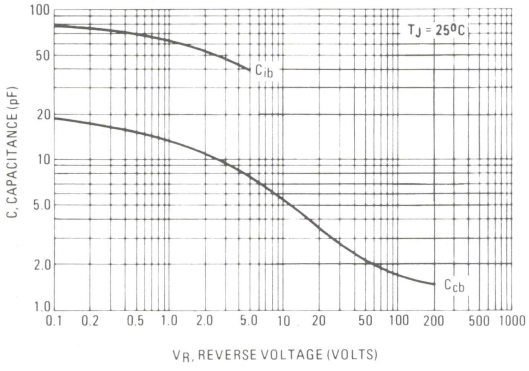

FIGURE 3 – CURRENT-GAIN–BANDWIDTH PRODUCT

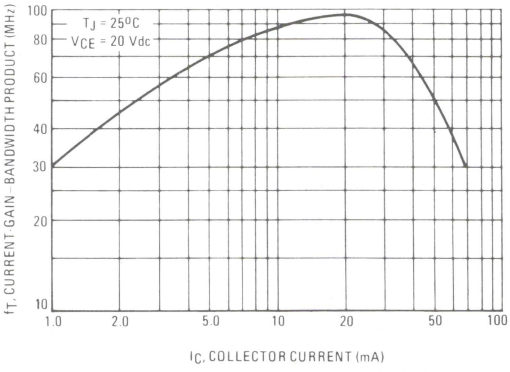

FIGURE 4 – "ON" VOLTAGES

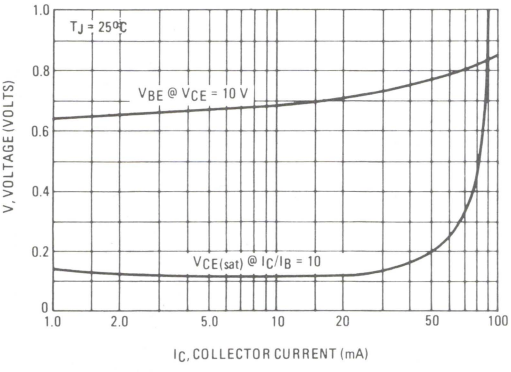

FIGURE 5 – DC SAFE OPERATING AREA

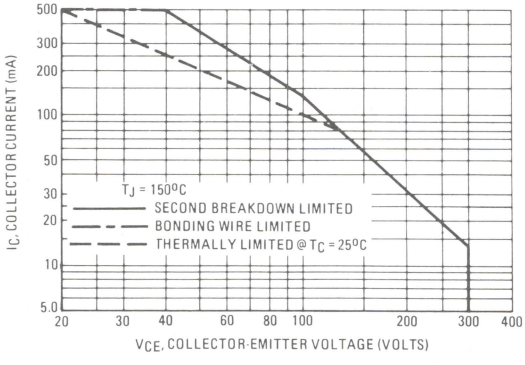

3

MPS-U95

PNP SILICON DARLINGTON AMPLIFIER TRANSISTOR

. . . designed for amplifier and driver applications.

- High DC Current Gain –
  h_{FE} = 25,000 (Min) @ I_C = 200 mAdc
  15,000 (Min) @ I_C = 500 mAdc
- Collector-Emitter Breakdown Voltage –
  $V_{(BR)CES}$ = 40 Vdc (Min) @ I_C = 100 μAdc
- Low Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.5 Vdc @ I_C = 1.0 Adc
- Monolithic Construction for High Reliability
- Complement to NPN MPS-U45

PNP SILICON DARLINGTON TRANSISTOR



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}(1)	40	Vdc
Collector-Emitter Voltage	V_{CES}	40	Vdc
Collector-Base Voltage	V_{CB}	50	Vdc
Emitter-Base Voltage	V_{EB}	10	Vdc
Collector Current -Continuous	I_C	2.0	Adc
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	1.0 8.0	Watt mW/°C
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	10 80	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$(2)	125	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	12.5	°C/W

(1) Due to the monolithic construction of this device, breakdown voltages of both transistor elements are identical, $V_{(BR)CES}$ is tested in lieu of $V_{(BR)CEO}$ in order to avoid errors caused by noise pickup. The voltage measured during the $V_{(BR)CES}$ test is the $V_{(BR)CEO}$ of the output transistor.
(2) $R_{\theta JA}$ is measured with the device soldered into a typical printed circuit board.

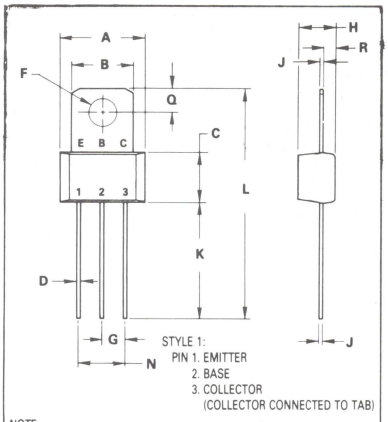

NOTE:
1. LEADS WITHIN 0.15 mm(0.006) TOTAL OF TRUE POSITION AT CASE, AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.14	9.53	0.360	0.375
B	6.60	7.24	0.260	0.285
C	5.41	5.66	0.213	0.223
D	0.38	0.53	0.015	0.021
F	3.18	3.33	0.125	0.131
G	2.54 BSC		0.100 BSC	
H	3.94	4.19	0.155	0.165
J	0.36	0.41	0.014	0.016
K	11.63	12.70	0.458	0.500
L	24.58	25.53	0.968	1.005
N	5.08 BSC		0.200 BSC	
Q	2.39	2.69	0.094	0.106
R	1.14	1.40	0.045	0.055

CASE 152-02

3

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (I_C = 100 μAdc, V_{BE} = 0)	$V_{(BR)CES}$	40	–	–	Vdc
Collector-Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	50	–	–	Vdc
Emitter-Base Breakdown Voltage (I_E = 10 μAdc, I_C = 0)	$V_{(BR)EBO}$	10	–	–	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0)	I_{CBO}	–	–	100	nAdc
Emitter Cutoff Current (V_{EB} = 8.0 Vdc, I_C = 0)	I_{EBO}	–	–	100	nAdc
ON CHARACTERISTICS(1)					
DC Current Gain	h_{FE}				–
(I_C = 200 mAdc, V_{CE} = 5.0 Vdc)		25,000	43,000	150,000	
(I_C = 500 mAdc, V_{CE} = 5.0 Vdc)		15,000	41,000	–	
(I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)		4,000	35,000	–	
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 2.0 mAdc)	$V_{CE(sat)}$	–	1.0	1.5	Vdc
Base-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 2.0 mAdc)	$V_{BE(sat)}$	–	1.85	2.0	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	–	1.7	2.0	Vdc
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (1) (I_C = 200 mAdc, V_{CE} = 5.0 Vdc, f = 100 MHz)	$\lvert h_{fe} \rvert$	0.5	1.6	–	–
Collector Base Capacitance (V_{CB} = 10 Vdc, I_E = 0, f = 1.0 MHz)	C_{cb}	–	2.5	12	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

Uniwatt Darlington transistors can be used in any number of low power applications, such as relay drivers, motor control and as general purpose amplifiers. As an audio amplifier these devices, when used as a complementary pair, can drive 3.5 watts into a 3.2 ohm speaker using a 14 volt supply with less than one percent distortion. Because of the high gain the base drive requirement is as low as 1 mA in this application. They are also useful as power drivers for high current application such as voltage regulators.

FIGURE 1 – DC CURRENT GAIN

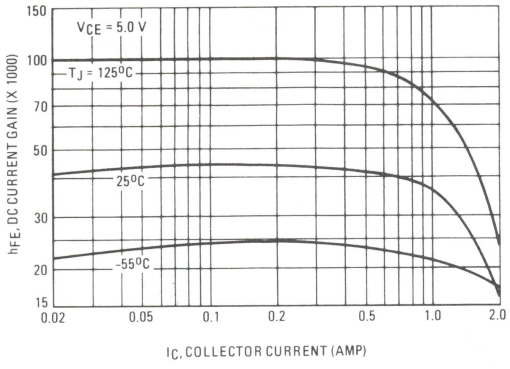

FIGURE 2 – SMALL-SIGNAL CURRENT GAIN

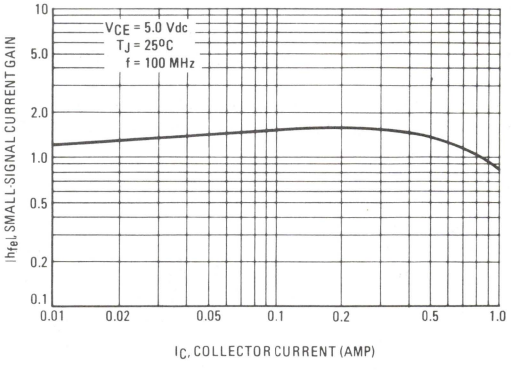

FIGURE 3 – "ON" VOLTAGES

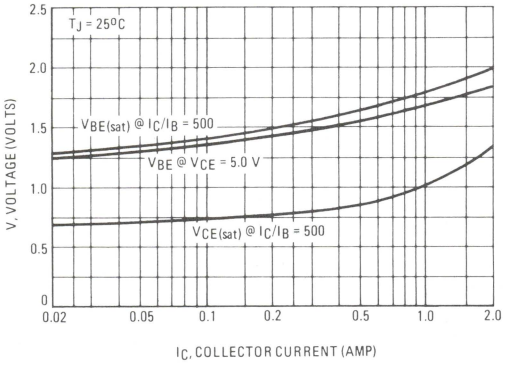

FIGURE 4 – TEMPERATURE COEFFICIENT

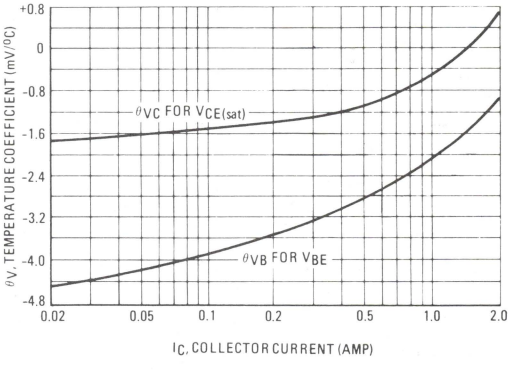

3

FIGURE 5 – DC SAFE OPERATING AREA

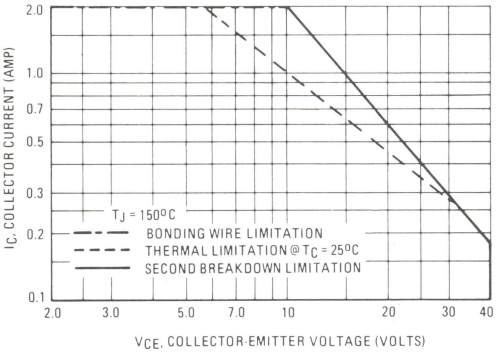

There are two limitations on the power handling ability of a transistor: junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

NPN	PNP
TIP29	TIP30
TIP29A	TIP30A
TIP29B	TIP30B
TIP29C	TIP30C

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications. Compact TO-220 AB package. TO-66 leadform also available.

1 AMPERE

POWER TRANSISTORS COMPLEMENTARY SILICON

40-60-80-100 VOLTS
30 WATTS



MAXIMUM RATINGS

Rating	Symbol	TIP29 TIP30	TIP29A TIP30A	TIP29B TIP30B	TIP29C TIP30C	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current — Continuous Peak	I_C	1.0 3.0				Adc
Base Current	I_B	0.4				Adc
Total Power Dissipation @ $T_C = 25^oC$ Derate above 25^oC	P_D	30 0.24				Watts $W/^oC$
Total Power Dissipation @ $T_A = 25^oC$ Derate above 25^oC	P_D	2.0 0.016				Watts $W/^oC$
Unclamped Inductive Load Energy (See Note 3)	E	32				mJ
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150				^oC

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.167	$^oC/W$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	$^oC/W$

ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	TIP29, TIP30 TIP29A, TIP30A TIP29B, TIP30B TIP29C, TIP30C	$V_{CEO(sus)}$	40 60 80 100	– – – –	Vdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0) (V_{CE} = 60 Vdc, I_B = 0)	 TIP29, TIP29A, TIP30, TIP30A TIP29B, TIP29C, TIP30B, TIP30C	I_{CEO}	 – –	 0.3 0.3	mAdc
Collector Cutoff Current (V_{CE} = 40 Vdc, V_{EB} = 0) (V_{CE} = 60 Vdc, V_{EB} = 0) (V_{CE} = 80 Vdc, V_{EB} = 0) (V_{CE} = 100 Vdc, V_{EB} = 0)	 TIP29, TIP30 TIP29A, TIP30A TIP29B, TIP30B TIP29C, TIP30C	I_{CES}	 – – – –	 200 200 200 200	μAdc
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 0.2 Adc, V_{CE} = 4.0 Vdc) (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)		h_{FE}	 40 15	 – 75	–
Collector-Emitter Saturation Voltage (I_C = 1.0 Adc, I_B = 125 mAdc)		$V_{CE(sat)}$	–	0.7	Vdc
Base-Emitter On Voltage (I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	1.3	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain — Bandwidth Product (2) (I_C = 200 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0	–	MHz
Small-Signal Current Gain (I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		h_{fe}	20	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.
(2) $f_T = |h_{fe}| \cdot f_{test}$
(3) This rating based on testing with L_C = 20 mH, R_{BE} = 100 Ω, V_{CC} = 10 V, I_C = 1.8 A, P.R.F. = 10 Hz.

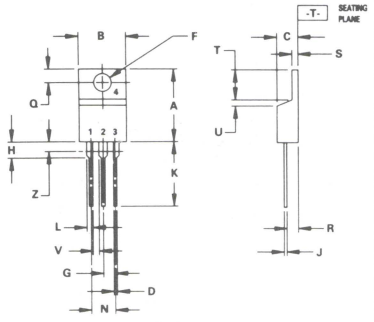

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

FIGURE 1 – DC CURRENT GAIN

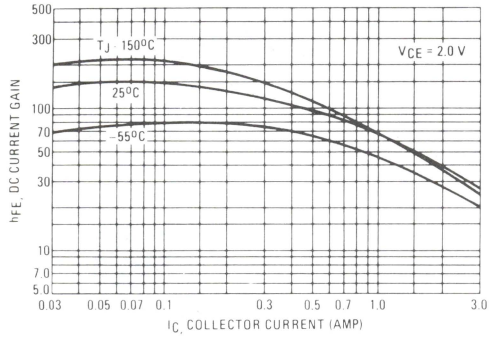

FIGURE 2 – TURN-OFF TIME

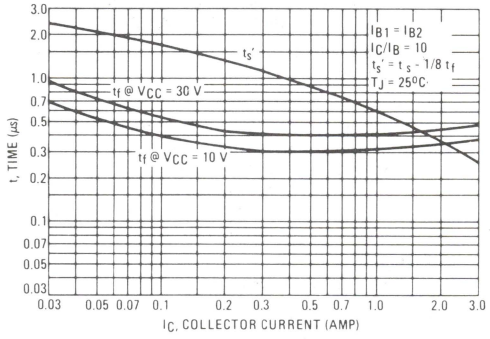

FIGURE 3 – SWITCHING TIME EQUIVALENT CIRCUIT

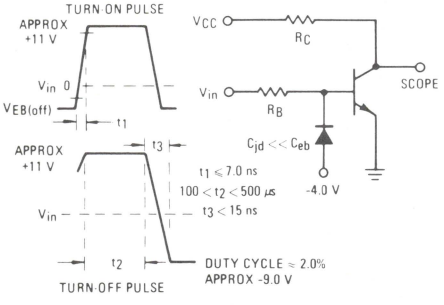

FIGURE 4 – TURN-ON TIME

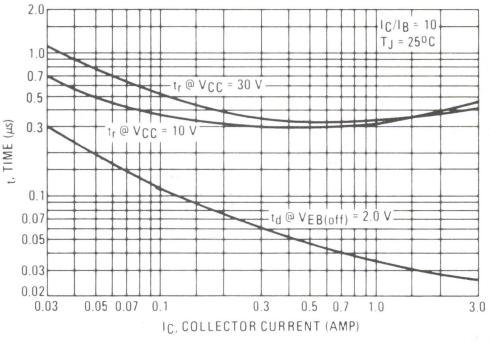

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

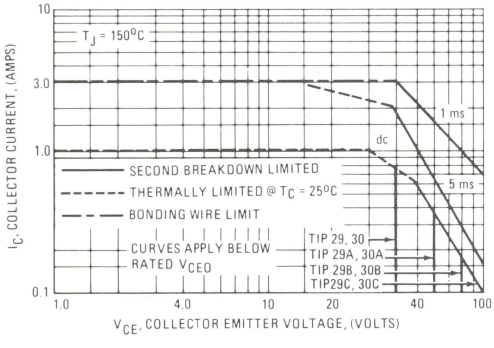

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
TIP31	TIP32
TIP31A	TIP32A
TIP31B	TIP32B
TIP31C	TIP32C

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications.

- Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.2 Vdc (Max) @ I_C = 3.0 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 40 Vdc (Min) – TIP31, TIP 32
  = 60 Vdc (Min) – TIP31A, TIP32A
  = 80 Vdc (Min) – TIP31B, TIP32B
  = 100 Vdc (Min) – TIP31C, TIP32C
- High Current Gain – Bandwidth Product
  f_T = 3.0 MHz (Min) @ I_C = 500 mAdc
- Compact TO-220 AB Package
- TO-66 Leadform Also Available

3 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
40-60-80-100 VOLTS
40 WATTS



*MAXIMUM RATINGS

Rating	Symbol	TIP31 TIP32	TIP31A TIP32A	TIP31B TIP32B	TIP31C TIP32C	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current - Continuous	I_C	3.0				Adc
Peak		5.0				
Base Current	I_B	1.0				Adc
Total Power Dissipation @ T_C = 25°C	P_D	40				Watts
Derate above 25°C		0.32				W/°C
Total Power Dissipation @ T_A = 25°C	P_D	2.0				Watts
Derate above 25°C		0.016				W/°C
Unclamped Inductive Load Energy (1)	E	32				mJ
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.125	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

(1) I_C = 1.8 A, L = 20 mH, P.R.F. = 10 Hz, V_{CC} = 10 V, R_{BE} = 100 Ω.

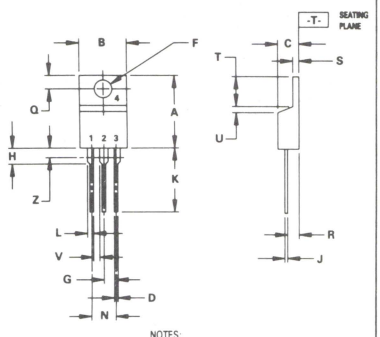

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MAX	INCHES MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	TIP31, TIP32	$V_{CEO(sus)}$	40	–	Vdc
	TIP31A, TIP32A		60	–	
	TIP31B, TIP32B		80	–	
	TIP31C, TIP32C		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	TIP31, TIP31A, TIP32, TIP32A		–	0.3	
(V_{CE} = 60 Vdc, I_B = 0)	TIP31B, TIP31C, TIP32B, TIP32C		–	0.3	
Collector Cutoff Current		I_{CES}			μAdc
(V_{CE} = 40 Vdc, V_{EB} = 0)	TIP31, TIP32		–	200	
(V_{CE} = 60 Vdc, V_{EB} = 0)	TIP31A, TIP32A		–	200	
(V_{CE} = 80 Vdc, V_{EB} = 0)	TIP31B, TIP32B		–	200	
(V_{CE} = 100 Vdc, V_{EB} = 0)	TIP31C, TIP32C		–	200	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)			25	–	
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)			10	50	
Collector-Emitter Saturation Voltage (I_C = 3.0 Adc, I_B = 375 mAdc)		$V_{CE(sat)}$	–	1.2	Vdc
Base-Emitter On Voltage (I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	1.8	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2) (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0	–	MHz
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		$\|h_{fe}\|$	20	–	–

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = |h_{fe}| \bullet f_{test}$

FIGURE 1 – POWER DERATING

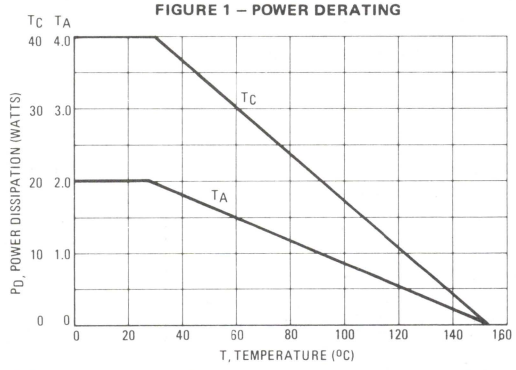

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

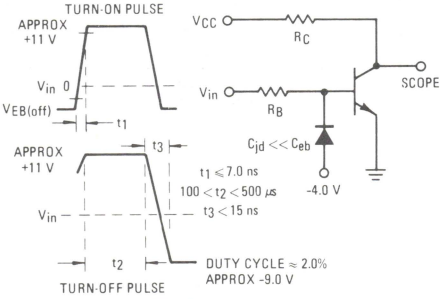

RB and RC VARIED TO OBTAIN DESIRED CURRENT LEVELS.

FIGURE 3 – TURN-ON TIME

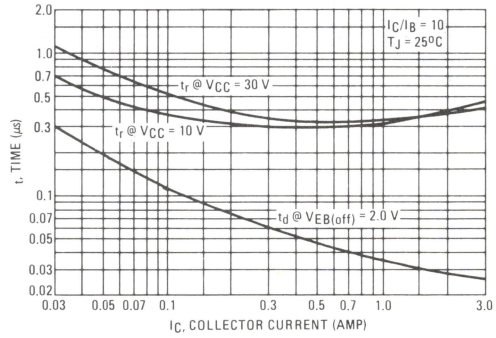

FIGURE 4 – THERMAL RESPONSE

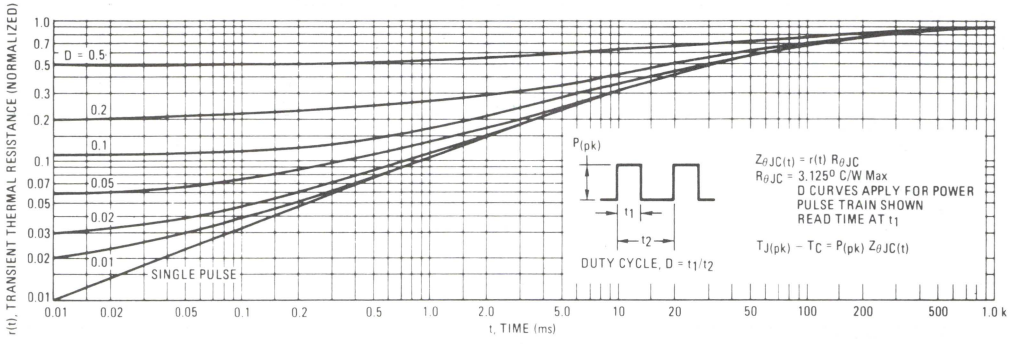

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

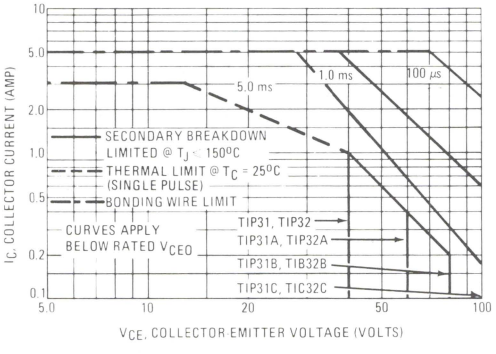

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C \cdot V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

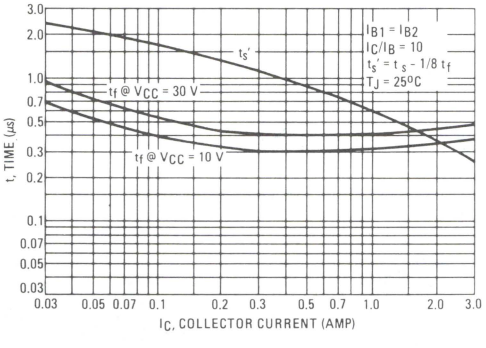

FIGURE 7 – CAPACITANCE

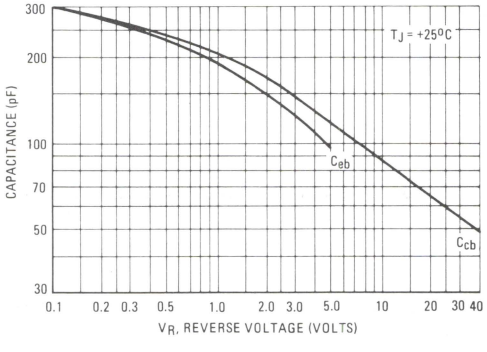

FIGURE 8 – DC CURRENT GAIN

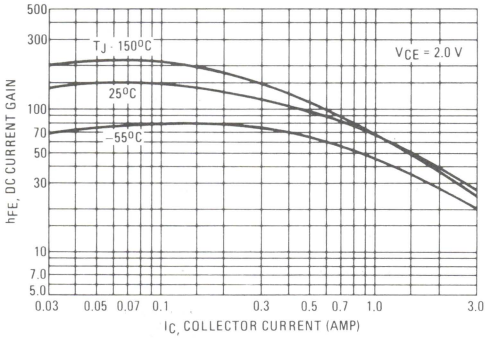

FIGURE 9 – COLLECTOR SATURATION REGION

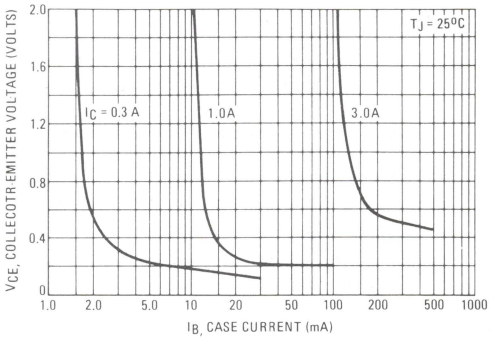

FIGURE 10 – "ON" VOLTAGES

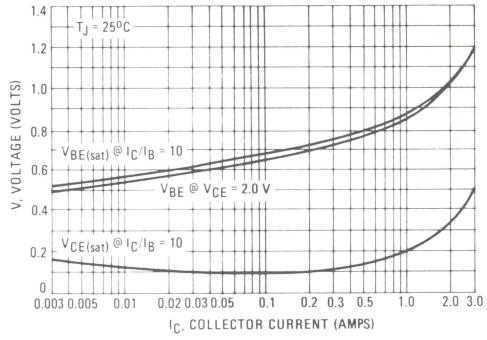

FIGURE 11 – TEMPERATURE COEFFICIENTS

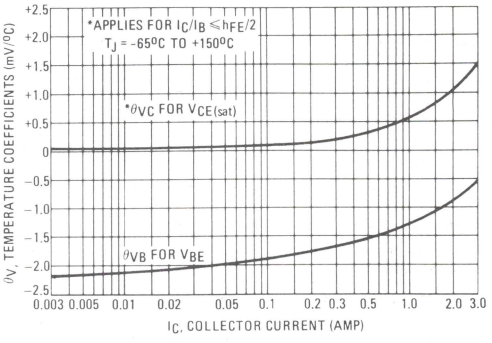

FIGURE 12 – COLLECTOR CUT-OFF REGION

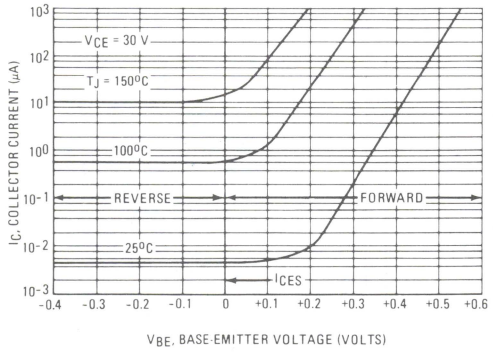

FIGURE 13 – EFFECTS OF BASE-EMITTER RESISTANCE

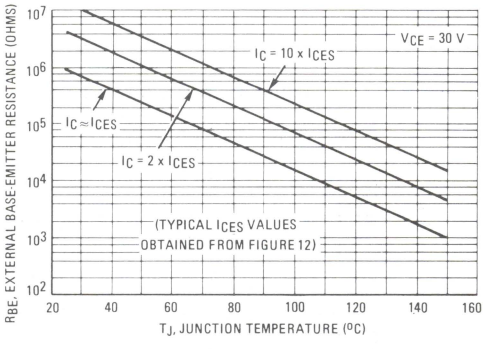

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
TIP33	TIP34
TIP33A	TIP34A
TIP33B	TIP34B
TIP33C	TIP34C

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . for general-purpose power amplifier and switching applications.

- 10 A Collector Current
- Low Leakage Current — I_{CEO} = 0.7 mA @ 30 and 60 V
- Excellent dc Gain — h_{FE} = 40 Typ @ 3.0 A
- High Current Gain Bandwidth Product — h_{fe} = 3.0 min @ I_C = 0.5 A, f = 1.0 MHz

10 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

40-100 VOLTS
80 WATTS



MAXIMUM RATINGS

Rating	Symbol	TIP33 TIP34	TIP33A TIP34A	TIP33B TIP34B	TIP33C TIP34C	Unit
Collector-Emitter Voltage	V_{CEO}	40 V	60 V	80 V	100 V	Vdc
Collector-Base Voltage	V_{CB}	40 V	60 V	80 V	100 V	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current — Continuous	I_C	10				Adc
Peak (1)		15				
Base Current — Continous	I_B	3.0				Adc
Total Power Dissipation @ T_C = 25°C	P_D	80				Watts
Derate above 25°C		0.64				W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Junction-To-Free-Air Thermal Resistance	$R_{\theta JA}$	35.7	°C/W

(1) Pulse Test: Pulse Width = 10 ms, Duty Cycle ≤10%.



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

FIGURE 1 — DC CURRENT GAIN

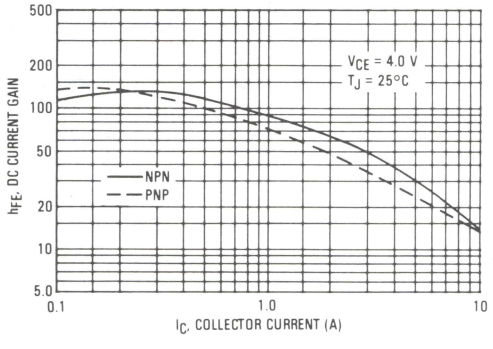

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mA, I_B = 0)	TIP33, TIP34	$V_{CEO(sus)}$	40	—	Vdc
	TIP33A, TIP34A		60	—	
	TIP33B, TIP34B		80	—	
	TIP33C, TIP34C		100	—	
Collector-Emitter Cutoff Current (V_{CE} = 30 V, I_B = 0)	TIP33, TIP33A, TIP34, TIP34A	I_{CEO}	—	0.7	mA
(V_{CE} = 60 V, I_B = 0)	TIP33B, TIP33C, TIP34B, TIP34C		—	0.7	
Collector-Emitter Cutoff Current (V_{CE} = Rated V_{CEO}, V_{EB} = 0)		I_{CES}	—	0.4	mA
Emitter-Base Cutoff Current (V_{EB} = 5.0 V, I_C = 0)		I_{EBO}	—	1.0	mA
ON CHARACTERISTICS (1)					
DC Current Gain (I_C = 1.0 A, V_{CE} = 4.0 V)		h_{FE}	40	—	—
(I_C = 3.0 A, V_{CE} = 4.0 V)			20	100	
Collector-Emitter Saturation Voltage (I_C = 3.0 A, I_B = 0.3 A)		$V_{CE(sat)}$	—	1.0	Vdc
(I_C = 10 A, I_B = 2.5 A)			—	4.0	
Base-Emitter On Voltage (I_C = 3.0 A, V_{CE} = 4.0 V)		$V_{BE(on)}$	—	1.6	Vdc
(I_C = 10 A, V_{CE} = 4.0 V)			—	3.0	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 0.5 A, V_{CE} = 10 V, f = 1.0 kHz)		h_{fe}	20	—	—
Current-Gain—Bandwidth Product (2) (I_C = 0.5 A, V_{CE} = 10 V, f = 1.0 MHz)		f_T	3.0	—	MHz

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.
(2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

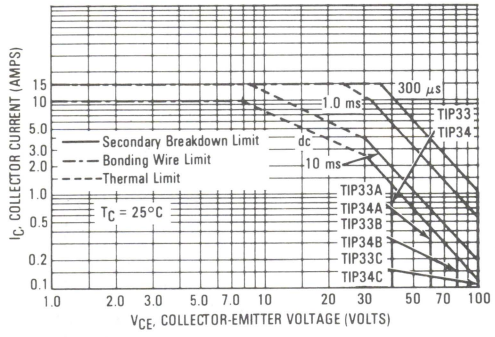

FIGURE 3 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

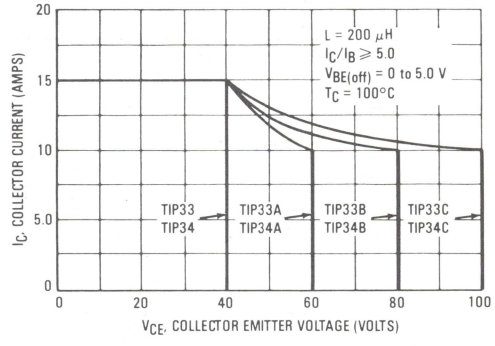

FORWARD BIAS

The Forward Bias Safe Operating Area represents the voltage and current conditions these devices can withstand during forward bias. The data is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10%, and must be derated thermally for $T_C > 25$°C.

REVERSE BIAS

The Reverse Bias Safe Operating Area represents the voltage and current conditions these devices can withstand during reverse biased turn-off. This rating is verified under clamped conditions so the device is never subjected to an avalanche mode.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
TIP35	TIP36
TIP35A	TIP36A
TIP35B	TIP36B
TIP35C	TIP36C

COMPLEMENTARY SILICON HIGH-POWER TRANSISTORS

. . . for general-purpose power amplifier and switching applications.

- 25 A Collector Current
- Low Leakage Current — I_{CEO} = 1.0 mA @ 30 and 60 V
- Excellent dc Gain — h_{FE} = 40 Typ @ 15 A
- High Current Gain Bandwidth Product — (h_{fe} = 3.0 min @ I_C = 1.0 A, f = 1.0 MHz

25 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

40-100 VOLTS
125 WATTS



MAXIMUM RATINGS

Rating	Symbol	TIP35 TIP36	TIP35A TIP36A	TIP35B TIP36B	TIP35C TIP36C	Unit
Collector-Emitter Voltage	V_{CEO}	40 V	60 V	80 V	100 V	Vdc
Collector-Base Voltage	V_{CB}	40 V	60 V	80 V	100 V	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current — Continuous	I_C	25				Adc
Peak (1)		40				
Base Current — Continous	I_B	5.0				Adc
Total Power Dissipation @ T_C = 25°C	P_D	125				Watts
Derate above 25°C		1.0				W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150				°C
Unclamped Inductive Load	E_{SB}	90				mJ

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Junction-To-Free-Air Thermal Resistance	$R_{\theta JA}$	35.7	°C/W

(1) Pulse Test: Pulse Width = 10 ms, Duty Cycle ≤10%.



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
TO-218AC

FIGURE 1 — POWER DERATING

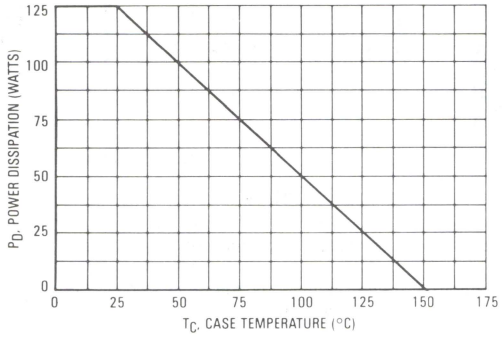

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 30 mA, I_B = 0)	TIP35, TIP36		40	—	
	TIP35A, TIP36A		60	—	
	TIP35B, TIP36B		80	—	
	TIP35C, TIP36C		100	—	
Collector-Emitter Cutoff Current		I_{CEO}			mA
(V_{CE} = 30 V, I_B = 0)	TIP35, TIP35A, TIP36, TIP36A		—	1.0	
(V_{CE} = 60 V, I_B = 0)	TIP35B, TIP35C, TIP36B, TIP36C		—	1.0	
Collector-Emitter Cutoff Current (V_{CE} = Rated V_{CEO}, V_{EB} = 0)		I_{CES}	—	0.7	mA
Emitter-Base Cutoff Current (V_{EB} = 5.0 V, I_C = 0)		I_{EBO}	—	1.0	mA
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			—
(I_C = 1.5 A, V_{CE} = 4.0 V)			25	—	
(I_C = 15 A, V_{CE} = 4.0 V)			15	75	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 15 A, I_B = 1.5 A)			—	1.8	
(I_C = 25 A, I_B = 5.0 A)			—	4.0	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 15 A, V_{CE} = 4.0 V)			—	2.0	
(I_C = 25 A, V_{CE} = 4.0 V)			—	4.0	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain (I_C = 1.0 A, V_{CE} = 10 V, f = 1.0 kHz)		h_{fe}	25	—	—
Current-Gain—Bandwidth Product (2) (I_C = 1.0 A, V_{CE} = 10 V, f = 1.0 MHz)		f_T	3.0	—	MHz

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.
(2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 — SWITCHING TIME EQUIVALENT TEST CIRCUITS

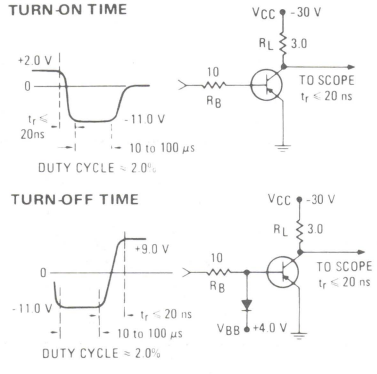

FOR CURVES OF FIGURES 3 & 4, R_B & R_L ARE VARIED.
INPUT LEVELS ARE APPROXIMATELY AS SHOWN.
FOR NPN, REVERSE ALL POLARITIES.

FIGURE 3 — TURN-ON TIME

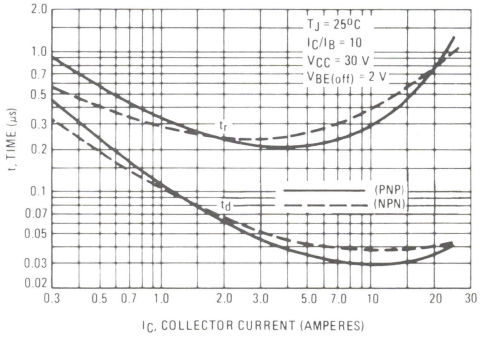

3

FIGURE 4 — TURN-OFF TIME

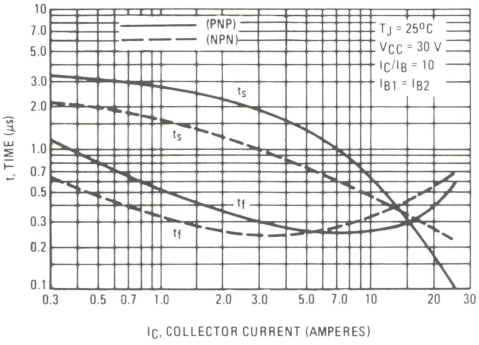

FIGURE 5 — DC CURRENT GAIN

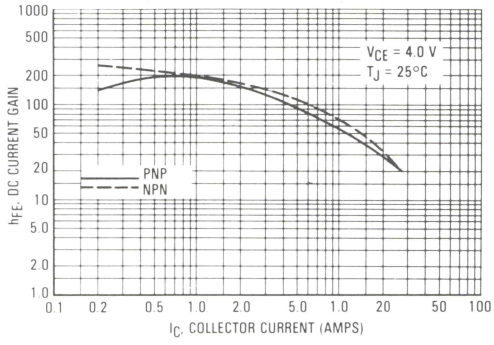

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25°C$. Second breakdown limitations do not derate the same as thermal limitations.

FIGURE 6 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

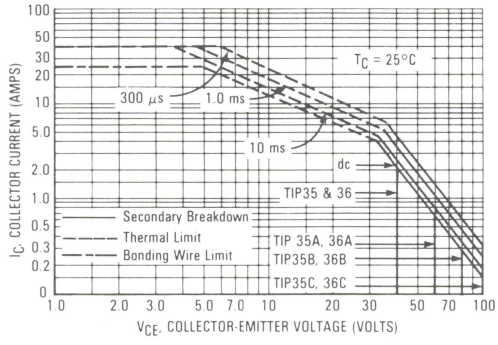

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 7 gives RBSOA characteristics.

FIGURE 7 — MAXIMUM RATED REVERSE BIAS SAFE OPERATING AREA

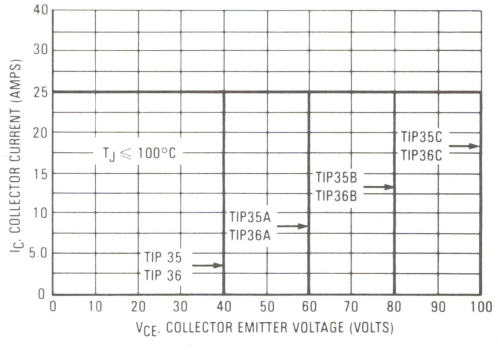

FIGURE 8 — INDUCTIVE LOAD SWITCHING

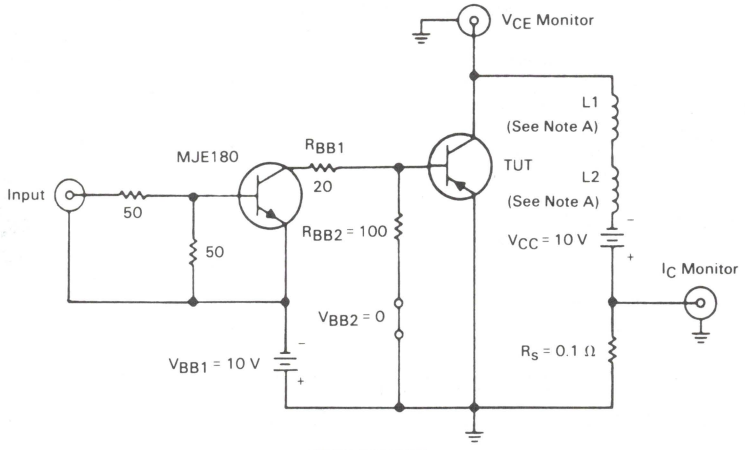

TEST CIRCUIT

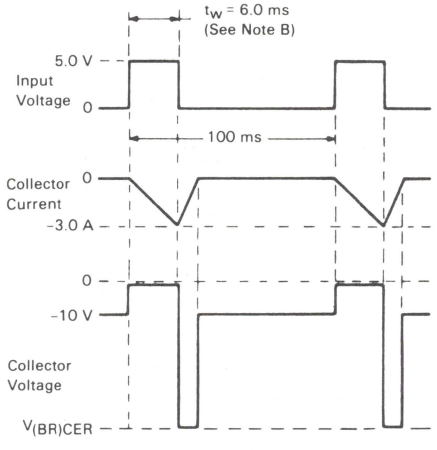

VOLTAGE AND CURRENT WAVEFORMS

NOTES:
A. L1 and L2 are 10 mH, 0.11 Ω, Chicago Standard Transformer Corporation C-2688, or equivalent.
B. Input pulse width is increased until I_{CM} = -3.0 A.
C. For NPN, reverse all polarities.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
TIP41	TIP42
TIP41A	TIP42A
TIP41B	TIP42B
TIP41C	TIP42C

COMPLEMENTARY SILICON PLASTIC POWER TRANSISTORS

. . . designed for use in general purpose amplifier and switching applications.

- Collector-Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 1.5 Vdc (Max) @ I_C = 6.0 Adc
- Collector-Emitter Sustaining Voltage –
  $V_{CEO(sus)}$ = 40 Vdc (Min) – TIP41, TIP42
  = 60 Vdc (Min) – TIP41A, TIP42A
  = 80 Vdc (Min) – TIP41B, TIP42B
  = 100 Vdc (Min) – TIP41C, TIP42C
- High Current Gain – Bandwidth Product
  f_T = 3.0 MHz (Min) @ I_C = 500 mAdc
- Compact TO-220AB Package
- TO-66 Leadform Also Available

6 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON

40-60-80-100 VOLTS
65 WATTS



*MAXIMUM RATINGS

Rating	Symbol	TIP41 TIP42	TIP41A TIP42A	TIP41B TIP42B	TIP41C TIP42C	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	40	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current - Continuous Peak	I_C	6 10				Adc
Base Current	I_B	2.0				Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	65 0.52				Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	2.0 0.016				Watts W/°C
Unclamped Inductive Load Energy (1)	E	62.5				mJ
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.92	°C/W
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

(1) I_C = 2.5 A, L = 20 mH, P.R.F. = 10 Hz, V_{CC} = 10V, R_{BE} = 100 Ω.

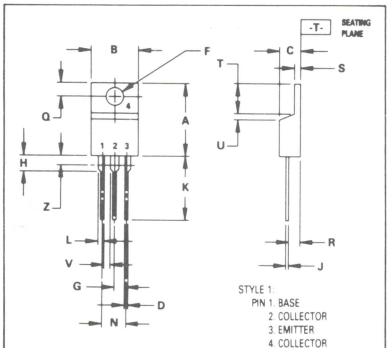

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	TIP41, TIP42	$V_{CEO(sus)}$	40	–	Vdc
	TIP41A, TIP42A		60	–	
	TIP41B, TIP42B		80	–	
	TIP41C, TIP42C		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	TIP41, TIP41A, TIP42, TIP42A		–	0.7	
(V_{CE} = 60 Vdc, I_B = 0)	TIP41B, TIP41C, TIP42B, TIP42C		–	0.7	
Collector Cutoff Current		I_{CES}			μAdc
(V_{CE} = 40 Vdc, V_{EB} = 0)	TIP41, TIP42		–	400	
(V_{CE} = 60 Vdc, V_{EB} = 0)	TIP41A, TIP42A		–	400	
(V_{CE} = 80 Vdc, V_{EB} = 0)	TIP41B, TIP42B		–	400	
(V_{CE} = 100 Vdc, V_{EB} = 0)	TIP41C, TIP42C		–	400	
Emitter Cutoff Current (V_{BE} = 5.0 Vdc, I_C = 0)		I_{EBO}	–	1.0	mAdc
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 0.3 Adc, V_{CE} = 4.0 Vdc)			30	–	
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)			15	75	
Collector-Emitter Saturation Voltage (I_C = 6.0 Adc, I_B = 600 mAdc)		$V_{CE(sat)}$	–	1.5	Vdc
Base-Emitter On Voltage (I_C = 6.0 Adc, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	–	2.0	Vdc
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product (2) (I_C = 500 mAdc, V_{CE} = 10 Vdc, f_{test} = 1 MHz)		f_T	3.0	–	MHz
Small-Signal Current Gain (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1 kHz)		$\|h_{fe}\|$	20	–	–

(1) Pulse Test: Pulsewidth ≤ 300 μs, Duty Cycle ≤ 2.0%.

(2) $f_T = |h_{fe}| \bullet f_{test}$

FIGURE 1 – POWER DERATING

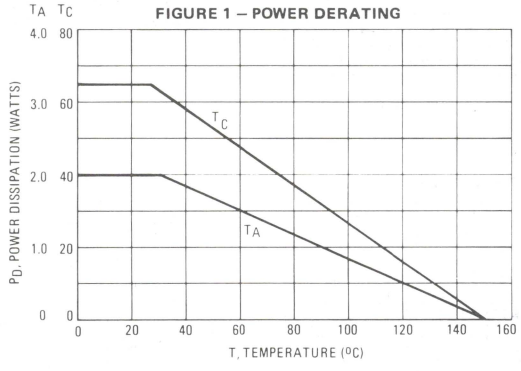

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

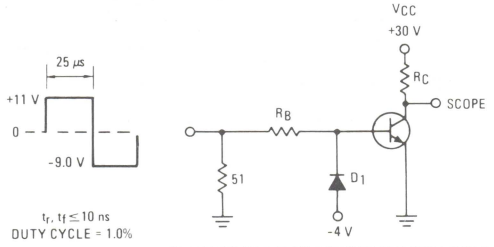

RB and RC VARIED TO OBTAIN DESIRED CURRENT LEVELS

D1 MUST BE FAST RECOVERY TYPE, eg:
MBD5300 USED ABOVE I_B ≈100 mA
MSD6100 USED BELOW I_B ≈100 mA

FIGURE 3 – TURN-ON TIME

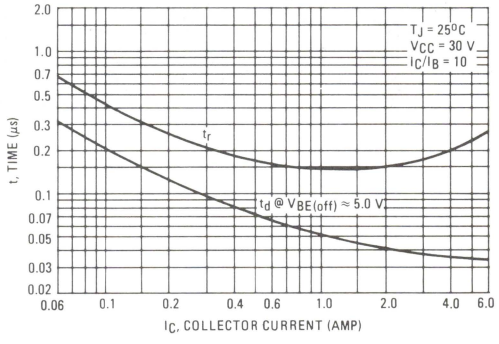

FIGURE 4 – THERMAL RESPONSE

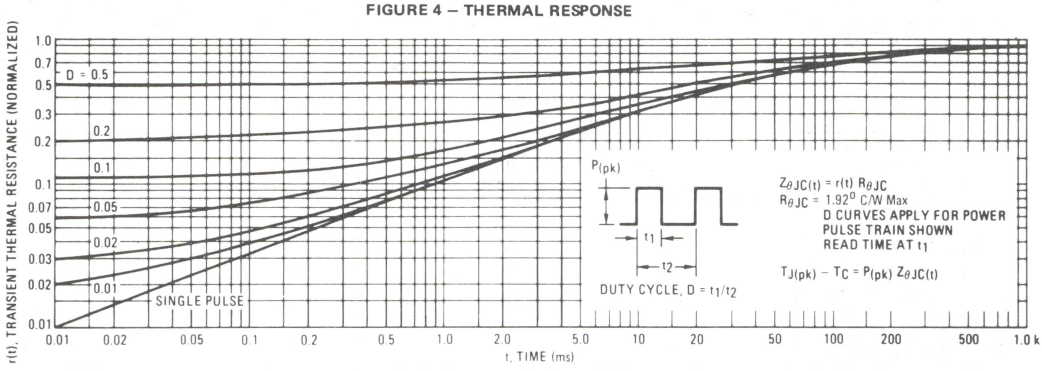

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

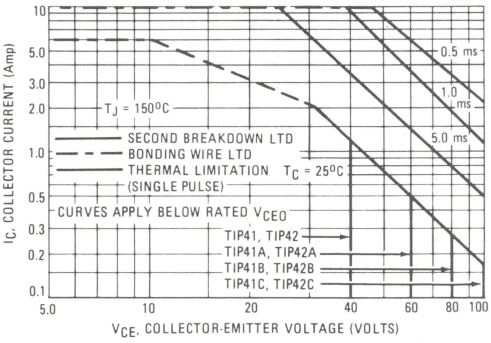

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^{\circ}C$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^{\circ}C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 – TURN-OFF TIME

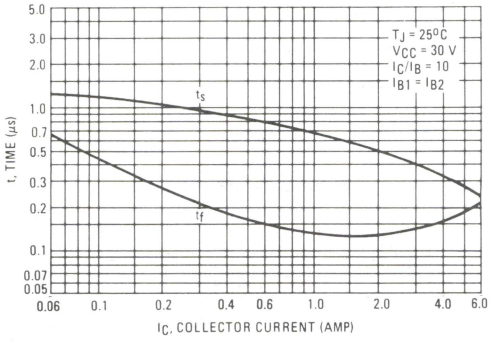

FIGURE 7 – CAPACITANCE

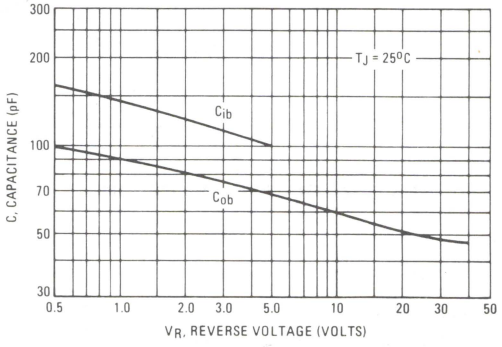

3

FIGURE 8 – DC CURRENT GAIN

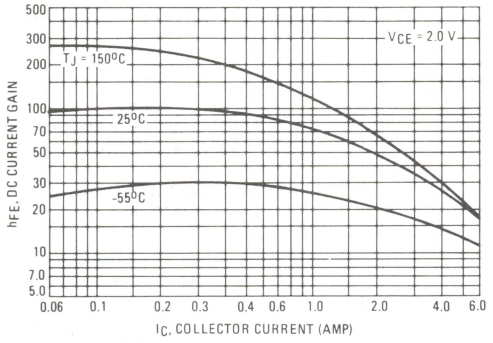

FIGURE 9 – COLLECTOR SATURATION REGION

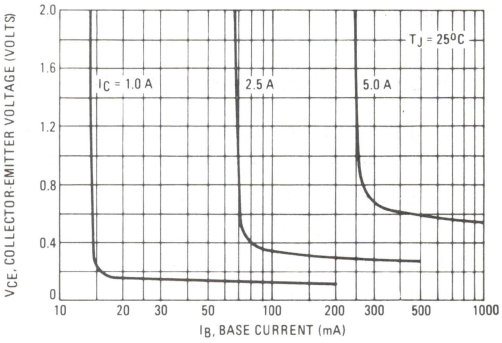

FIGURE 10 – "ON" VOLTAGES

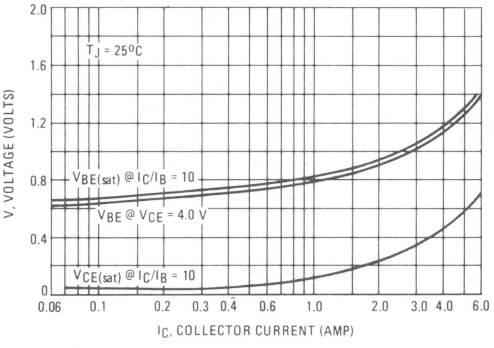

FIGURE 11 – TEMPERATURE COEFFICIENTS

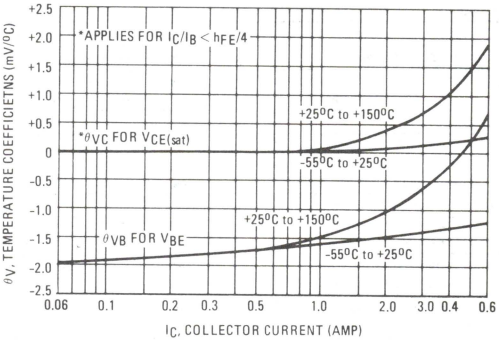

FIGURE 12 – COLLECTOR CUT-OFF REGION

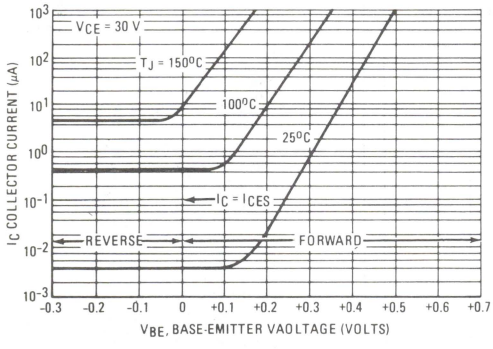

FIGURE 13 – EFFECTS OF BASE-EMITTER RESISTANCE

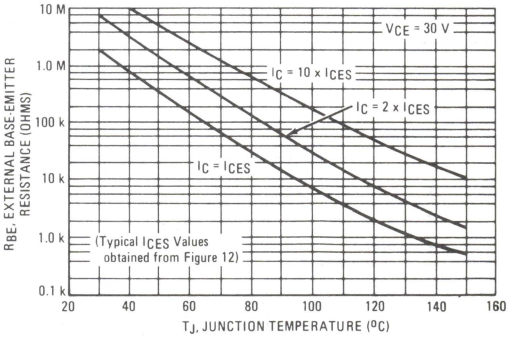

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

TIP47 TIP48 TIP49 TIP50

HIGH VOLTAGE NPN SILICON POWER TRANSISTORS

. . . designed for line operated audio output amplifier, Switchmode power supply drivers and other switching applications.

- 250 V to 400 V (Min) – $V_{CEO(sus)}$
- 1 A Rated Collector Current
- Popular TO-220 Plastic Package
- TO-66 Leadform Available

1.0 AMPERE

POWER TRANSISTORS
NPN SILICON

250-300-350-400 VOLTS
40 WATTS



MAXIMUM RATINGS

Rating	Symbol	TIP47	TIP48	TIP49	TIP50	Unit
Collector-Emitter Voltage	V_{CEO}	250	300	350	400	Vdc
Collector-Base Voltage	V_{CB}	350	400	450	500	Vdc
Emitter-Base Voltage	V_{EB}	5.0				Vdc
Collector Current – Continuous Peak	I_C	1.0 2.0				Adc
Base Current	I_B	0.6				Adc
Total Power Dissipation @ T_C = 25° C Derate above 25° C	P_D	40 0.32				Watts W/°C
Total Power Dissipation @ T_A = 25° C Derate above 25° C	P_D	2.0 0.016				Watts W/°C
Unclamped Inducting Load Energy (See Figure 8)	E	20				mJ
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.125	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

3

FIGURE 1 – POWER DERATING

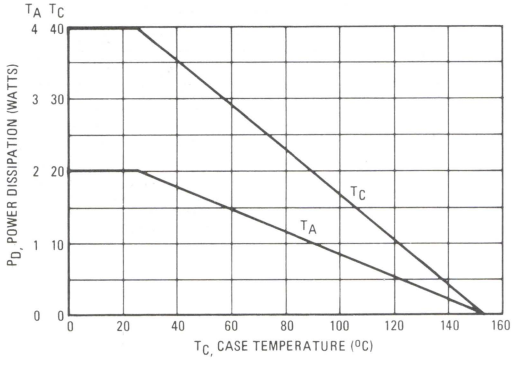

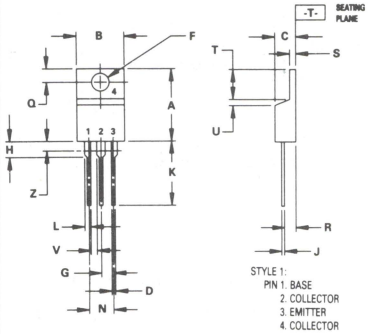

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

CASE 221A-04
TO-220AB

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)	TIP47	$V_{CEO(sus)}$	250	–	Vdc
(I_C = 30 mAdc, I_B = 0)	TIP48		300	–	
	TIP49		350	–	
	TIP50		400	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 150 Vdc, I_B = 0)	TIP47		–	1.0	
(V_{CE} = 200 Vdc, I_B = 0)	TIP48		–	1.0	
(V_{CE} = 250 Vdc, I_B = 0)	TIP49		–	1.0	
(V_{CE} = 300 Vdc, I_B = 0)	TIP50		–	1.0	
Collector Cutoff Current		I_{CES}			mAdc
(V_{CE} = 350 Vdc, V_{BE} = 0)	TIP47		–	1.0	
(V_{CE} = 400 Vdc, V_{BE} = 0)	TIP48		–	1.0	
(V_{CE} = 450 Vdc, V_{BE} = 0)	TIP49		–	1.0	
(V_{CE} = 500 Vdc, V_{BE} = 0)	TIP50		–	1.0	
Emitter Cutoff Current		I_{EBO}	–	1.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 0.3 Adc, V_{CE} = 10 Vdc)			30	150	
(I_C = 1.0 Adc, V_{CE} = 10 Vdc)			10	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	–	1.0	Vdc
(I_C = 1.0 Adc, I_B = 0.2 Adc)					
Base-Emitter On Voltage		$V_{BE(on)}$	–	1.5	Vdc
(I_C = 1.0 Adc, V_{CE} = 10 Vdc)					
DYNAMIC CHARACTERISTICS					
Current Gain – Bandwidth Product		f_T	10	–	MHz
(I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 2.0 MHz)					
Small-Signal Current Gain		h_{fe}	25	–	–
(I_C = 0.2 Adc, V_{CE} = 10 Vdc, f = 1.0 kHz)					

(1) Pulse Test: Pulsewidth ≤ 300 μs, Duty Cycle ≤ 2.0%.

FIGURE 2 – SWITCHING TIME EQUIVALENT CIRCUIT

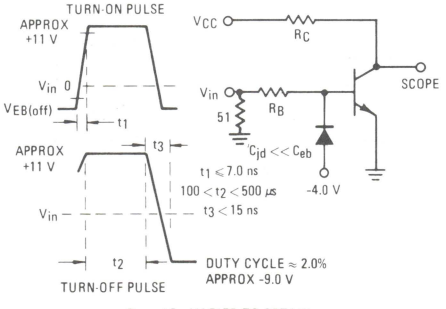

R_B and R_C VARIED TO OBTAIN DESIRED CURRENT LEVELS.

FIGURE 3 – TURN-ON TIME

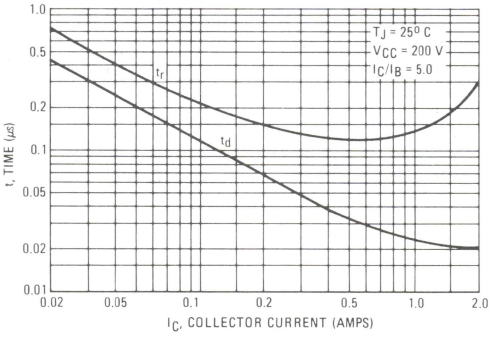

FIGURE 4 – THERMAL RESPONSE

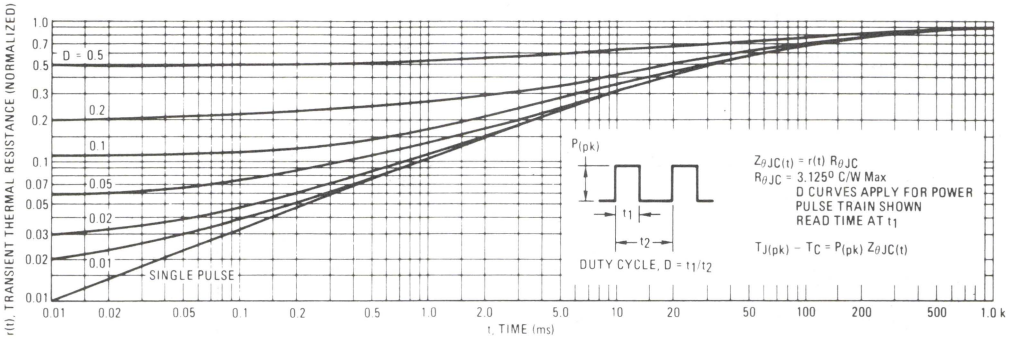

FIGURE 5 – ACTIVE REGION SAFE OPERATING AREA

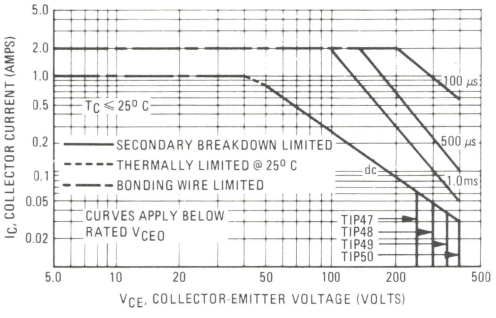

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leqslant 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

3

FIGURE 6 – TURN-OFF TIME

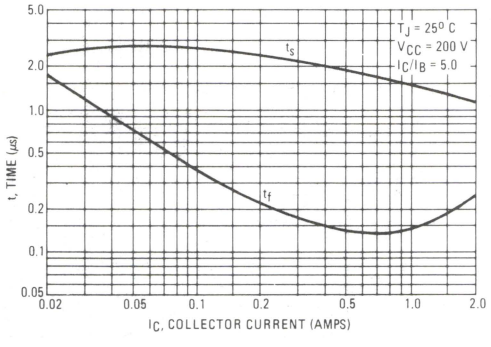

FIGURE 7 – TEMPERATURE COEFFICIENTS

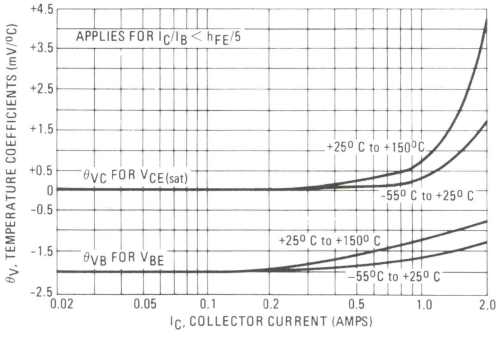

FIGURE 8 – INDUCTIVE LOAD SWITCHING

Test Circuit

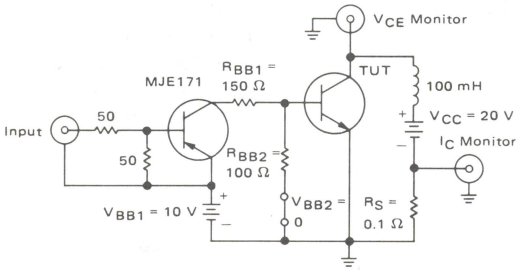

Note A: Input pulse width is increased until I_{CM} = 0.63 A.

Voltage and Current Waveforms

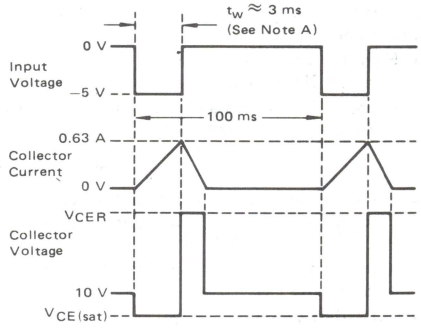

FIGURE 9 – DC CURRENT GAIN

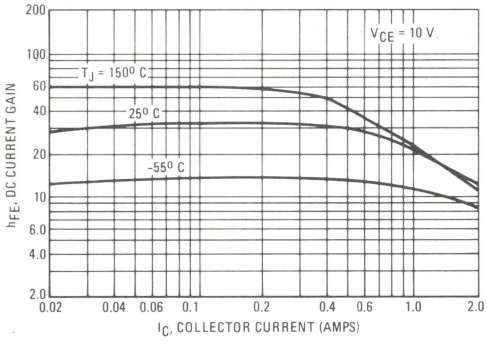

FIGURE 10 – "ON" VOLTAGES

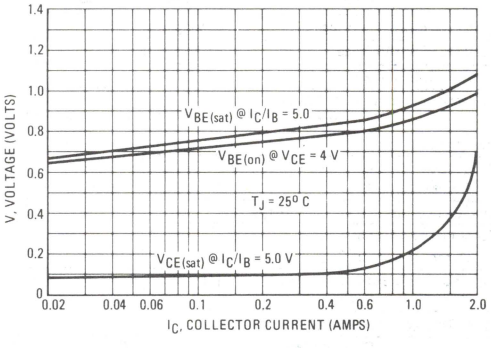

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

NPN	PNP
TIP100	TIP105
TIP101	TIP106
TIP102	TIP107

PLASTIC MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain — h_{FE} = 2500 (Typ) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage — @ 30 mAdc
  $V_{CEO(sus)}$ = 60 Vdc (Min) — TIP100, TIP105
  = 80 Vdc (Min) — TIP101, TIP106
  = 100 Vdc (Min) — TIP102, TIP107
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 3.0 Adc
  = 2.5 Vdc (Max) @ I_C = 8.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors
- TO-220AB Compact Package
- TO-66 Leadform Also Available

DARLINGTON 8 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60-80-100 VOLTS
80 WATTS



*MAXIMUM RATINGS

Rating	Symbol	TIP100, TIP105	TIP101, TIP106	TIP102, TIP107	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous Peak	I_C	8.0 15			Adc
Base Current	I_B	1.0			Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	80 0.64			Watts W/°C
Unclamped Inductive Load Energy (1)	E	30			mJ
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	2.0 0.016			Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150			°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.56	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

(1) I_C = 1.1 A, L = 50 mH, P.R.F. = 10 Hz, V_{CC} = 20 V, R_{BE} = 100 Ω.

FIGURE 1 — POWER DERATING

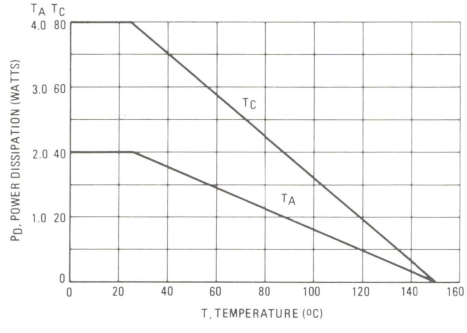

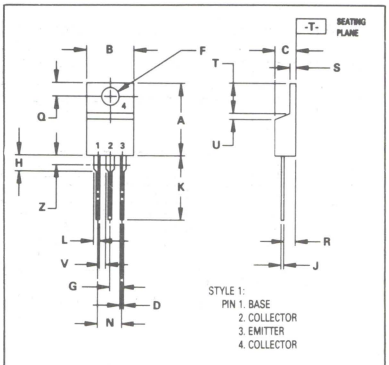

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 30 mAdc, I_B = 0)	TIP100, TIP105		60	–	
	TIP101, TIP106		80	–	
	TIP102, TIP107		100	–	
Collector Cutoff Current		I_{CEO}			μAdc
(V_{CE} = 30 Vdc, I_B = 0)	TIP100, TIP105		–	50	
(V_{CE} = 40 Vdc, I_B = 0)	TIP101, TIP106		–	50	
(V_{CE} = 50 Vdc, I_B = 0)	TIP102, TIP107		–	50	
Collector Cuttoff Current		I_{CBO}			μAdc
(V_{CB} = 60 Vdc, I_E = 0)	TIP100, TIP105		–	50	
(V_{CB} = 80 Vdc, I_E = 0)	TIP101, TIP106		–	50	
(V_{CB} = 100 Vdc, I_E = 0)	TIP102, TIP107		–	50	
Emitter Cutoff Current		I_{EBO}	–	8.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON-CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc)			1000	20,000	
(I_C = 8.0 Adc, V_{CE} = 4.0 Vdc)			200	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 6.0 mAdc)			–	2.0	
(I_C = 8.0 Adc, I_B = 80 mAdc)			–	2.5	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 8.0 Adc, V_{CE} = 4.0 Vdc)			–	2.8	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain		$\lvert h_{fe} \rvert$			
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 MHz)			4.0	–	–
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	TIP105, TIP106, TIP107		–	300	
	TIP100, TIP101, TIP102		–	200	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

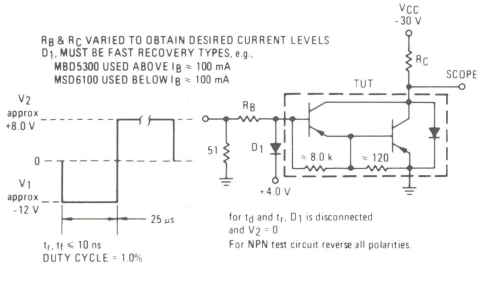

FIGURE 3 – SWITCHING TIMES

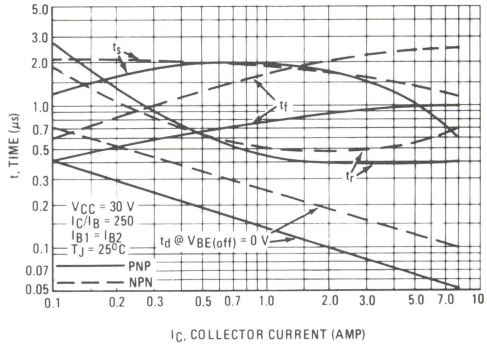

FIGURE 4 – THERMAL RESPONSE

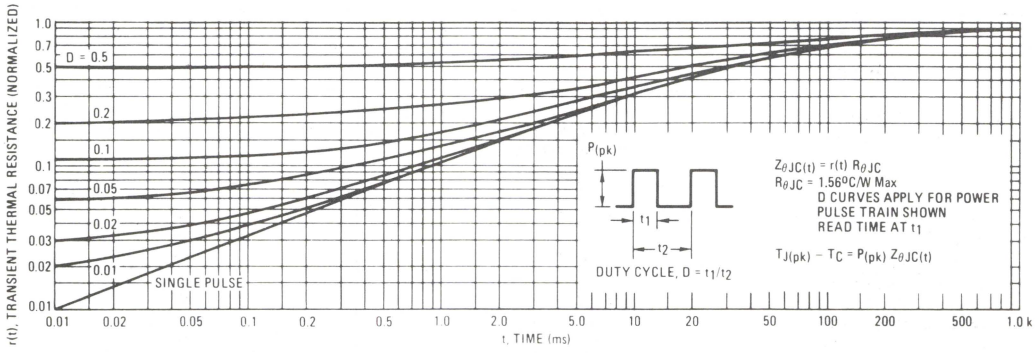

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

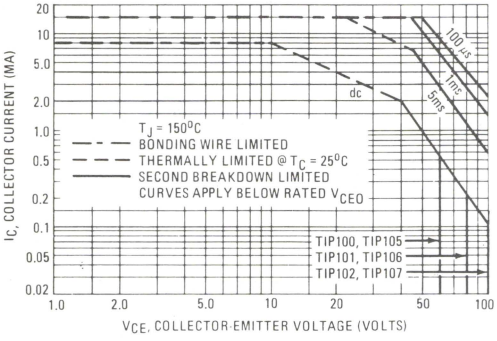

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown

3

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

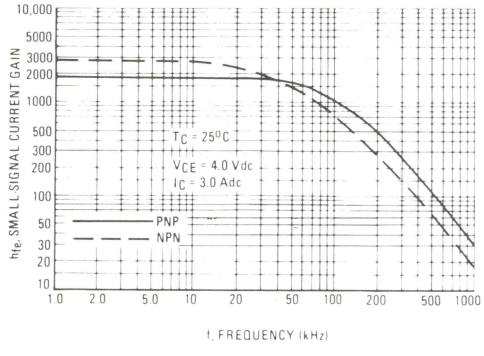

FIGURE 7 – CAPACITANCE

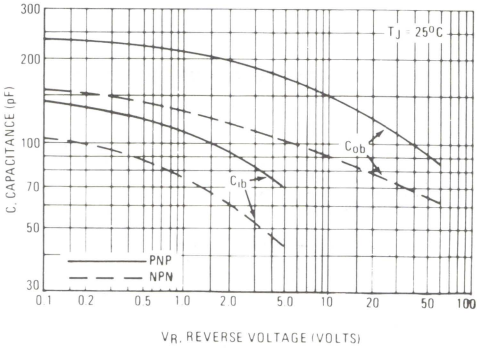

NPN
TIP100, TIP101, TIP102

PNP
TIP105, TIP106, TIP107

FIGURE 8 – DC CURRENT GAIN

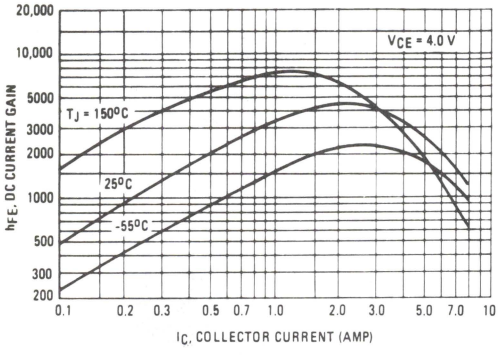

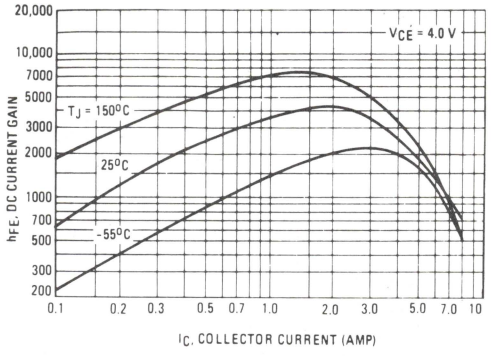

FIGURE 9 – COLLECTOR SATURATION REGION

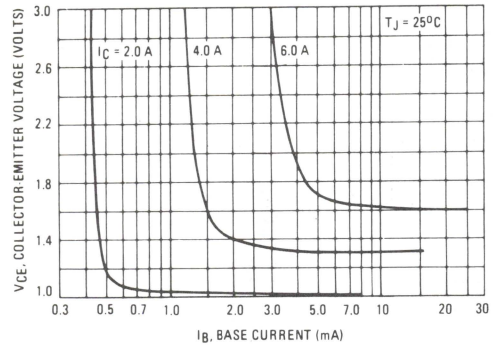

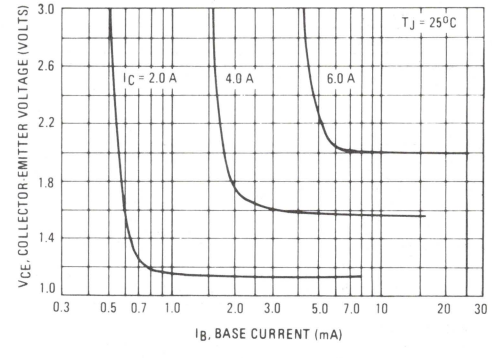

FIGURE 10 – "ON" VOLTAGES

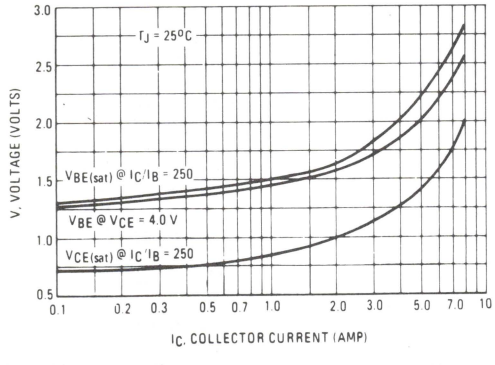

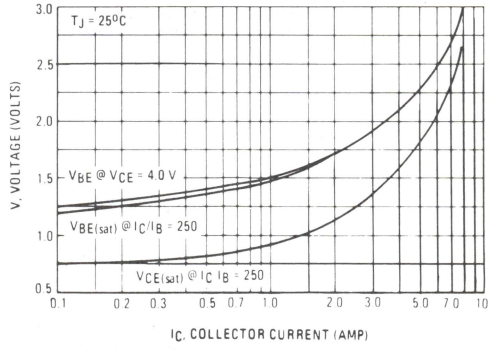

3

NPN	PNP
TIP110	TIP115
TIP111	TIP116
TIP112	TIP117

PLASTIC MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain – h_{FE} = 2500 (Typ) @ I_C = 1.0 Adc
- Collector-Emitter Sustaining Voltage – @ 30 mAdc
  $V_{CEO(sus)}$ = 60 Vdc (Min) – TIP110, TIP115
  = 80 Vdc (Min) – TIP111, TIP116
  = 100 Vdc (Min) – TIP112, TIP117
- Low Collector-Emitter Saturation Voltage – $V_{CE(sat)}$ = 2.5 Vdc (Max) @ I_C = 2.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors
- TO-220AB Compact Package
- TO-66 Leadform Also Available

DARLINGTON
2 AMPERE
COMPLEMENTARY SILICON POWER TRANSISTORS
60-80-100 VOLTS
50 WATTS



*MAXIMUM RATINGS

Rating	Symbol	TIP110, TIP115	TIP111, TIP116	TIP112, TIP117	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current – Continuous Peak	I_C	2.0 4.0			Adc
Base Current	I_B	50			mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	50 0.4			Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	2.0 0.016			Watts W/°C
Unclamped Inductive Load Energy – Figure 13	E	25			mJ
Operating and Storage Junction,	T_J, T_{stg}	–65 to +150			°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

FIGURE 1 – POWER DERATING

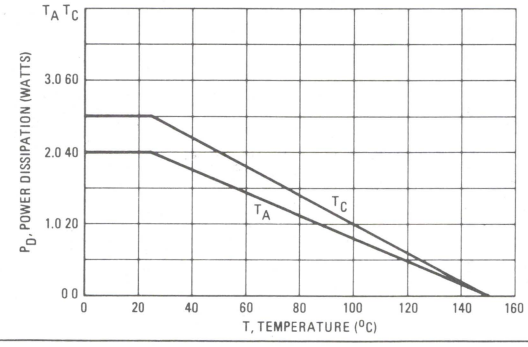

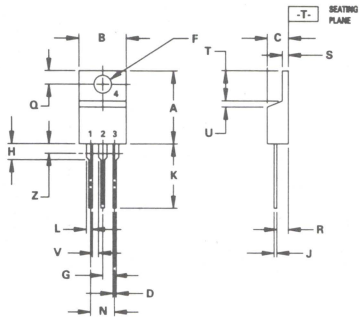

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 30 mAdc, I_B = 0)	TIP110, TIP115		60	–	
	TIP111, TIP116		80	–	
	TIP112, TIP117		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	TIP110, TIP115		–	2.0	
(V_{CE} = 40 Vdc, I_B = 0)	TIP111, TIP116		–	2.0	
(V_{CE} = 50 Vdc, I_B = 0)	TIP112, TIP117		–	2.0	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	TIP110, TIP115		–	1.0	
(V_{CB} = 80 Vdc, I_E = 0)	TIP111, TIP116		–	1.0	
(V_{CB} = 100 Vdc, I_E = 0)	TIP112, TIP117		–	1.0	
Emitter Cutoff Current		I_{EBO}	–	2.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 1.0 Adc, V_{CE} = 4.0 Vdc)			1000	–	
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc)			500	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 2.0 Adc, I_B = 8.0 mAdc)			–	2.5	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 2.0 Adc, V_{CE} = 4.0 Vdc)			–	2.8	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain		$\|h_{fe}\|$			–
(I_C = 0.75 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)			25	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	TIP115, TIP116, TIP117		–	200	
	TIP110, TIP111, TIP112		–	100	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

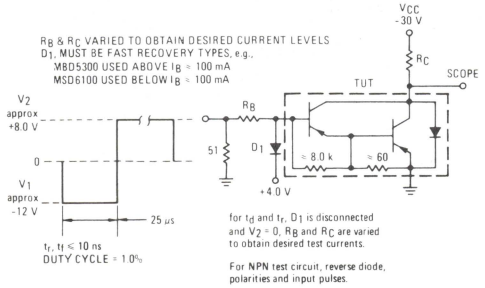

FIGURE 3 – SWITCHING TIMES

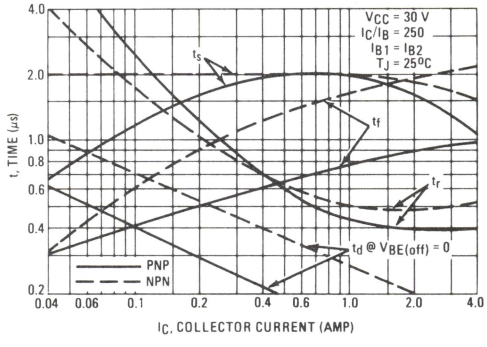

FIGURE 4 – THERMAL RESPONSE

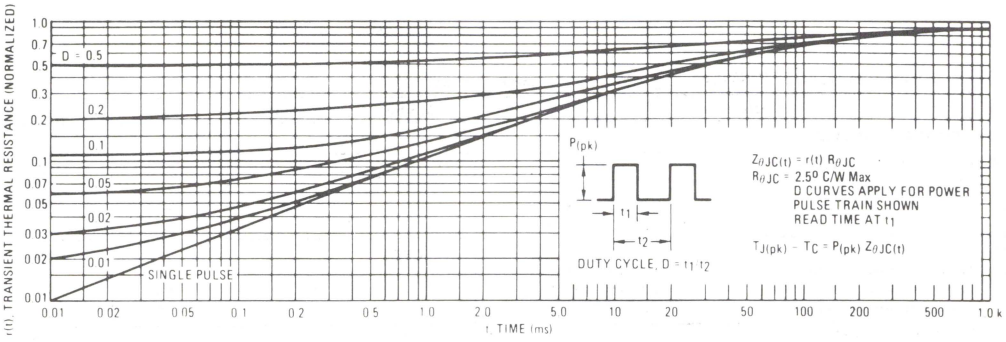

ACTIVE-REGION SAFE-OPERATING AREA

FIGURE 5 – TIP115, 116, 117

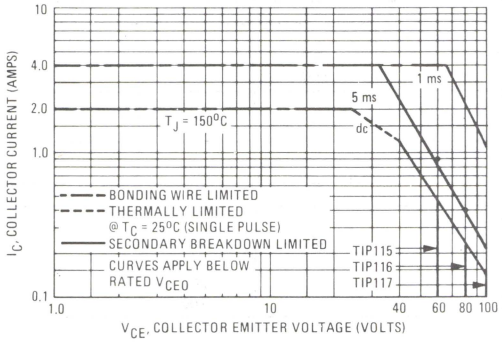

FIGURE 6 – TIP110, 111, 112

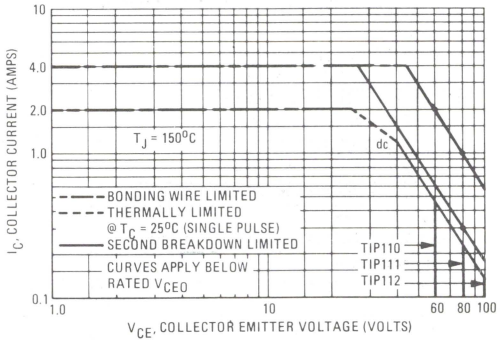

3

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figures 5 and 6 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 7 – CAPACITANCE

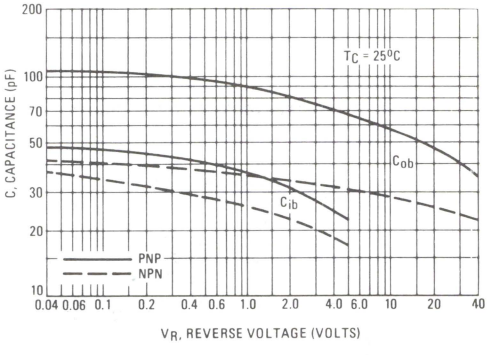

NPN TIP120 TIP121 TIP122 — PNP TIP125 TIP126 TIP127

PLASTIC MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS

. . . designed for general-purpose amplifier and low-speed switching applications.

- High DC Current Gain — h_{FE} = 2500 (Typ) @ I_C = 4.0 Adc
- Collector-Emitter Sustaining Voltage — @ 100 mAdc
  $V_{CEO(sus)}$ = 60 Vdc (Min) — TIP120, TIP125
  = 80 Vdc (Min) — TIP121, TIP126
  = 100 Vdc (Min) — TIP122, TIP127
- Low Collector-Emitter Saturation Voltage —
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ I_C = 3.0 Adc
  = 4.0 Vdc (Max) @ I_C = 5.0 Adc
- Monolithic Construction with Built-In Base-Emitter Shunt Resistors
- TO-220AB Compact Package
- TO-66 Leadform Also Available

DARLINGTON 5 AMPERE COMPLEMENTARY SILICON POWER TRANSISTORS

60-80-100 VOLTS
65 WATTS



*MAXIMUM RATINGS

Rating	Symbol	TIP120, TIP125	TIP121, TIP126	TIP122, TIP127	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous Peak	I_C	5.0 8.0			Adc
Base Current	I_B	120			mAdc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	65 0.52			Watts W/°C
Total Power Dissipation @ T_A = 25°C Derate above 25°C	P_D	2.0 0.016			Watts W/°C
Unclamped Inductive Load Energy (1)	E	50			mJ
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.92	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

(1) I_C = 1 A, L = 100 mH, P.R.F. = 10 Hz, V_{CC} = 20 V, R_{BE} = 100 Ω.

FIGURE 1 — POWER DERATING

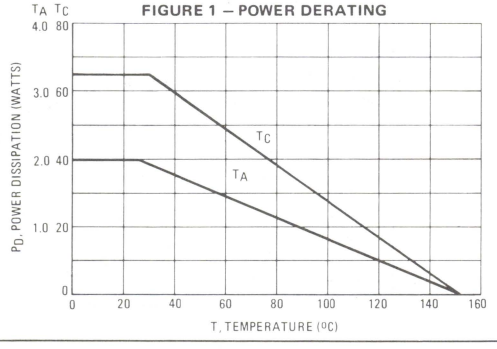

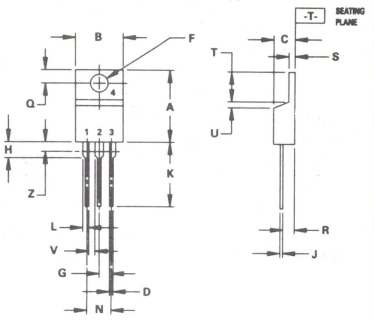

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	14.48	15.75	0.570	0.620
B	9.66	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.64	0.88	0.025	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.93	0.110	0.155
J	0.46	0.71	0.018	0.028
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

CASE 221A-04
TO-220AB

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$			Vdc
(I_C = 100 mAdc, I_B = 0)	TIP120, TIP125		60	–	
	TIP121, TIP126		80	–	
	TIP122, TIP127		100	–	
Collector Cutoff Current		I_{CEO}			mAdc
(V_{CE} = 30 Vdc, I_B = 0)	TIP120, TIP125		–	0.5	
(V_{CE} = 40 Vdc, I_B = 0)	TIP121, TIP126		–	0.5	
(V_{CE} = 50 Vdc, I_B = 0)	TIP122, TIP127		–	0.5	
Collector Cutoff Current		I_{CBO}			mAdc
(V_{CB} = 60 Vdc, I_E = 0)	TIP120, TIP125		–	0.2	
(V_{CB} = 80 Vdc, I_E = 0)	TIP121, TIP126		–	0.2	
(V_{CB} = 100 Vdc, I_E = 0)	TIP122, TIP127		–	0.2	
Emitter Cutoff Current		I_{EBO}	–	2.0	mAdc
(V_{BE} = 5.0 Vdc, I_C = 0)					
ON CHARACTERISTICS (1)					
DC Current Gain		h_{FE}			–
(I_C = 0.5 Adc, V_{CE} = 3.0 Vdc)			1000	–	
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)			1000	–	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = 3.0 Adc, I_B = 12 mAdc)			–	2.0	
(I_C = 5.0 Adc, I_B = 20 mAdc)			–	4.0	
Base-Emitter On Voltage		$V_{BE(on)}$			Vdc
(I_C = 3.0 Adc, V_{CE} = 3.0 Vdc)			–	2.5	
DYNAMIC CHARACTERISTICS					
Small-Signal Current Gain		$\|h_{fe}\|$			–
(I_C = 3.0 Adc, V_{CE} = 4.0 Vdc, f = 1.0 MHz)			4.0	–	
Output Capacitance		C_{ob}			pF
(V_{CB} = 10 Vdc, I_E = 0, f = 0.1 MHz)	TIP125, TIP126, TIP127		–	300	
	TIP120, TIP121, TIP122		–	200	

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

3

FIGURE 2 – SWITCHING TIMES TEST CIRCUIT

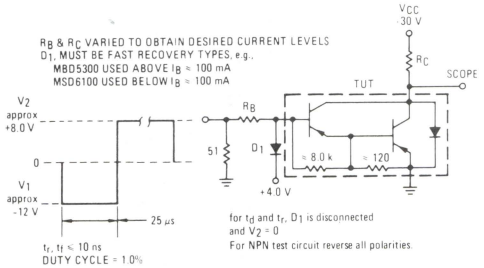

FIGURE 3 – SWITCHING TIMES

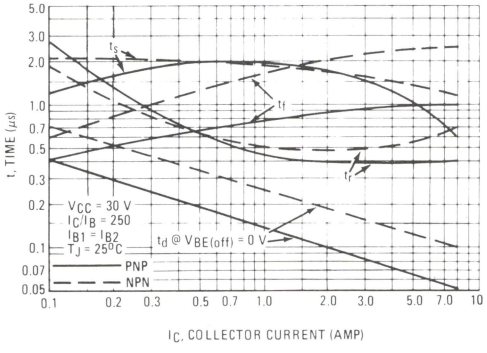

FIGURE 4 – THERMAL RESPONSE

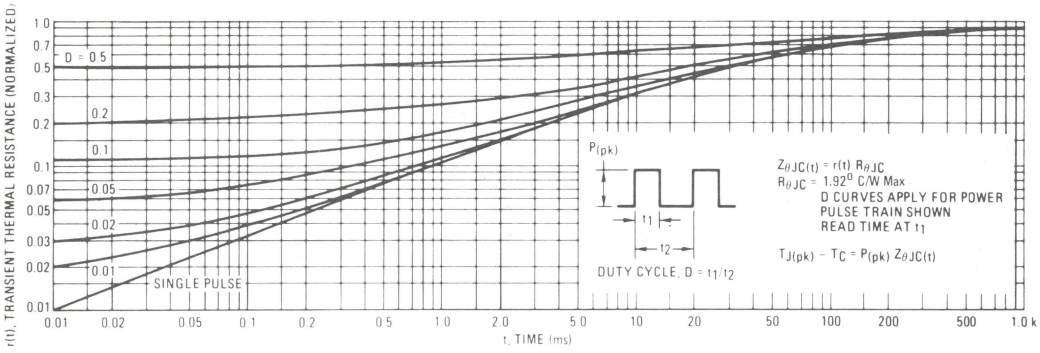

FIGURE 5 – ACTIVE-REGION SAFE OPERATING AREA

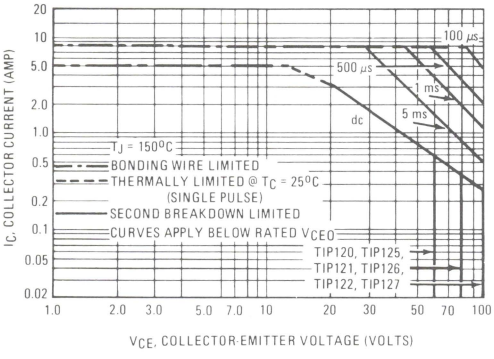

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 150^oC$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150^oC$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown

FIGURE 6 – SMALL-SIGNAL CURRENT GAIN

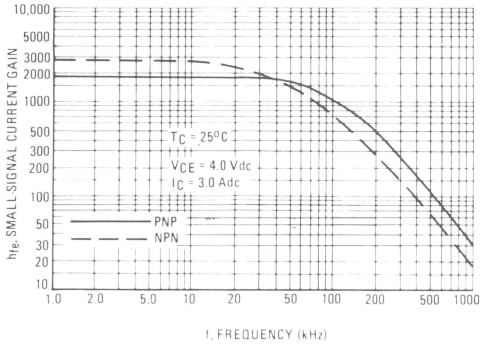

FIGURE 7 – CAPACITANCE

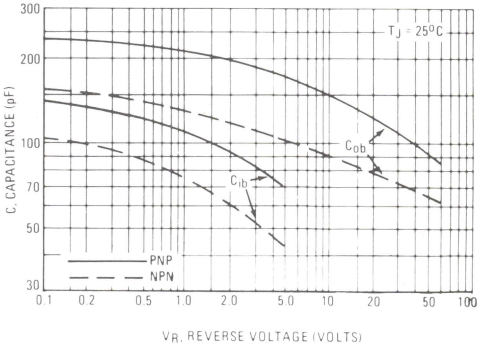

3

NPN
TIP120, TIP121, TIP122

PNP
TIP125, TIP126, TIP127

FIGURE 8 – DC CURRENT GAIN

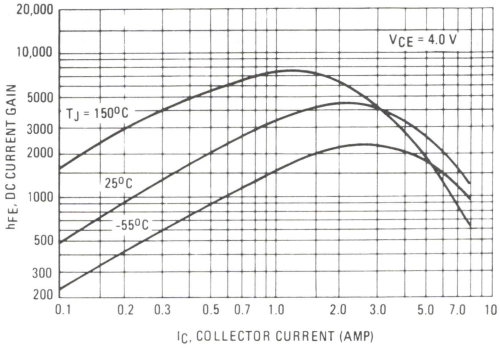

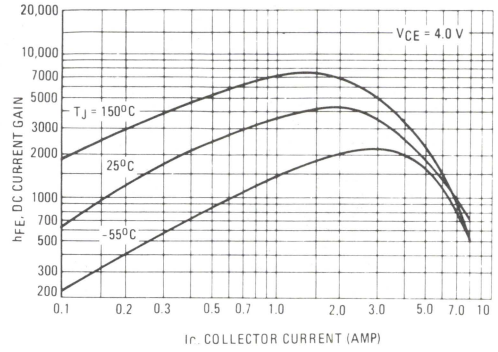

FIGURE 9 – COLLECTOR SATURATION REGION

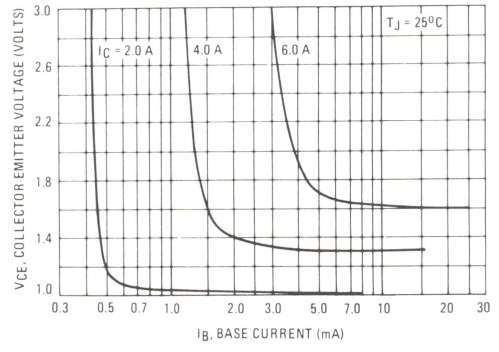

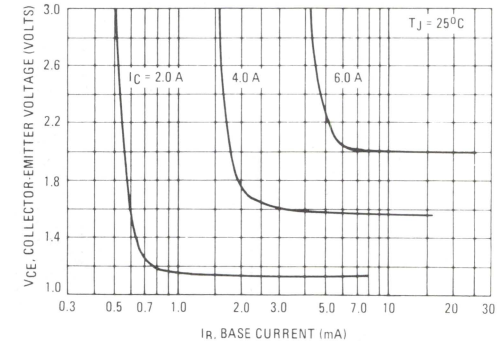

FIGURE 10 – "ON" VOLTAGES

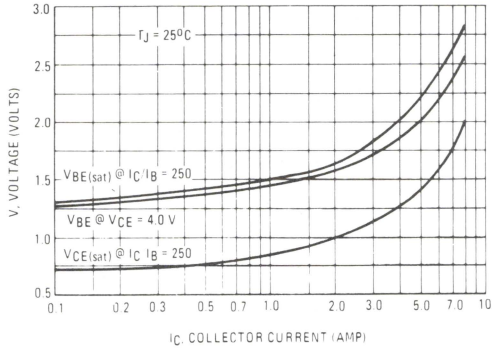

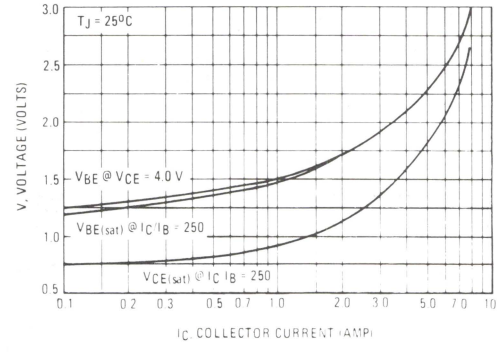

3

NPN	PNP
TIP140	TIP145
TIP141	TIP146
TIP142	TIP147

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose amplifier and low frequency switching applications.

- High DC Current Gain — Min h_{FE} = 1000 @ I_C = 5 A, V_{CE} = 4 V
- Collector-Emitter Sustaining Voltage — @ 30 mA

  $V_{CEO(sus)}$ = 60 Vdc (Min) — TIP140, TIP145
  80 Vdc (Min) — TIP141, TIP146
  100 Vdc (Min) — TIP142, TIP147
- Monolithic Construction with Built-In Base-Emitter Shunt Resistor

10 AMPERE DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

60-100 VOLTS
125 WATTS



MAXIMUM RATINGS

Rating	Symbol	TIP140 TIP145	TIP141 TIP146	TIP142 TIP147	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	Vdc
Collector-Base Voltage	V_{CB}	60	80	100	Vdc
Emitter-Base Voltage	V_{EB}	5.0			Vdc
Collector Current — Continuous Peak (1)	I_C	10 15			Adc
Base Current — Continuous	I_B	0.5			Adc
Total Device Dissipation @ T_C = 25°C	P_D	125			Watts
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W
Thermal Resistance, Case to Ambient	$R_{\theta JA}$	35.7	°C/W

(1) 5 ms, ≤10% Duty Cycle

DARLINGTON SCHEMATICS

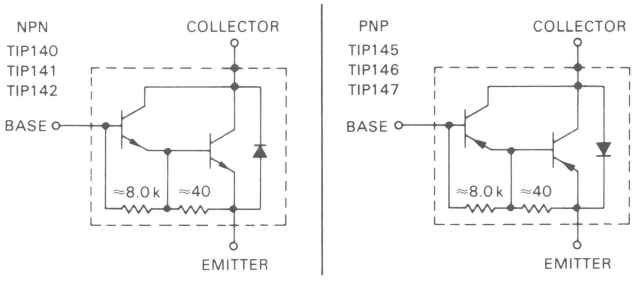



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	3.94	4.19	0.155	0.165

CASE 340-01
TO-218AC

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector-Emitter Sustaining Voltage (1)		$V_{CEO(sus)}$				Vdc
(I_C = 30 mA, I_B = 0)	TIP140, TIP145		60	—	—	
	TIP141, TIP146		80	—	—	
	TIP142, TIP147		100	—	—	
Collector Cutoff Current		I_{CEO}				mA
(V_{CE} = 30 Vdc, I_B = 0)	TIP140, TIP145		—	—	2.0	
(V_{CE} = 40 Vdc, I_B = 0)	TIP141, TIP146		—	—	2.0	
(V_{CE} = 50 Vdc, I_B = 0)	TIP142, TIP147		—	—	2.0	
Collector Cutoff Current		I_{CBO}				mA
(V_{CB} = 60 V, I_E = 0)	TIP140, TIP145		—	—	1.0	
(V_{CB} = 80 V, I_E = 0)	TIP141, TIP146		—	—	1.0	
(V_{CB} = 100 V, I_E = 0)	TIP142, TIP147		—	—	1.0	
Emitter Cutoff Current V_{BE} = 5.0 V		I_{EBO}	—	—	2.0	mA
ON CHARACTERISTICS (1)						
DC Current Gain		h_{FE}				—
(I_C = 5.0 A, V_{CE} = 4.0 V)			1000	—	—	
(I_C = 10 A, V_{CE} = 4.0 V)			500	—	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$				Vdc
(I_C = 5.0 A, I_B = 10 mA)			—	—	2.0	
(I_C = 10 A, I_B = 40 mA)			—	—	3.0	
Base-Emitter Saturation Voltage (I_C = 10 A, I_B = 40 mA)		$V_{BE(sat)}$	—	—	3.5	Vdc
Base-Emitter On Voltage (I_C = 10 A, V_{CE} = 4.0 Vdc)		$V_{BE(on)}$	—	—	3.0	Vdc
SWITCHING CHARACTERISTICS						
Resistive Load (See Figure 1)						
Delay Time	(V_{CC} = 30 V, I_C = 5.0 A,	t_d	—	0.15	—	μs
Rise Time	I_B = 20 mA, Duty Cycle ≤ 2.0%,	t_r	—	0.55	—	μs
Storage Time	I_{B1} = I_{B2}, R_C & R_B Varied, T_J = 25°C)	t_s	—	2.5	—	μs
Fall Time		t_f	—	2.5	—	μs

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

3

FIGURE 1 — SWITCHING TIMES TEST CIRCUIT

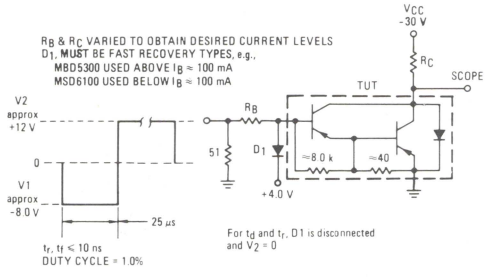

For NPN test circuit reverse diode and voltage polarities.

FIGURE 2 — SWITCHING TIMES

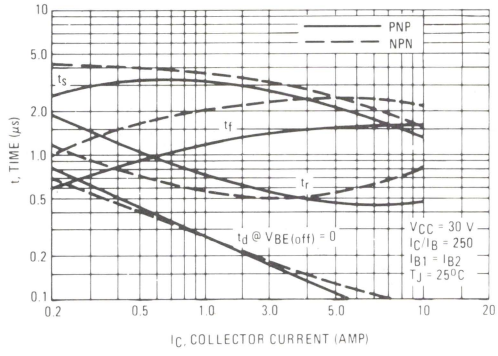

TYPICAL CHARACTERISTICS

NPN
TIP140, TIP141, TIP142

PNP
TIP145, TIP146, TIP147

FIGURE 3 — DC CURRENT GAIN versus COLLECTOR CURRENT

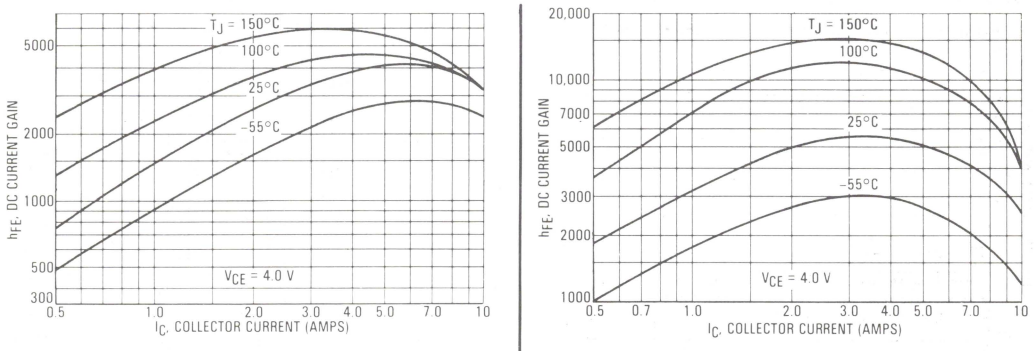

FIGURE 4 — COLLECTOR-EMITTER SATURATION VOLTAGE

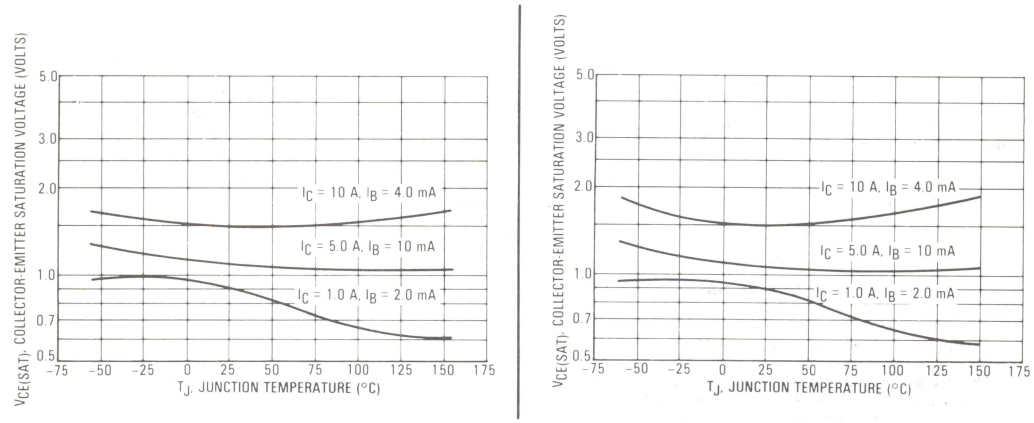

FIGURE 5 — BASE-EMITTER VOLTAGE

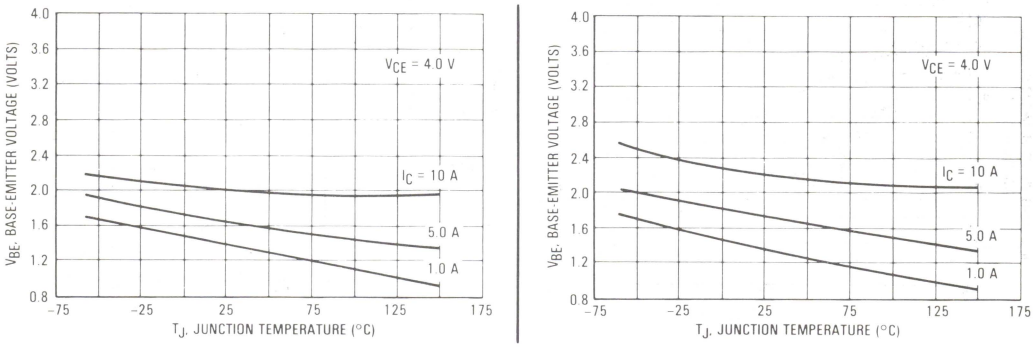

3

ACTIVE-REGION SAFE OPERATING AREA

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 6 is based on $T_{J(pk)}$ = 150°C; T_C is variable depending on conditions. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 — ACTIVE-REGION SAFE OPERATING AREA

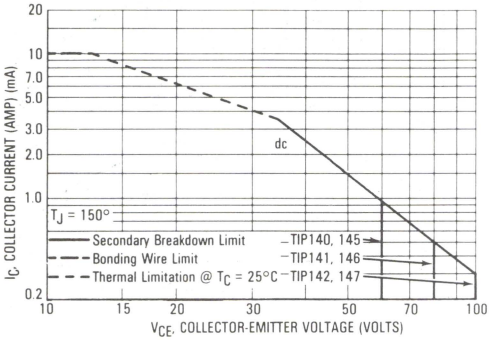

FIGURE 7 — UNCLAMPED INDUCTIVE LOAD

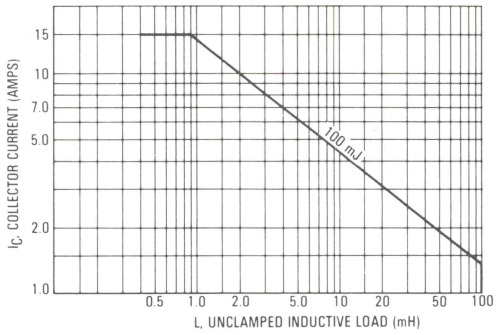

FIGURE 8 — INDUCTIVE LOAD

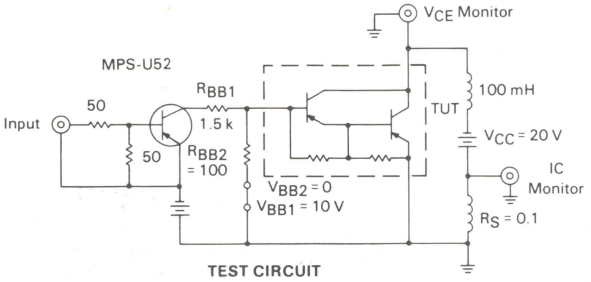

TEST CIRCUIT



VOLTAGE AND CURRENT WAVEFORMS

NOTE 1: Input pulse width is increased until I_{CM} = 1.42 A.
NOTE 2: For NPN test circuit reverse polarities.

FIGURE 9 — MAGNITUDE OF COMMON EMITTER SMALL-SIGNAL SHORT-CIRCUIT FORWARD CURRENT TRANSFER RATIO

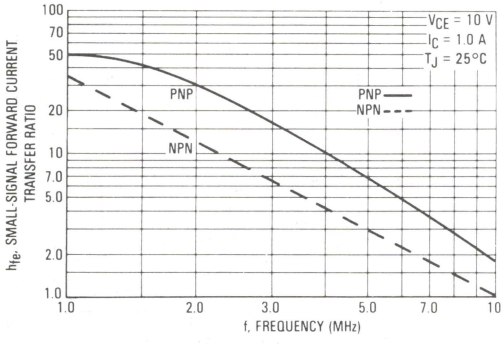

FIGURE 10 — FREE-AIR TEMPERATURE POWER DERATING

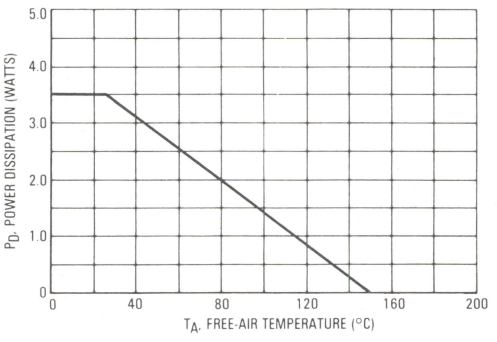

NPN TIP3055 PNP TIP2955

COMPLEMENTARY SILICON POWER TRANSISTORS

. . . designed for general-purpose switching and amplifier applications.

- DC Current Gain — h_{FE} = 20–70 @ I_C = 4.0 Adc
- Collector-Emitter Saturation Voltage — $V_{CE(sat)}$ = 1.1 Vdc (Max) @ I_C = 4.0 Adc
- Excellent Safe Operating Area

15 AMPERE
POWER TRANSISTORS
COMPLEMENTARY SILICON
60 VOLTS
90 WATTS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	60	Vdc
Collector-Emitter Voltage	V_{CER}	70	Vdc
Collector-Base Voltage	V_{CB}	100	Vdc
Emitter-Base Voltage	V_{EB}	7.0	Vdc
Collector Current — Continuous	I_C	15	Adc
Base Current	I_B	7.0	Adc
Total Power Dissipation @ T_C = 25°C Derate above 25°C	P_D	90 0.72	Watts W/°C
Operating and Storage Junction Temperature Range	T_J,T_{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.39	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	35.7	°C/W

FIGURE 1 — DC CURRENT GAIN

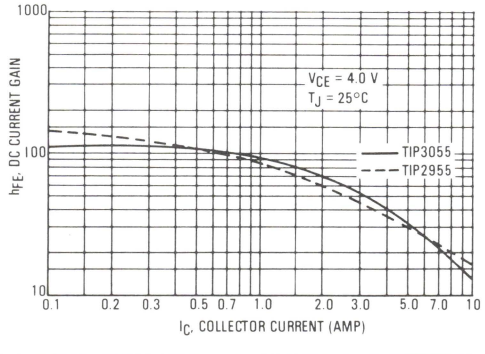



STYLE 1:
1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	20.32	21.08	0.800	0.830
B	15.49	15.90	0.610	0.626
C	4.19	5.08	0.165	0.200
D	1.02	1.65	0.040	0.065
E	1.35	1.65	0.053	0.065
G	5.21	5.72	0.205	0.225
H	2.41	3.20	0.095	0.126
J	0.38	0.64	0.015	0.025
K	12.70	15.49	0.500	0.610
L	15.88	16.51	0.625	0.650
N	12.19	12.70	0.480	0.500
Q	4.04	4.22	0.159	0.166

CASE 340-01
(TO-218AC)

3

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) (I_C = 30 mAdc, I_B = 0)	$V_{CEO(sus)}$	60	—	Vdc
Collector Cutoff Current (V_{CE} = 70 Vdc, R_{BE} = 100 Ohms)	I_{CER}	—	1.0	mAdc
Collector Cutoff Current (V_{CE} = 30 Vdc, I_B = 0)	I_{CEO}	—	0.7	mAdc
Collector Cutoff Current (V_{CE} = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc)	I_{CEV}	—	5.0	mAdc
Emitter Cutoff Current (V_{BE} = 7.0 Vdc, I_C = 0)	I_{EBO}	—	5.0	mAdc
ON CHARACTERISTICS (1)				
DC Current Gain (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc) (I_C = 10 Adc, V_{CE} = 4.0 Vdc)	h_{FE}	20 5.0	70 —	—
Collector-Emitter Saturation Voltage (I_C = 4.0 Adc, I_B = 400 mAdc) (I_C = 10 Adc, I_B = 3.3 Adc)	$V_{CE(sat)}$	— —	1.1 3.0	Vdc
Base-Emitter On Voltage (I_C = 4.0 Adc, V_{CE} = 4.0 Vdc)	$V_{BE(on)}$	—	1.8	Vdc
SECOND BREAKDOWN				
Second Breakdown Collector Current with Base Forward Biased (V_{CE} = 30 Vdc, t = 1.0 s; Nonrepetitive)	$I_{s/b}$	3.0	—	Adc
DYNAMIC CHARACTERISTICS				
Current Gain—Bandwidth Product (I_C = 0.5 Adc, V_{CE} = 10 Vdc, f = 1.0 MHz)	f_T	2.5	—	MHz
Small-Signal Current Gain (V_{CE} = 4.0 Vdc, I_C = 1.0 Adc, f = 1.0 kHz)	h_{fe}	15	—	kHz

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Note: For additional design curves, refer to electrical characteristics curves of 2N3055.

3

FIGURE 2 — MAXIMUM RATED FORWARD BIAS SAFE OPERATING AREA

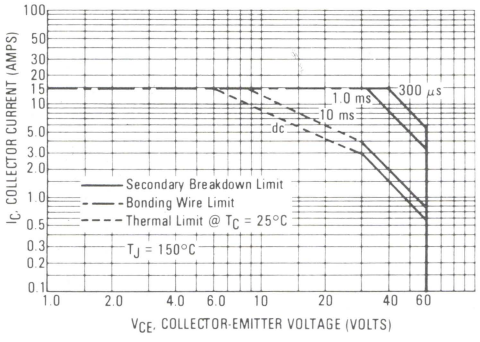

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C–V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on T_C = 25°C; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature.

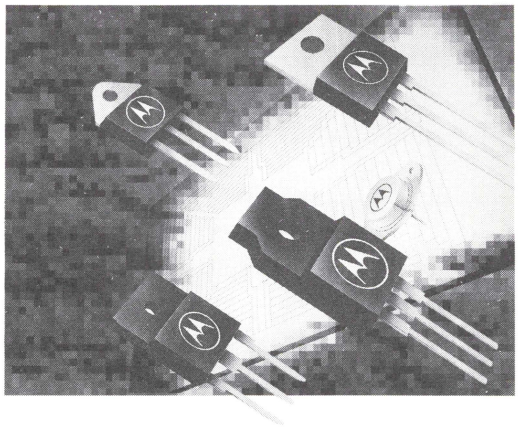

1 Alphanumeric Index and Cross Reference

2 Selector Guide

3 Data Sheets

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.
EUROPE: Motorola Ltd.; European Literature Center; 88 Tanners Drive, Blakelands Milton Keynes, MK145BP, England
ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; P.O. Box 80300; Cheung Sha Wan Post Office; Kowloon Hong Kong